

Nama : Avifah Hasna NF

NIM : L200170072

Kelas : B

MODUL 9

PENGENALAN STATIC NETWORK ADDRESS TRANSLATION PADA ROUTER CISCO


E. Tugas Modul 9

1. Tarik kesimpulan dari konfigurasi NAT tersebut, bandingkan dengan mekanisme routing static tanpa menggunakan NAT

Konfigurasi dari NAT bisa digunakan untuk membantu computer atau PC local (LAN) yang menggunakan IP Private agar bisa terhubung dengan internet dengan cara menstranslasi alamat IP Private tersebut ke dalam alamat IP global, dimana dalam kasus yang dapat ditemui adalah computer server yang digunakan pada saat UNBK.

Perbandingan yang terlihat diantara penggunaan mekanisme routing static dengan dan tanpa NAT adalah kegunaannya dimana NAT akan lebih digunakan sebagai jembatan antara jaringan local dengan jaringan global, sedangkan mekanisme yang tidak memanfaatkan NAT akan lebih cocok sebagai dinding atau pembatas untuk mengelompokkan kumpulan jaringan dan membuat akses khusus pada jaringan tertentu.

2. Catat langkah praktikum 1 – 7 dan jawaban kesimpulan anda pada laporan praktikum, kumpulkan pada pertemuan berikutnya

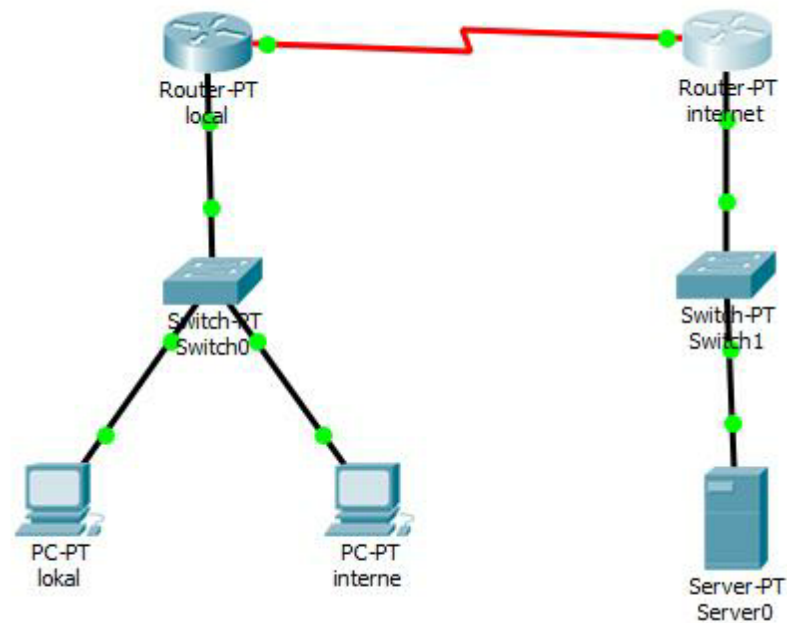

1) Konfigurasi Router Internet

```

router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
router(config)#hostname internet
internet(config)#int fa0/0
internet(config-if)#ip address 10.0.0.1 255.255.255.0
internet(config-if)#no shutdown

internet(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up

internet(config-if)#exit

internet(config)#int serial2/0
internet(config-if)#ip address 20.0.0.2 255.255.255.0
internet(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
internet(config-if)#exit

```

```

internet(config)#ip route 30.0.0.0 255.255.255.0 20.0.0.1
internet(config)#ip nat inside source static 10.0.0.2 50.0.0.1
internet(config)#int fa 0/0
internet(config-if)#ip nat inside
internet(config-if)#exit
internet(config)#int serial 2/0
internet(config-if)#ip nat outside
internet(config-if)#exit

```

2) Konfigurasi Router Local

```

Router>enable
Router#conf
Configuring from terminal, memory, or network [terminal]?
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname lokal
lokal(config)#int fa0/0
lokal(config-if)#ip address 30.0.0.1 255.255.255.0
lokal(config-if)#no shutdown

lokal(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0,
changed state to up

lokal(config-if)#exit

lokal(config-if)#exit
lokal(config)#int serial2/0
lokal(config-if)#ip address 20.0.0.1 255.255.255.0
lokal(config-if)#clock rate 64000
lokal(config-if)#bandwidth 64
lokal(config-if)#no shutdown
lokal(config-if)#exit
lokal(config)#ip route 50.0.0.0 255.255.255.0 20.0.0.2
lokal(config)#exit
lokal#
%SYS-5-CONFIG_I: Configured from console by console

lokal#

```

3) Konfigurasi IP Address, Subnet Mask, dan Default Gateway untuk PC Lokal

The screenshot displays a network configuration window titled "IP Configuration" with a close button (X) in the top right corner. The window has a tabbed interface with tabs for "Physical", "Config", "Desktop", "Programming", and "Attributes". The "Config" tab is selected.

Under the "IP Configuration" section, there are two radio buttons: "DHCP" (unselected) and "Static" (selected). Below these are four text input fields:

- IP Address: 30.0.0.2
- Subnet Mask: 255.255.255.0
- Default Gateway: 30.0.0.1
- DNS Server: 0.0.0.0

Below the IP Configuration section is the "IPv6 Configuration" section, which has three radio buttons: "DHCP" (unselected), "Auto Config" (unselected), and "Static" (selected). Below these are four text input fields:

- IPv6 Address: (empty) / (empty)
- Link Local Address: FE80::2D0:BCFF:FE74:5481
- IPv6 Gateway: (empty)
- IPv6 DNS Server: (empty)

At the bottom left of the window, there is a "Top" button.

4) Konfigurasi IP Address, Subnet Mask, dan Default Gateway untuk PC internet

The screenshot shows a network configuration window titled "IP Configuration" with a close button (X) in the top right corner. The window has a tabbed interface with tabs for "Physical", "Config", "Desktop", "Programming", and "Attributes". The "Config" tab is selected.

Under the "IP Configuration" section, there are two radio buttons: "DHCP" (unselected) and "Static" (selected). Below these are four text input fields:


- IP Address: 10.0.0.2
- Subnet Mask: 255.255.255.0
- Default Gateway: 10.0.0.1
- DNS Server: 0.0.0.0

Below the IP Configuration section is the "IPv6 Configuration" section. It has three radio buttons: "DHCP" (unselected), "Auto Config" (unselected), and "Static" (selected). Below these are four text input fields:

- IPv6 Address: (empty) / (empty)
- Link Local Address: FE80::206:2AFF:FE44:1290
- IPv6 Gateway: (empty)
- IPv6 DNS Server: (empty)

At the bottom left of the window, there is a "Top" button.

5) Menguji coba koneksi PC local dengan server

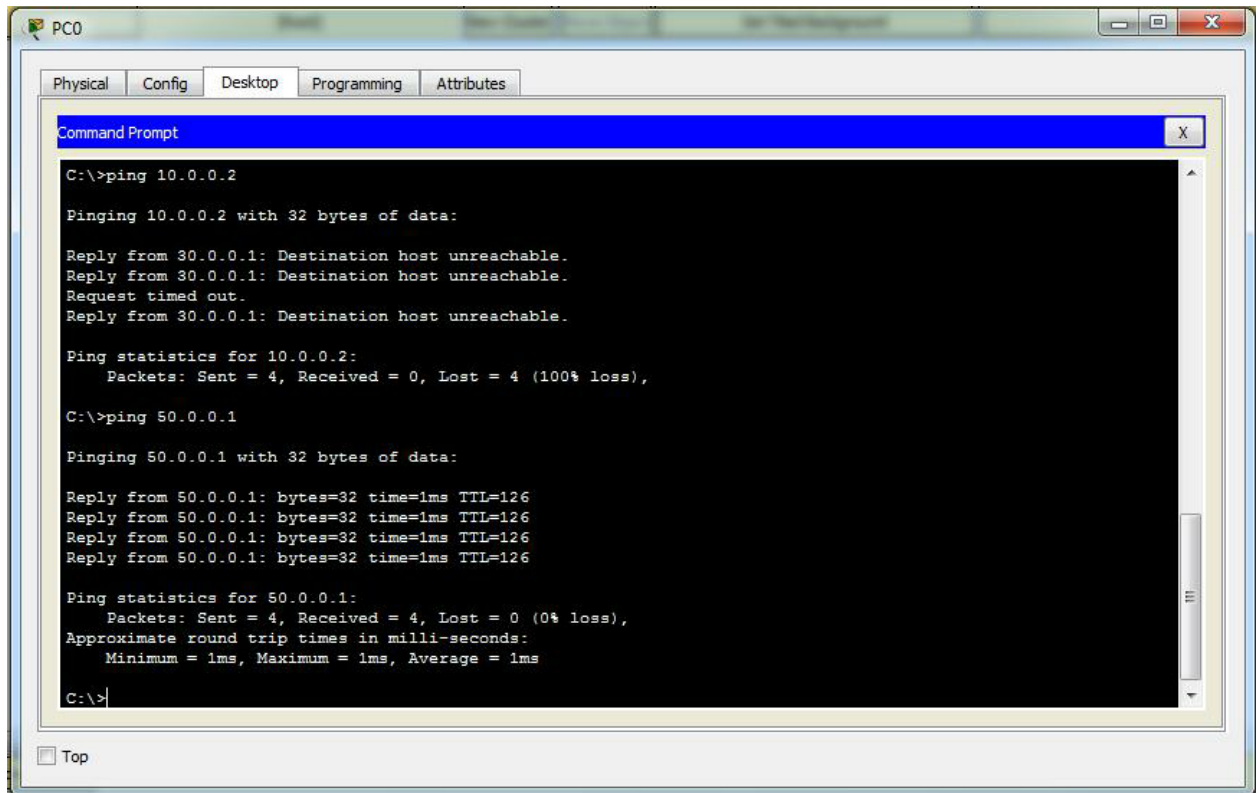

The screenshot shows a window titled "PC0" with tabs for "Physical", "Config", "Desktop", "Programming", and "Attributes". The "Desktop" tab is active, displaying a "Command Prompt" window. The Command Prompt shows the results of two ping commands. The first command is "C:\>ping 10.0.0.2", which results in a 100% loss of packets. The second command is "C:\>ping 50.0.0.1", which results in a 0% loss of packets. The Command Prompt window has a blue title bar and a scroll bar on the right. A "Top" button is visible at the bottom left of the PC0 window.

```
C:\>ping 10.0.0.2

Pinging 10.0.0.2 with 32 bytes of data:

Reply from 30.0.0.1: Destination host unreachable.
Reply from 30.0.0.1: Destination host unreachable.
Request timed out.
Reply from 30.0.0.1: Destination host unreachable.

Ping statistics for 10.0.0.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 50.0.0.1

Pinging 50.0.0.1 with 32 bytes of data:

Reply from 50.0.0.1: bytes=32 time=1ms TTL=126
Reply from 50.0.0.1: bytes=32 time=1ms TTL=126
Reply from 50.0.0.1: bytes=32 time=1ms TTL=126
Reply from 50.0.0.1: bytes=32 time=1ms TTL=126

Ping statistics for 50.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>
```