


Nama : Tidhar Katon Birowo

NIM : L200170187

Kelas : D

1. Buat topologi seperti pada gambar.

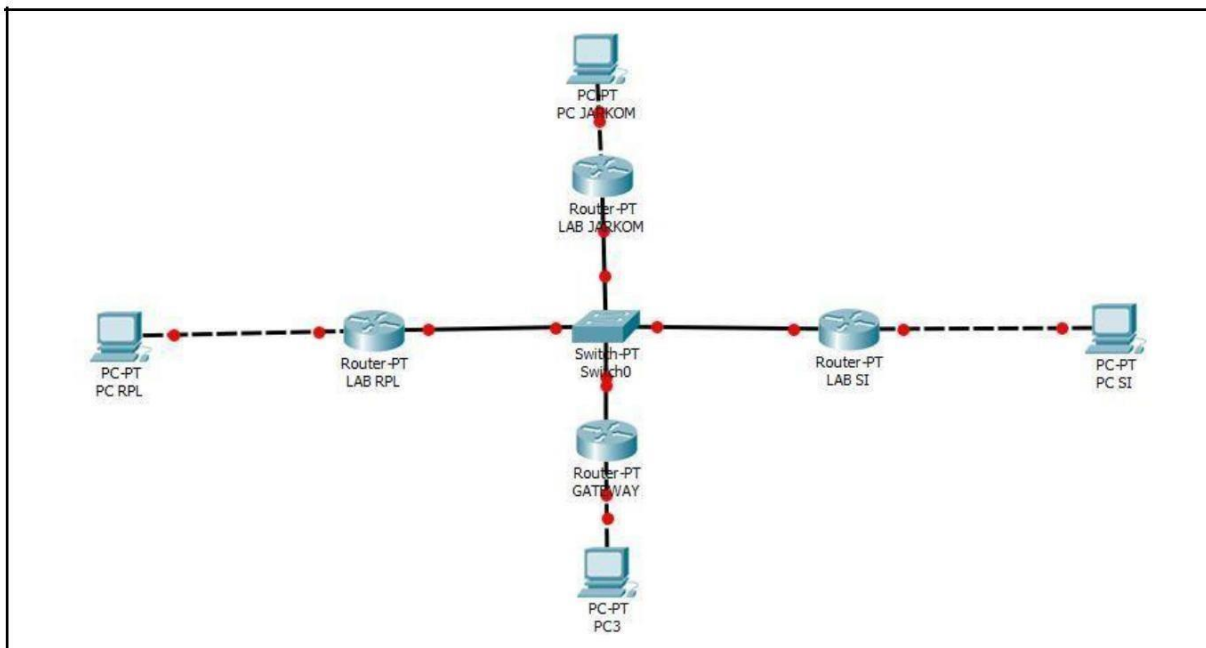

2. Konfigurasi semua router

a. Router Jarkom

```

LAB JARKOM
Physical Config CLI Attributes
IOS Command Line Interface

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname JARKOM
JARKOM(config)#int fa0/0
JARKOM(config-if)#ip address 172.16.0.1 255.255.255.0
JARKOM(config-if)#no shutdown

JARKOM(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

JARKOM(config-if)#exit
JARKOM(config)#int fa1/0
JARKOM(config-if)#ip address 172.16.0.1 255.255.255.0
JARKOM(config-if)#no shutdown

JARKOM(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

JARKOM(config-if)#exit
JARKOM(config)#
  
```

b. Router LAB SI

```
LAB SI
Physical Config CLI Attributes
IOS Command Line Interface

32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname SistemInformasi
SistemInformasi(config)#int fa0/0
SistemInformasi(config-if)#ip address 172.17.0.1 255.255.255.0
SistemInformasi(config-if)#no shutdown

SistemInformasi(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

SistemInformasi(config-if)#exit
SistemInformasi(config)#int fa1/0
SistemInformasi(config-if)#ip address 172.15.0.2 255.255.255.0
SistemInformasi(config-if)#no shutdown

SistemInformasi(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

SistemInformasi(config-if)#exit
SistemInformasi(config)#

Ctrl+F6 to exit CLI focus
```

c. Router RPL

```
LAB RPL
Physical Config CLI Attributes
IOS Command Line Interface

32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname RPL
RPL(config)#int fa0/0
RPL(config-if)#ip address 172.18.0.1 255.255.255.0
RPL(config-if)#no shutdown

RPL(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up


RPL(config-if)#exit
RPL(config)#int fa1/0
RPL(config-if)#ip address 172.15.0.3 255.255.255.0
RPL(config-if)#no shutdown

RPL(config-if)#
%LINK-5-CHANGED: Interface FastEthernet1/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/0, changed state to up

RPL(config-if)#exit
RPL(config)#
```

d. Router UMS

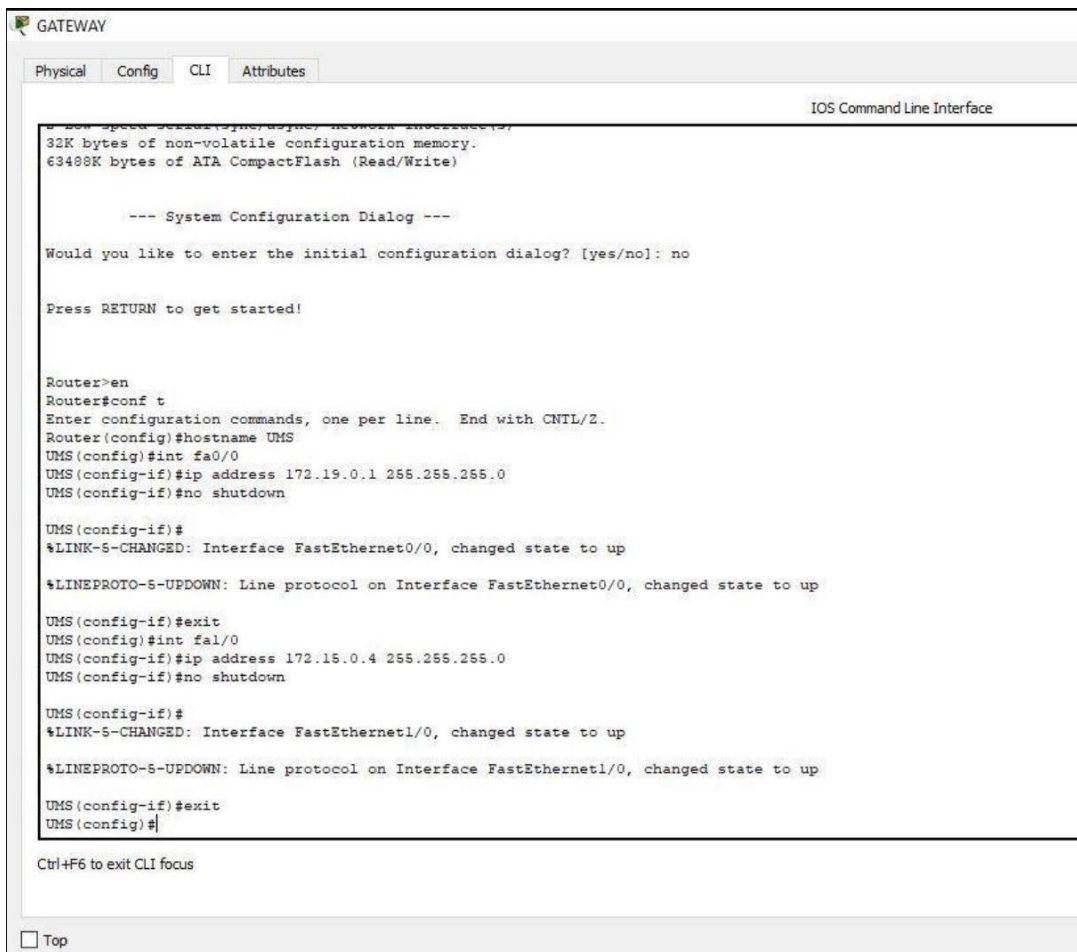

3. Konfigurasi routing table pada 4 router

a. Router Jarkom

```

JARKOM(config)#router rip
JARKOM(config-router)#network 172.15.0.0
JARKOM(config-router)#networkj 172.16.0.0
^
% Invalid input detected at '^' marker.

JARKOM(config-router)#network 172.16.0.0
JARKOM(config-router)#network 172.17.0.0
JARKOM(config-router)#network 172.18.0.0
JARKOM(config-router)#network 172.19.0.0
JARKOM(config-router)#

```

b. Router SI

```

SistemInformasi(config)#router rip
SistemInformasi(config-router)#network 172.15.0.0
SistemInformasi(config-router)#network 172.16.0.0
SistemInformasi(config-router)#network 172.17.0.0
SistemInformasi(config-router)#network 172.18.0.0
SistemInformasi(config-router)#network 172.19.0.0
SistemInformasi(config-router)#

```

Ctrl+F6 to exit CLI focus

c. Router RPL

```
RPL(config)#router rip
RPL(config-router)#network 172.15.0.0
RPL(config-router)#network 172.16.0.0
RPL(config-router)#network 172.17.0.0
RPL(config-router)#network 172.18.0.0
RPL(config-router)#network 172.19.0.0
RPL(config-router)#
```

Ctrl+F6 to exit CLI focus

d. Router UMS

```
UMS(config)#router rip
UMS(config-router)#network 172.15.0.0
UMS(config-router)#network 172.16.0.0
UMS(config-router)#network 172.17.0.0
UMS(config-router)#network 172.18.0.0
UMS(config-router)#network 172.19.0.0
UMS(config-router)#
```

4. Konfigurasi IP pada masing- masing PC

a. PC Jarkom

The screenshot shows the 'PC JARKOM' configuration window with the 'Config' tab selected. The 'IP Configuration' section is active, showing the following settings:

- IP Configuration:**
 - ☐ DHCP
 - ☒ Static
 - IP Address: 172.16.0.2
 - Subnet Mask: 255.255.255.0
 - Default Gateway: 172.16.0.1
 - DNS Server: 0.0.0.0
- IPv6 Configuration:**
 - ☐ DHCP
 - ☐ Auto Config
 - ☒ Static
 - IPv6 Address: (empty field) / (empty field)
 - Link Local Address: FE80::2D0:D3FF:FE30:5C09
 - IPv6 Gateway: (empty field)
 - IPv6 DNS Server: (empty field)

At the bottom left, there is a checkbox labeled 'Top' which is currently unchecked.

b. PC SI

PC SI

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address 172.17.0.2

Subnet Mask 255.255.255.0

Default Gateway 172.17.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address /

Link Local Address FE80::201:C9FF:FE82:A4C1

IPv6 Gateway

IPv6 DNS Server

☐ Top

c. PC RPL

PC RPL

Physical Config Desktop Programming Attributes

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address 172.18.0.2

Subnet Mask 255.255.255.0

Default Gateway 172.18.0.1

DNS Server 0.0.0.0

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address /


Link Local Address FE80::260:3EFF:FE4C:A785

IPv6 Gateway

IPv6 DNS Server

☐ Top

d. PC UMS

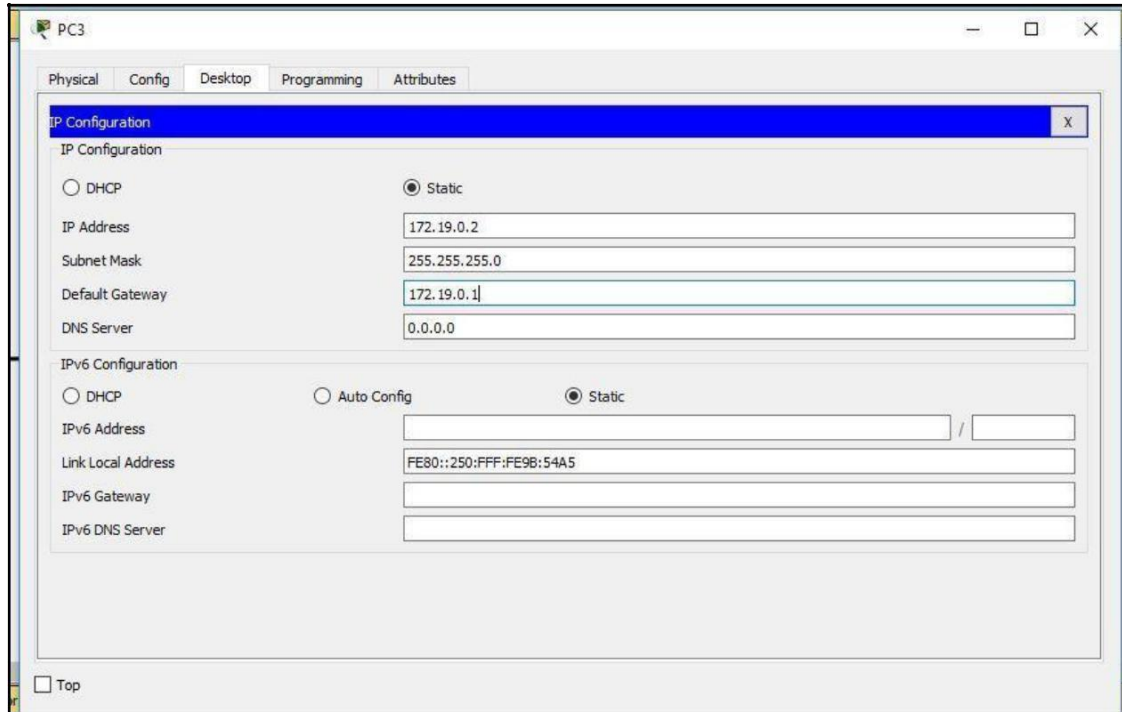

2. Lakukan pengujian ICMP request(ping) untuk test koneksi a. PC UMS ke PC Jarkom

```
C:\>ping 172.16.0.2

Pinging 172.16.0.2 with 32 bytes of data:

Reply from 172.16.0.2: bytes=32 time=1ms TTL=126
Reply from 172.16.0.2: bytes=32 time=12ms TTL=126
Reply from 172.16.0.2: bytes=32 time=12ms TTL=126
Reply from 172.16.0.2: bytes=32 time=12ms TTL=126

Ping statistics for 172.16.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 12ms, Average = 9ms
```

b. PC UMS ke PC SI

```
C:\>ping 172.18.0.2

Pinging 172.18.0.2 with 32 bytes of data:

Reply from 172.18.0.2: bytes=32 time<1ms TTL=126
Reply from 172.18.0.2: bytes=32 time=15ms TTL=126
Reply from 172.18.0.2: bytes=32 time=19ms TTL=126
Reply from 172.18.0.2: bytes=32 time=12ms TTL=126

Ping statistics for 172.18.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 19ms, Average = 11ms

C:\>
```

c. PC UMS ke PC RPL

```
C:\>ping 172.17.0.2
```

```
Pinging 172.17.0.2 with 32 bytes of data:
```

```
Reply from 172.17.0.2: bytes=32 time<1ms TTL=126
```

```
Reply from 172.17.0.2: bytes=32 time=19ms TTL=126
```

```
Reply from 172.17.0.2: bytes=32 time=10ms TTL=126
```

```
Reply from 172.17.0.2: bytes=32 time=12ms TTL=126
```

```
Ping statistics for 172.17.0.2:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 0ms, Maximum = 19ms, Average = 10ms
```