ZGB37RG(A6587)



Dimenison(mm)

N20/30

FF030

RF130 BLDC 1632 FF130

FF180

RF500

RF300

RF310

094 BLDC 2035

370

2418

2430

385

2838

395 30-C

32-C

40-C

32ZY13

32ZY25

520 BLDC 520

380

555

BLDC 3640

775

38S

BLDC 38S


45S


BLDC 45S

50S

BLDC 50S

60S BLDC 60S 80S 稳压器

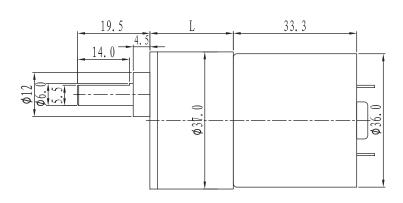



Specification

DC Motor	Ratio	1/7.5	1/13.5	1/20	1/31	1/47.5	1/57.7	1/64	1/73	1/83	1/94.9	1/111	1/148	1/171	1/194	1/221	1/258	1/314	1/382	1/516	1/604	1/981
ZYTD-520 (12V-3500R)	No load (r/min)	460	255	170	110	72	59	54	57	41	36	31	23	20	18	16	13	11	9	7	6	4
	On load (r/min)	375	210	140	90	59	49	44	39	34	30	25	19	17	15	13	11	9	8	6	5	3
	Rated torque (kgf.cm)	0.35	0.55	0.85	1.1	1.7	2.1	2.1	2.4	2.7	3.1	3.7	5	5.1	5.9	6.7	7.9	8	8	10	10	10
ZYTD-520 (24V-5000R)	No load (r/min)	665	370	250	160	105	86	78	68	60	53	45	34	29	26	23	19	16	13	10	8	5
	On load(r/min)	555	310	210	135	88	72	65	57	50	44	38	28	24	21	19	16	14	12	9	7	5
	Rated torque (kgf.cm)	0.37	0.5	0.8	1.15	1.8	2.2	2.2	2.5	2.9	3.3	3.9	5.3	5.4	6.3	7.2	8	8	8	10	10	10
回转方向	电源正极接 + 端子	CW	CC	W	CW			CCW				CW					CCW					

Gearbox

Reduction Ratio	L	Stagos	Allowable Torque				
Reduction Ratio	mm	Stages	mN.m	kgf.cm			
1/7.5	23	3	147	1.5			
1/13.5~1/20	23	4	245	2.5			
1/31~1/57.7	25	5	392	4			
1/64~1/148	27	6	588	6			
1/171~1/382	30	7	784	8			
1/516~1/981	31	8	980	10			

★ 本公司可定做各种非标产品,如有需要请来电咨询。

同步 电机 永磁 直流电机

交流 可逆电机

浙江正科电机有限公司

Fax:0577-6287 1122

Http:www.zhengkemotor.com

087

Tel:0577-6289 0088