
MRDVS
Mobile Robot Vision Expert



Nvidia Jetson Thor Ready GMSL2 Interface

Hand-Mounted Vision for Humanoid Robots

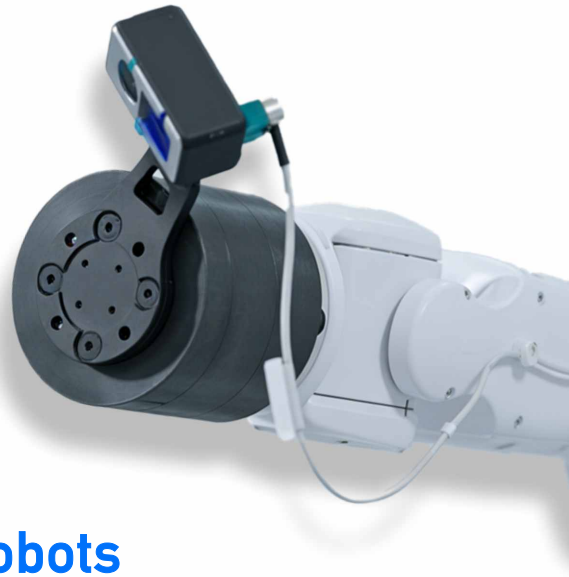


M4-G iToF 3D Camera




CORE CAPABILITIES

- High-Precision Depth
- Reliable Low-Light Sensing
- High Data Integrity
- Multi-Modal Output
- Lossless Data Transmission

GMSL2 INTERFACE




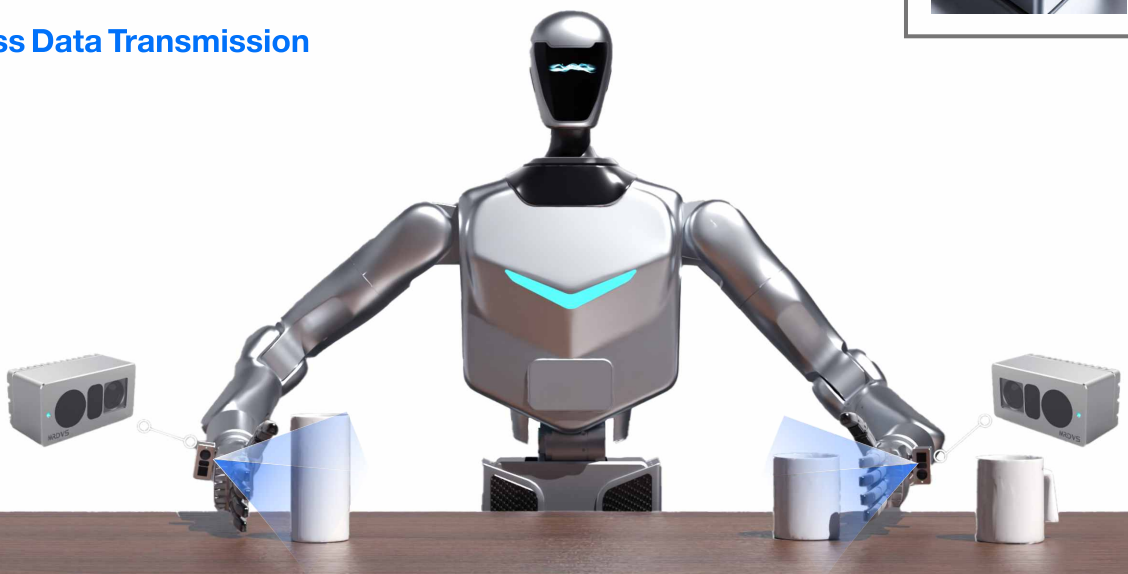

WhatsApp +86 133 7088 2355
www.mrdvs.com
service@mrdvs.com


MRDVS
Mobile Robot Vision Expert

PICK
with confidence

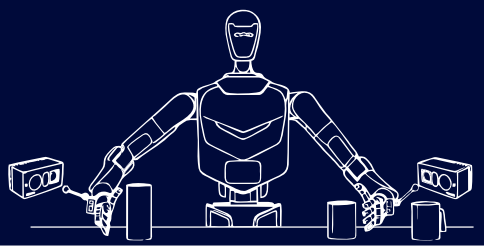


M4-G is an iToF-based RGB-D camera engineered for close-range, high-precision perception in humanoid robots. With up to 4 mm depth accuracy from 0.05 to 1 m and 30 FPS synchronized RGB-D output, it enables precise 3D perception for near-field sensing, tabletop object grasping, and dexterous manipulation.

MULTI-MODAL 3D PERCEPTION



Point cloud



Depth




RGB



IR

APPLICATIONS

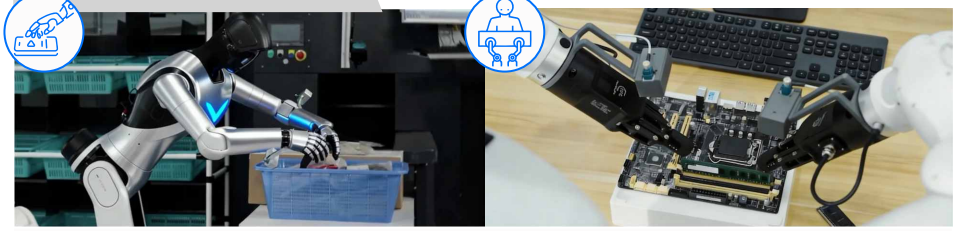

- **In industrial environments,** humanoid robots use high-precision vision guidance to identify, grasp, and assemble components for tasks such as bin picking, precision assembly, and machine tending.



- Autonomous object recognition and grasping across diverse scenarios for home, office, and beyond.

SPECIFICATIONS

Depth Resolution	640 × 480 (VGA), 30 FPS	**Operating Range**	0.05–1 m
Depth FOV	90° × 70° (±3°)	**Accuracy**	1% (up to 4 mm @ 1 m)
Dimensions	60 × 30 × 29 mm	**Weight**	<200 g
Interface Support	GMSL2	**Operating Temp.**	–20°C to 60°C
Power Supply	12 V DC / 1 A	**Storage Temperature**	–40°C to 85°C
RGB FOV	115° × 100° (±3°)	**RGB Resolution**	1280 × 1056, 30 FPS
RGB Pixel Size	2.5 µm	**RGB HDR**	⩾100 dB
RGB Lens Aperture (F#)	2.05	**RGB EFL**	1.28 mm

MRDVS Technology *A wholly owned subsidiary of Lanxin Robotics.*

