



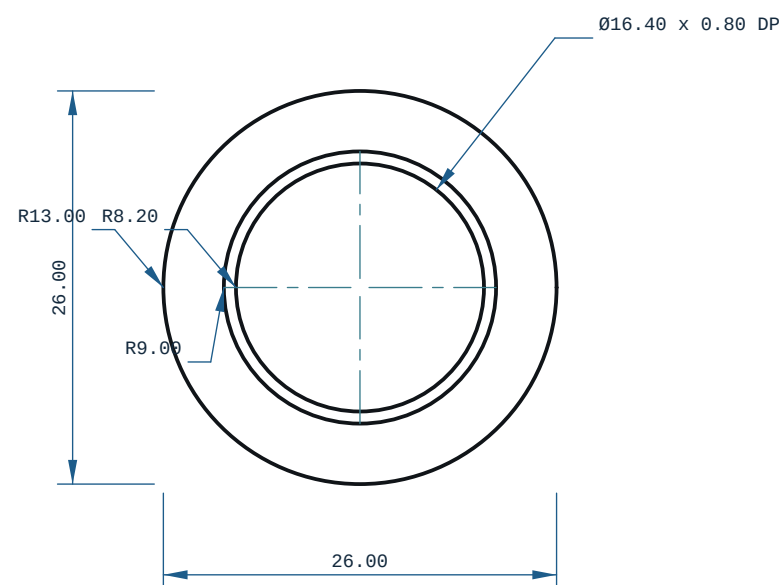


TOP VIEW

X ? Y ?

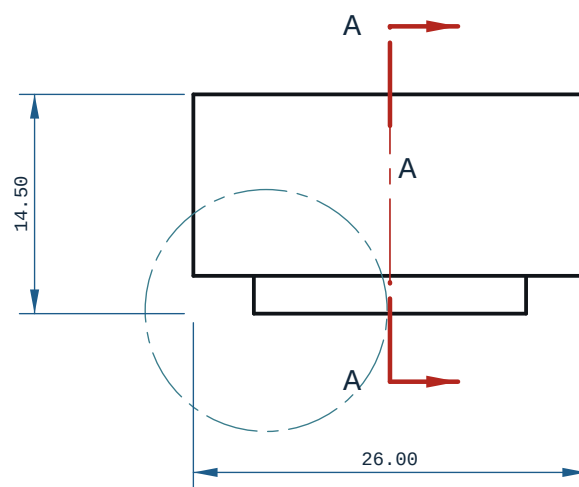


FRONT VIEW

-X ? Z ?

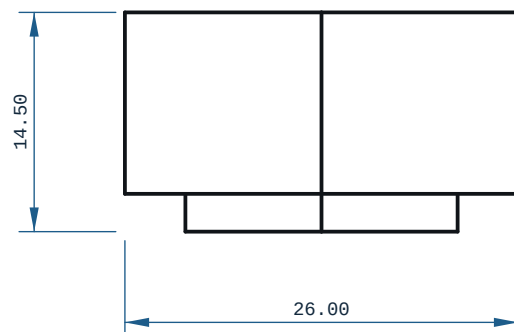


RIGHT VIEW

-Y ? Z ?

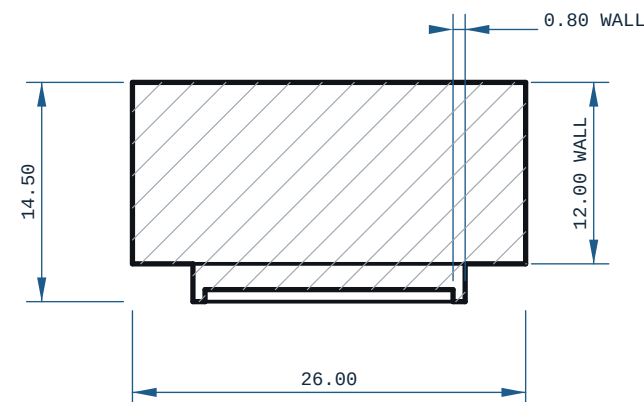

SECTION A-A

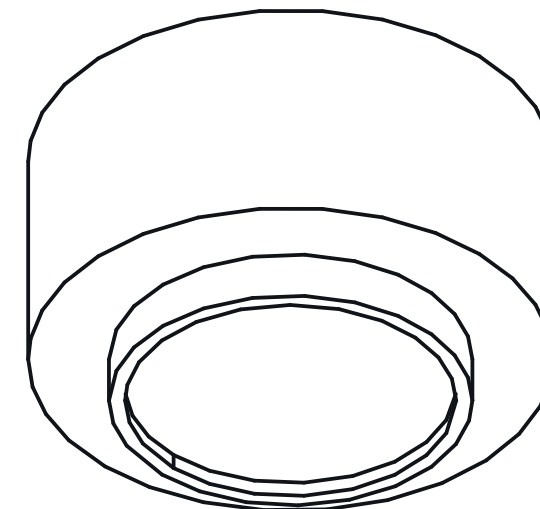

ISOMETRIC VIEW

26.00 x 26.00 x 14.50 mm


NOTES

1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. THINNEST WALL, WHOLE SOLID (RAY MINIMUM): 0.8000 mm, AT X=8.186 Y=3.735 Z=0.208 ? MEASURED OVER THE WHOLE SOLID = BY RAY=EXACT AT 0.6990 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). THIS IS A DISTANCE THROUGH MATERIAL, NOT A WALL: AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IT IS REAL AND UNPRINTABLE BY DEFINITION. DO NOT JUDGE PRINTABILITY BY IT ? THE NEXT NOTE IS THE ONE THAT DOES.
3. PRINTABLE MINIMUM WALL: 0.7998 mm, AT X=-1.634 Y=6.595 Z=0.795 ? MEASURED AS THE SMALLEST MEDIAN WALL OVER A NEIGHBOURHOOD OF 1.8260 mm (≥ 8 SAMPLES), RAYS CAPPED AT 4.000 mm, BY cecad.inspect.printable_wall_detail. AGAINST THE 0.8000 mm FLOOR (2 PERIMETERS @ 0.4 mm NOZZLE, cecad/printed.py:801): VERDICT FAIL ? THIS REGION IS BELOW THE FLOOR AND WILL NOT PRINT SOLID: THICKEN IT, OR PRINT WITH A SMALLER NOZZLE AND SAY SO ON THE ROUTE CARD.
4. GENERAL TOLERANCE: CANNOT DETERMINE ? THIS PART DECLARES NO PROCESS THIS REPO CAN READ.
5. SECTION A-A AT X=0.00: THINNEST MATERIAL IN THIS PLANE ONLY 0.80 mm, AT Y=8.60, Z=0.79 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. FRONT VIEW: hidden lines SUPPRESSED: all 37 edge samples still land on drawn ink without them.
7. TOP VIEW: hidden lines SUPPRESSED: all 45 edge samples still land on drawn ink without them.
8. RIGHT VIEW: hidden lines SUPPRESSED: all 41 edge samples still land on drawn ink without them.

PRINT / DFM

1. **ORIENTATION:** laid flat (26 x 26 x 14 mm)
2. **THINNESS WALL, WHOLE SOLID (RAY MINIMUM):** 0.8000 mm ? a distance through material, NOT a printable wall where it falls on an edge, a fillet run-out or a chamfer tip. Printability is judged on the next line.
3. **PRINTABLE MINIMUM WALL:** 0.7998 mm (smallest median wall over a 1.8260 mm neighbourhood, `ccad.inspect.printable_wall_detail` against a 0.8000 mm floor (2 perimeters @ 0.4 mm nozzle): **VERDICT FAIL** ? thicken this region or print it with a smaller nozzle and say so on the route card.
4. **FILAMENT:** PLA, ~3 g (modelled), 73 layers @ 0.2 mm

SCALE 5:1
DETAIL A

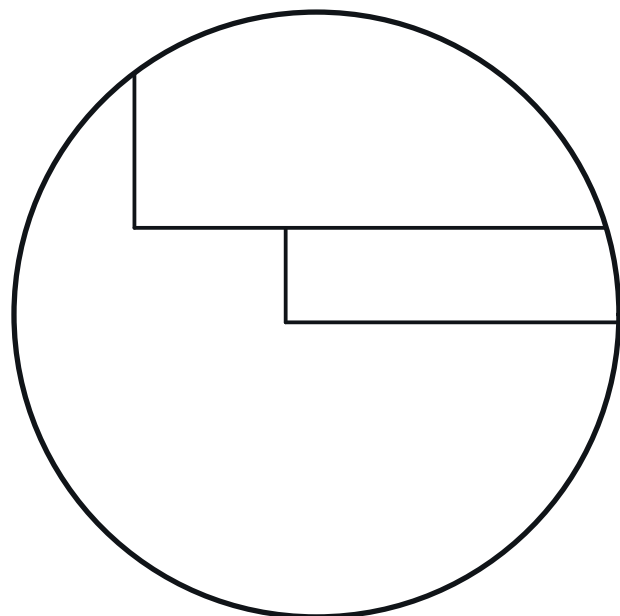

MICRODUC - JIG-PRESS-22-INNER					REV A	
MATERIAL		PROCESS			SCALE	
PLA		-			2:1	
CATEGORY	GENERAL TOL		FINISH		SHEET	
-	SEE NOTES		AS PRINTED		A2 1/1	
VOLUME (MEASURED)		MASS (ASSUMES PLA)			UNITS	
6.84 cm3		8.5 g			mm / deg	
SIZE (BBOX, MEASURED)		DRAWN			PROJECTION	
26.00 x 26.00 x 14.50		ce-cad 2026-09-03			THIRD ANGLE	
SOURCE (DESIGN FILE)						
tools/jigs.py						