



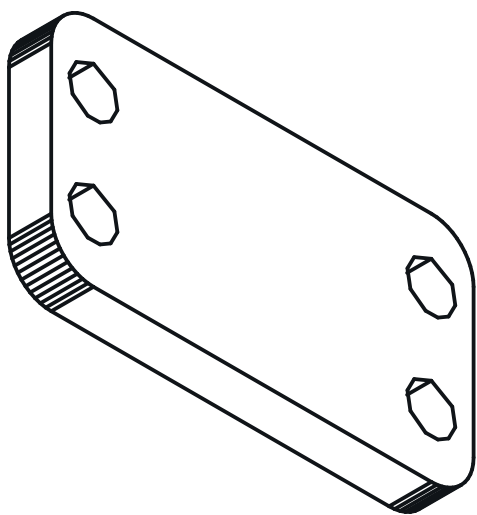

ISOMETRIC VIEW

2.00 x 20.00 x 11.00 mm




REFERENCE RENDER (1502) ? rendered off this solid, 900 x 680 px

NOTES


1. ALL DIMENSIONS IN mm AND DEGREES. EVERY DIMENSION AND EVERY HOLE CALLOUT WAS MEASURED OFF THE SOLID.
2. PROCESS: FDM.
3. THINNEST WALL, WHOLE SOLID: 0.8500 mm, AT X=0.333 Y=-12.850 Z=77.500 ? MEASURED OVER THE WHOLE SOLID BY RAY+EXACT AT 0.310 mm SAMPLE SPACING (A FEATURE NARROWER THAN THAT CAN BE MISSED). A RAY MINIMUM AT AN EDGE, A FILLET RUN-OUT OR A CHAMFER TIP IS A REAL DISTANCE THROUGH MATERIAL AND IS NOT A PRINTABLE WALL.
4. GENERAL TOLERANCE CANNOT DETERMINE ? SEE PRINT / DFM NOTES UNLESS STATED.
5. SECTION A-A AT Y=-30.00: THINNEST MATERIAL IN THIS PLANE ONLY 2.00 mm, AT X=1.00, Z=69.59 ? A SCAN OF ONE CUT, NOT THE PART MINIMUM.
6. RIGHT VIEW: hidden lines SUPPRESSED: all 580 edge samples still land on drawn ink without then.
7. FRONT VIEW: hidden lines SUPPRESSED: all 574 edge samples still land on drawn ink without then.

PRINT / DFM

1. ORIENTATION: laid flat (2 x 20 x 11 mm)
2. THINNEST WALL: 0.85 mm (floor 0.80 mm = 2 perimeters @ 0.4 mm nozzle)
3. 4 horizontal bore(s) bridge at the crown: ream any bearing or press-fit bore to size
4. FILAMENT: PLA, -0 g (modelled), 55 layers @ 0.2 mm
5. TOLERANCE BASIS, IN-HOUSE: CANNOT DETERMINE. Every Bambu on this farm records tolerance_mm: null, cite "no coupon printed and measured on this machine" (ce-machines/bambu-h2s-*, bambu-h2d-*/capabilities.json, read 2026-09-02), and Bambu Lab's own H2D Pro spec sheet carries no dimensional-accuracy line. DIMENSIONS HERE ARE NOMINAL AS MODELLED.
6. TOLERANCE BASIS, OUTSOURCED: JLC3DP +/-0.3 mm FDM (jlc3dp.com, ce-machines/farm-jlc3dp); Hubs +/-0.5%, floor +/-0.5 mm (hubs.com/3d-printing/, ce-machines/farm-hubs). Apply the route's figure, not both. The +/-0.2 mm in cecad/machining.py fdm is a repo planning constant with no vendor cite and is NOT used here. One printed and measured coupon closes this note.
7. NO ISO 286 CLASS IS DECLARED ON ANY BORE: FDM cannot be sized to one (H7/p6 at 03 is a 0.010 mm band). REAM bearing and press-fit bores after printing.

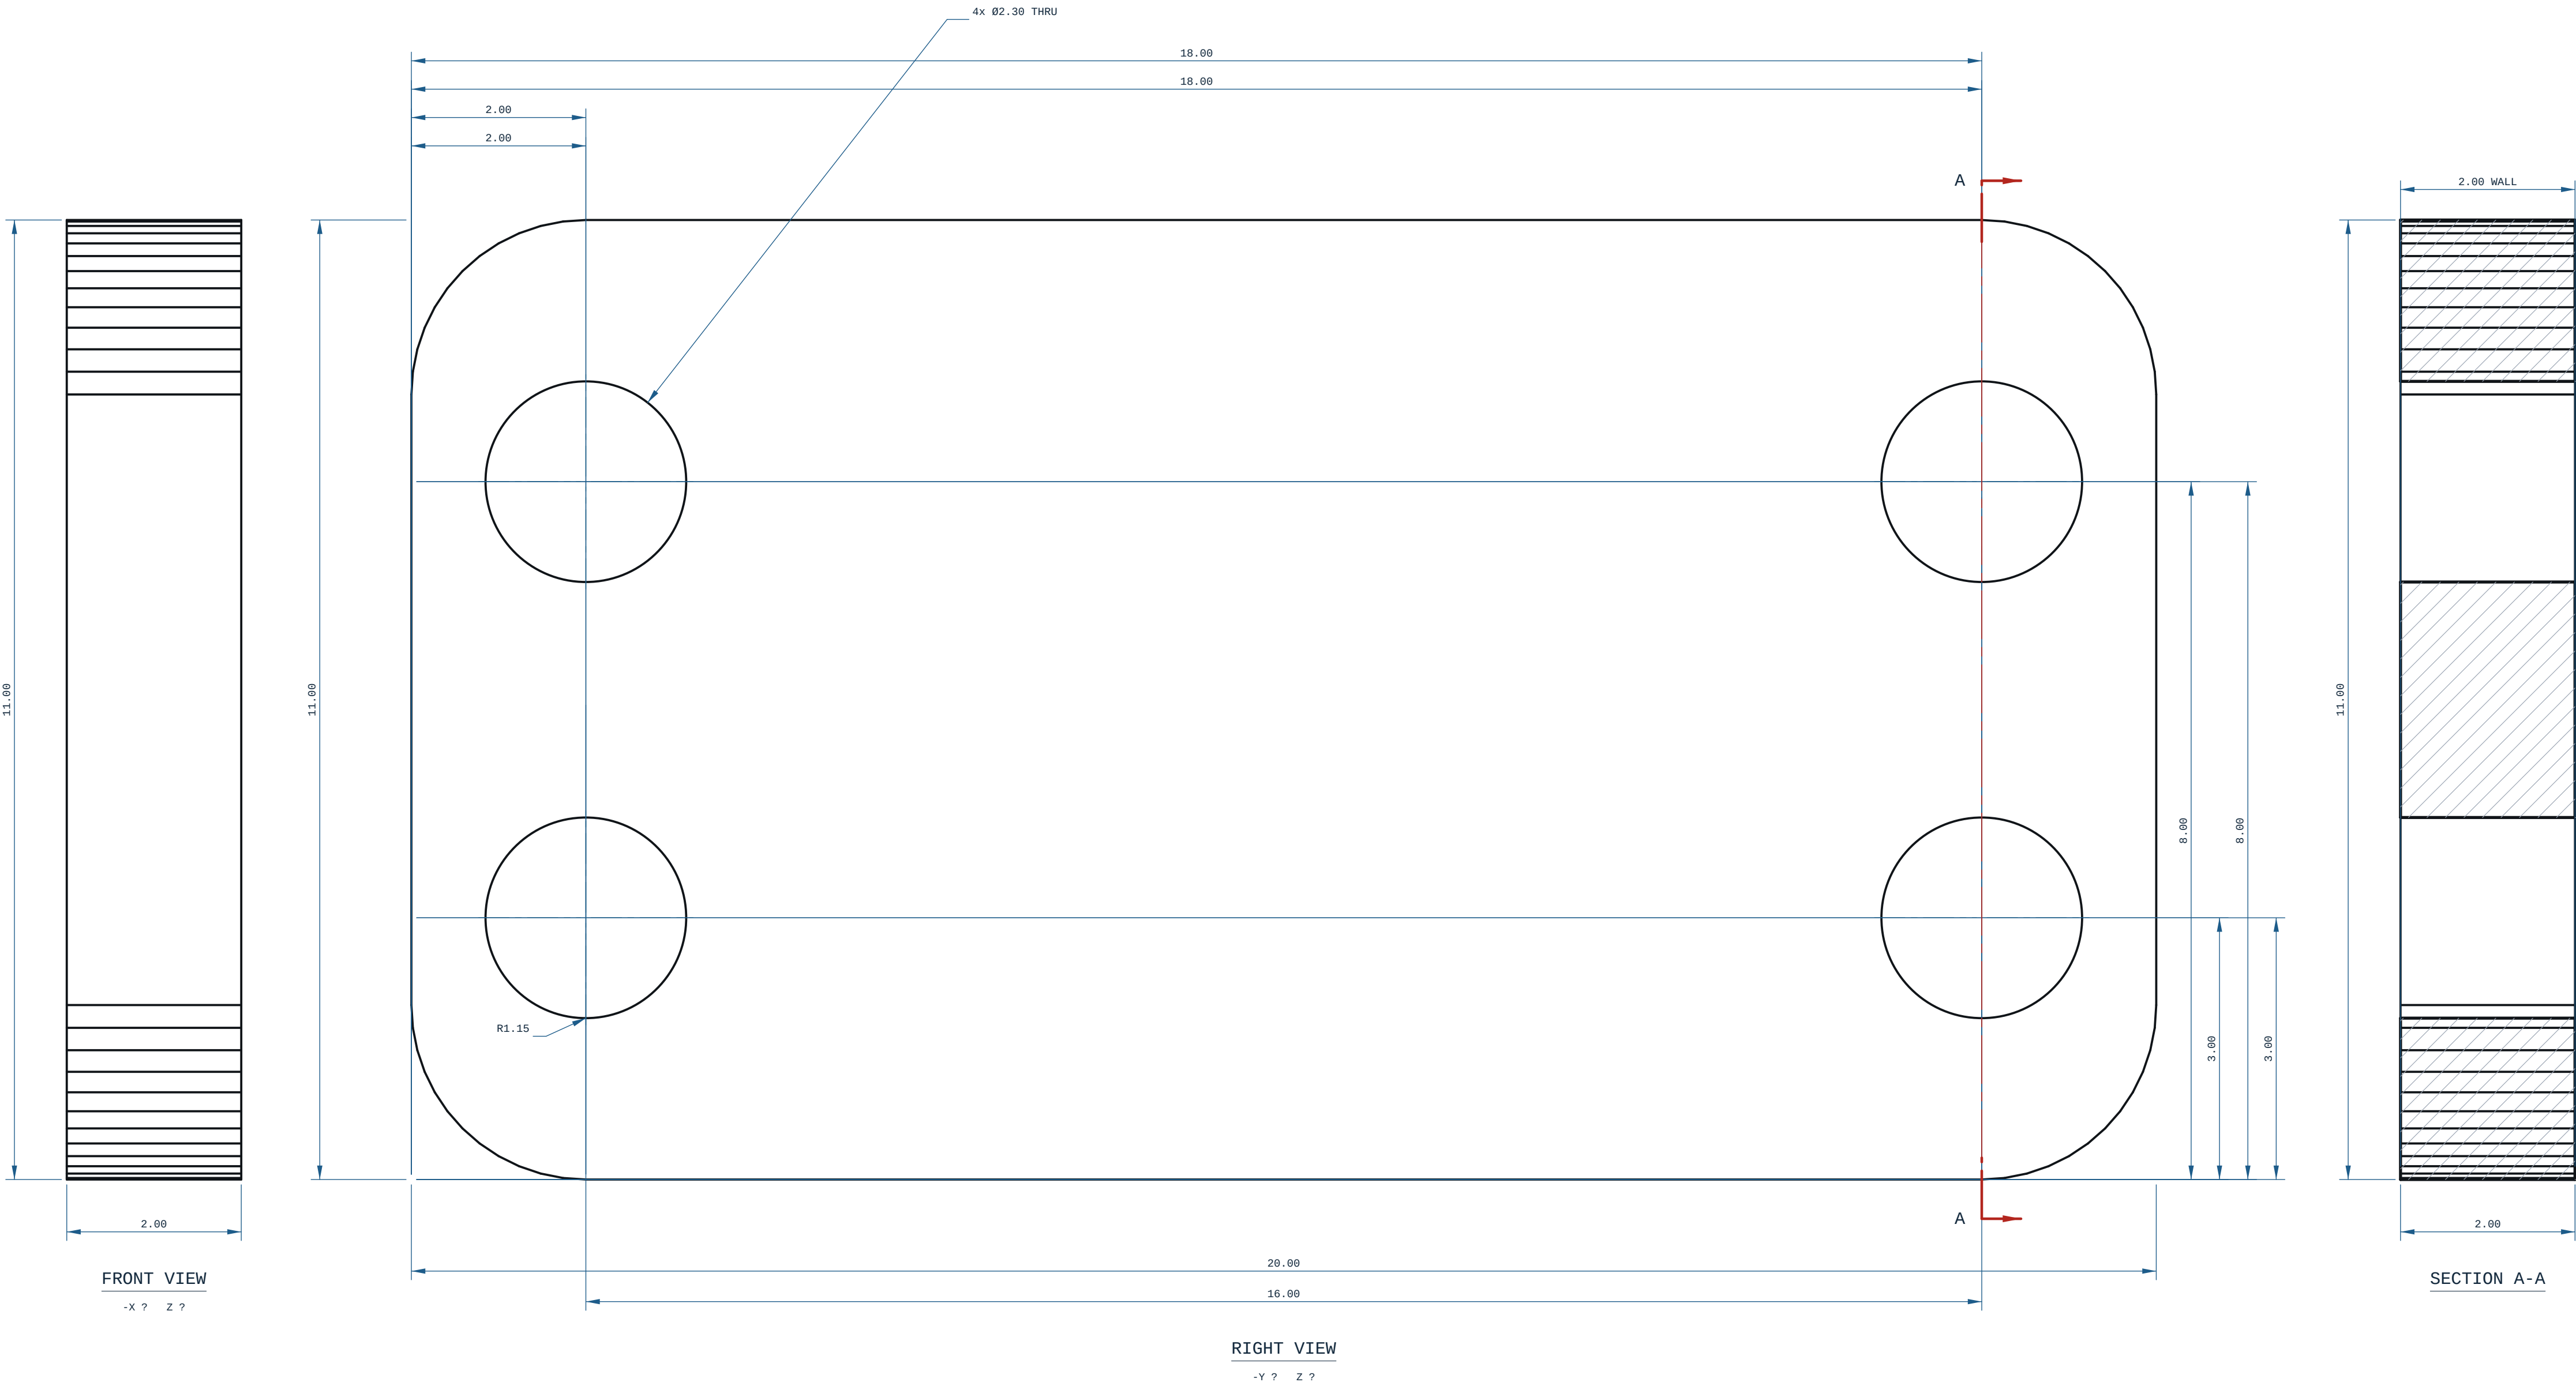

MICRODUCK - NECK - PLATE



REV
A

MATERIAL PLA		PROCESS FDM	SCALE 20:1
CATEGORY robot-link	GENERAL TOL CANNOT DETERMINE ?~	FINISH AS PRINTED	SHEET A1 1/1
VOLUME (MEASURED) 0.40 cm3	MASS (ASSUMES PLA) 0.5 g		UNITS mm / deg
SIZE (BOX, MEASURED) 2.00 x 20.00 x 11.00	DRAWN ce-cad 2026-09-03		PROJECTION THIRD ANGLE
SOURCE (DESIGN FILE) ce-parts/microduck-neck-plate/current/cad/part.py			