DECU6000

BIO-NEURAL PERCUSSION SYNTHESIZER

USER MANUAL

VERSION 0.9.0 // VST3 + STANDALONE // WINDOWS + LINUX



FREE & OPEN SOURCE // GNU AGPL v3.0 OR LATER // GITHUB.COM/LEXLONGCODING/DECU6000

Contents

1 Welcome
2 Installing
3 Quick start
4 The editor
5 Pads, keyboards and MIDI learn
6 The voices
7 Master and gated reverb
8 The Bio-Neural Engine
9 Patches
10 Sound design tips
11 Troubleshooting
12 Credits and license

New to plug-ins? Read sections 2 and 3 first - they get you from download to hitting pads in a few minutes. Everything else is reference you can dip into.

1 Welcome

Decu6000 is a drum synthesizer inspired by mid-90s cyber-industrial, glitch and trip-hop production. Every sound is synthesized in real time - there are no samples - so each of the 16 voices can be bent far beyond a normal drum kit.

It is designed around a **4x4 MIDI pad controller** such as the Akai MPD18, and works equally well with a MIDI keyboard or a DAW's piano roll.

What's inside

- **11 machine voices** - kick, snare, closed and open hi-hats, crash, ride, three toms and two FM percussion voices.
- **5 bio-neural voices** - Crystal Impact, Liquid Metal, Synthetic Breath, Digital Perc and Bio Burst: glassy, liquid, vocal, glitchy and granular sounds you won't find in a classic drum machine.
- **Gated reverb** on the master, fed by the bio-neural voices' SEND knobs.
- **Bio-Neural Engine** - a global instability layer that "awakens" the longer you play: glitch stutters, crushing, tape-style wow, timing drift and dropped hits.
- **Two views** - a rack of every voice, or a pad grid laid out like your controller.
- **MIDI learn** for pads and knobs, pad layout presets for pads, keyboards and General MIDI.
- **Patches** - 7 factory patches plus your own, shared between the plug-in and the standalone app.

2 Installing

Decu6000 comes in two forms: a **VST3 plug-in** you load into a DAW (Reaper, Bitwig, Ableton Live, Cubase, FL Studio, Ardour...) and a **Standalone** app you can play without a DAW.

Windows (64-bit)

- **VST3:** copy the whole `Decu6000.vst3` folder to `C:\Program Files\Common Files\VST3\` (Windows asks for administrator permission). Rescan plug-ins in your DAW - Decu6000 appears as an instrument.
- **Standalone:** double-click `Decu6000.exe`. No installation needed.
- The first time, Windows may show *"Windows protected your PC"* because the app isn't signed with a paid certificate. Click **More info**, then **Run anyway**.

Linux (x86_64)

- **VST3:** copy `Decu6000.vst3` to `~/.vst3/` and rescan in your DAW (Bitwig, Reaper, Ardour, Carla...).
- **Standalone:** run `./Decu6000` (if needed, first `chmod +x Decu6000`). It supports ALSA and JACK; with PipeWire, `pw-jack ./Decu6000` also works.

Setting up the Standalone

Click **Options** (top-left of the window), then **Audio/MIDI Settings...**

- **Output:** choose your audio interface. On Windows, *Windows Audio (Exclusive Mode)* gives the lowest latency. A buffer of 128-256 samples is a good start.
- **MIDI input:** tick your MPD18 or keyboard under *Active MIDI inputs*.

> **Building it yourself:** Decu6000 is open source. The README explains how to build it with Visual Studio or on Linux, or how to let GitHub build Windows and Linux versions for you automatically.

3 Quick start

- **1. Load it.** Add Decu6000 to an instrument track in your DAW, or open the Standalone.
- **2. Hear it.** Click any trigger pad in the window - each one plays its voice.
- **3. Play it.** Hit the pads on your controller. An MPD18 (and most 4x4 pad controllers) works straight away: pad 1, bottom-left, is the kick.
- **4. Using a keyboard?** Open **PAD LAYOUT...** in the header and choose *Keyboard: from C2* or *from middle C* - or *General MIDI drum map* if your DAW's drum lanes use GM.
- **5. Try patches.** Click the arrows either side of the LCD to step through the factory patches.
- **6. Make it yours.** Turn knobs (the LCD shows the value), then click the LCD and choose **Save As...**

Default pad layout (MPD18 bank A)

Pads are numbered from the bottom-left, left to right, then upward - like the hardware.

Crystal Impact **48 C2**	**Liquid Metal** **49 C#2**	**Synthetic Breath** **50 D2**	**Digital Perc** **51 D#2**
Ride **44 G#1**	**Perc 1** **45 A1**	**Perc 2** **46 A#1**	**Bio Burst** **47 B1**
Lo Tom **40 E1**	**Mid Tom** **41 F1**	**Hi Tom** **42 F#1**	**Crash** **43 G1**
Kick **36 C1**	**Snare** **37 C#1**	**Closed HH** **38 D1**	**Open HH** **39 D#1**

Note numbers with names (middle C = C3, the Akai / Ableton convention).

4 The editor

The header is the same in both views:


- **RACK VIEW / PAD VIEW** - switch between the two layouts (remembered with your project).
- **LCD** - shows the current patch, e.g. `PATCH 03 // RUST BELT`. A * means you've changed it since loading. While you turn a knob it shows the value. Click it for the patch menu; the arrows either side step through patches.
- **PAD LAYOUT...** - presets for which MIDI notes play which pads (section 5).
- **MIDI LEARN** - assign keys, pads and controller knobs (section 5).



Rack view: machine voices on top; bio-neural voices, the Bio-Neural Engine and the master section below.

Rack view

Every voice is a column with its knobs and a trigger pad. The pad shows the MIDI note that plays it and flashes when it's hit. Click it to hear the voice.

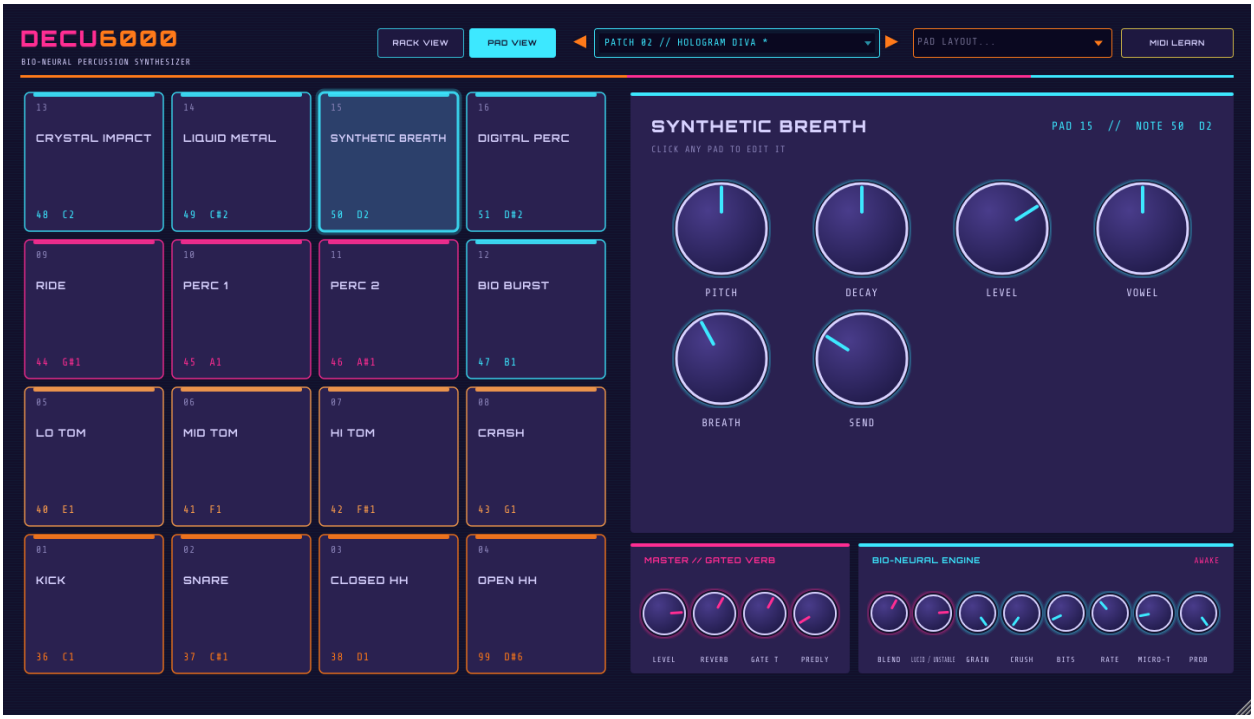

Pad view: the 4x4 grid, the selected voice's knobs, master and engine.

Pad view

The 4x4 grid matches your controller. **Click a pad** to hear it and to edit it: its knobs appear large on the right. Master and Bio-Neural Engine controls sit underneath.

Handy everywhere

- **Double-click** a knob to reset it to its default.
- **Right-click** a knob to MIDI-learn it, clear its controller, or reset it.
- **Hover** over a knob to see its full name.
- **Resize** the window by dragging its bottom-right corner; it keeps its shape and remembers its size.

5 Pads, keyboards and MIDI learn

Every pad on a controller sends a MIDI *note number*. Decu6000 keeps a map of which note plays which voice. A voice can answer to several notes (in the General MIDI map, the kick plays on 35 and 36).

Pad layout presets

PRESET	NOTES	USE IT FOR
Pads: notes 36-51	36 to 51 in a row	MPD18 and most 4x4 pad controllers (default)
Keyboard: from C2	48 to 63	Playing from a MIDI keyboard, lower octave
Keyboard: from middle C	60 to 75	Playing from a MIDI keyboard around middle C
General MIDI drum map	GM standard	DAW drum lanes, e-kits, GM drum MIDI files

General MIDI note assignments


VOICE	NOTES	VOICE	NOTES
Kick	35, 36	Ride	51, 59
Snare	38, 40	Perc 1 (side stick)	37
Closed HH	42, 44	Perc 2 (clap)	39
Open HH	46	Crystal Impact	52
Lo Tom	41, 43	Liquid Metal	53
Mid Tom	45, 47	Bio Burst	54
Hi Tom	48, 50	Synthetic Breath	55
Crash	49, 57	Digital Perc	56

MIDI learn: pads and keys

- Click **MIDI LEARN**. Every pad and knob gets a yellow outline with its current note (`N 36`) or controller (`CC 21`).
- Click a **pad**, then hit any key or pad on your controller. That note now plays the voice. It replaces the pad's previous notes and is taken away from any other pad that used it.
- Click the next pad to keep going. **Esc** cancels; click MIDI LEARN again when you're done.

MIDI learn: knobs (CC)

- In MIDI LEARN mode, click a **knob**, then move a knob or fader on your controller.
- Each knob listens to one controller (CC); moving a CC to a new knob frees the old one.
- Outside learn mode you can also right-click any knob and choose **Learn MIDI CC...**
- In learn mode, right-click a pad or knob to clear its mapping.

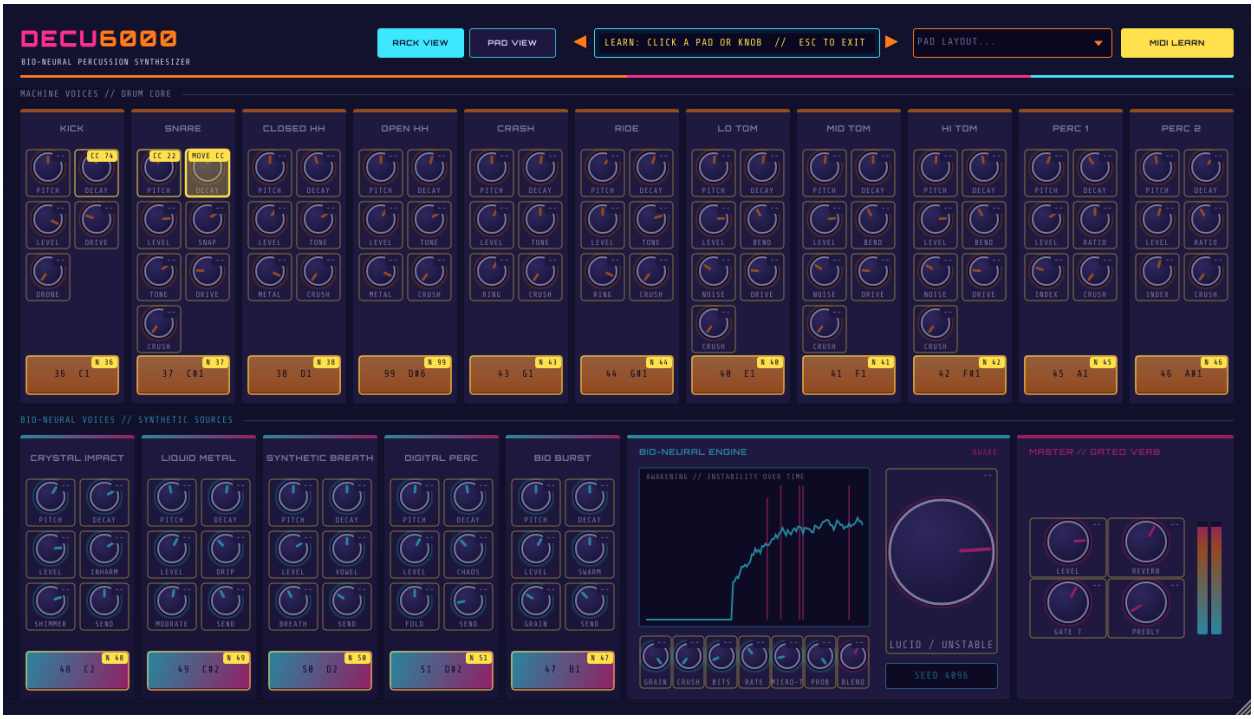

MIDI LEARN mode: every mapping shown at a glance; the armed knob waits for a controller.

> Note and CC mappings are saved with your **project**, not with patches - they describe your controller, so they stay put when you change sounds.

6 The voices

All voices respond to velocity (how hard you hit). Several also get brighter when hit harder. Ranges and defaults below are exactly what the knobs show.

Kick // Pad 1 - note 36

A sine kick with a pitch sweep. Drive comes before the decay envelope, so the tail stays distorted; Drone feeds the tail back into itself until it can hold like a drone.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Fundamental pitch the sweep settles on.	30 Hz to 120 Hz	50 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	50 ms to 2.50 s	500 ms
LEVEL	Volume of this voice.	0% to 100%	90%
DRIVE	Saturation. Grows stronger with longer Decay settings.	0% to 100%	30%
DRONE	Tuned feedback on the tail - from a normal kick to a sustained, growling drone.	0% to 100%	0%

Snare // Pad 2 - note 37

Two tuned tones for the drum body plus filtered noise for the snares.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch of the drum body.	120 Hz to 400 Hz	190 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	30 ms to 1 s	200 ms
LEVEL	Volume of this voice.	0% to 100%	80%
SNAP	Amount (and length) of the noise 'snares'.	0% to 100%	60%
TONE	Brightness of the snares.	0% to 100%	50%
DRIVE	Saturation - warmer and louder at first, gritty and distorted when pushed.	0% to 100%	20%
CRUSH	Lo-fi sample-rate and bit reduction, like an old cheap sampler.	0% to 100%	0%

Closed / Open Hi-Hat // Pads 3 and 4 - notes 38, 39

808-style metallic hats: six detuned square waves blended with noise. The closed hat cuts off (chokes) a ringing open hat. Both hats have the same controls; the table shows the closed hat's defaults (open hat decay: 100 ms to 2 s, default 600 ms).

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch of the metallic oscillators (in semitones).	-12 st to +12 st	0 st
DECAY	How long the sound rings (time to fade by 60 dB).	20 ms to 500 ms	60 ms
LEVEL	Volume of this voice.	0% to 100%	60%
TONE	Brightness (cut-off of the high-pass filter).	0% to 100%	50%
METAL	Blend from pure noise (0%) to metallic clang (100%).	0% to 100%	70%
CRUSH	Lo-fi sample-rate and bit reduction, like an old cheap sampler.	0% to 100%	0%

Crash / Ride // Pads 8 and 9 - notes 43, 44

Ring-modulated cymbals: pairs of square waves multiplied together for dense, clangy overtones, plus a noise wash and a strike burst. The Ride is the same engine with a longer, brighter, more metallic default.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch of the metallic oscillators (in semitones).	-12 st to +12 st	0 st
DECAY	How long the sound rings (time to fade by 60 dB).	300 ms to 5 s	1.60 s
LEVEL	Volume of this voice.	0% to 100%	60%
TONE	Brightness.	0% to 100%	50%
RING	Blend from noise wash (0%) to ring-modulated clang (100%).	0% to 100%	60%
CRUSH	Lo-fi sample-rate and bit reduction, like an old cheap sampler.	0% to 100%	0%

Lo / Mid / Hi Tom // Pads 5, 6, 7 - notes 40, 41, 42

Electronic toms with an adjustable pitch 'zap'. Each tom has its own full set of controls; the table shows the Lo Tom (Mid: 60-240 Hz, default 123 Hz; Hi: 90-360 Hz, default 184 Hz).

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch the tom settles on after the bend.	40 Hz to 160 Hz	82 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	50 ms to 2 s	450 ms
LEVEL	Volume of this voice.	0% to 100%	80%
BEND	Pitch drop at the start: flat (0%) to a long Simmons-style zap sweeping down from about 3 octaves up (100%).	0% to 100%	40%
NOISE	Short stick-click at the start of the hit.	0% to 100%	30%
DRIVE	Saturation - warmer and louder at first, gritty and distorted when pushed.	0% to 100%	20%
CRUSH	Lo-fi sample-rate and bit reduction, like an old cheap sampler.	0% to 100%	0%

Perc 1 / Perc 2 // Pads 10 and 11 - notes 45, 46

Two-operator FM percussion. Perc 1 starts as a woody click, Perc 2 as a metallic blip; both have the same controls (Perc 2 defaults: 540 Hz, 300 ms, ratio 1.41:1, index 55%).

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch of the carrier tone.	100 Hz to 2000 Hz	720 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	10 ms to 1.50 s	70 ms
LEVEL	Volume of this voice.	0% to 100%	70%
RATIO	Modulator-to-carrier frequency ratio. Whole numbers (1:1, 2:1, 3:1) sound woody and tonal; in-between values (1.41:1, 2.76:1) sound like bells, cowbells and metal.	0.50:1 to 8.00:1	2.00:1
INDEX	FM depth: how buzzy and bright the attack is. Harder hits are brighter.	0% to 100%	25%
CRUSH	Lo-fi sample-rate and bit reduction, like an old cheap sampler.	0% to 100%	0%

Crystal Impact // Pad 13 - note 48

Modal synthesis of struck glass: eight ringing partials, the higher ones dying faster, plus a tiny glass 'glint'.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Tuning of the voice.	200 Hz to 4000 Hz	880 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	100 ms to 6 s	1.60 s
LEVEL	Volume of this voice.	0% to 100%	60%
INHARM	Partial spacing: evenly spaced and bell-like (0%) to the stretched spacing of a glass bar (100%).	0% to 100%	70%
SHIMMER	Adds slightly detuned twins of every partial; they beat against each other so the tail glitters.	0% to 100%	40%
SEND	How much of this voice goes to the gated reverb.	0% to 100%	25%

Liquid Metal // Pad 14 - note 49

A metallic FM tone that drips and wobbles.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Tuning of the voice.	60 Hz to 2000 Hz	330 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	50 ms to 4 s	700 ms
LEVEL	Volume of this voice.	0% to 100%	60%
DRIP	Rising pitch sweep at the start - the 'bloop' of a falling drop - up to two octaves.	0% to 100%	50%
MODRATE	Speed of the warble in pitch and brightness that makes the tail move like molten metal.	0.5 Hz to 30 Hz	7.0 Hz
SEND	How much of this voice goes to the gated reverb.	0% to 100%	30%

Synthetic Breath // Pad 15 - note 50

Formant synthesis - a robotic throat. A buzzy source and breath noise are shaped into vowel sounds; each hit is a short exhale.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Pitch of the buzzy 'voice'.	60 Hz to 400 Hz	140 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	30 ms to 2 s	350 ms
LEVEL	Volume of this voice.	0% to 100%	70%
VOWEL	Sweeps the vowel: U - O - A - E - I (dark to bright).	0% to 100%	50%
BREATH	Blend from buzzy robot voice (0%) to whispered gasp (100%).	0% to 100%	40%
SEND	How much of this voice goes to the gated reverb.	0% to 100%	30%

Digital Perc // Pad 16 - note 51

A short blip pushed through a wavefolder, with a chaotic digital source mixed in.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Tuning of the voice.	50 Hz to 2000 Hz	420 Hz
DECAY	How long the sound rings (time to fade by 60 dB).	10 ms to 1.50 s	120 ms
LEVEL	Volume of this voice.	0% to 100%	60%
CHAOS	Blends in a chaotic number generator and makes the pitch jump between octaves and fifths - from clean to broken machine.	0% to 100%	35%
FOLD	Wavefolding: from a clean tick (0%) to harsh, buzzy metal (100%). Harder hits fold more.	0% to 100%	50%
SEND	How much of this voice goes to the gated reverb.	0% to 100%	15%

Bio Burst // Pad 12 - note 47

A swarm of tiny sound grains released by each hit.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
PITCH	Centre pitch of the swarm.	150 Hz to 6000 Hz	1200 Hz
DECAY	How long grains keep spawning.	50 ms to 3 s	600 ms
LEVEL	Volume of this voice.	0% to 100%	60%
SWARM	How many grains and how widely their pitches scatter: sparse chirps (0%) to a dense insect swarm (100%).	0% to 100%	50%
GRAIN	Grain length: clicky static (0%) to buzzing, tonal chirps (100%).	0% to 100%	30%
SEND	How much of this voice goes to the gated reverb.	0% to 100%	35%

7 Master and gated reverb

The master section sets the overall level and runs the **gated reverb** - the classic 80s/90s drum verb that opens on a hit, holds, then slams shut instead of fading. The bio-neural voices feed it through their SEND knobs.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
LEVEL	Overall output level. A soft limiter after it keeps loud, stacked hits from clipping harshly.	0% to 100%	80%
REVERB	Level of the reverb you hear (return).	0% to 100%	50%
GATE T	How long the reverb stays open after a hit before it's cut off.	50 ms to 1 s	300 ms
PREDLY	Gap before the reverb starts - pushes the reverb behind the dry hit.	0 ms to 250 ms	20 ms

The two meters show the output level. The master soft limiter only acts above about -2 dBFS, so normal playing is untouched.

8 The Bio-Neural Engine

A global instability layer over the whole kit. It "awakens": the longer and busier you play, the more unstable things get; stop playing and it relaxes. The screen on the engine panel draws this live, with a pink line for each glitch stutter.

> **Off means off.** With LUCID / UNSTABLE at 0 or BLEND at 0 the engine is completely bypassed and your sound is untouched. INIT starts with LUCID at 0.

LUCID versus BLEND

Think of a distortion pedal. **LUCID / UNSTABLE** is the *drive*: how hard the engine works - how often it glitches, how deep it crushes, how far the timing drifts. **BLEND** is the *mix*: how much of the engine you hear next to your clean kit. High LUCID with low BLEND gives wild glitching tucked behind a solid beat; low LUCID with high BLEND gives a subtly worn, lo-fi kit.

CONTROL	WHAT IT DOES	RANGE	DEFAULT
BLEND	How much of the engine you hear. All the way left = off; all the way right = full effect. Crush, bits, wow and stutters mix in parallel with the dry kit; PROB and MICRO-T scale down with it.	0% to 100%	100%
LUCID / UNSTABLE	How unstable the engine gets, and how strongly it awakens as you play.	0% to 100%	0%
GRAIN	Chance of glitch stutters - a short slice of the output repeats 2 to 7 times.	0% to 100%	30%
CRUSH	Sample-rate reduction.	0% to 100%	30%
BITS	Bit depth, in whole steps from 16 bits down to 3.	0% to 100%	30%
RATE	Speed of a drifting, tape-style pitch wow (a random wander, not a regular wobble).	0.1 Hz to 12.0 Hz	1.5 Hz
MICRO-T	Random timing push on each hit - human feel at small settings, drunken at large ones.	0 ms to 40 ms	12 ms
PROB	Chance that each hit plays at all. 100% = every hit.	0% to 100%	100%
SEED	Starting point of the randomness. Click the SEED display for a new one; the same seed repeats the same glitches, so patches sound the same every time.	0 to 9999	4096

9 Patches

A patch stores every sound setting - all voices, the master section and the Bio-Neural Engine.

- **Browse:** click the arrows beside the LCD, or click the LCD for the full list.
- **Save:** click the LCD and choose **Save As...** to name a new patch, or **Save** to update the user patch you're on. **Delete** removes a user patch (the sound stays loaded).
- **Your DAW's preset menu** lists the same patches.
- Your project remembers which patch was loaded, including unsaved changes.
- Pad layouts and MIDI CC assignments are *not* part of a patch.

Where patches are stored

SYSTEM	FOLDER
Windows	%APPDATA%\Decu6000\Patches (paste into the Explorer address bar)
macOS	~/Library/Decu6000/Patches
Linux	~/.config/Decu6000/Patches

Patches are small `.decupatch` files: copy them between computers or share them. The plug-in and Standalone share the same folder. Older patches load fine in newer versions - controls added later simply start at their defaults.

Factory patches

PATCH	CHARACTER
INIT	Every control at its default. Engine asleep. A clean starting point.
HOLOGRAM DIVA	Bright and glassy: shimmering Crystal Impact, metallic hats, generous gated reverb, a light touch of the engine.
RUST BELT	Industrial: overdriven droning kick, crushed snare and hats, zapping toms, clanging cymbals, crunchy engine.
TRIP HOP 94	Dusty and laid back: low, soft snare, darker hats, gentle toms, lo-fi sampler wobble and a longer reverb.
GLITCH RITUAL	Broken machines: heavy crush, extreme FM percs, full-bend toms, and a strongly awake engine with stutters and dropped hits.
SUBMERGED	Deep and wet: sub kick drone, dark tones, dripping Liquid Metal, long open reverb.
AWAKENING	The engine at full tilt - play for a while and listen to it come alive.

10 Sound design tips

IDEA	TRY THIS
Industrial kick	Kick: Pitch 40 Hz, Decay 1.2 s, Drive 80%, Drone 30-40%. Add Engine CRUSH for grit.
Trip-hop snare	Snare: Pitch 150 Hz, Snap 40%, Tone 30%, Crush 20-30%, Decay 350 ms.
Simmons tom fill	Toms: Bend 70-100%, Decay 600 ms+, a little Drive. Play Hi-Mid-Lo quickly.
Cowbell from Perc 2	Pitch about 560 Hz, Ratio 1.41:1, Index 50%, Decay 250 ms.
Woodblock / clave	Perc 1: Ratio 1:1 or 2:1, Index 10-25%, Decay 30-70 ms, Pitch 700 Hz-1.5 kHz.
Gated 80s snare	Send Crystal or Breath to the reverb, Gate T 150-250 ms, Reverb 60%+.
Robot vocal hits	Synthetic Breath: Breath 0%, Vowel swept per hit with a MIDI-learned knob, Pitch 100-200 Hz.
Data-corruption hi-hat	Closed HH Crush 60%+, Digital Perc with Chaos 80% layered underneath at low Level.
Humanise, don't glitch	Engine: LUCID 30%, BLEND 100%, GRAIN 0, CRUSH 0, BITS 0, MICRO-T 8-12 ms, PROB 100% - just a loose, human feel.

Keep a knob under your hand: MIDI-learn the engine's LUCID or a voice's Decay to a controller knob and ride it while you play.

11 Troubleshooting

PROBLEM	WHAT TO DO
No sound from the Standalone	Options > Audio/MIDI Settings: check the output device is selected and not muted. On Linux, try another ALSA device, or start JACK / use pw-jack.
Pads trigger the wrong sounds	Your controller sends different notes. Choose a preset under PAD LAYOUT, or use MIDI LEARN to assign each pad.
Only some keys make sound	With the default layout only notes 36-51 are mapped. Choose a Keyboard layout or learn the keys you want.
Hits sometimes don't play	The Bio-Neural Engine's PROB is below 100% with LUCID up. Raise PROB or lower BLEND.
Timing feels loose	Engine MICRO-T is pushing hits late. Turn it down (or BLEND down).
Unexpected crunch or stutters	The engine is awake. Set LUCID or BLEND to 0 to switch it off.
DAW doesn't list Decu6000	Check the .vst3 folder is in your VST3 folder (section 2) and rescan plug-ins.
Linux build won't start	The ready-made build needs a 2023-or-newer distro (glibc 2.38+). Use the build from the GitHub workflow, or build from source.
Windows says the app is unsafe	Click More info > Run anyway. The app isn't signed with a paid certificate.

12 Credits and license

Decu6000 is free software: you can redistribute it and/or modify it under the terms of the **GNU Affero General Public License**, version 3 or (at your option) any later version. It is distributed in the hope that it will be useful, but **without any warranty**; see the LICENSE file for details.

In short: you can use, study, change and share Decu6000. If you distribute a modified version, you must make its source code available under the same license.

Source code: `https://github.com/LexLongcoding/Decu6000`

Built with

- **JUCE 8** (juce.com), used under the AGPLv3.
- **VST 3 SDK** by Steinberg Media Technologies GmbH. VST is a trademark of Steinberg Media Technologies GmbH; Decu6000 is not affiliated with Steinberg.
- **Orbitron** by The League of Moveable Type (instanced and renamed "Decu Display") and **Share Tech Mono** by Carrois Type Design - both under the SIL Open Font License 1.1.

Decu6000 - Copyright (C) 2026 LexLongcoding. Manual for version 0.9.0.