



Industrial PC

Debian 11 OS on RK3568

User Manual

For RK3568 Products

Content can change at anytime, check [documentation website](https://www.chipsee.com) for latest information.
www.chipsee.com

Contents

| | |
|--|----|
| 1. Debian 11 OS | 3 |
| 1.1. System Information | 4 |
| 1.2. Prepare for Developing | 4 |
| 1.2.1. Prepare the Hardware | 4 |
| 1.2.2. Prepare the Software | 5 |
| 1.3. Connecting to the Chipsee industrial PC | 5 |
| 1.3.1. Serial Port Debugging | 5 |
| 1.3.2. SSH Connect | 7 |
| 1.3.3. Connect with VNC Remote Desktop | 10 |
| 1.4. Hardware Resources in the OS | 11 |
| 1.4.1. Network | 11 |
| 1.4.2. Serial Port RS232 and RS485 | 12 |
| 1.4.3. GPIO | 14 |
| 1.4.4. BUZZER | 14 |
| 1.4.5. Backlight | 15 |
| 1.4.6. CAN Bus | 15 |
| 1.5. Flashing OS Image | 16 |
| 1.5.1. Download Required Tools | 16 |
| 1.5.2. Download Prebuilt OS Images | 17 |
| 1.5.3. Start Flashing | 17 |
| 1.5.4. Video Tutorial for Flashing OS | 21 |
| 1.6. Disclaimer | 23 |
| 1.7. Technical Support | 23 |

Debian 11 OS

Debian 11 OS on RK3568 User Manual



This is the software manual for RK3568 Chipsee industrial PC. If you've never developed on this hardware with a Debian 11 OS, this manual can get you started quickly.

Supported Chipsee PCs: all Chipsee RK3568 based industrial PCs, including but not limited to:

- CS12720-RK3568-050P
- CS10600-RK3568-070P
- CS12800-RK3568-101P
- CS10768-RK3568-121P
- CS19108-RK3568-133P
- CS10768-RK3568-150P
- CS19108-RK3568-156P
- CS12800-RK3568-215P
- CS19108-RK3568-236P

When you develop software for the Chipsee industrial PC, you can open the hardware document beside this software document, to aid you in wiring your devices.

In this document, main topics are:

- How to connect to the hardware from your workstation.
- How to use the hardware resources such as RS232, RS485 and GPIO, etc.
- How to install a new operating system.

System Information

Out of Box System

| | Description |
|---------------------|--|
| Kernel | 5.10.110 |
| Bootloader | U-Boot 2017.09 |
| OS | Debian GNU/Linux 11 (bullseye) aarch64 |
| Python | 3.9.2 |
| Qt | 5.15.2, QMake 3.1 |
| GCC | 10.2.1 |
| username/password | [linaro/linaro] |
| Window Manager | Xfwm4 |
| Desktop Environment | Xfce 4.16 |

Prepare for Developing

To get started, you first need to power on the Chipsee industrial PC, then you may want to connect to this PC from your own laptop or computer to control it. Let's prepare some hardware and software to start developing.

Prepare the Hardware

To power on and connect to Chipsee industrial PC, we need:

1. A power adaptor. For products with a screen of 7 inch and below, a power adaptor with 6V ~ 36V DC output is required; for 10.1 inch and above products, you need one with 12V ~ 36V.
2. A USB to serial cable (if you need serial debug).
3. An Ethernet cable (if you want to SSH into the Chipsee industrial PC). You may also use WiFi if your Chipsee industrial PC supports WiFi, in this case you don't need the Ethernet cable.
4. A USB type-C cable (if you want to flash a new OS).

Prepare the Software

Thanks to the Debian 11 OS, developing on Chipsee industrial PC isn't really different from developing on any other PCs, you can use any developer software you're comfortable with, with only one exception for flashing OS.

1. To flash a new operating system, you need RKDevtool, you can refer to the Flashing OS Image section.

The software listed below are not mandatory, they're recommendations because we find them easy to use:

2. To SSH into a Chipsee industrial PC, you may find **PuTTY** on Windows handy; for Linux and macOS users, a terminal app should come with your OS out of box, like **Terminal/iTerm2** on macOS and **xterm** on Linux.
3. To use a remote desktop, you can download **VNC Viewer** on your laptop or PC.

Connecting to the Chipsee industrial PC

When a power supply is plugged, the Chipsee industrial PC should boot itself automatically, next let's connect to it from our laptop or computer.

There are three different approaches: serial port debugging, SSH with Ethernet/WiFi and remote desktop with VNC.

Serial Port Debugging

[Cheatsheet for experienced developer: username: **linaro**, password **linaro**.]

Physically, your laptop connects to your Chipsee industrial PC with a USB to serial cable. To connect to the Chipsee industrial PC in the terminal program, you first need to know what port your laptop or computer is using in the device tree.

The best way to find this is check what **tty** devices you have before connecting the Chipsee industrial PC to your computer, then find out what is changed after you connect it to your laptop or PC.

Take macOS as an example:

```
# on your laptop  
ls /dev/tty.*
```

You may see:

```
# → ~ ls /dev/tty.*
# /dev/tty.Bluetooth-Incoming-Port /dev/tty.wlan-debug
# → ~
```

It means there is a Bluetooth and a wlan port **before** you plug the Chipsee industrial PC to your Macbook.

Now you can plug the USB end to your laptop or computer, connect the serial port end to your Chipsee industrial PC's RS232 port. For different products the pins may vary, you can check the pin definition table to find out which pins are the RS232 TX, RX, GND for serial debugging.

And let's check again what has changed **after** we connect the two:

```
# on your laptop, check again
ls /dev/tty.*
```

You might see:

```
# → ~ ls /dev/tty.*
# /dev/tty.Bluetooth-Incoming-Port /dev/tty.wlan-debug /dev/tty.usbmodem2812
# → ~
```

You can tell the last `/dev/tty.usbmodem2812` appeared right after we plug in the cable, and this is the serial port that connects to your Chipsee industrial PC with your USB to serial cable.

For Windows and Linux users the approach is almost the same, on Windows you may check the Microsoft Windows Device Manager. And check which COM port appears/disappears when you plug/unplug the USB to serial cable.

Now that we know the port on our OS, let's use the terminal program to connect to it.

Take macOS as an example:

```
# on your laptop
screen /dev/tty.usbmodem2812 115200
```

Use the **screen** command followed by the port name (in our case `usbmodem2812`), and a baud rate to connect to this serial port.

After a few seconds, in your terminal you should see some text, asking for a username and password. In our RK3568 based system, we should input *linaro* for the username, and also *linaro* for the password.

For Windows users who use PuTTY, you should select Session, choose Serial in the radio buttons, and choose the COM port you found in the previous procedure, say COM3, and choose 115200 as baud rate, then click Open. When it asks for a username and password, give **linaro** for username and also **linaro** for password.



Input your-com in the Serial Line field, in our case COM3

That's it for connecting the Chipsee industrial PC to your machine with a serial debug port.

SSH Connect

[Cheatsheet for experienced developer: username: **linaro**, password: **linaro**, IP check: **sudo ifconfig**.]

If you have a network connecting the Chipsee industrial PC and your laptop or computer, you may find SSH comes handy.

To connect to your Chipsee industrial PC with SSH, you need to plug an Ethernet cable to the RJ45 port, or connect through WiFi if your product supports WiFi.

You will need to know the IP address of your Chipsee industrial PC to use SSH, to find out which, you can use a mouse and keyboard temporarily and type:

```
# type this in your Chipsee PC's xterm program to find out the IP address of this device:
$ sudo ifconfig
```

You should see a bunch of outputs, look for the keyword **eth** and **inet**, they will turn out to be your IP address, for example:

```
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 192.168.6.134 netmask 255.255.255.0 broadcast 192.168.6.255
    inet6 fe80::c3be:d086:e810:ee8e prefixlen 64 scopeid 0x20<link>
    .....

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    .....


p2p0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500
    .....
```

In our example, the IP address is **192.168.6.134**.

Now that we have the IP of our Chipsee industrial PC, we can detach the mouse and keyboard, and go back to our laptop or computer to proceed.

We can now open a terminal app, like PuTTY on Windows, or Terminal/xterm on macOS/Linux.

For Windows users using PuTTY, you can choose Session, input **username@your-ip** (in our case *linaro@192.168.6.134*, yours should be different) in the Host Name field. Port Number should remain 22, choose SSH as the connection type in the radio buttons, click "Open". When the prompt asks for the password, type **linaro** and hit enter.

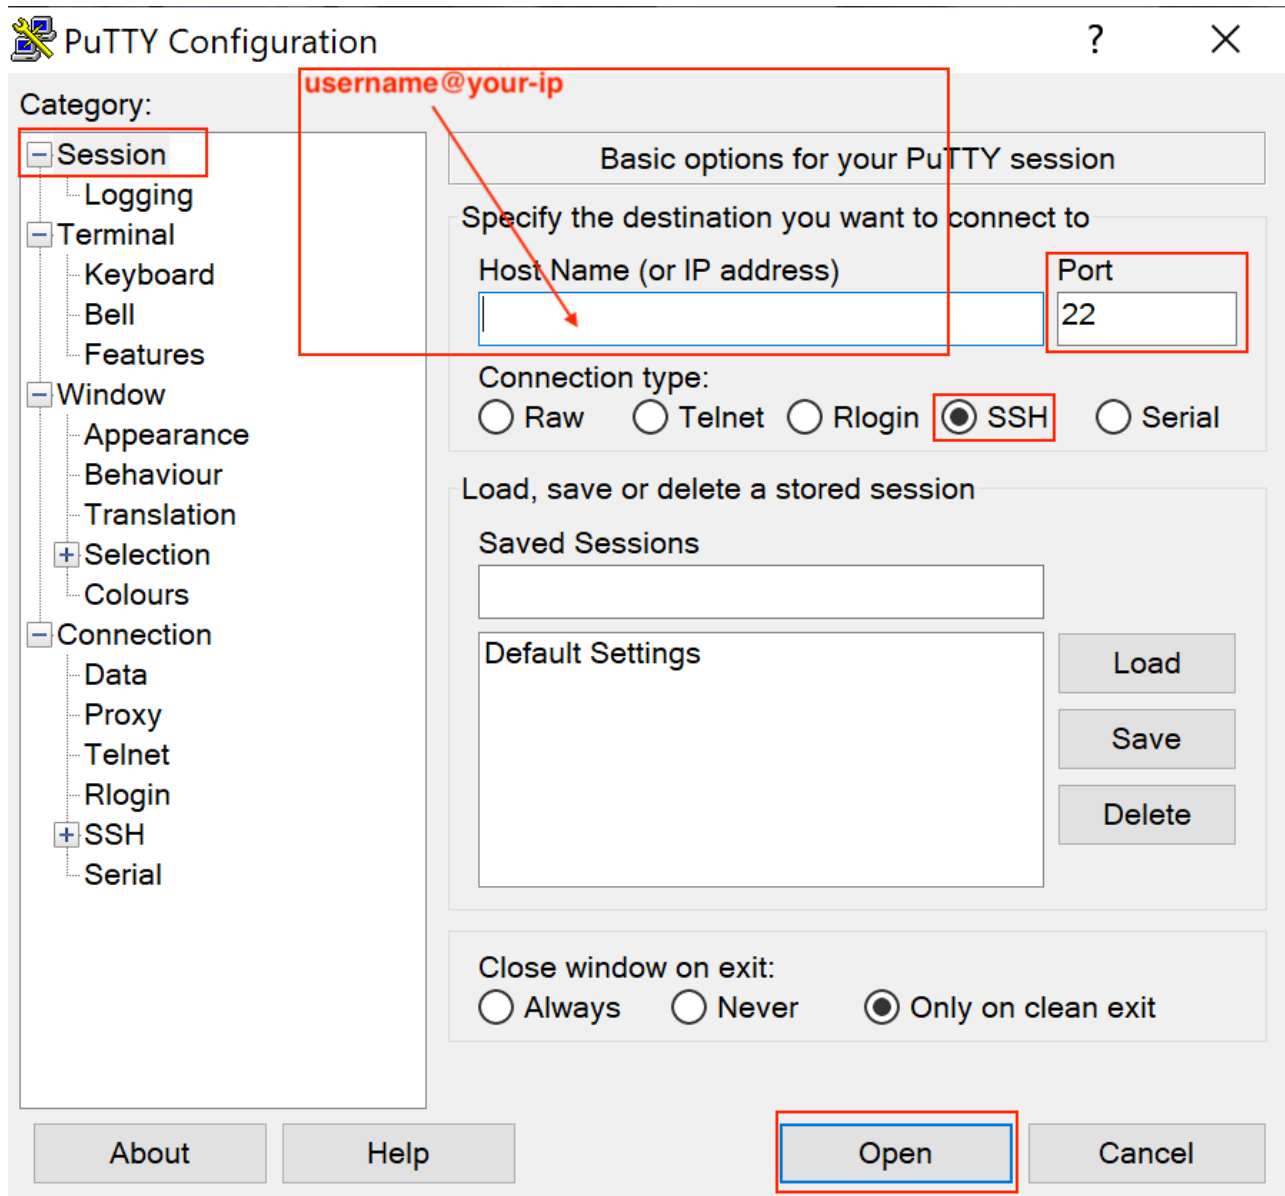

Input username@your-ip in the Host Name field, in our case linaro@192.168.6.134

For macOS/Linux, in your terminal program, type:

```
# change 192.168.6.134 to your Chipsee PC's IP we got earlier
ssh linaro@your-ip
# in our case, we are
ssh linaro@192.168.6.134
```

A terminal window titled 'finn — finn@finndeMac-mini — ~ — -zsh — 52x8'. The terminal shows the last login as 'Wed May 31 08:37:34 on ttys001'. Below this, there are four lines of SSH commands, each preceded by a red arrow and a tilde (~). The commands are: 'ssh username@your-ip', 'ssh linaro@192.168.6.134', 'ssh pi@192.168.1.134', and 'ssh chipsee@192.168.6.134'. The last command is followed by a red arrow and a tilde (~) with a grey rectangular cursor block.

Change the command to `ssh username@your-ip`, in our case `ssh linaro@192.168.6.134`

When the prompt asks for your password, input **linaro**, the password will not show up on the screen when you type it, it's OK, just hit enter when you finish typing.

For both Windows and Linux/macOS users, we should have successfully ssh'd into our Chipsee industrial PC now.

Connect with VNC Remote Desktop

[*Cheatsheet for experienced developer: username: **linaro**, password: **linaro**, IP check: **sudo ifconfig**, VNC port: **5900** (default port).*]

We can have a graphical user interface if we use VNC to connect to our Chipsee industrial PC. This is handy if you're developing an HMI and want to test from your own laptop or computer. Here is how:

First please refer to the previous section to learn how to find out your Chipsee industrial PC's IP address. In our case we get **192.168.6.134**.

Then, for either Windows, macOS or Linux users, please open the VNC Viewer software on your laptop or PC. In the input area, which has a placeholder "Enter a VNC server address or search", you should input the IP address we obtained earlier: **your-ip**, in our case: **192.168.6.134** (yours should be different), and hit enter.



Change the input to your-ip, in our case 192.168.6.134

VNC Viewer might ask for your credentials, you should input our username and password, in our case: username: **linaro**, password: **linaro**. And then continue, VNC Viewer might tell you the connection is not encrypted, it's OK if you're in your local network.


Now we should see our Chipsee industrial PC's desktop GUI in the VNC Viewer software.

Hardware Resources in the OS

Now that you have successfully booted the Chipsee industrial PC and connected the Chipsee industrial PC to your laptop/computer, this section will tell you how to control this Chipsee industrial PC from its OS desktop itself, or from your PC.

Network

From the Chipsee industrial PC's desktop GUI, you can click the Network icon in the menu bar to set your network.

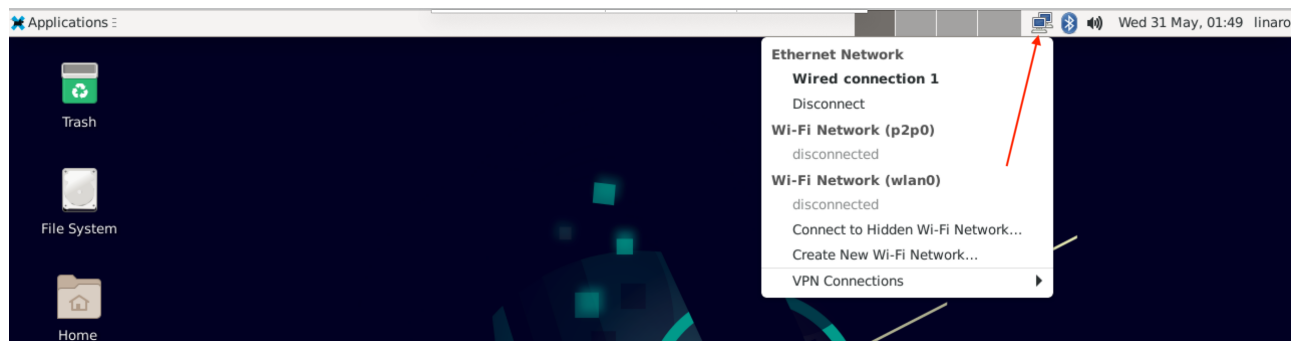

Network Settings

From the terminal, you can use **nmcli** to configure the network. You can refer to the documents of the **nmcli** program for more information. **nmcli** is not a Chipsee specific tool, it's widely used in Linux distributions.

```
$ nmcli -o

eth0: connected to Wired connection 1
    "eth0"
    ethernet (rk_gmac-dwmac), 42:0B:6F:67:B0:E3, hw, mtu 1500
    ip4 default
    inet4 192.168.6.134/24

p2p0: disconnected
    "p2p0"
    wifi (rtl8821cs), B6:6D:C2:13:A3:AE, hw, mtu 1500

wlan0: disconnected
    "wlan0"
    wifi (rtl8821cs), B4:6D:C2:13:A3:AE, hw, mtu 1500
```

Serial Port RS232 and RS485

The RK3568 based Chipsee industrial PC supports RS232 and RS485, here are the mapping from the port name to the system tree device:

5 inch product

| Name | Node | Protocol |
|---------|--------------|---------------------|
| RS232_0 | /dev/ttyS0 | RS232 |
| RS232_2 | /dev/ttyFIQ0 | RS232, Serial Debug |
| RS485_3 | /dev/ttyS3 | RS485 |
| RS485_5 | /dev/ttyS4 | RS485 |

Table 160 RS232/485 for 5 inch product(CS12720-RK3568-050P)

7 inch product

| Name | Node | Protocol |
|---------|--------------|---------------------|
| RS232_0 | /dev/ttyS0 | RS232 |
| RS232_2 | /dev/ttyFIQ0 | RS232, Serial Debug |
| RS485_3 | /dev/ttyS3 | RS485 |
| RS485_4 | /dev/ttyS4 | RS485 |
| RS485_5 | /dev/ttyS5 | RS485 |

Table 161 RS232/485 for **7 inch** product(CS10600-RK3568-070P)

10.1+ inch products

| Name | Node | Protocol |
|---------|--------------|---------------------|
| RS232_0 | /dev/ttyS0 | RS232 |
| RS232_2 | /dev/ttyFIQ0 | RS232, Serial Debug |
| RS485_3 | /dev/ttyS3 | RS485 |
| RS485_4 | /dev/ttyS4 | RS485 |

Table 162 RS232/485 for **10.1+ inch** products(CS12800-RK3568-101P, CS10768-RK3568-121P, CS19108-RK3568-133P, CS10768-RK3568-150P, CS19108-RK3568-156P, CS12800-RK3568-215P, CS19108-RK3568-236P)

The 120 Ohm match resistor is already mounted on the RS485 port. RS485 ports are half-duplex, the hardware can switch the Tx/Rx direction automatically. RS232 ports are full-duplex.

You can install **cutecom** to test the serial port:

```
$ sudo apt-get install cutecom
```

Only root user and use the serial port:

```
$ sudo cutecom
```

You can then use two Chipsee industrial PCs to test each other.

If you've got only one Chipsee industrial PC, you can test that with your computer: you can use a USB to serial cable, connect the USB end to your computer, and connect the serial end to any of the Chipsee industrial PC's serial port. You may also wish to install a UART/COM Assistant software which has a GUI for testing.

If you're an experienced engineer, you can also use a programming language to test the serial ports, like C, C++, Python, Javascript. They have their libraries for controlling serial port devices.

GPIO

There are 8 GPIOs, 4 Output, and 4 Input, they are all isolated. You can control the output or input pin voltage by feeding the VDD_ISO suite voltage. The pin voltage should be from 5V to 24V. Refer to the tables below for a detailed port definition:

| Function | Device Node |
|----------|--------------------|
| IN1 | /dev/chipsee-gpio5 |
| IN2 | /dev/chipsee-gpio6 |
| IN3 | /dev/chipsee-gpio7 |
| IN4 | /dev/chipsee-gpio8 |
| OUT1 | /dev/chipsee-gpio1 |
| OUT2 | /dev/chipsee-gpio2 |
| OUT3 | /dev/chipsee-gpio3 |
| OUT4 | /dev/chipsee-gpio4 |

Table 163 GPIO Device Node

• Set *OUT1* to high or low

```
$ echo 1 > /dev/chipsee-gpio1    # set OUT1 to high
$ echo 0 > /dev/chipsee-gpio1    # set OUT1 to low
```

• Get *IN1* value

```
$ cat /dev/chipsee-gpio5    # value 1 indicates high, value 0 indicates low
```

BUZZER

The Chipsee industrial PC has one buzzer. We have created one symbol link to */dev/buzzer* . You can control it as follows:

```
$ echo 1 > /dev/buzzer    # enable buzzer
$ echo 0 > /dev/buzzer    # disable buzzer
```

Backlight

We use one PWM to control the backlight of RK3568 boards, You can use the following commands:

- **Get the supported max brightness:**

```
$ cat /sys/class/backlight/backlight/max_brightness
```

- **Get the current brightness:**

```
$ cat /sys/class/backlight/backlight/actual_brightness
```

- **Set brightness:**

```
# might require write permission to the brightness file if you're not root
$ sudo chmod a+w /sys/class/backlight/backlight/brightness
# then set the new brightness
$ echo 50 > /sys/class/backlight/backlight/brightness
```

CAN Bus

There are two CAN bus channels on the RK3568 based Chipsee industrial PC. You can install *can-utils* and use them to test CAN. But you must add one 120Ω resistor between CAN_H and CAN_L on one of the two Boards, as shown on the figure below.

Note

The Chipsee IPC does not mount the 120Ω matched resistor on all CAN signals by default.

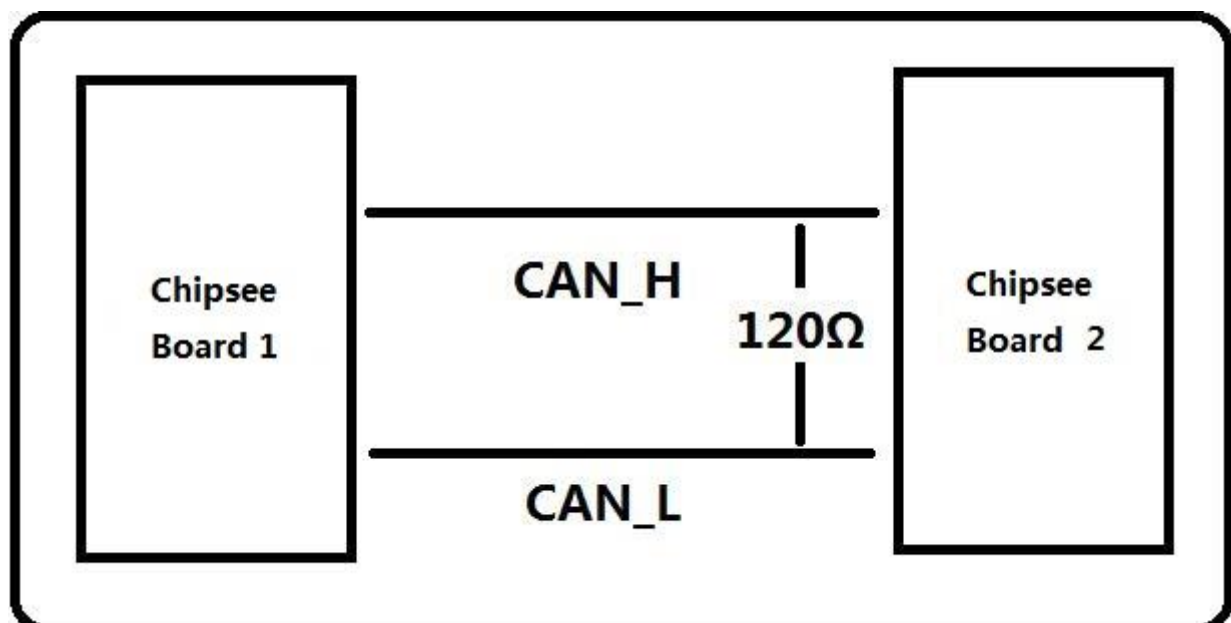


Figure 633: Connecting CAN

Here are a few examples to test CAN by using CAN units.

- **Install *can-utils* if you haven't.**

```
$ sudo apt install can-utils
```

- **Set the bit-rate to 50Kbits/sec with triple sampling using the following command (use ROOT user):**

```
$ sudo ip link set can0 down  
$ sudo ip link set can0 type can bitrate 50000 triple-sampling on
```

- **Bring up the device using the command:**

```
$ sudo ip link set can0 up
```

- **Transfer packets**

```
$ sudo cansend can0 5A1#11.2233.44556677.88
```

- **Receive data from CAN bus**

```
$ sudo candump can0
```

- **Bring down the device**

```
$ sudo ip link set can0 down
```

Flashing OS Image

Download Required Tools

If you want a fresh OS, you can flash your Chipsee industrial PC.

You need two tools to flash the Debian 11 OS image to the RK3568 PC. The first is *DriverAssistant_v5.1.1*, the second is *RKDevTool_v2.93*, you can [download all of them here](#).

These tools are Windows executables, please execute them on a Windows machine.

If you've been using a prior version of *DriverAssistant*, click uninstall before installing *DriverAssistant_v5.1.1*.

| Name | Date modified | Type | Size |
|---------------|--------------------|------------------------|--------|
| ADBDriver | 2/26/2023 9:21 AM | File folder | |
| bin | 2/26/2023 9:21 AM | File folder | |
| Driver | 2/26/2023 9:21 AM | File folder | |
| Log | 1/11/2023 11:24 AM | File folder | |
| config | 6/3/2014 3:38 PM | Configuration settings | 1 KB |
| DriverInstall | 11/10/2020 2:15 PM | Application | 490 KB |



Download Prebuilt OS Images

If you haven't downloaded the prebuilt OS images, you can [find one here](#).

Start Flashing


After installing the DriverAssistant, you can now start to flash an OS image to the RK3568 board with *RKDevTool*. Double click the program to start flashing. The tool has English and Chinese language support.

is PC > Downloads > RKDevTool_Release_v2.93 > RKDevTool_Release_v2.93

| Name | Date modified |
|---|---------------------|
| bin | 2/26/2023 9:21 AM |
| Language | 5/23/2023 8:10 AM |
| Log | 5/23/2023 8:10 AM |
| Android7_to_Android11 | 10/18/2022 10:57 AM |
| config.cfg | 5/23/2023 8:11 AM |
| config | 5/23/2023 8:11 AM |
| README | 10/18/2022 11:10 AM |
| revision | 1/19/2022 5:38 PM |
|  RKDevTool | 1/19/2022 5:37 PM |


STEP 1:

1. Connect the Type-C cable and power on the board. (If unexpected messages occur at any of the following steps, try plugging the Type-C cable again.)
2. Click **Upgrade Firmware** tab.
3. Click **Firmware** button to select a .img Debian 11 image file. The screenshots show a debian11 img file is selected, but this is applicable to other OSes as well.

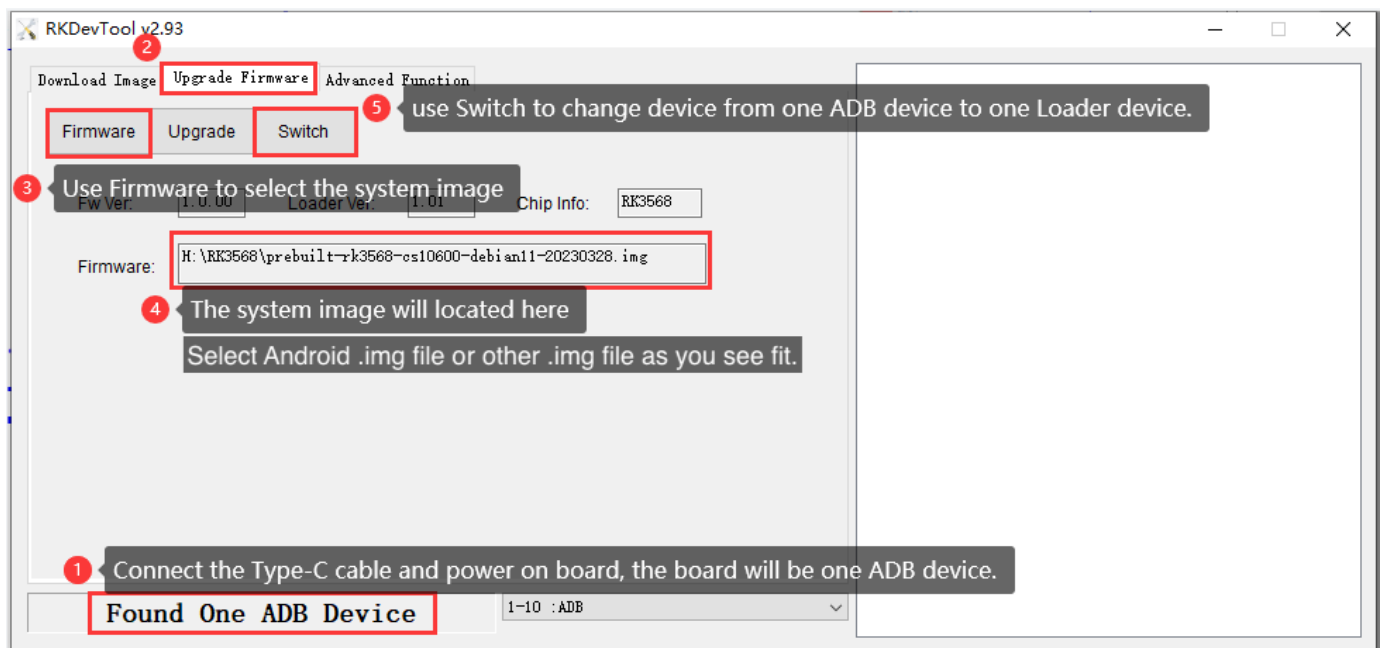


STEP 2:

1. Click **Switch** button to switch the device to a Loader device.

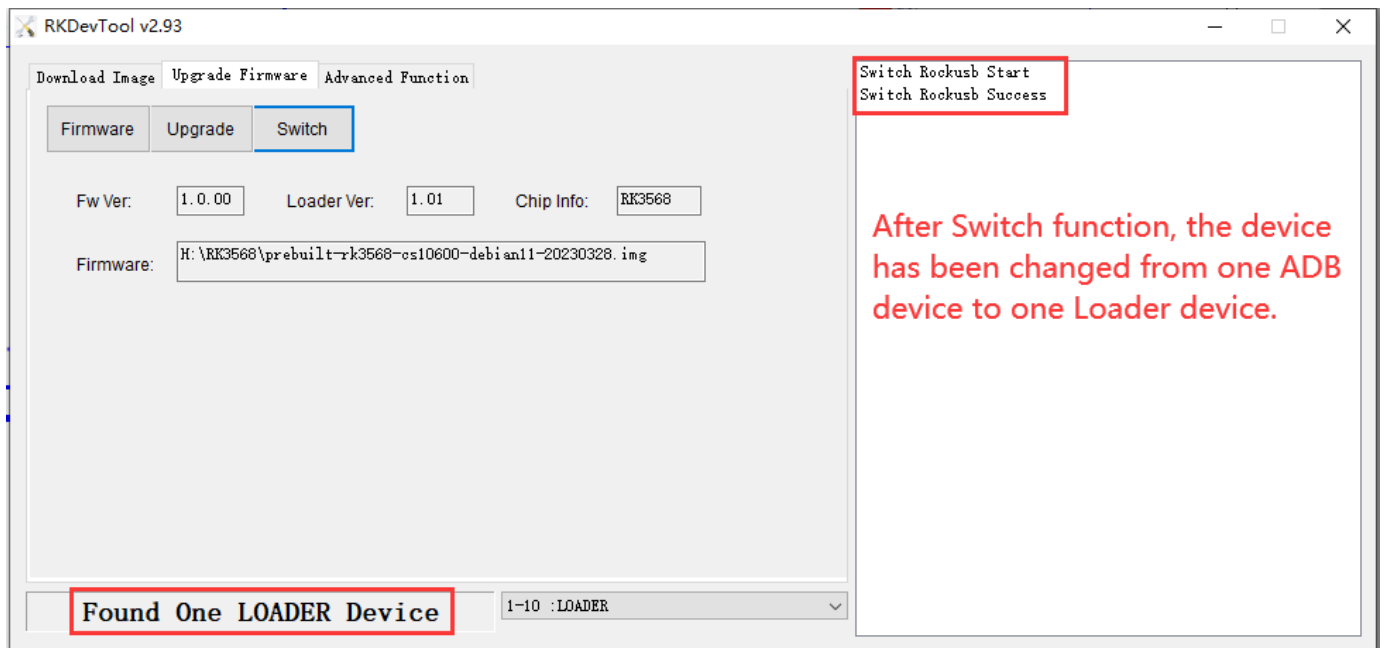**STEP 3:**

1. You should see "Found One LOADER Device".
2. Click **Advanced Function** tab.
3. Click **EraseAll** button.
4. You should see "Erasing sectors success" on the right side logs.

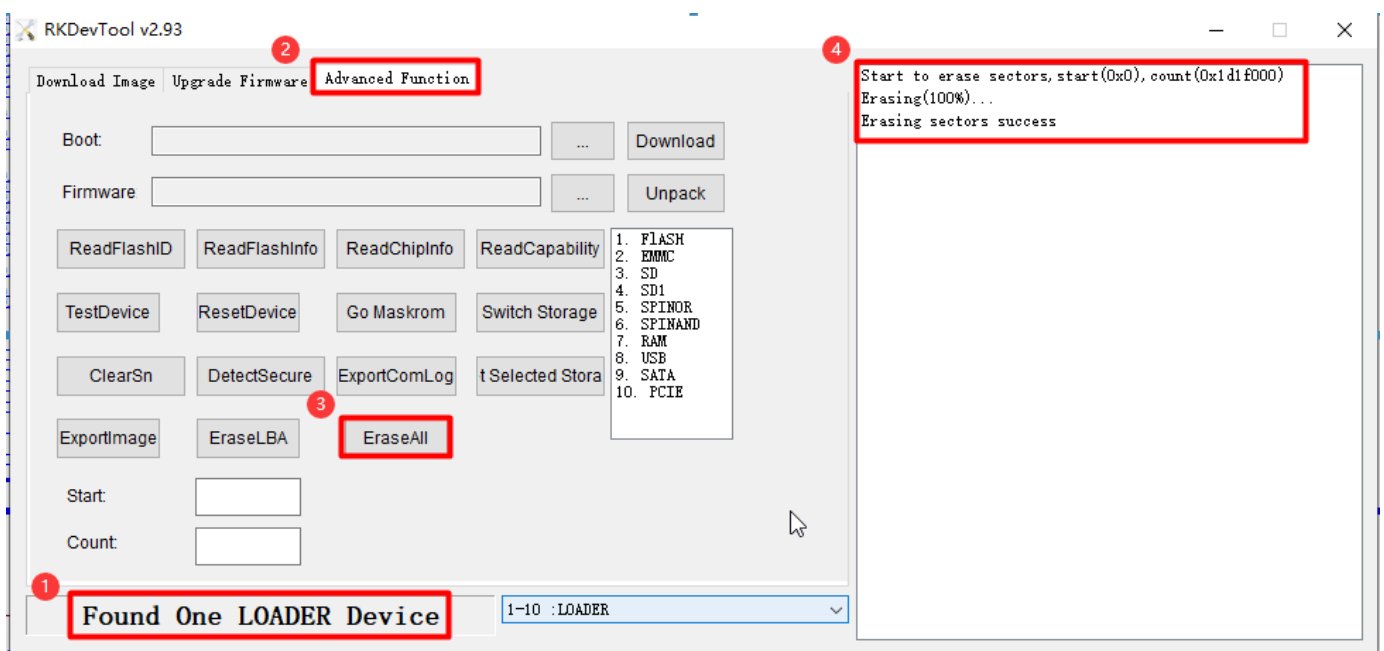

STEP 4:

1. Click **Upgrade Firmware** tab.
2. Click **Upgrade** button.
3. You should see Download Firmware progress on the right side logs.

**STEP 5:**

1. After the download firmware progress goes to 100%, the board reboots itself automatically.
2. After a few minutes, you should see "Found One ADB Device".
3. Now your new OS is ready for use.



Video Tutorial for Flashing OS

Here is a video tutorial we made demonstrating the OS installation process described above in Windows in the **LOADER** mode: <https://www.youtube.com/watch?v=ufKDCJ1hpf4>

The approach in the video above works best for devices that are still able to boot into the desktop, and when your workstation is a Windows machine. However, if you do not have a Windows machine in the room, you can use the approach below to flash an OS, in a Linux or Mac.

Apart from flashing in **LOADER** mode, when you're working on a Linux(X86_64) workstation or MacOS(Intel and Apple Silicon) machine, you can use another approach: **MASKROM** mode, to flash the OS. There is a PROG button on the Chipsee industrial PC, you can press the button before powering up the device, power up and hold the PROG button for 2~4 seconds, then use a X86_64/darwin_64 *upgrade_tool* program in the command line to flash the OS, here is a video we made to teach you how to do that in two minutes: <https://www.youtube.com/watch?v=TDIHoQ9AuX4>

The approach described in the second video works best for devices that are "bricked" (compared to the first approach), it can help rescue your device if your operating system is broken and cannot boot into the desktop. Even if your device is still functional, you can also use this approach to flash an OS, it works in Windows, Linux as well as MacOS.

The command used in the videos are:

For **Linux** workstation:

```
sudo ./upgrade_tool_linux_x86-64 ld # to list device
sudo ./upgrade_tool_linux_x86-64 uf ./prebuilt-rk3568-xxx.img # to upload
firmware
```

For **MacOS**:

```
./upgrade_tool_darwin64 ld # to list device
./upgrade_tool_darwin64 uf ./prebuilt-rk3568-xxx.img # to upload firmware
```

And that's all it takes.

The **upgrade_tool** used in the video can be download at:

1. **upgrade_tool_x86-64 (For Linux x86)**
2. **upgrade_tool_darwin64 (For MacOS Intel & Apple Silicon)**

We've tested that the MacOS upgrade_tool can execute in M1/Apple Silicon Macs, but you will need to install Rosetta to run this program. For Intel Macs, you do not need Rosetta, you can execute the binary program directly in your terminal.

Also, as noted in the video, do use a **absolute path** to the firmware file or **"./prebuilt-rk3568-xxx.img"**, rather than a relative path (e.g. your current directory contains the img file, and you directly use "upgrad_tool uf prebuilt-rk3568-xxx.img", this will not work). And make sure to use *sudo* in Linux.

Disclaimer

This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.

While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.

Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.

Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at support@chipsee.com, providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.