


YES 40 FS/FI

Outside Glazed, Center Set Storefront Systems



STOREFRONT SYSTEM

Product Description

The YES 40 FS (1-3/4" x 4") is a center set, flush glazed framing systems designed primarily for 1/4" glass or infill panels 1/4" to 3/8" thick. The YES 40 FI (2" x 4") is a center set, flush glazed framing system developed for 1" insulating glass and other types of infill panels of varying thicknesses. Both systems will accommodate YKK AP's hinged mullion, as well as our flexible mullion; these mullions allow more creative freedom where curves and angles become a functional part of the design.


Product Options & Features

- Outside Glazed
- Screw Spline or Shear Block Assembly
- Gasket With Stretch-Resistant Cord
- Integral Entrance Door Frames
- Enhanced Water Infiltration Resistance



**YKK
ap**

Quality
inspires®

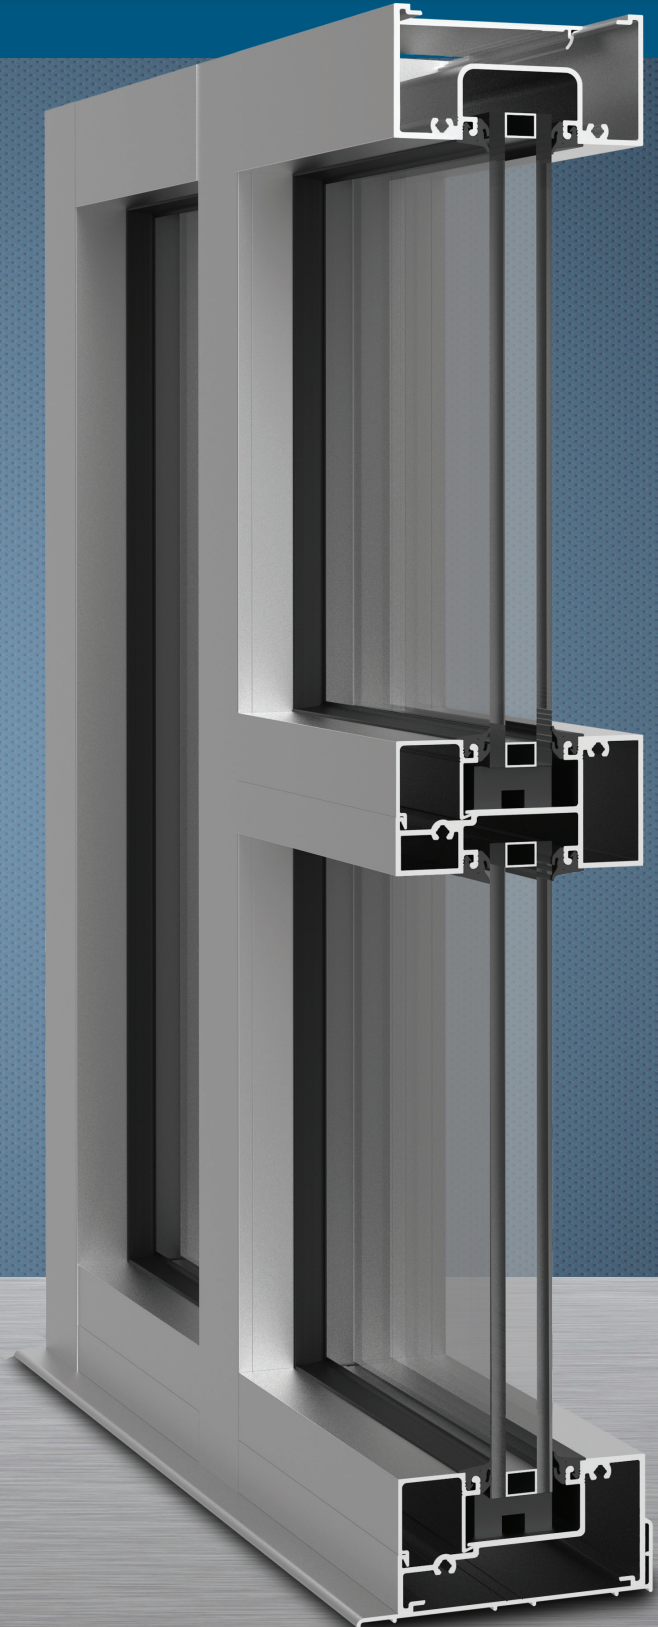

YES 40 FS/FI

SYSTEM SPECIFICATIONS

System Sightline	Base Depth	Glazing & Config	Glass	Air Infiltration	Water Infiltration	Thermal Performance	Acoustical Performance
1-3/4" (FS) and 2" (FI)	4"	Outside & Center Set	1" IGU with Low-E (C.O.G. U-factor: 0.29)	0.06 CFM/FT ² (1.10 m ³ /h·m ²) @ 6.24 PSF (299 Pa)	Static: 10 PSF (479 Pa) Dynamic: 10 PSF (479 Pa)	U-factor: 0.48 BTU/HR·FT ² ·°F* CRF: Minimum of 61 on frame**	Std STC: 32 Std OITC: 27
Testing Standards				ASTM E 283	ASTM E 331 & AAMA 501	* NFRC 100 & ** AAMA 1503	Lam STC: 37 Lam OITC: 30
							ASTM E 90 & 1425

Installation Options


Screw Spline or Shear Block with Insulating Glass

Available Finishes

Factory Anodized (AAMA 612) and Organic Paints (AAMA 2604 & AAMA 2605)

GLAZING OPTIONS

Various sized glazing is available to fit your project specifications.

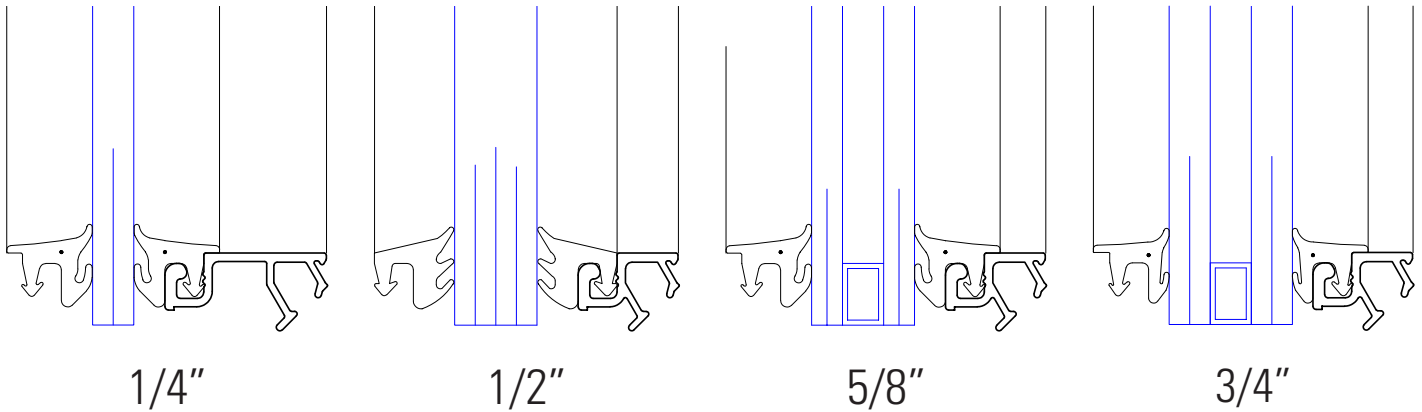

The Borghese - Atlanta, GA



QS / 1 Data Systems - Spartanburg, SC

Additional information including CAD details, CSI specifications, Test Reports and Installation instructions are available online at:

www.ykkap.com/commercial/product/storefronts/yes-40-fs/

www.ykkap.com/commercial/product/storefronts/yes-40-fi/