

TfW: preliminary results for the Class 150 design

Lucy Henley, Joshua Moore, Timothy Ostler & Thomas Woolley*

August 11, 2020

Key points

- We have integrated the seat layout of both carriages of the Class 150 into our software from the designs provided (file titled Seating marker layouts 2 m.pdf, received 27/08/2020).
- We achieved a maximum seat occupancy of 22.5%, whilst strictly adhering to a 2m social distancing measure.
- We have developed a web-based application for the Class 150 train seating that allows the user to specify the social distancing measure and return the maximal capacity. Available https://lucyhenley.shinyapps.io/TFW_socialdistancing/here.

What we could do next

- Apply further optimisation and refinement to the method to possibly improve on current results.
- Carry out the computations for all other train designs, and integrate these designs into the web-application for TfW use.
- Include passenger direction to the analysis; a 1m social distance may be sufficient for passengers facing away from each other.
- Include the use of plastic shields for each carriage type in computation, allowing for possible cost-benefit analysis.


Costings for further work

During this work, we established a new app which, currently, contains only the layout one type of train. We developed methods to extract the seat location data from the available PDF file, and then ran our algorithm to determine a suitable seating plan. Further, we conducted a mathematical investigation of the problem to determine whether a true optimum is easily available, and then developed methods that could potentially improve on the first result found. In total, this work took approximately 1 month to complete, and for a similar level of work to be undertaken in the future we would request remuneration of £3000. However, the exact cost of any future work would be subject to the quantity of work undertaken, and the level of complexity of the required work.


Methods and results

Following our discussions, we added the seating arrangements for the Class 150 train layout to our software. Distance calculations are taken from the centre point of each seat, upon selecting a fixed

*moorej16@cardiff.ac.uk

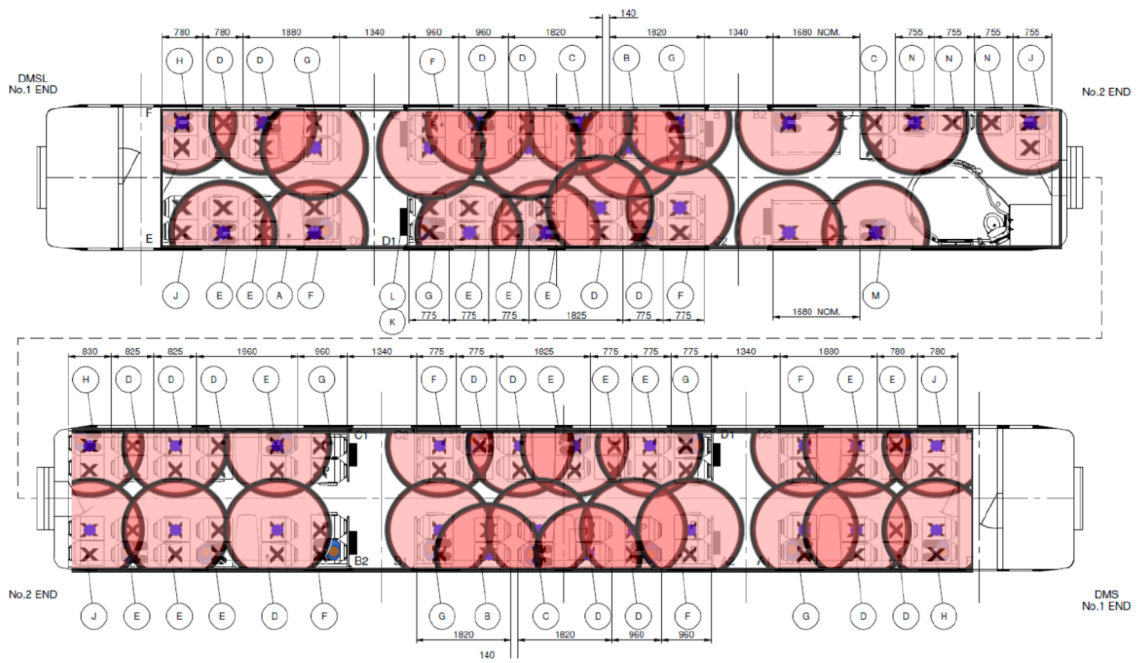

(a) A sample seating arrangement for the class 150 train with a social distancing radius of 1m, using 42 seats.

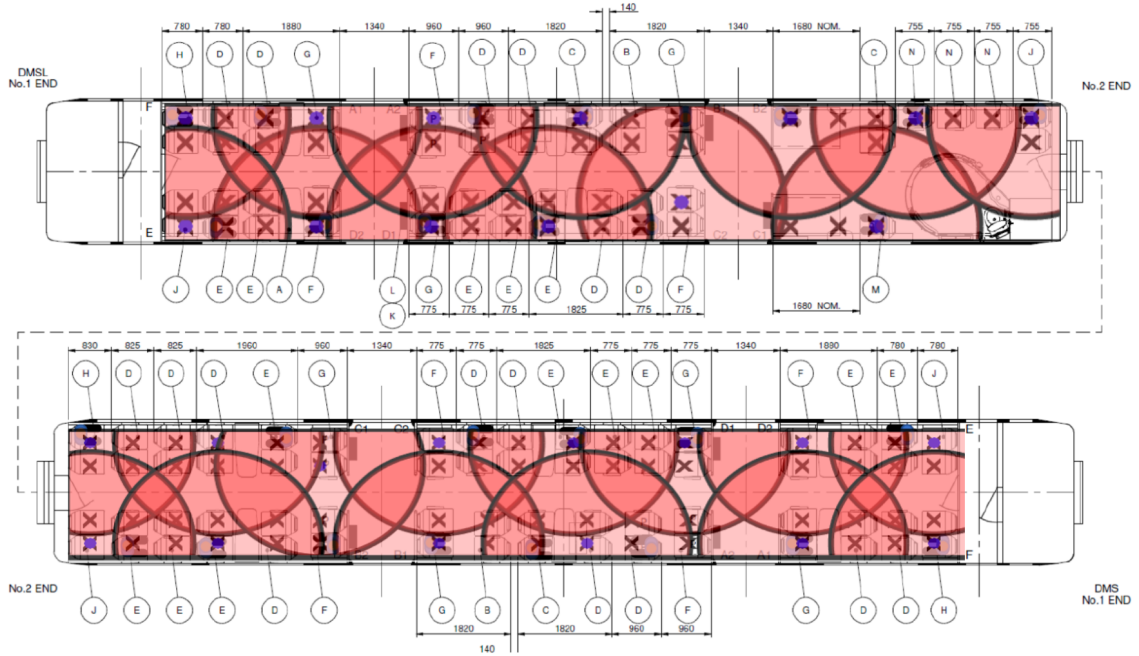

(b) A sample seating arrangement for the class 150 train with a social distancing radius of 2m, using 27 seats.

Figure 1: A proposed seating layout given by the app for 1 and 2 metre social distancing for both carriages of the class 150 train. Seat locations are marked with crosses, available seats are marked with dots and the ‘region of safety’ is denoted by a circle around the available seats. Overlapping circles imply that certain regions are exposed to contamination from multiple sources, but no available seats are located in these regions.

seat, the algorithm sweeps through all other seats and removes any seat that is within the social distance measure provided, repeating this process until all available seats have been checked. In order to find an optimal solution, we simulated the seat selection randomly 10,000 times for each carriage, selecting the order of fixed seats that yielded the greatest capacity. The results of the optimal seat

selection algorithm are displayed in Figure 1 and in Table 1.

	Maximum capacity at 2m social distancing
Benchmark	28 (23.3%) ¹
Cardiff App	27 (22.5%)

Table 1: Comparison of the performance of the Cardiff seat finding app against the benchmark provided in the supplied report.

As demonstrated in Table 1, we can very quickly achieve similar occupancy rates in the train whilst maintaining social distancing measures. Given more time, we can develop methods for taking passenger direction into account, and geometrical constraints (walls/partitions in the carriages) allowing for higher occupancy rates.

Prospective developments for improving optimality

Our application always provides seating arrangements that obey social distancing measures and provides locally optimal solutions which are similar to the given benchmarks. Returning the absolute optimum arrangement is a lot more difficult because the problem is what is known as ‘NP-hard’. Simply put, the only way to guarantee you have the most possible seats used is to try every possible order of seat checking, and pick the one which has the most seats used. Actually trying out every seat ordering would take a very long time; there are more ways to order 120 seats than there are particles in the universe.

To improve our model, we could develop techniques to check our solutions and continuously improve upon them where possible. This would improve the likelihood we will find the best possible seating arrangement, allowing us to potentially further improve on our already powerful result. For example, we have provided preliminary calculations in ?? to show that our current results are optimal up to 10,000 simulations, however, this can be extended with computational power and theoretical applications.

¹We note that in the provided estimation of the Class 150 design, there exists ‘usable’ seats that are within 2 metres of each other.