




ONE GREEN FILTER | 3-STAGE WHOLE-HOME FILTER

ONE GREEN PURIFIER

One Green Purifier™ Series

One revolutionary tank with three proprietary treatment layers, housed in a **premium full stainless-steel jacket** engineered to last. The **One Green Purifier** reduces **up to 98% of PFAS**, removes chlorine, iron, hydrogen sulfide and dissolved heavy metals, and inhibits bacteria and algae from growing inside the system — all with **no salt, no brine, and no sodium added**.

Water enters the top and passes down through **FerroShield™** and **ChloroShield™** redox layers that strip iron, H₂S, chlorine and dissolved heavy metals, then through a deep **CarbonShield™** catalytic bed that removes PFAS, taste, odor and sediment to 1 micron, and finally a graded support underbed — then returns up the center riser, fully treated. Designed for soft-water homes, or as the perfect filtration upstream of an existing softener.

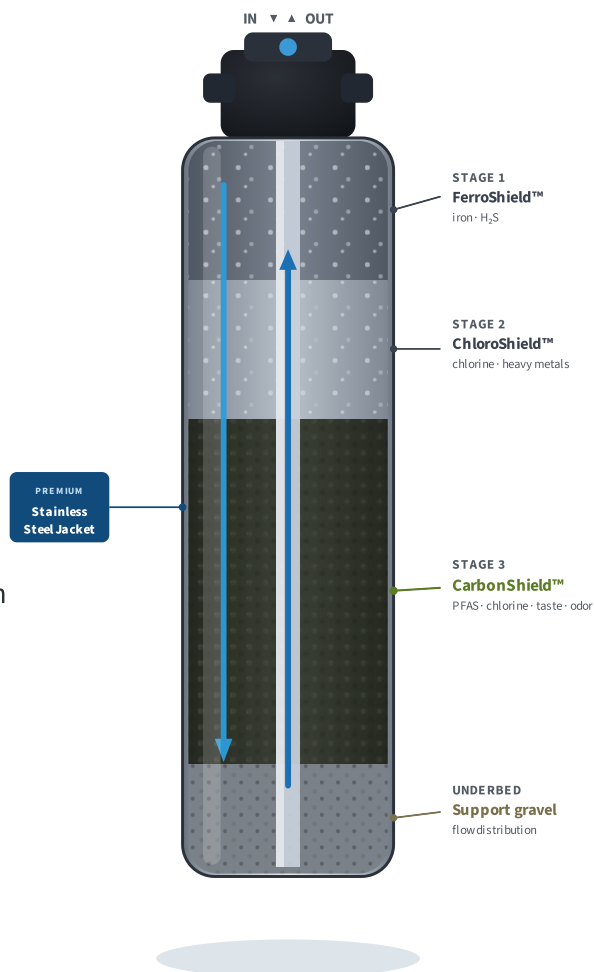

Up to 98%
PFAS / PFOA reduction



Chlorine Removed
Catalytic carbon stage



Bacteriostatic
Stops bacteria & algae growth



Stainless Build
Premium full steel jacket



THREE POWERFUL STAGES. ONE SMART TANK.

The One Green Purifier is engineered around a **premium full stainless-steel jacketed mineral tank** with three proprietary OneGreenFilter media layers stacked from inlet to underbed. Water enters the top and passes **straight down through all three stages** in sequence, then returns up the center riser, fully treated, to your home.

1

FERROSHIELD™ PRO REDOX — *Iron, Hydrogen Sulfide & Bacteriostatic*

A proprietary high-purity copper-zinc redox media. Converts dissolved **ferrous iron** into filterable ferric hydroxide and eliminates **rotten-egg sulfur (H₂S)**. Its electrolytic field plus trace hydroxyl radicals **inhibit bacteria, algae and fungi** from growing inside the bed.

2

CHLOROSHIELD™ PRO REDOX — *Chlorine & Heavy Metals*

Removes **up to 99% of free chlorine** by electrochemically converting it to harmless chloride ions, plus **up to 98% of dissolved heavy metals** — lead, mercury, copper, nickel and chromium. Also adds to the bacteriostatic protection of the bed.

3

CARBONSHIELD™ CATALYTIC — *PFAS, Taste & Odor*

A proprietary metal-oxide and iron-enhanced catalytic coconut-shell carbon. Its **positively charged surface** breaks down the long carbon-fluorine chains of perfluorinated compounds, reducing **up to 98% of PFAS / PFOA**. High-surface-area carbon (2,000–2,500 m²/g) also captures chlorine, tastes, odors and sediment to **≤ 1 µm**.

◆

SUPPORT UNDERBED — *Flow Distribution & Media Support*

A graded support underbed evenly distributes service and backwash flow across the cross-section of the tank, supports the four treatment layers above, and keeps media fines out of the riser and distributor.

FerroShield™ and ChloroShield™ redox media are bacteriostatic — they inhibit microbial growth within the media bed and are not a disinfection system. Pre-treatment may be required for very high iron, manganese or hydrogen sulfide. PFAS reduction depends on empty-bed contact time (EBCT ≥ 90 sec) and influent water chemistry.

PURE FILTRATION. BUILT TO LAST.



PFAS PROTECTION

Targets the "forever chemicals" most carbon filters leave behind — up to 98% reduction.



CHLORINE REMOVED

Deep CarbonShield™ catalytic bed strips chlorine, taste, odor, and sediment to 1 micron.



HEAVY METALS REMOVED

ChloroShield™ redox strips dissolved lead, mercury, copper, nickel and chromium at the source.



IRON & H₂S REMOVED

FerroShield™ converts dissolved iron into filterable form and eliminates rotten-egg sulfur odor.



BACTERIOSTATIC

Proprietary redox media inhibits bacteria, algae and fungi from growing inside the system.



WHOLE-HOME

Point-of-entry protection. Every tap, every shower, every appliance gets the same filtered water.

PURIFIER VS. STANDARD CARBON FILTER

	Standard Carbon Filter	One Green Purifier
Reduces chlorine, taste & odor	✓	✓
Reduces PFAS / forever chemicals	✗	✓ up to 98%
Removes iron & hydrogen sulfide	✗	✓ FerroShield
Removes dissolved heavy metals	✗	✓ ChloroShield
Inhibits bacteria, algae & fungi in bed	✗	✓ (redox)
Adds sodium to your water	No	None
Premium stainless-steel jacket	varies	✓ standard
Sediment filtration	limited	✓ to 1 micron



BATHROOM

Chlorine-free showers, healthier hair & skin.



KITCHEN

Crisp water for cooking, coffee & tea.



DRINKING

PFAS-protected water at every tap.



APPLIANCES

Cleaner water means cleaner appliances.

TECHNICAL DATA



RESIDENTIAL SYSTEM SIZING

Model	OGP-8	OGP-11	OGP-14
Stage 1 — FerroShield™ Pro	0.15 ft ³	0.20 ft ³	0.25 ft ³
Stage 2 — ChloroShield™ Pro	0.15 ft ³	0.20 ft ³	0.25 ft ³
Stage 3 — CarbonShield™ Catalytic	1.0 ft ³	1.5 ft ³	2.0 ft ³
Support underbed	0.25 ft ³	0.35 ft ³	0.50 ft ³
Peak service flow	8 gpm	11 gpm	14 gpm
PFAS-rated flow (EBCT ≥ 90s) ¹	4 gpm	6 gpm	8 gpm
Mineral tank	10" × 54"	12" × 52"	13" × 54"
Inlet / outlet connection	1"	1"	1"
Approx. shipping weight	165 lb	245 lb	315 lb

¹PFAS reduction depends on empty-bed contact time (EBCT ≥ 90 sec) and influent water chemistry. Size to the PFAS-rated flow for maximum reduction. Larger and commercial configurations available on request.

CARBONSHIELD™ CATALYTIC

Base	Coconut carbon, MO/Fe-enhanced
Appearance	Greenish-black
Mesh	8×30 · 0.6–2.4 mm
Surface (BET)	2,000–2,500 m ² /g
Bulk density	630–640 kg/m ³
Service life	2–5 yrs (regen.)

OPERATING PARAMETERS

Service flow direction	Down-flow
Operating temperature	40–100 °F
Operating pressure	25–80 psi
Inlet pH range	6.5–9.5
Max. TDS / salinity	35,000 ppm
Electrical	None · opt. meter

FERROSHIELD™ / CHLOROSHIELD™

Base	High-purity Cu-Zn
Appearance	Gray metallic
Mechanism	Redox (electron exchange)
Reduces	Cl ₂ · Fe · H ₂ S · heavy metals
Microbial	Bacteriostatic†
Service life	5–8 yrs

INCLUDED & PACKAGING

- Premium full stainless-steel jacketed mineral tank
- 3-stage proprietary media set (FerroShield™ + ChloroShield™ + CarbonShield™)
- Graded support underbed
- Professional Series in/out control head (meter optional)
- Riser, distributor, installation & owner's manual



CERTIFICATIONS & NOTES

CarbonShield™ catalytic carbon is **certified through IAPMO to NSF/ANSI/CAN 61 & 372** (same standards as NSF). FerroShield™ and ChloroShield™ redox media meet EPA/FDA potable-water standards. †Redox media is bacteriostatic — not a disinfection system. Do not use on microbiologically unsafe water.

Disclaimer: Information is based on media-manufacturer data, provided in good faith without warranty. Actual contaminant reduction varies with water chemistry, flow rate, contact time and concentration. Specifications subject to change without notice.