


1.Install VirtualBox or VMware Workstation Player on your computer and create a new virtual machine named 'MyServerLab' with default settings.

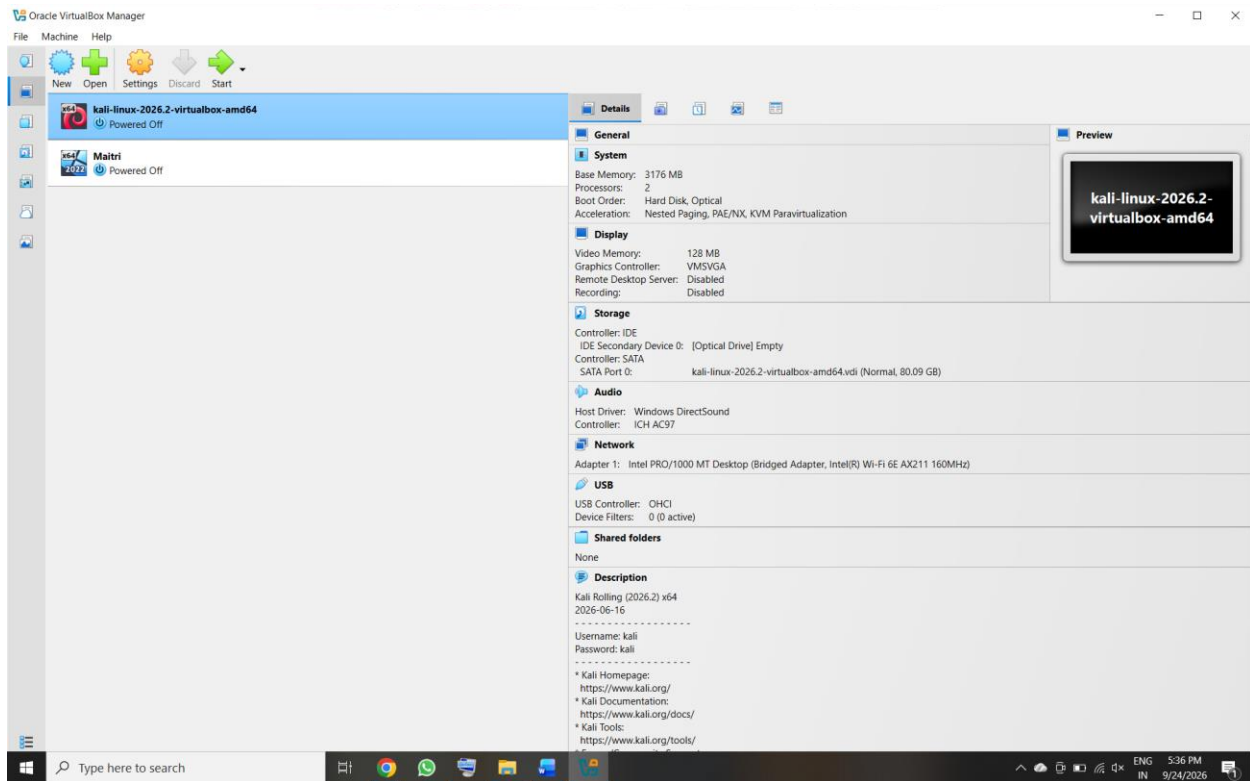


**2. Within your 'MyServerLab' virtual machine, configure the hardware settings to assign 2 CPU cores, 4GB RAM, and a 40GB virtual hard disk.

Hint: Use the 'Settings' or 'Edit virtual machine settings' option before starting the VM.**

General	Preview
Name: Server Operating System: Windows Server 2022 (64-bit)	
System Base Memory: 4096 MB Boot Order: Floppy, Optical, Hard Disk Acceleration: Nested Paging, Hyper-V Paravirtualization	
Display Video Memory: 128 MB Graphics Controller: VBoxSVGA Remote Desktop Server: Disabled Recording: Disabled	
Storage Controller: SATA SATA Port 0: Server.vdi (Normal, 50.00 GB) SATA Port 1: [Optical Drive] 26100.32230.260111-0550.It_release_svc_refresh_SERVER_EVAL_x64FRE_en-us.iso (7.59 GB)	
Audio Host Driver: Default Controller: Intel HD Audio	
Network Adapter 1: Intel PRO/1000 MT Desktop (NAT)	

3. Add a second virtual network interface card (NIC) to your 'MyServerLab' VM and set one NIC to NAT and the other to Bridged mode. **Hint:** This simulates how real servers can connect to multiple networks.

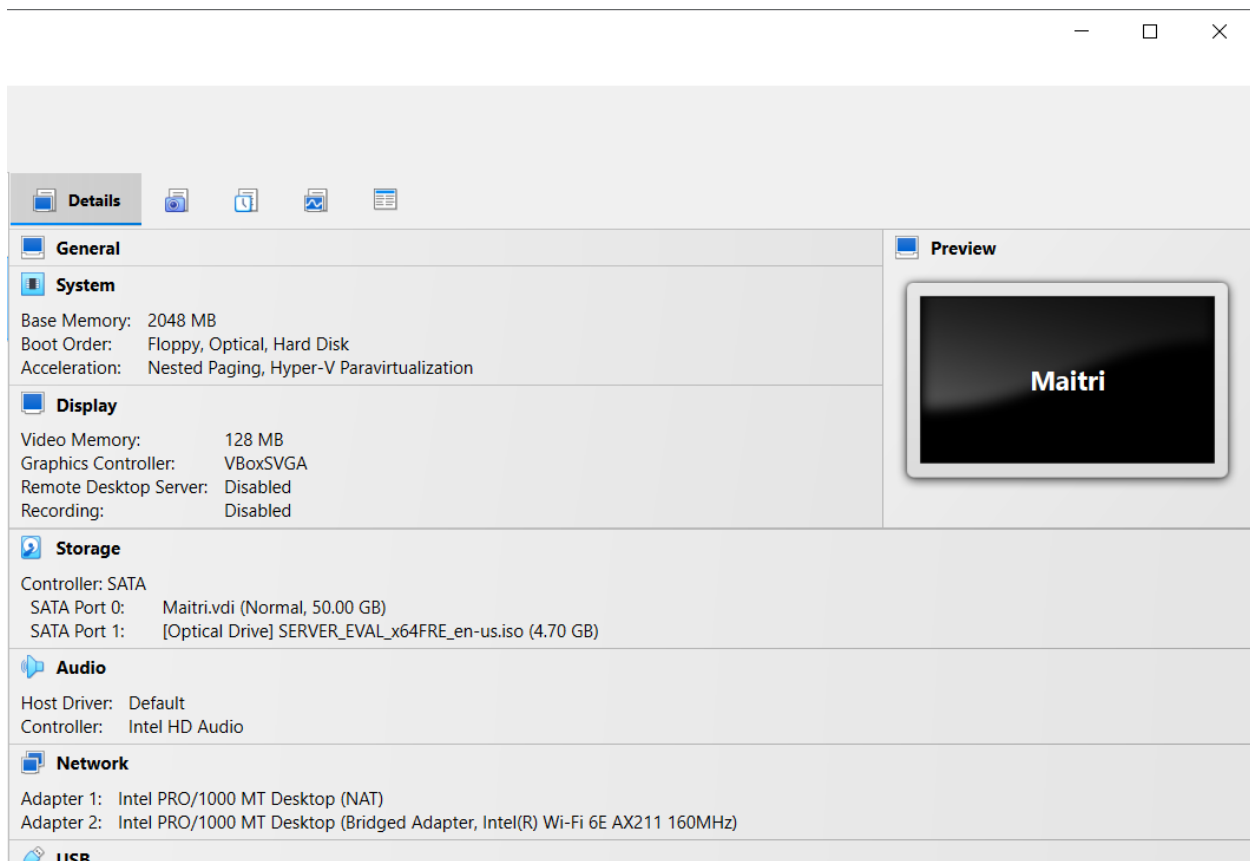

4. Boot your virtual machine and use the system information tool (like 'System Information' on Windows or 'lshw' on Linux) to list the detected CPU, RAM, storage, and network interfaces. Take a screenshot of the output.

```
root@kali: ~  
Session Actions Edit View Help  
(Reading database.. 425756 files and directories currently installed.)  
Preparing to unpack ./lshw_02.19.git.2021.06.19.996aaad9c7-2.1_amd64.deb..  
Unpacking lshw (02.19.git.2021.06.19.996aaad9c7-2.1)..  
Setting up lshw (02.19.git.2021.06.19.996aaad9c7-2.1)..  
Processing triggers for kali-menu (2026.2.6)..  
Processing triggers for man-db (2.13.1-1)..  
  
(root@kali)~  
# sudo lshw -short  
H/W path Device Class Description  
/0 system VirtualBox  
/0/0 bus VirtualBox  
/0/0 memory 128KiB BIOS  
/0/1 memory 2GiB System memory  
/0/2 processor Intel(R) Core(TM) i5-8350U CPU @ 1.70GHz  
/0/100 bridge 440FX - 82441FX PMC [Natoma]  
/0/100/1 bridge 82371SB PIIX3 ISA [Natoma/Triton II]  
/0/100/1/0 input PnP device PNP0303  
/0/100/1/1 input PnP device PNP0f03  
/0/100/1.1 scsi1 storage 82371AB/EB/MB PIIX4 IDE  
/0/100/1.1/0.0.0 /dev/cdrom disk CD-ROM  
/0/100/2 /dev/fb0 display SVGA II Adapter  
/0/100/3 eth0 network 82540EM Gigabit Ethernet Controller  
/0/100/4 input7 input VirtualBox mouse integration  
/0/100/5 card0 multimedia 82801AA AC'97 Audio Controller  
/0/100/6 bus KeyLargo/Intrepid USB  
/0/100/6/1 usb1 bus OHCI PCI host controller  
/0/100/6/1/1 input6 input VirtualBox USB Tablet  
/0/100/7 bridge 82371AB/EB/MB PIIX4 ACPI  
/0/100/d scsi2 storage 82801HM/HEM (ICH8M/ICH8M-E) SATA Controller [AHCI mode]  
/0/100/d/0.0.0 /dev/sda disk 86GB VBOX HARDDISK  
/0/100/d/0.0.0/1 /dev/sda1 volume 80GiB EXT4 volume  
/1 input0 input AT Translated Set 2 keyboard  
/2 input2 input Power Button  
/3 input3 input Sleep Button  
/4 input4 input Video Bus  
/5 input5 input ImExPS/2 Generic Explorer Mouse  
/6 input8 input PC Speaker  
  
(root@kali)~  
#  
fwd-i-search: _
```

5. Change the RAM allocation for your virtual machine from 4GB to 2GB, restart the VM, and observe any performance changes or warning messages. Write a short note on how RAM size impacts server performance.

