


Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.40mil	Solder Resist	Solder Mask	GTS
Copper	PWR	0.69mil		Signal	GTL
Prepreg		7.72mil	PP-006	Dielectric	
CF-004	D1	1.38mil		Signal	G1
		40.55mil	FR-4	Dielectric	
CF-004	D2	1.38mil		Signal	G2
Prepreg		7.72mil	PP-006	Dielectric	
Copper	GND	0.69mil		Signal	GBL
Surface Material	Bottom Solder	0.40mil	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 60.92mil

Drill Drawing View (Scale 1:1)

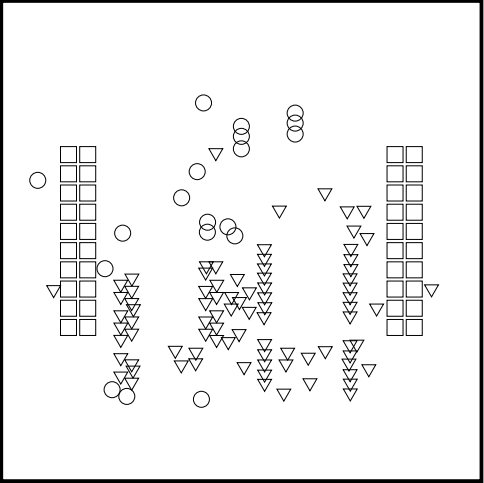


Drill Table


Symbol	Count	Hole Size	Plated	Hole Tolerance
▽	86	0.41mm	Plated	
○	19	0.71mm	Plated	
□	40	1.30mm	Plated	
	145 Total			

1. FABRICATE PER IPC-6012A CLASS 2
2. FOR BOARD THICKNESS AND IMPEDANCE DETAILS REFER STACKUP DOCUMENT
3. PRINTED WIRING BOARD SHALL COMPLY WITH REQUIREMENTS OF ANSI/J-STD-003
4. SURFACE FINISH: HASL
5. ALL VIAS ARE UNTENTED
6. SOLDER MASK OPENING IS KEPT SAME SIZE AS PAD (1:1) FOR ALL COMPONENTS
7. MANUFACTURER'S IDENTIFICATION, DATECODE LETTER SHALL BE SILKSCREENED ON SOLDER SIDE OF THE BOARD
8. TRACE WIDTH SHOULD BE ACCURATELY ETCHED. MAX TOLERANCE +/- 1 MIL
9. TEST IN ACCORDANCE WITH THE CURRENT REVISION OF IPC-TM-650 2.4.22
10. FLAMMABILITY RATING MUST MEET OR EXCEED UL94V-0 REQUIREMENTS. PCB MUST BEAR THE UL94V-0 REGISTERED MATERIAL ID NUMBER
11. LAYER STACK IS SAME AS MANUFACTURERS 4 LAYER BOARD
12. ALL TRACES ARE IMPEDANCE MATCHED TO GIVEN LAYER STACK MANGEMENT
13. NO COPPER SHALL BE UNDERNEATH THE INDUCTOR OR SURROUNDING PARTS
14. THE DISTANCE BETWEEN THE OUTER COLUMN OF PINS OF J1/3 AND J2/4 MUST BE 1800 MILLS AS PER THE BOOSTERPACK INTERFACE REQUIREMENTS (SEE ATTACHED IMAGE)


View from Top side (Scale 1:1)

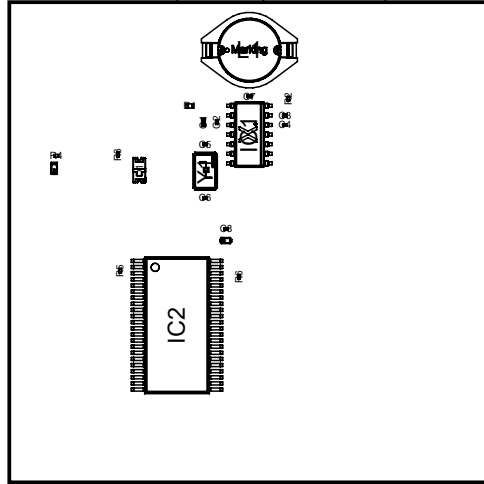


View from Left side (Scale 1:1)

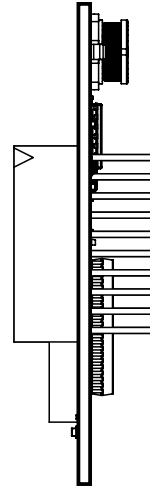

View from Right side (Scale 1:1)

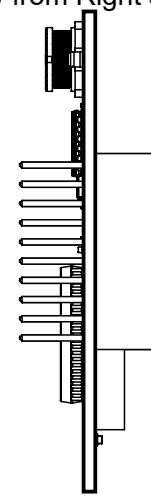

View from Bottom side (Scale 1:1)

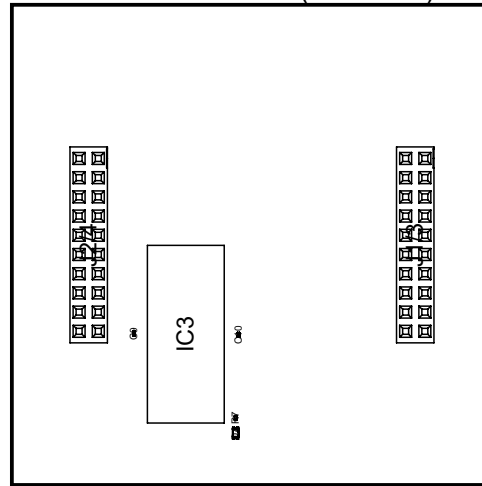

A


B

C


D

E


PWR (Scale 1:1)

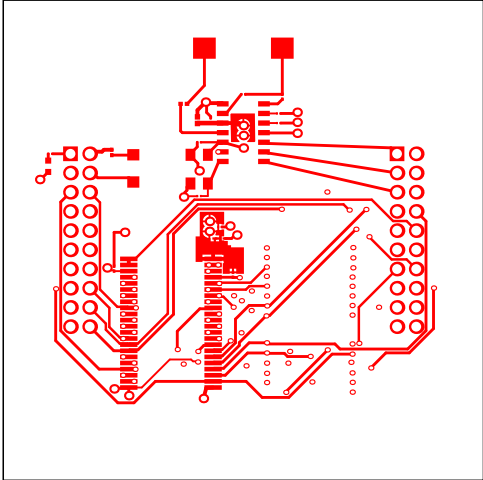


D1 (Scale 1:1)

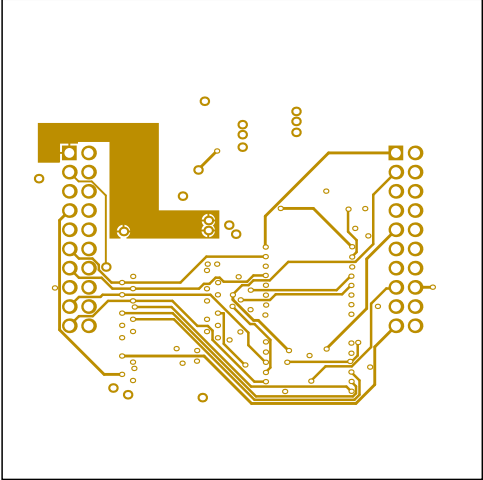

D2 (Scale 1:1)

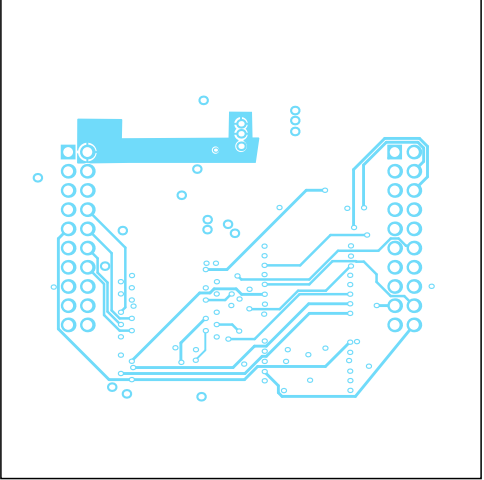

GND (Scale 1:1)

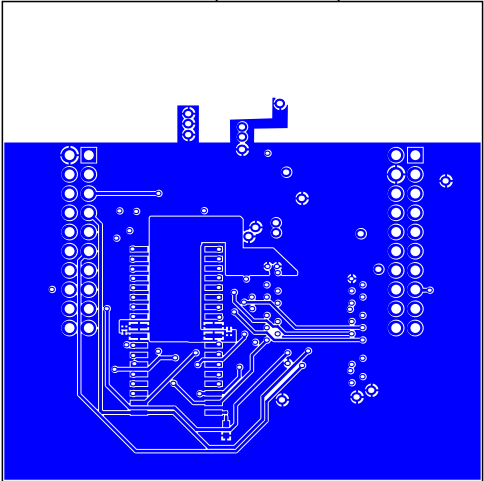

A

B

C

D

E