

Part 02736321, PKR RETV Hydrow II A-P 9.625 36-47# x 3.5 x 2.875 HNBR 22Rc, D (Design) BOM List:


Line Number	Number	Primary Legacy Number	Name	Quantity	UOM	Find Number	Reference Designator
1	00234408	234408	Top Conn. HYD-IIAP 9.625 X 3.5 X 2.875 WS410	1.0	each		
2	00157317	905-96-321	Slip body, upper HDW2 9.625in WD002	1.0	each		
3	00229454	00229454	Upper Slip, 9.625 Hydrow IIP Packer WS601	4.0	each		
4	00161535	480-70-900	Spring,Slip, 7.000 Isolation Injection	24.0	each		
5	00157359	905-96-910	Screw, set SLTD 0.438 UNF 20TPI SLTD STD STL 1.188 LG	4.0	each		
6	00155366	M20-C6-008	Screw, shear slotted 0.375-16 x 0.500 mild steel 4350 LBF	8.0	each		
7	00157370	905-96-411	Cone, Upper, Hydrow II 36-47#, 9.625x3.5x3.5, WD001	1.0	each		
8	03213883	3213883	O-ring -341 (HNBR 90 standard) SAE AS568 Non-API	6.0	each		
9	00158788	905-96-523H	Element, Packing End Hydrow II 9.625 HNBR 90D	2.0	each		
10	00158753	905-96-841	Ring, Spacer Hydrow II 36-47#,9.625x3.5x3.5, WD001	2.0	each		
11	00168967	905-96-501H	Element,Packing,HNBR 70D,9.625x3.50x3.50 Hydrow II	1.0	each		
12	00157303	B20-C6-006	Screw, shear slotted 0.375-16 x 0.375 brass 3250 LBF	10.0	each		
13	03213886	3213886	O-ring -368 (HNBR 90 standard) SAE AS568 Non-API	1.0	each		
14	00158794	905-96-751	Mandrel, Setting Hydrow II 9.625in 36-47# WD002	1.0	each		
15	00158735	905-96-756	Cylinder, Setting,Hydrow II 9.625 36-47# 8.00 SA B Up WD002	1.0	each		
16	00158572	905-96-721	Ring, locking HDW2 9.625in WS412	1.0	each		
17	03210002	3210002	O-ring -264 (HNBR 90 standard) SAE AS568 Non-API	1.0	each		
18	00157349	905-96-421	Cone, Lower, Hydrow II 36-47#,9.625x3.5x3.5, WD001	1.0	each		
19	00231540	231540	Slip, Lower Hydrow II-AP 9.625 WS601	4.0	each		
20	00157376	905-96-318	Slip body lower Hydrow-II 9.625 8.125 SA B Dn WD001	1.0	each		
21	00158576	905-96-761	Ring, pick up HDW2 9.625in WS412	1.0	each		
22	00158585	907-95-336HS	Cap,Lower Slip Body, Hydrow II, 9.625x3.5x3.5, WD001	1.0	each		
23	00156867	650-00-900	Screw, Shear SLTD 0.625 UNC 11TPI SLTD BRS .500 LG, 6200LBS	8.0	each		
24	00158897	905-96-741	Sleeve, Shear Hydrow II, 9.625x3.5x3.5, WD002	1.0	each		
25	00168356	905-93-212HS	Mandrel, Long String LSS Hydrow II 3.500 NU WD001	1.0	each		
26	00160836	52CB-08	Sub, Crossover 3.500 EUE pin 3.500 NUE box L-80	1.0	each		
27	00168876	907-96-220HS	Mandrel Short String Hyd II 9.625 X 3.5NU PX 2.875EU P WD001	1.0	each		

PDF Created:
2026-01-14 11:45:17 CST




© Weatherford 2026 All rights reserved
This document is copyrighted and whether containing patentable or non-patentable subject matter is and comprises the proprietary and confidential information of Weatherford International Ltd. and by receiving this document the recipient agrees that this document is loaned in confidence with the understanding that neither it nor the information in it will be reproduced or disclosed, in whole or in part for any purpose except the limited purpose for which it is loaned. This document and any facsimiles hereof shall be returned to Weatherford International Ltd. upon demand.

PDM SYSTEM INFORMATION FOR PART 02736321
PKR RETV Hydrow II A-P 9.625 36-47# x 3.5 x 2.875 HNBR 22Rc

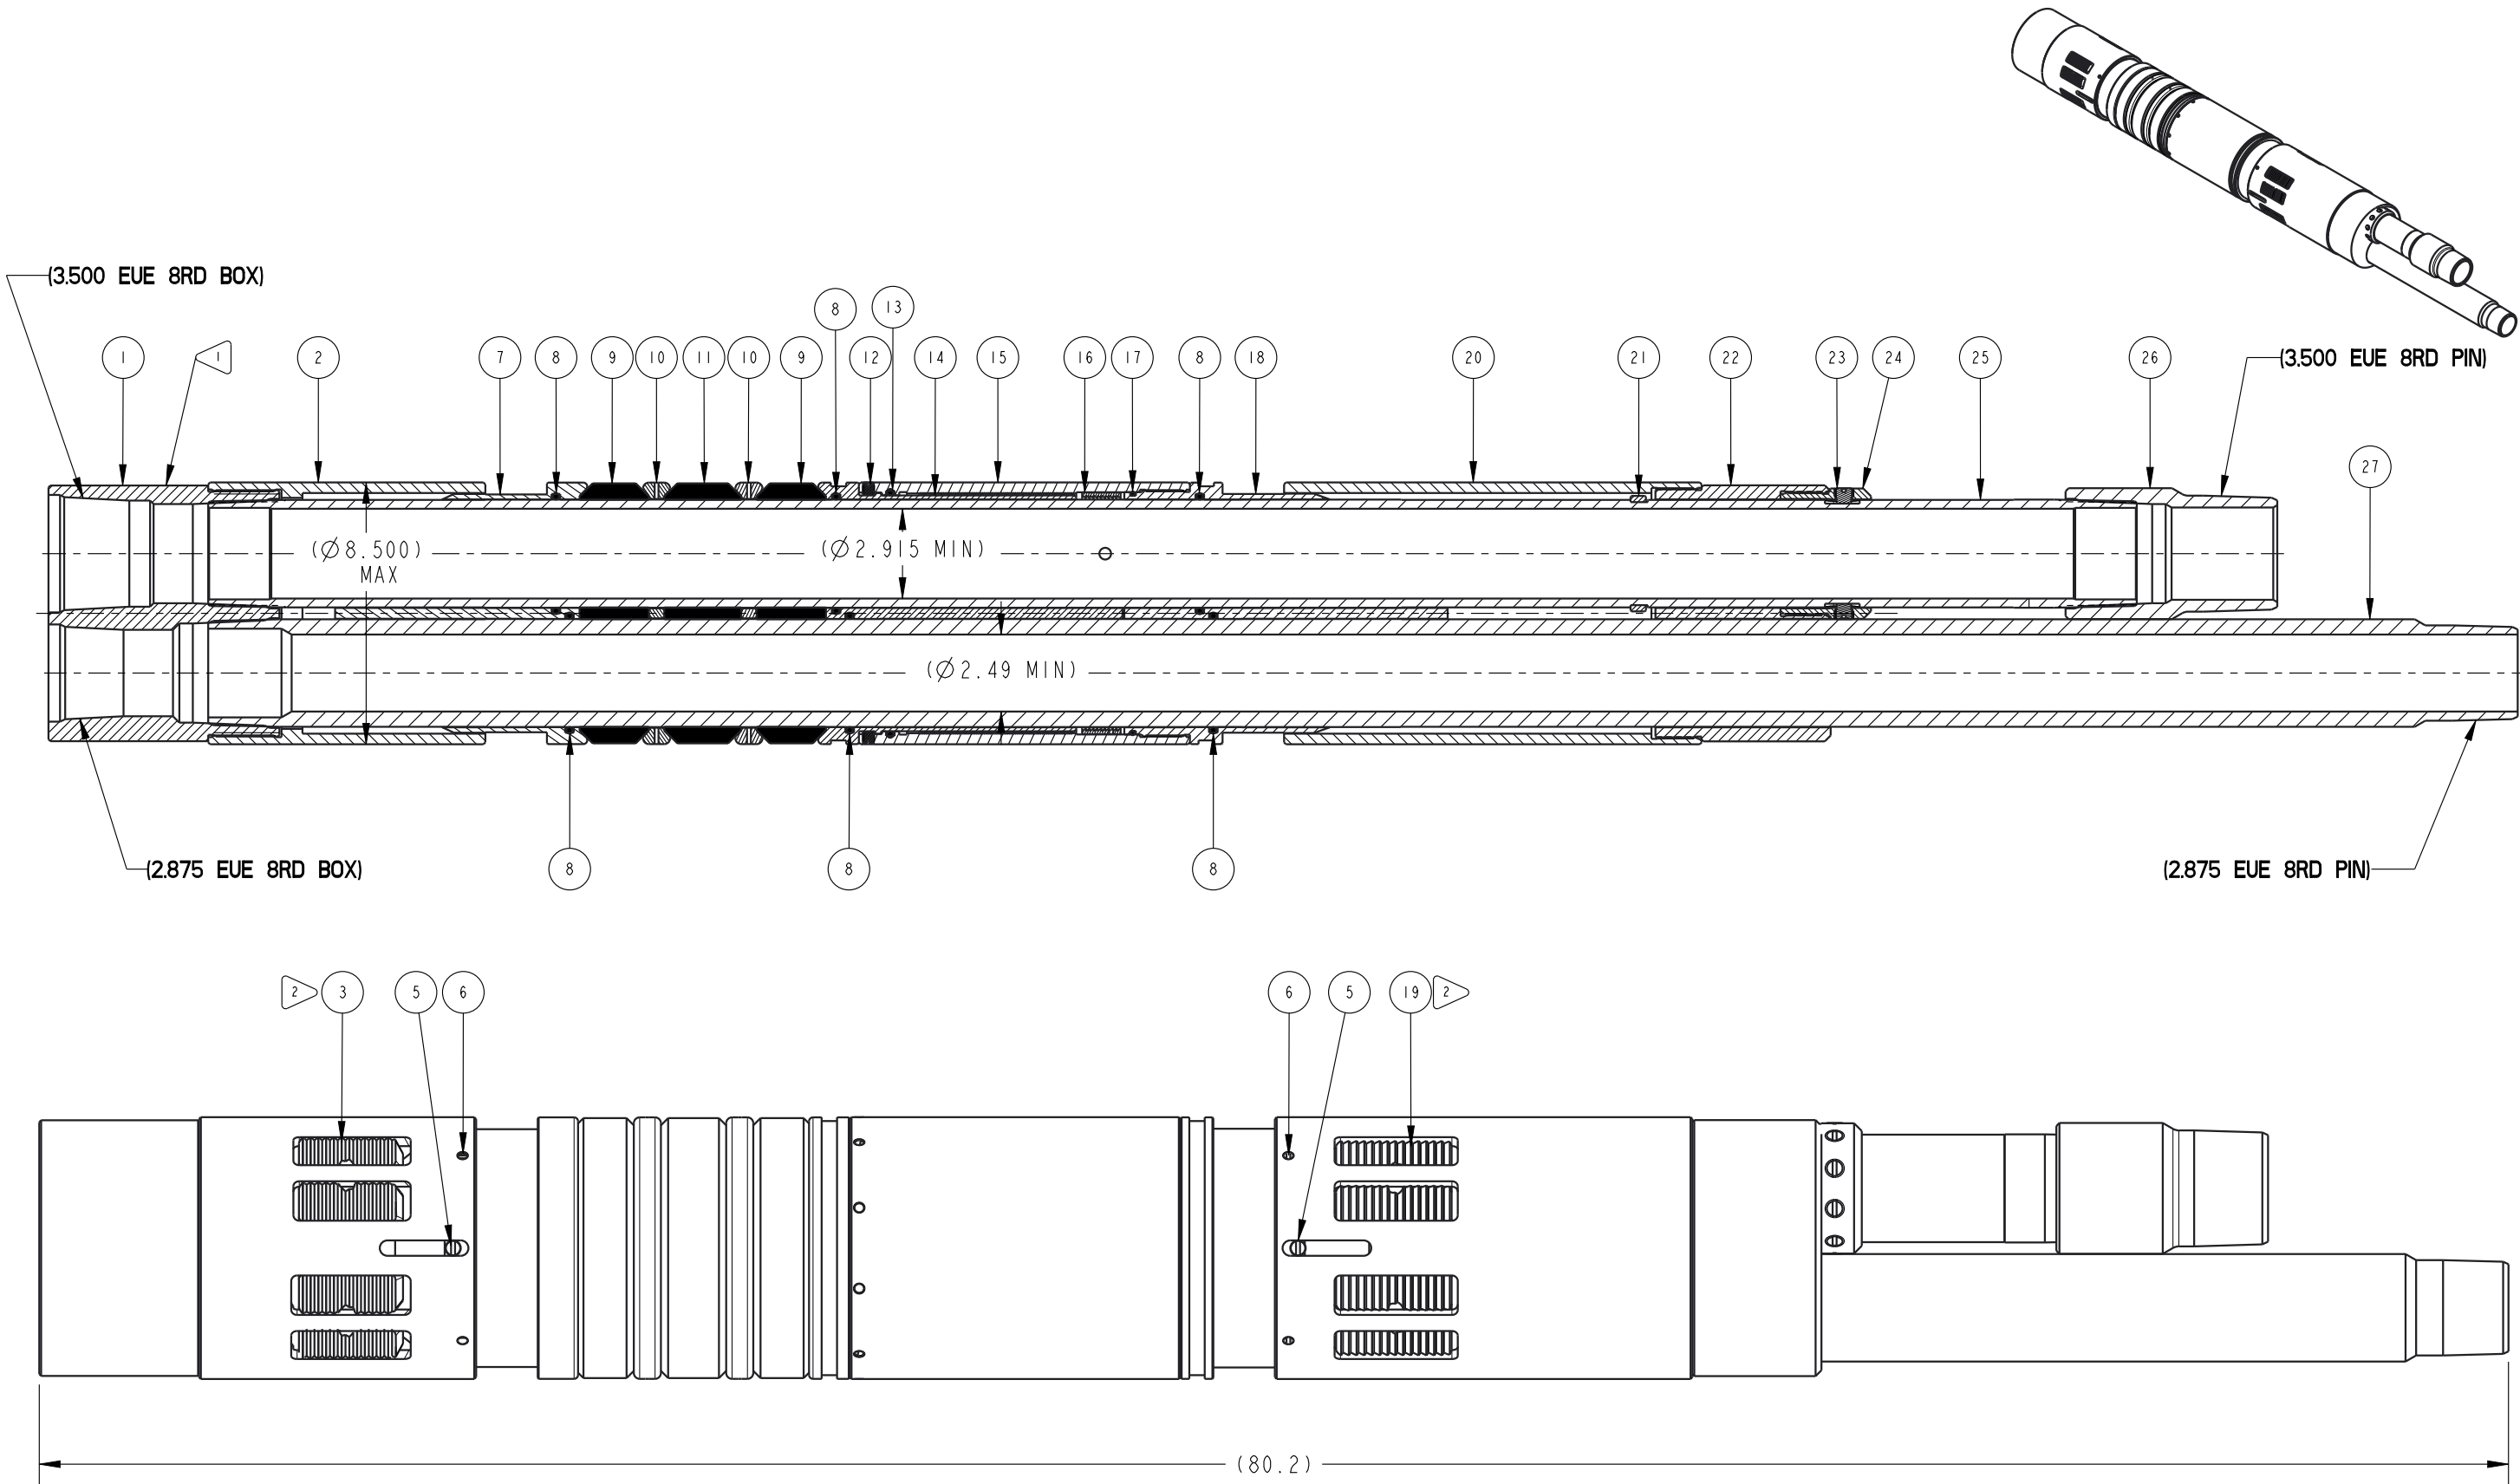

- NOTES:
- 1 MARK PART# AND WORK ORDER# WHERE SHOWN AS PER WT-073
 - 2 ITEM NO. 4 SLIP SPRING NOT SHOWN. QTY. 3 SPRINGS PER SLIP.

DRAWING UNITS: INCH [mm]			COMPLETIONS		SHEET : 1 OF 1		 © Weatherford 2016 All rights reserved This document is copyrighted and whether containing patentable or non-patentable subject matter is and comprises the proprietary and confidential information of Weatherford International Ltd, and by receiving this document the recipient agrees that this document is loaned in confidence with the understanding that neither it nor the information in it will be reproduced or disclosed, in whole or in part for any purpose except the limited purpose for which it is loaned. This document and any facsimiles hereof shall be returned to Weatherford International Ltd upon demand.		
TOLERANCES (DRIVEN BY IMPERIAL SIZE)			Engineering Location: DUBAI		SIZE : A3				
INCH mm FINISH			DO NOT SCALE DRAWING		SCALE : 0.180				
X ±.12 [±3.04]			UNLESS OTHERWISE SPECIFIED		WEIGHT: - -				
.X ±.025 [±0.64]			1 THREAD FINISH 125µi [3.2µm] 2 BREAK ALL EDGES 0.015 [0.381] X 45° OR 0.015 [0.381] R 3 0.032 [0.813] MAX CORNER RAD 4 ALL DIAMETERS CONCENTRIC WITHIN 0.010 [0.25] T.I.R. 5 THREAD ENTRY AND EXIT ANGLES TO BE 25°-45° OFF THREAD AXIS		NAME		PKR RETV HYDROW II A-P 9.625 36-47# x 3.50 EUE x 2.875 EUE		
.XX ±.010 [±0.25]					MODEL FILE		C006472007		
.XXX ±.005 [±0.127]					MODEL VERSION		B.5		
FRACTIONS ANGLES ±1/32 [±0.79] X° ±1/2°					3RD ANGLE 		DRAWING FILE C006472008		DRAWING VERSION B.5