


Demountable Shoulder Bushings




SHORT SHOULDER BUSHINGS



SHOULDER BUSHINGS

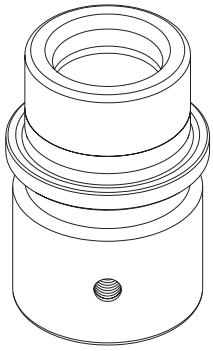


LONG SHOULDER BUSHINGS

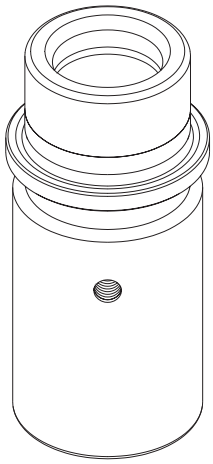


EXTRA LONG SHOULDER BUSHINGS

Case Hardened
60 - 64 HRc

To Be Use With:





STRAIGHT GUIDE POSTS

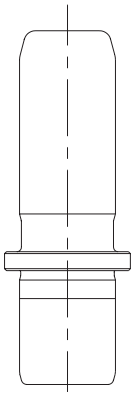


DEMOUNTABLE GUIDE POSTS

Examples

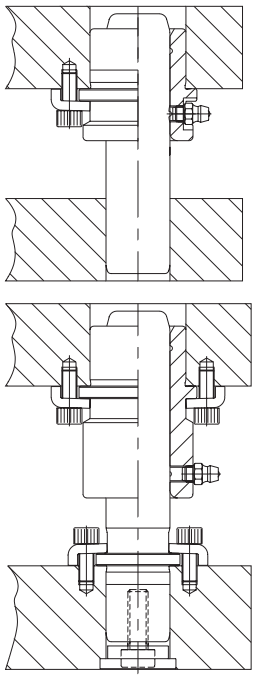


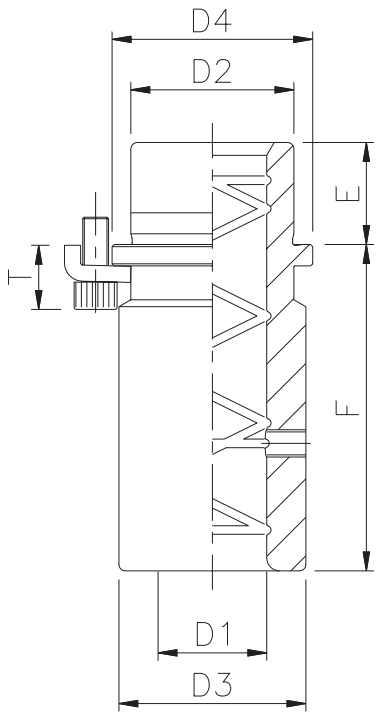

Clamp Arrangements

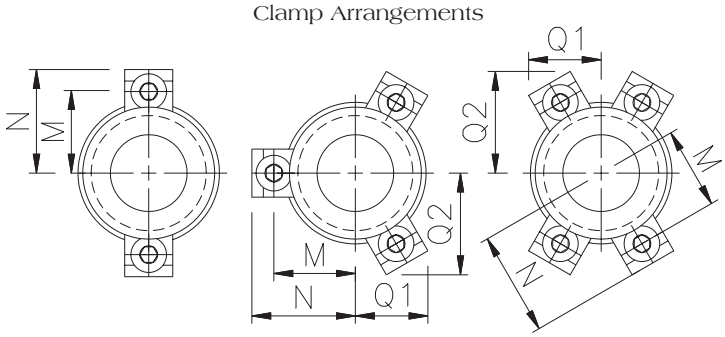

Component Parts Supplied

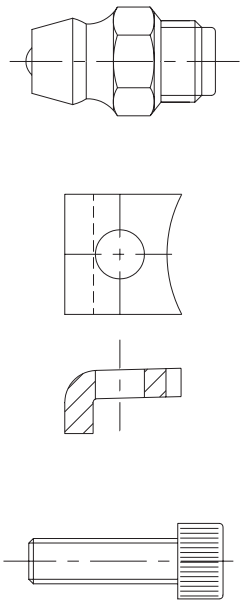

MDL Demountable Steel Bushings feature bearing quality alloy steel, case hardened. ID is precision ground and hone assuring interchangeability with Guide Posts.

Shoulder face and OD are ground in the same operation over an arbor to guarantee the concentricity and perpendicularity of the Bushing.


MDL Demountable Bronze Plated Bushings are manufactured using the same material and process as the steel bushings being electrolytic platted with Bronze before the honing operation.

The plating thickness is approximately 0,015 mm which assures the low coefficient of friction of the bronze with the rigidity of the steel.

D_1	20	25	32	40	50	63	80
F	SHORT SHOULDER BUSHINGS						
16	B11.020.016						
	B21.020.016						
20		B11.025.020	B11.032.020	B11.040.020	B11.050.020	B11.063.020	B11.080.020
		B21.025.020	B21.032.020	B21.040.020	B21.050.020	B21.063.020	B21.080.020
F	SHOULDER BUSHINGS						
32	B11.020.032						
	B21.020.032						
50		B11.025.050	B11.032.050	B11.040.050	B11.050.050	B11.063.050	B11.080.050
		B21.025.050	B21.032.050	B21.040.050	B21.050.050	B21.063.050	B21.080.050
F	LONG SHOULDER BUSHINGS						
75		B11.025.075	B11.032.075	B11.040.075	B11.050.075	B11.063.075	B11.080.075
		B21.025.075	B21.032.075	B21.040.075	B21.050.075	B21.063.075	B21.080.075
F	EXTRA LONG SHOULDER BUSHINGS						
100			B11.032.100	B11.040.100	B11.050.100	B11.063.100	B11.080.100
			B21.032.100	B21.040.100	B21.050.100	B21.063.100	B21.080.100
DIMENSIONAL DATA							
D_2	28	38	45	54	65	81	100
D_3	29	42	49	58	70	88	110
D_4	32,5	47,0	54,0	63,0	75,0	93,0	115,0
E	18	22	25	30	35	48	
M	19,5	27,5	31,0	37,0	43,0	52,0	63,0
N	26,3	35,7	39,1	48,0	53,9	62,8	73,7
Q_1	-	24,3	26,0	30,5	33,5	38,0	43,5
Q_2	-	34,1	37,1	44,9	50,1	57,9	67,5
T	11,3	15,1		18,1			
CLAMPS	B01.005.000	B01.006.000		B01.008.000			
SCREWS	A05.005.012 (M5 X 12)	A05.006.016 (M6 X 16)		A05.008.020 (M8 X 20)			
QTY.	2	3		4			


Low Profile Bushings

STEEL
B13.DDD.FFF
BRONZE PLATED
B23.DDD.FFF





Case Hardened
60 - 64 HRc

To Be Use With:

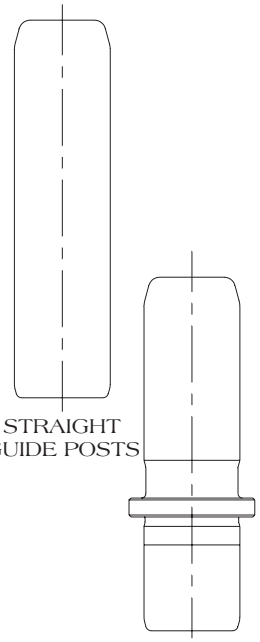


Examples

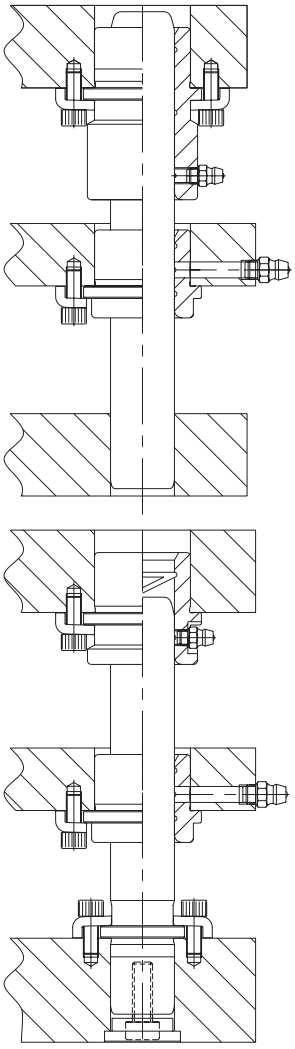


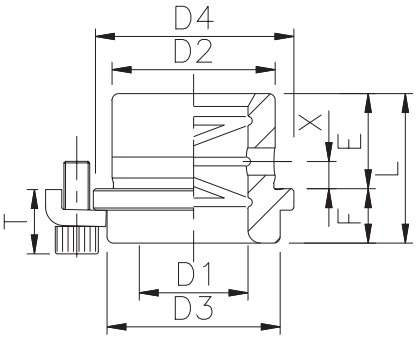

Component Parts Supplied

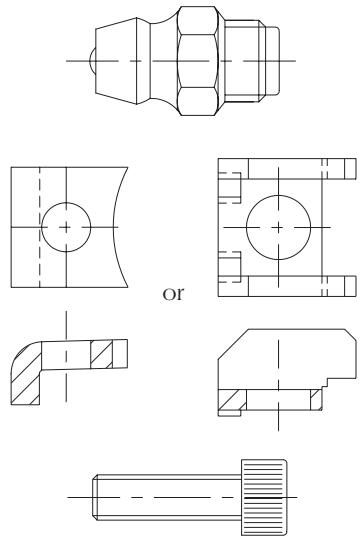

Clamp Arrangements

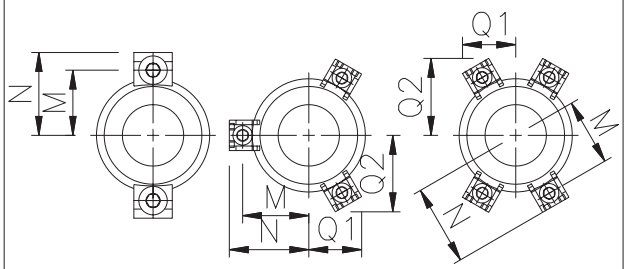

D_1	20	25	32	40	50	63	80
F	CATALOG NUMBER						
10	B13.020.010	B13.025.010	B13.032.010				
	B23.020.010	B23.025.010	B23.032.010				
14				B13.040.014	B13.050.014	B13.063.014	B13.080.014
				B23.040.014	B23.050.014	B23.063.014	B23.080.014
E	18	23	30	38	48	61	78
L	28	33	40	52	62	75	92
D_2		38	45	54	65	81	100
D_3	29	36	43	50	64	79	99
D_4	32,5	47,0	54,0	63,0	75,0	93,0	115,0
M	19,5	30,0	33,5	40,0	46,0	55,0	66,0
N	26,3	38,6	42,0	52,0	57,9	66,8	77,7
Q_1	-	25,2	27,0	33,7	36,7	41,2	46,7
Q_2	-	36,4	39,5	49,0	54,2	61,9	71,5
T	11,3	10,2		13,2			
X	6		10		20		32
CLAMPS	B01.005.000	B02.006.000		B02.008.000			
SCREWS	A05.005.012 (M5 X 12)	A05.006.012 (M6 X 12)		A05.008.016 (M8 X 16)			
QTY.	2	3		4			