
TRUE LOCATION™

# Headed Punch Retainers


Type
**ART**
**For Round Punches**



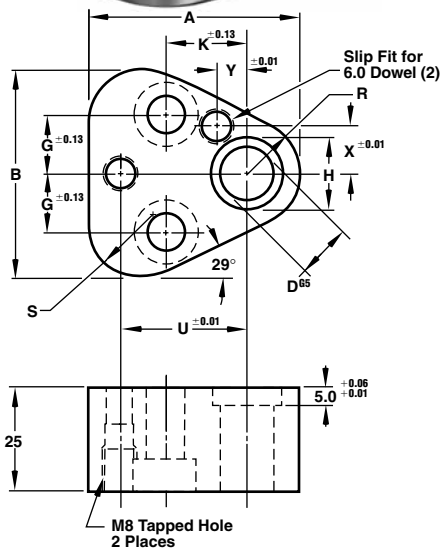


Type
**ARTS**
**For Shaped Punches**



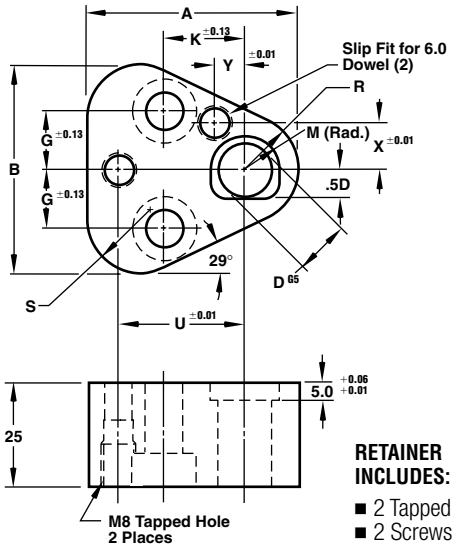


**RETAINER INCLUDES:**
- 2 Tapped dowels
- 2 Screws


Don't waste time and money buiding a retainer for just one punch. TRUE LOCATION Retainers offer precise dowel locations allowing CNC machining of the punch and die plates. The dimensional accuracy also permits interchangeability of retainers that before could not have been done without plugging holes and re-machining for dowels.

Use Dayton's Center Dowel Punches and Pilots for the best accuracy. With the dowel located directly over the center-line of the punch, accumulation of tolerances is eliminated. This provides the best possible alignment. In addition, only one dowel is needed for a round punch, a shaped punch requires a second dowel for radial location. An additional dowel hole is provided for use with die buttons.

- Ground top and bottom
- Case-Hardened to approximately Rc 42

| Catalog No. | | | | | ART | | | ARTS | | | | | | Screw |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | Code | D | A | B | H | G | K | M | R | S | U | X | Y | Size |
| ART/ARTS | 10 | 10.00 | 44.5 | 43.7 | 14.0 | 11.1 | 19.0 | 7.0 | 9.5 | 12.0 | 26.925 | 9.0 | 7.5 | M8 |
| ART/ARTS | 13 | 13.00 | 50.8 | 50.0 | 17.0 | 14.3 | 19.0 | 8.5 | 12.7 | 15.2 | 29.970 | 12.0 | 6.5 | M8 |
| ART/ARTS | 16 | 16.00 | 54.0 | 53.2 | 20.0 | 15.9 | 19.0 | 10.0 | 14.3 | 16.8 | 31.750 | 13.5 | 6.0 | M8 |
| ART/ARTS | 20 | 20.00 | 60.3 | 59.5 | 24.0 | 17.5 | 19.0 | 12.0 | 17.5 | 20.0 | 33.530 | 16.5 | 5.0 | M10 |
| ART/ARTS | 25 | 25.00 | 69.9 | 69.1 | 29.0 | 19.8 | 23.8 | 14.5 | 22.2 | 24.7 | 40.640 | 22.0 | 7.0 | M12 |
| ART/ARTS | 32 | 32.00 | 69.9 | 69.1 | 36.0 | 19.8 | 23.8 | 18.0 | 22.2 | 24.7 | 40.640 | 22.0 | 7.0 | M12 |

# Shim Plates





| D | 1.8 (soft) | 4.8 (Rc55) |
|---|---|---|
| 10 | URSP 10 18 | URBP 10 48 |
| 13 | URSP 13 18 | URBP 13 48 |
| 16 | URSP 16 18 | URBP 16 48 |
| 20 | URSP 20 18 | URBP 20 48 |
| 25 | URSP 25 18 | URBP 25 48 |
| 32 | URSP 32 18 | URBP 32 48 |


## How To Order:

Quantity Catalog No.

*10 ART10*
*12 ARTS25*
*10 URBP 10 48*

# TuffPunch® Single Head Retainers

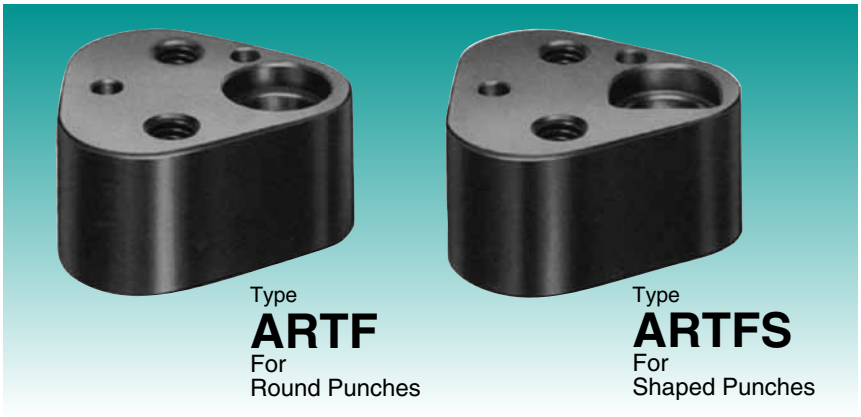


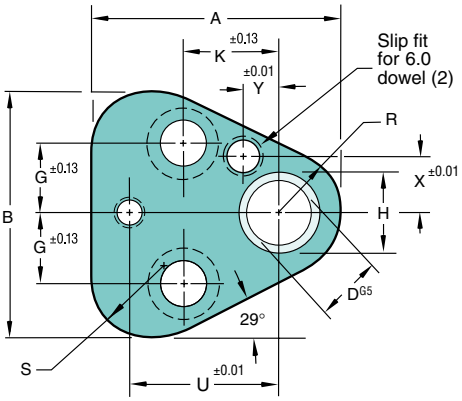




**HOW TO ORDER**


| Specify: | Qty. | Type | D |
|---|---|---|---|
| Example: | 4 | ARTF | 10 |
| | 6 | ARTFS | 25 |

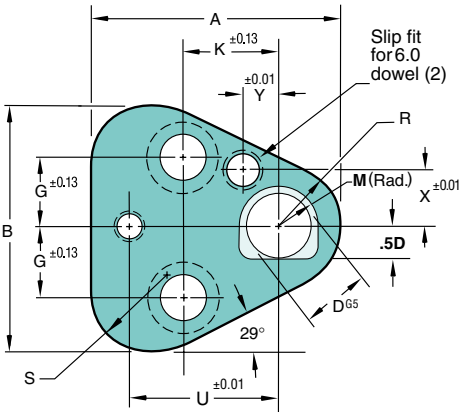ARTF and ARTFS TuffPunch® Retainer sets include:
- 2 Screws
- 2 Dowels




| Backing Plate | |
|---|---|
| D | Catalog No. |
| 10 | URBP 10 63 |
| 13 | URBP 13 63 |
| 16 | URBP 16 63 |
| 20 | URBP 20 63 |
| 25 | URBP 25 63 |

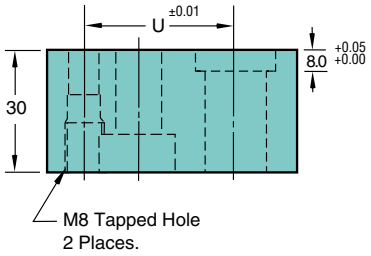


| Catalog No. | | | | | | | | | | | | | | Screw |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Type | Code | D | A | B | ARTF H | G | K | ARTFS M | R | S | U | X | Y | Size |
| ARTF ARTFS | 10 | 10.00 | 44.5 | 43.7 | 15.5 | 11.1 | 19.0 | 7.75 | 9.5 | 12.0 | 26.925 | 9.0 | 7.5 | M8 |
| | 13 | 13.00 | 50.8 | 50.0 | 18.5 | 14.3 | 19.0 | 9.25 | 12.7 | 15.2 | 29.970 | 12.0 | 6.5 | M8 |
| | 16 | 16.00 | 54.0 | 53.2 | 21.5 | 15.9 | 19.0 | 10.75 | 14.3 | 16.8 | 31.750 | 13.5 | 6.0 | M8 |
| | 20 | 20.00 | 60.3 | 59.5 | 25.5 | 17.5 | 19.0 | 12.75 | 17.5 | 20.0 | 33.530 | 16.5 | 5.0 | M10 |
| | 25 | 25.00 | 69.9 | 69.1 | 30.5 | 19.8 | 23.8 | 15.25 | 22.2 | 24.7 | 40.640 | 22.0 | 7.0 | M12 |

## Features/Benefits

TuffPunch® ARTF and ARTFS Single Head Punch Retainers are designed specifically for use with TuffPunch® Punches—Jektole® and Regular. Only one dowel is required for round punches, reducing machining time by up to 50%. The in-line center dowel assures precise punch-to-matrix alignment, giving you higher quality parts, longer punch life, and reduced downtime. Shaped punches use a secondary dowel for precise alignment.

Use of the TuffPunch® Center Dowel Punch and Retainer also eliminates hand-fitting, cutting mounting time by nearly 50%. Simply pull the retainer from its box, and screw it into the die set. This TuffPunch® combination gives you true dimensional accuracy every time.

FDS® FIRM DELIVERY SCHEDULE

*1 Day*