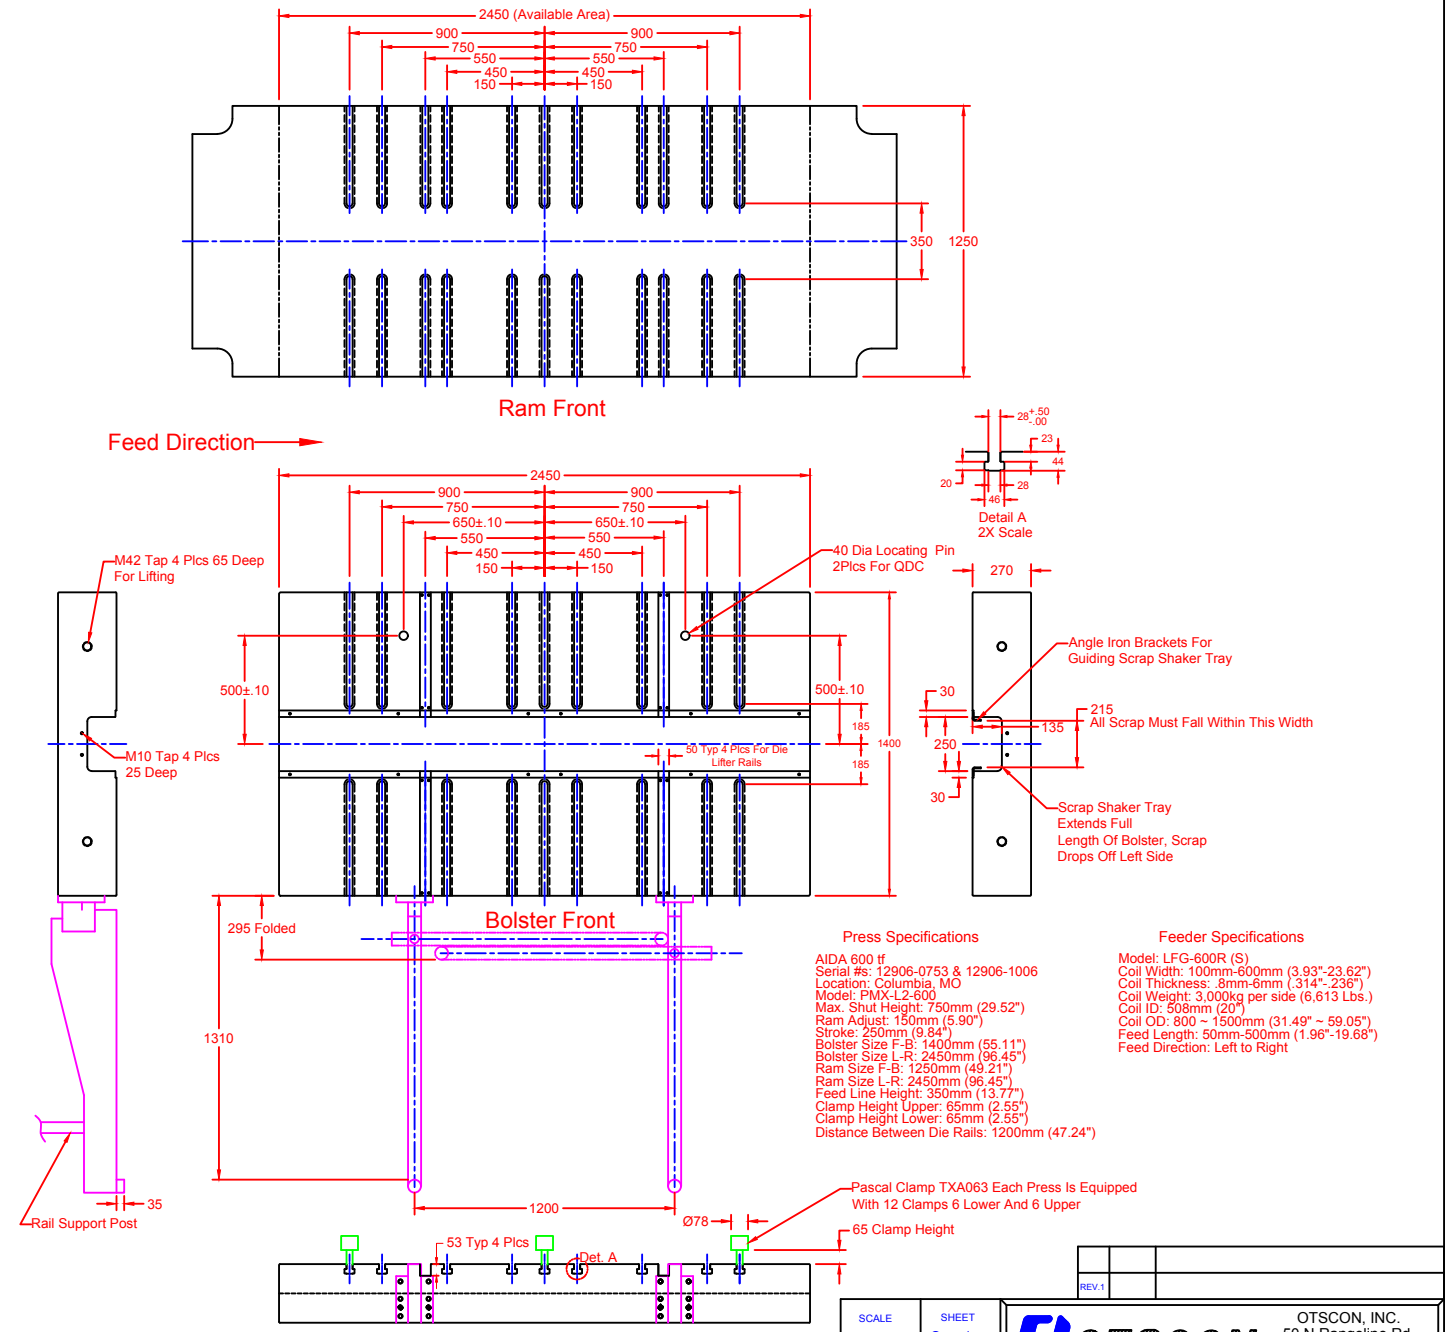

2450 (Available Area)
900
900
750
750
550
550
450
450
150
150
350
1250
Ram Front
Feed Direction
2450
650±.10
650±.10
M42 Tap 4 Plcs 65 Deep
For Lifting
40 Dia Locating Pin
2Plcs For QDC
270
28 +.50 .00
23
44
20
28
46
Detail A
2X Scale
500±.10
500±.10
185
185
1400
50 Typ 4 Plcs For Die
Lifter Rails
M10 Tap 4 Plcs
25 Deep
Angle Iron Brackets For
Guiding Scrap Shaker Tray
30
215
All Scrap Must Fall Within This Width
135
250
30
Scrap Shaker Tray
Extends Full
Length Of Bolster, Scrap
Drops Off Left Side
Bolster Front
295 Folded
1310
Press Specifications
AIDA 600 tf
Serial #s: 12906-0753 & 12906-1006
Location: Columbia, MO
Model: PMX-L2-600
Max. Shut Height: 750mm (29.52")
Ram Adjust: 150mm (5.90")
Stroke: 250mm (9.84")
Bolster Size F-B: 1400mm (55.11")
Bolster Size L-R: 2450mm (96.45")
Ram Size F-B: 1250mm (49.21")
Ram Size L-R: 2450mm (96.45")
Feed Line Height: 350mm (13.77")
Clamp Height Upper: 65mm (2.55")
Clamp Height Lower: 65mm (2.55")
Distance Between Die Rails: 1200mm (47.24")
Feeder Specifications
Model: LFG-600R (S)
Coil Width: 100mm-600mm (3.93"-23.62")
Coil Thickness: .8mm-6mm (.314"-.236")
Coil Weight: 3,000kg per side (6,613 Lbs.)
Coil ID: 508mm (20")
Coil OD: 800 ~ 1500mm (31.49" ~ 59.05")
Feed Length: 50mm-500mm (1.96"-19.68")
Feed Direction: Left to Right
35
Rail Support Post
1200
Ø78
Pascal Clamp TXA063 Each Press Is Equipped
With 12 Clamps 6 Lower And 6 Upper
65 Clamp Height
53 Typ 4 Plcs
Det. A
REV.1
SCALE 1=1
SHEET Oversize
OTSCON
OTSCON, INC.
50 N Rangeline Rd.
Columbia, MO 65201
573/474-7066
TOLERANCE UNLESS SPECIFIED
.XX ±0.5000mm
.X ±0.2540mm
.XX ±0.0254mm
.XXX ±0.0127mm
ANGLE ±0.5 DEG
File Name: V:\Tool & Die\DieStandards\330TonAIDABolsterOMM
DRAWN BY: TCK
DATE: 11/12/2018
THIRD ANGLE P.
MM
TOOL DESCRIPTION
AIDA 660 Press Specs
TOOL NUMBER
12906-0753 & 12906-1006
MACHINE/EQUIPMENT
AIDA Press, 660 U.S. Tons OMM