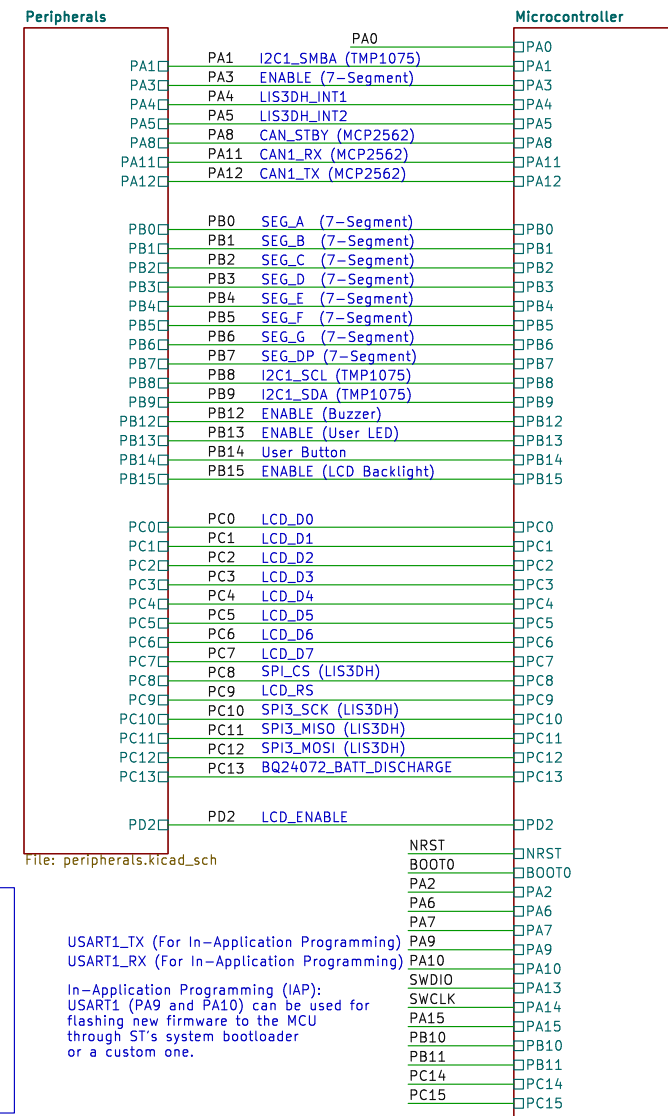
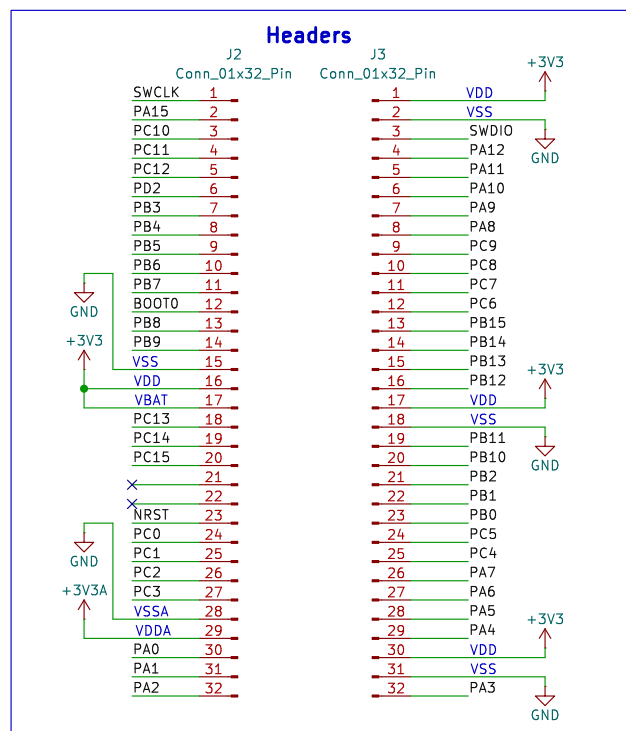
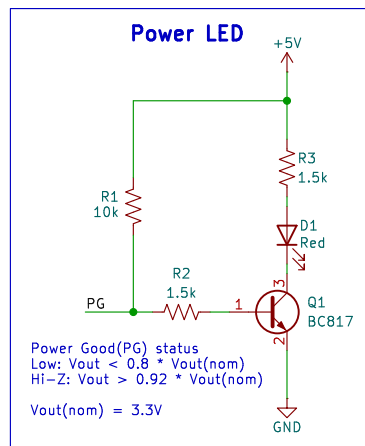
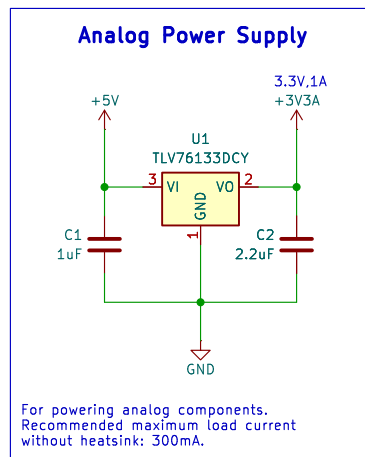
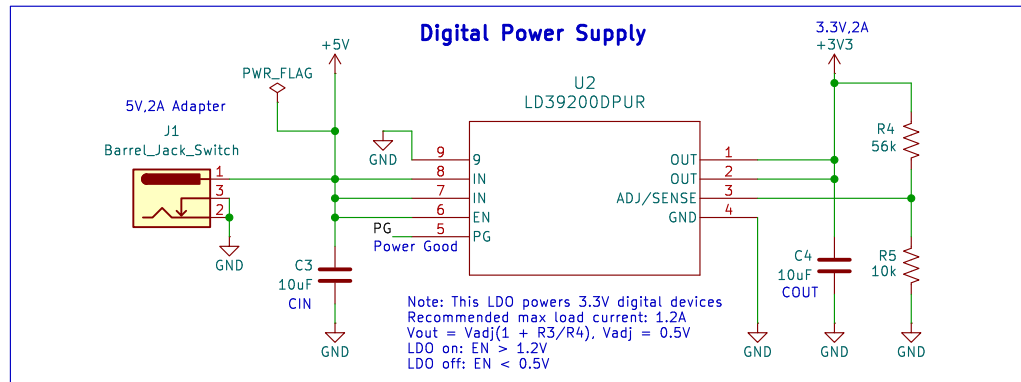


Modification: Added separate connector for SWD on 09/06/2026.

RJX Embedded

Sheet: /

File: rjx_training_kit.kicad_sch


Title: RJX Embedded Training Kit

Size: A4 | Date: 2026-03-05 | Rev: 1.0

KiCad E.D.A. 9.0.6 | Id: 1/3

Lithium Battery Charging & State-of-charge Measurement

Connectors




The CHG_OUT and one of the LiPo connectors can be used for testing purposes.


Note:
 $I(CHG)$ = Fast charge current
 $I(IN_MAX)$ = Input current limit
 $t(MAXCHG)$ = Fast-charge safety timer

If Jumper is open:
 1. The load at the OUT terminal of the charger will be powered by the battery (BAT) instead.
 2. No charging occurs. Battery discharges through an internal FET to power the system load.
 Jumper_2_Open


600mA Charger

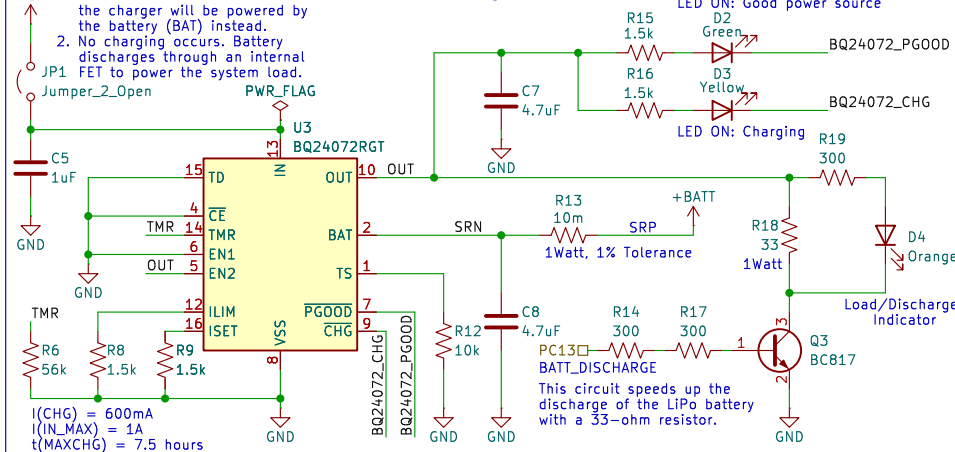


Buzzer

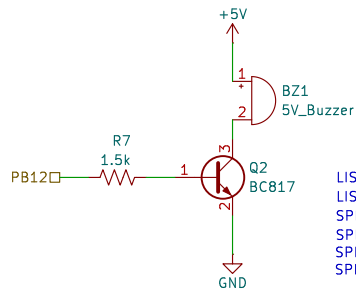


Accelerometer

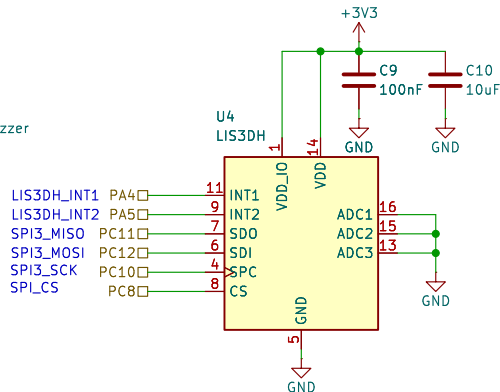


7 Segment Display

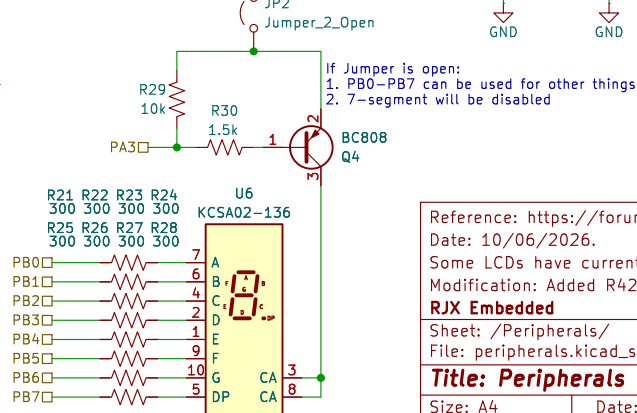


User Button




User LED




Liquid Crystal Display

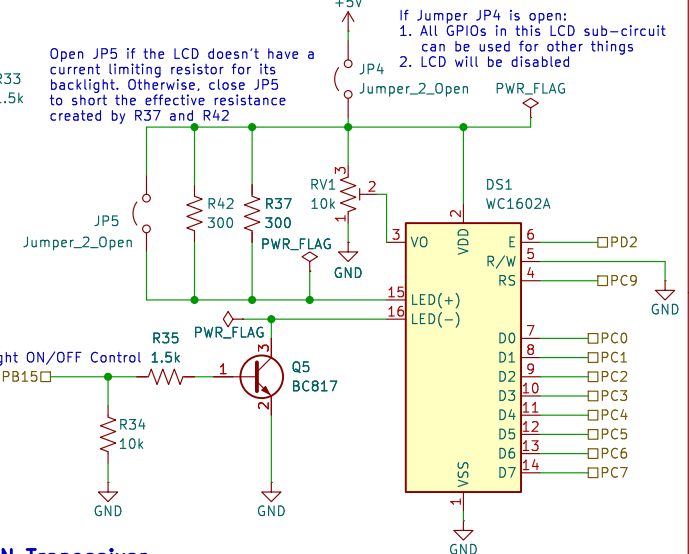


Temperature Sensor



CAN Transceiver

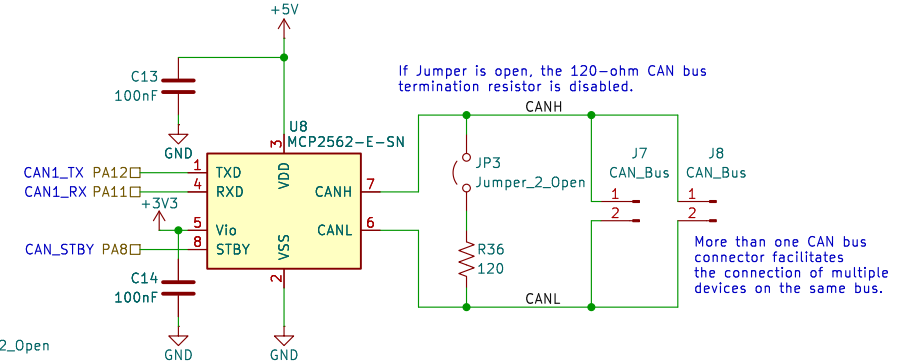

I2C/SMBus Pull-up Resistors



Reference: <https://forum.arduino.cc/t/solved-resistor-for-lcd-16x2/150515>

Date: 10/06/2026.

Some LCDs have current limiting resistors for their backlights, while others don't.
 Modification: Added R42 and JP5 to account for different types of LCDs.

RJX Embedded

Sheet: /Peripherals/
 File: peripherals.kicad_sch

Title: Peripherals


Size: A4 Date: 2026-03-05

KiCad E.D.A. 9.0.6

Rev: 1.0

Id: 2/3

Microcontroller (MCU)

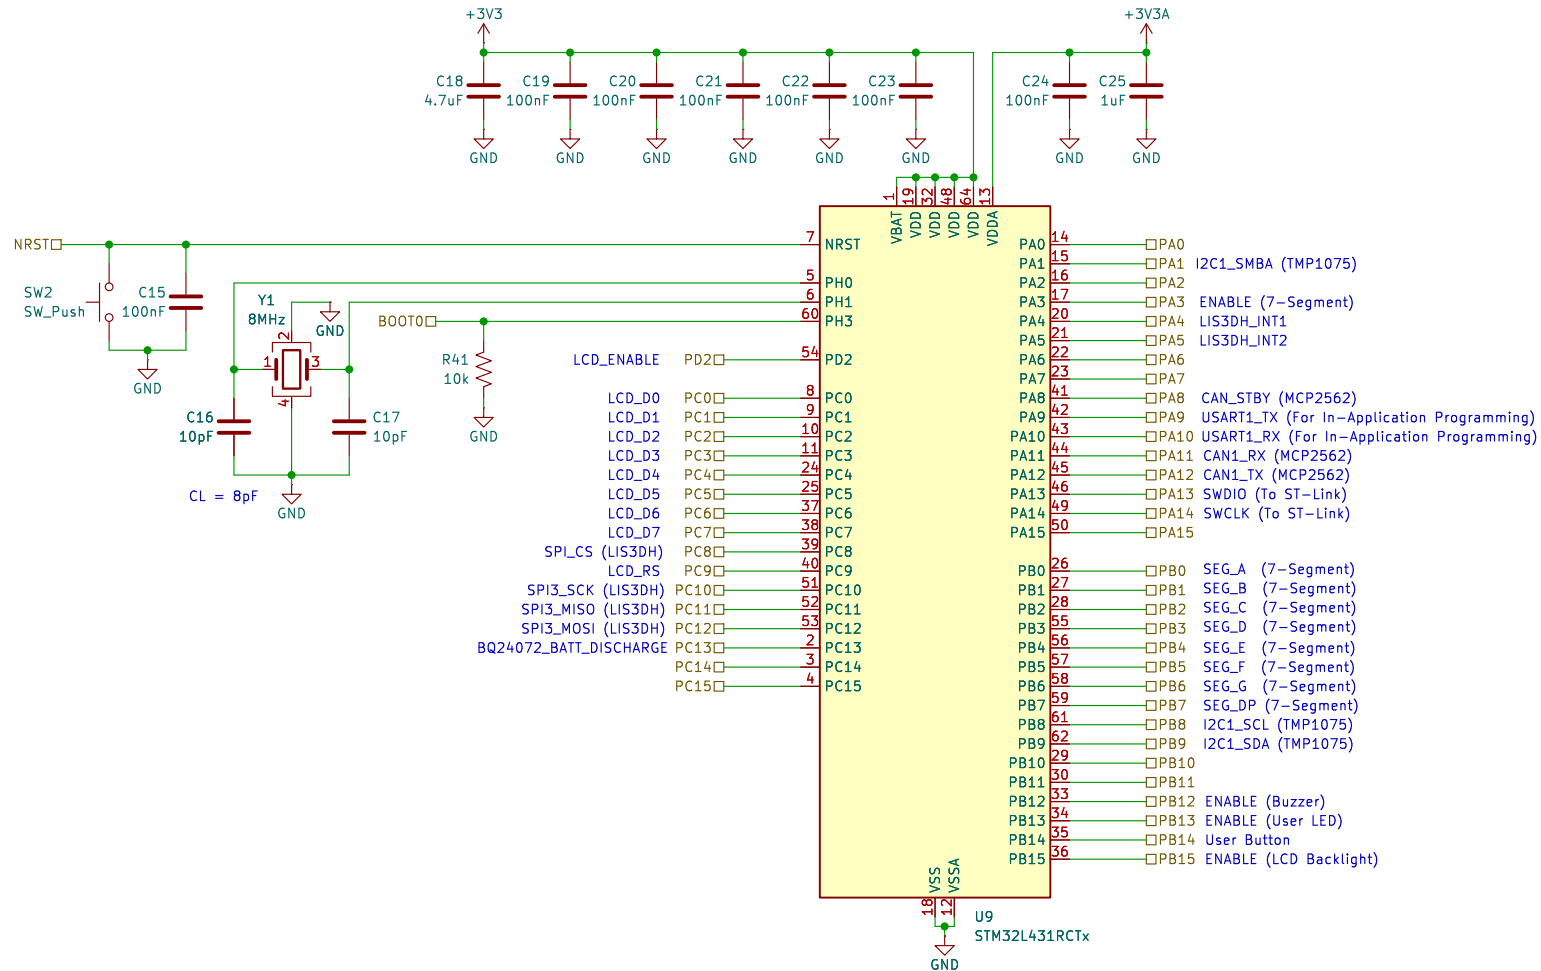

In-Application Programming (IAP):
USART1 (PA9 and PA10) can be used for
flashing new firmware to the MCU
through ST's system bootloader
or a custom one.

Sheet: /Microcontroller/
File: microcontroller.kicad_sch

Title: Microcontroller

Size: A4 Date: 2026-03-05

KiCad E.D.A. 9.0.6

Rev: 1.0

Id: 3/3