
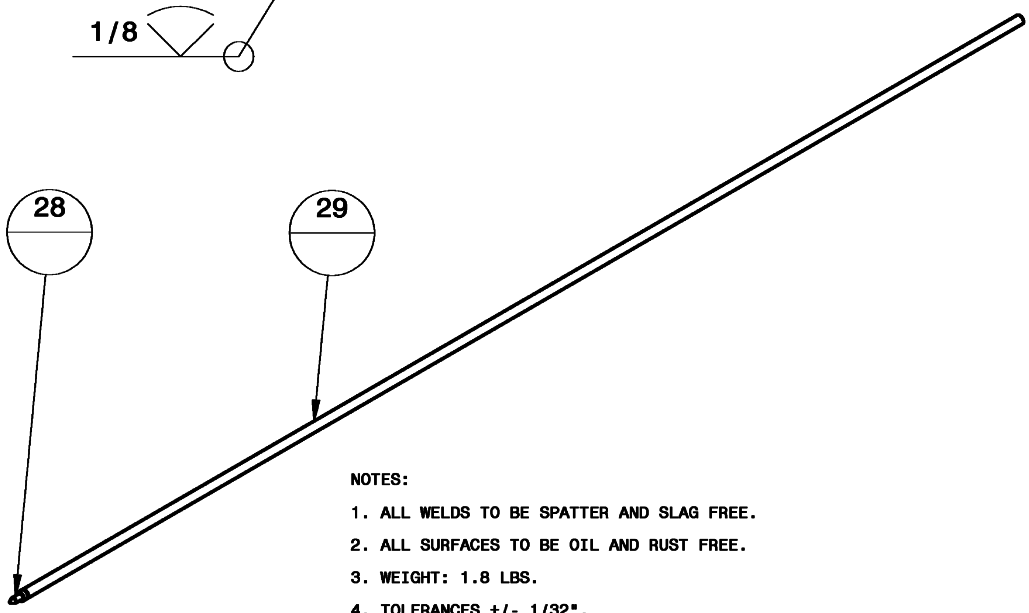


LET.	REVISION	DRN. BY	DATE
A	JOB DESCRIPTION CHANGE. PROJECT QUANTITY CHANGED FROM 3 TO 1.	JASHWORTH	7/27/2010

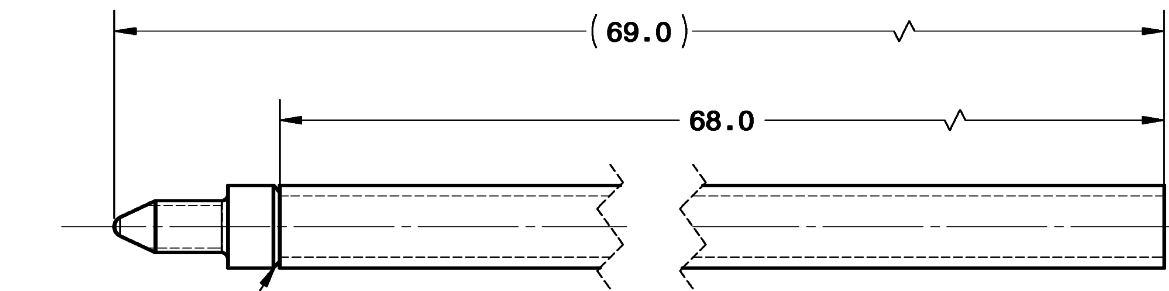


- NOTES:
1. ALL WELDS TO BE SPATTER AND SLAG FREE.
 2. ALL SURFACES TO BE OIL AND RUST FREE.
 3. WEIGHT: 1.8 LBS.
 4. TOLERANCES +/- 1/32".
 5. ALL WELDED CONNECTIONS MUST BE IN ACCORDANCE TO CSA-W59.
 6. ALL WELDED CONNECTIONS MUST UNDERGO VISUAL EXAMINATION BY A DESIGNATED PERSON AS SPECIFIED IN THE MITP, IN ACCORDANCE TO CSA-W59.
 7. FOLLOW ALL WELD SYMBOLS AS INDICATED AS THEY ARE REQUIRED FOR STRUCTURAL PURPOSES. HOWEVER, ALL MATING EDGES OF WELDMENT COMPONENTS ARE TO BE WELDED WITH A MINIMUM 3/16" FILLET WELD, TO SEAL ALL CREVICES. FINAL INSPECTION OF THE WELDMENT BY A PERSON DESIGNATED IN THE MITP IS REQUIRED, TO ENSURE THAT ALL CREVICES HAVE BEEN FULLY SEALED, PRIOR TO ANY SUBSEQUENT OPERATIONS.
 8. ALL DETAILS WITH A "W" BESIDE THE ITEM NUMBER HAVE NO DRAWING AND REQUIRE NO MACHINING PRIOR TO WELDING.CUT DETAIL TO SIZE INDICATED IN BILL OF MATERIAL.
 9. PAINT NOTE:
-PAINT - AECL IMPERIAL BLUE
-PAINT TYPE - HIGH SOLIDS EPOXY
-PAINT PRODUCT # - 224
-MANUFACTURER - DEVOE COATINGS

☐ ACCEPTED AS NOTED ☒ ACCEPTED ☐ NOT ACCEPTED

Signature	Representing	Date
J. Enns <i>J. Enns</i>	gen	2010.09.17

"The use and meaning of "ACCEPTED" is governed by the terms and conditions of the P.O. AECL Ref. No: 87630-223000 and in any event its use does not relieve the supplier of any of its obligations to AECL and/or its Client."



ASSIGNED AECL NUMBER
RT-87630-71254-1016-1-DD-B Rev.0

BOM on Drawing For Reference Only

0029W	1	NOZZLE DELIVERY TOOL TUBE 0.5 OD X .065 WALL X 68.0 LG.	A-519 CDS TUBE 12995-1254-0029				
0028B	1	NOZZLE DELIVERY TOOL SCREW 0.50 DIA. X 1.00 LG.	C-1018 CRS 12995-1254-0028				
ITM	QTY	DESCRIPTION	MFR				
Material		Finish	Heat Treat	QTY.	TOTAL		
WELDMENT - ASSEMBLY		SEE DWG NOTE	NONE	1	1		
Drawn By SHAWN DONNELLY		 AUTOMATION TOOLING SYSTEMS INC. 250 ROYAL OAK ROAD, CAMBRIDGE, ON N3H 4R6					
Date MAY 07 2010							
<u>Unless Otherwise Specified</u>		ATOMIC ENERGY OF CANADA VRS RETRIEVAL TOOLS NOZZLE DELIVERY TOOL					
Machining Tolerances .000 ± .005 .00 ± .010 Angle ± .5° .0 ± .030							
Weldment/Fabrication Tolerances							
Mat'l Thickness 0 - 12 ± .030 (1" or less) >12 - 36 ± .060 Length (inches) >36 - 80 ± .125							
Mat'l Thickness 0 - 12 ± .060 (> 1") >12 - 36 ± .125 Length (inches) >36 - 80 ± .250							
<u>Unless Otherwise Specified</u>							
-Dimensions Apply After Finish							
-Break All Sharp Corners to Min .005, Max .015							
-Do not Machine Stock Sizes							
-All Machined Surfaces to be 125 / (Ra) or better							
		Drawing No.				Rev.	
-Do Not Scale Drawing -Dimensions are in inches		B-12995-1254-0016				A	
3rd Angle Projection		Scale 1:1		Job No.		Sheet 1 of 1	