✓ 1. What is the prefix length notation for the subnet mask 255.255.240.0 ? 1/1

- ○ /19
- ○ /18
- ◉ /20 ✓
- ○ /21

✓ 2. How many usable IP addresses are available on the 192.168.1.0/26 network? 1/1

- ○ 256
- ○ 30
- ○ 254

- (●) 62 ✓
- ( ) 32

✓ 3. Which two parts are components of an IPv4 address? (Choose two.) 1/1

- [x] Network portion ✓
- [ ] Broadcast portion
- [ ] Logical portion
- [ ] Physical portion
- [ ] Subnet portion
- [x] Host portion ✓

✓ 4. What does the IP address 10.17.4.128/26 represent? 1/1

- ( ) host address
- (●) network address ✓
- ( ) multicast address
- ( ) broadcast address

✓ 5. What is the purpose of the subnet mask in conjunction with an IP address? 1/1

- ( ) to mask the IP address to outsiders

✓ 5. What is the purpose of the subnet mask in conjunction with an IP address? 1/1

- ○ to mask the IP address to outsiders
- ◉ to determine the subnet to which the host belongs ✓
- ○ to uniquely identify a host on a network
- ○ to identify whether the address is public or private

FLSM

1 of 7 points

Consider a IP address 10.243.43.50/12.

You have to create subnets for 2048 hosts in each subnets. Make sure the loss of subnets address in minimum. Answer the following questions.

✓ 1. Which is the network address for given IP address? 1/1

10.240.0.0/12 ✓

✗ 2. How many subnets need to be created? ···/1

1 ✗

✗ 3. How many hosts will lose out on subnetting, if we create subnets by using actual IP address? ···/1

3. How many hosts will lose out on subnetting, if we create subnets by using actual IP address? ···/1

2046

Suppose you are the network administrator of subnet number #133. Answer the following question (4-7) about your network.

4. What is your network address? ···/1

10.255.168.0/21

5. What is your Subnet Mask? ···/1

255.255.248.0/21

6. What is your network Broadcast address? ···/1

10.255.175.255/21

7. What is the fifth usable address? ···/1

10.255.168.5/21

VLSM

6 of 8 points

You are designing a network for a KUET with the following departments and their respective number of hosts shown in following image.
Design a VLSM scheme to efficiently allocate IP addresses to these departments. Use the IP address 130.133.0.5/16 as the base network address. Be sure to calculate the number of subnets needed, their subnet masks, and the usable IP ranges for each subnet. Also, specify the network address and the broadcast address for each subnet.

KUET Inter Dept. Network.

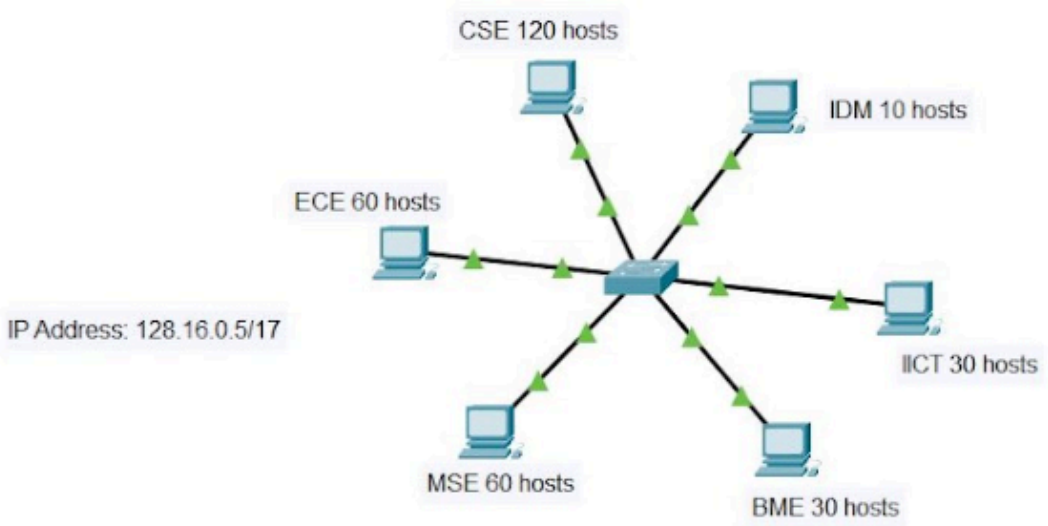

✓ 1. What will be the network address for CSE? 2/2

128.16.0.0/25 ✓

KUET Inter Dept. Network.

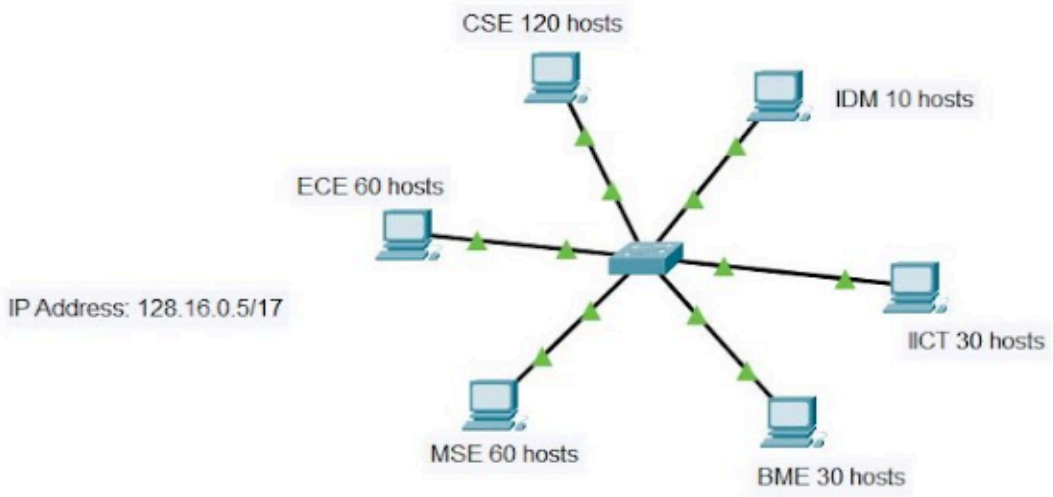

✓ 1. What will be the network address for CSE? 2/2

128.16.0.0/25 ✓

✓ 2. IP address of the 2nd host in ECE department- 2/2

128.16.0.130/26 ✓

✗ 3. Subnet mask for BME network- ···/2

255.255.255.224/27 ✗

✓ 4. Broadcast address of IDM department- 2/2

128.16.1.79/28 ✓

https://limewire.com/d/zJzHh#LKOtOGQI7Y