



Deckblatt Auftragsdokumentation

Coverage Documentation

Coverture Documentation

Gegenstand OBJECT OBJET	:	Federungszyylinder CYLINDER SPRING ASSY. CYLINDRE DE SUSPENSION
Abmessung MEASURE MÉTRAGE	:	D 220/100x150 Hub / stroke /course
Loesche Bestell-Nr. LOESCHE ORDER-NO. LOESCHE COMMANDE-NO.	:	4501.7985
Kennwort KEYWORD REFERENCE	:	Narayangonj
Hersteller Auftrags-Nr. MANUFACTURE ORDER-NO. REF. NO. DU MANUFACTUREUR	:	107217
Erstellungsdatum MANUFACTURING DATE DATE DE MANUFACTURATION	:	2004


Inhaltsverzeichnis / List of contents / Table des materies

- 1. Ersatzteilliste** : **50-1454-1-B**
SPARE PARTS LIST
LISTE DES PIECES DE RECHANGE
- 2. Ersatzteilzeichnung** : **50-1454-1-B**
SPARE PARTS DRAWING
DESSIN DE LA PIECE DE RECHANGE
- 3. Montage, Inbetriebnahme u. Wartung**
ASSEMBLY, START-UP AND MAINTENANCE
INSTRUCTION DE MONTAGE

Ersatzteilliste / Spare parts list							
Bezeichnung :			Federungszyylinder / Cylinder spring assy.				
Type							
Abmessung :			D 220/100-150 Hub / stroke		Kennwort:		Narayangonj
Meassure					Key Word		
RUHFUS-Zeichnungs Nr.:			50.1454.1/B				
RUHFUS-Drawing-No.							
Pos.	St.	Bezeichnung	Zeichnungs-Nr.	Abmessung	Qualität	DIN / EN	Bemerkungen
Pos.	Piec.	Name	Drawing-No.	Messure	Quality	DIN / EN	Remarks
1	1	Zylinderrohr	1166.01.00.00.00.2/A				
		Tube					
2	1	Kolbenstange	1454.02.00.00.00.2/0				
		Piston rod					
3	1	Stangenführung	1166.02.00.00.00.2/0				
		Rod guide					
4	1	Dichtungsaufnahme	1166.04.00.00.00.2/0				
		Seal bush					
5	1	Kolben	1166.10.00.00.00.2/0				
		Piston					
15	1	Bodenaug	1454.15.00.00.00.2/0				
		Bottom eye					
16	1	Stangenaug	1454.16.00.00.00.2/0				
		Rod eye					
17	4	Ring	1166.17.00.00.00.4/0				
		Ring					
20	2	Flachschmierkopf		R 1/4		3404	
		Lubrication nipple					
21	1	Faltenbalg	Beistellung Fa. LOESCHE				
22	1	Schlauchklemme	Beistellung Fa. LOESCHE				
		Hose clamp					
23	24	Zylinderschraube		M20x60	10.9	912	
		Screw					
24	24	Zylinderschraube		M10x20	8.8	912	
		Screw					
25	2	Entlüfterventil		M8x1			ATE
		Aeration valve					
26	24	Sperrkantring		D 20	Fed.St.		
		Spring washer					
27	24	Federring		D 10	Fed.St.	7980	
		Spring washer					
28	1	Gewindestift		M12x30	45H	915	
		Hexagon socket screw					
29	4	Zylinderschraube		M20x80	10.9	912	
		Screw					
30	2	Verschlußschraube	VSTI-M42x2-ED				
		Lock screw					
31	1	Verschlußschraube	VSTI-R1/2-ED				
		Lock screw					
32	1	Pendelrollenlager	Beistellung Fa. LOESCHE				
		Bearing					
40	1	Dichtsatz kpl.	1454.EDS				
		Sealing set cpl.					
40.1	1	Abstreifer		D 100/108x7x4	PTFE-Bz/NBR		
		Scraper ring					
40.2	1	Stangendichtung		D 100/115x10	PU		
		Rod seal					
40.3	1	Dachmanschette		D 100/115x30	NBR / Gewebe		
		Chevron sael					

1454-stl

.							

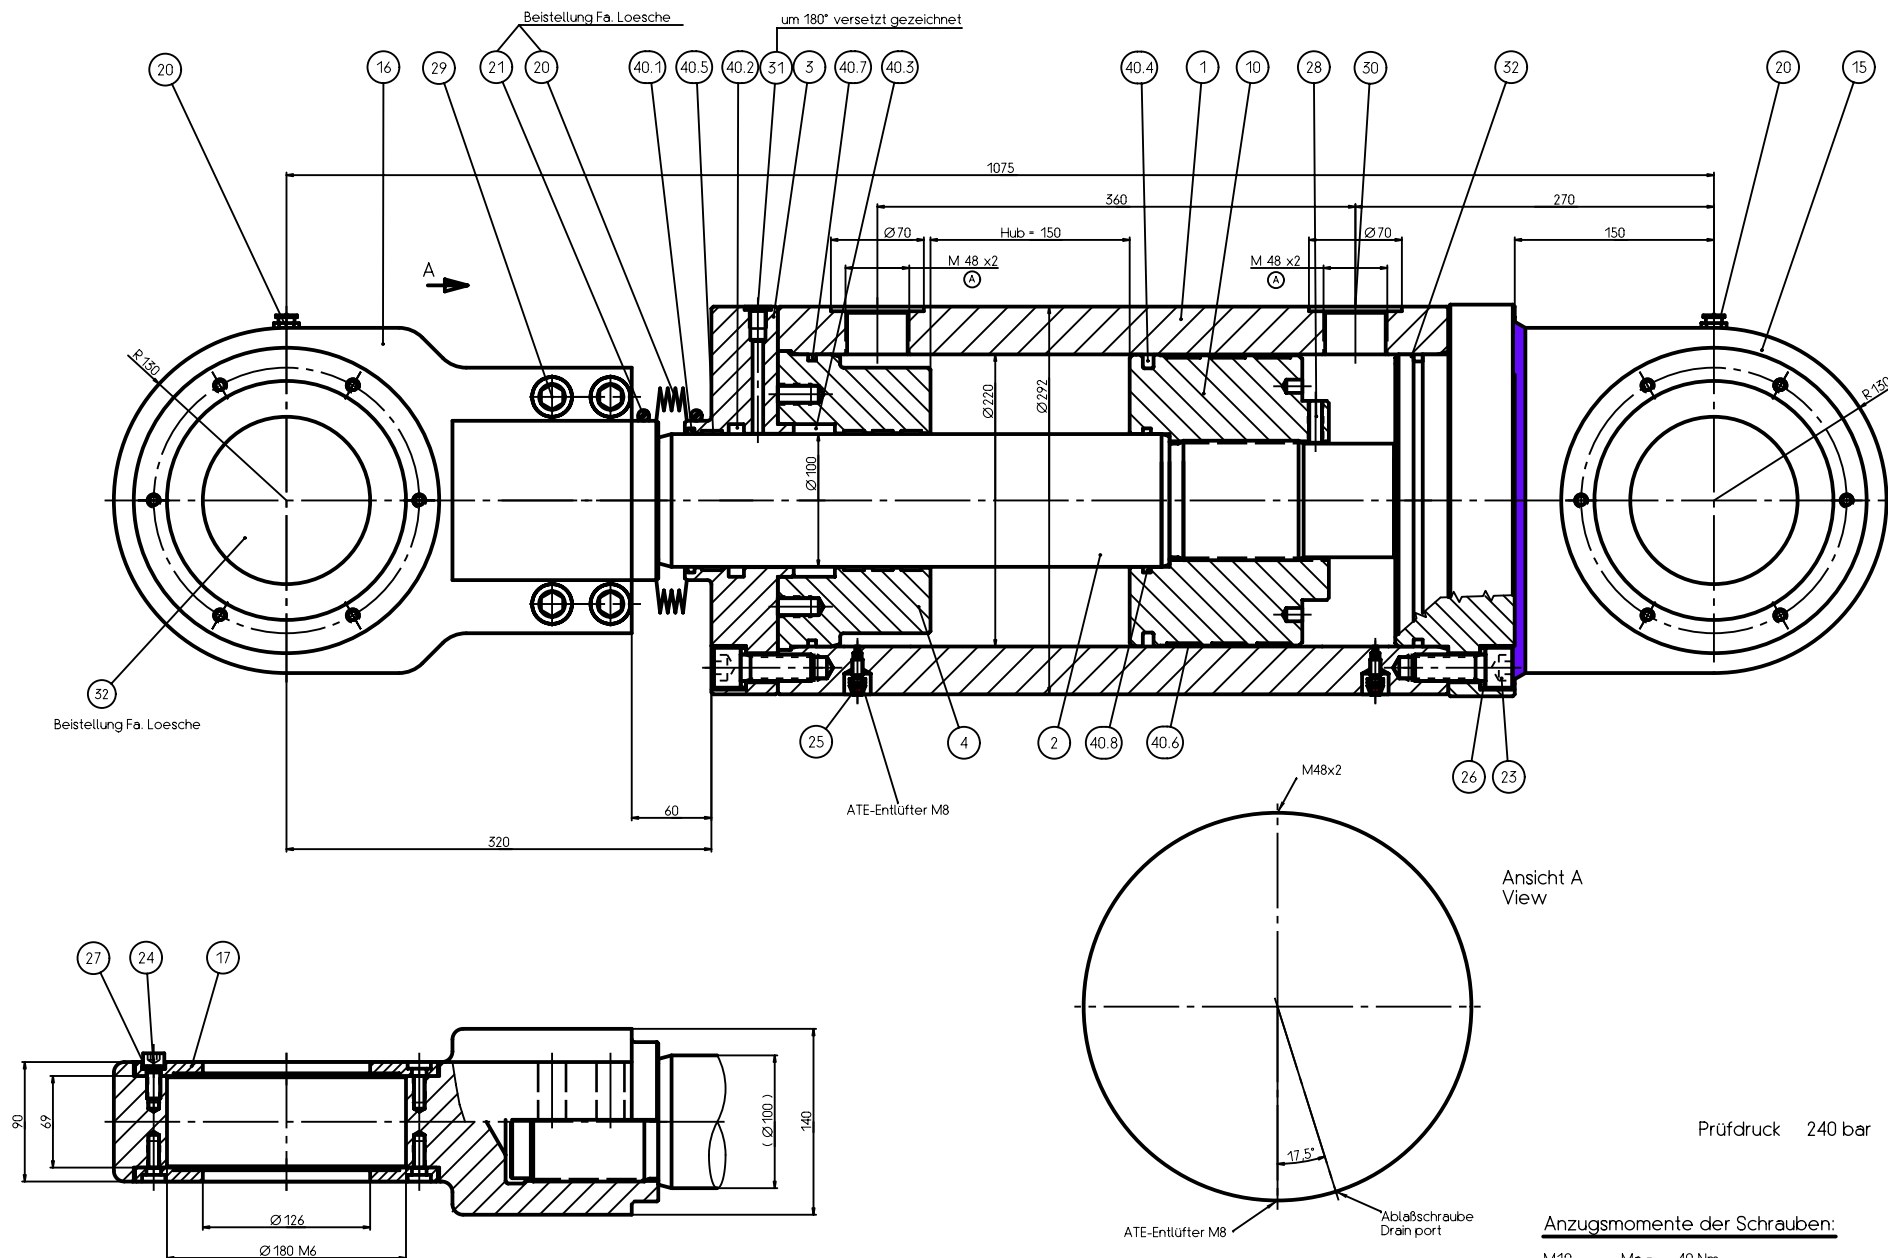

Das Einschraubgewinde der Kolbenstangenführung, des Kolbens sowie Anlagefläche von Rohr und Stangenführung, sind mit VALVOLINE TECTYL 858.C zu schmieren.

Nach dem Anziehen von Kolben und Stangenführung, werden Kolbenstange bzw. Stangenführung, wie gezeichnet angebohrt.
Sicherung des Kolbens mit Loctite 245, sowie der Gewindestifte durch Loctite 245 und Körnerschlag auf die Gewindeflanken.

Anzugsmomente der Schrauben:


M10	Ma = 40 Nm
M12	Ma = 85 Nm
M20	Ma = 600 Nm

URHUSCHUTZ nach DIN 54 vorbehalten Copyright reserved RUHFUS Systemhydraulik GmbH	
A	Anschlüsse waren
M 40x2	17.08.00
Zeit	Nummern

CAD-Zeichnung	
Datum 20.04.00	Gezeichnet A. Schwin
Gezeichnet	Norm
RUHFUS SYSTEMHYDRAULIK	

Maßstab 1:2	Gewicht in kg ~350
* / *	
Federungszyylinder Cylinder spring assy. D 220/100-150 Hub/stroke	
Blatt	50.1454.1/B

Produktionsfreigabe	
Kom-Nr	Datum




Assembly,
Start-up and Maintenance
of Hydraulic Cylinders

Data Sheet No.
HY-3910-4
Issued: 11/2002

Table of Contents

1. General Description
2. Mounting and Assembly
3. Start-up
4. Maintenance
5. Usage limitations for sealing and guide elements
6. Assembly of seal / scrapers / guide elements
7. Transportation and Storage
8. Safety Specifications



Assembly, Start-up and Maintenance of Hydraulic Cylinders

Data Sheet No.
HY-3910-4
Issued: 11/2002

1. General Description

Before starting up the hydraulic cylinder consult the following standards:

- | | |
|----------------------|----------------------|
| - German standards | DIN 24346, para. 5.2 |
| - ISO standard | ISO 4413, para. 6.2 |
| - European standards | EN 982, para. 5.3.2 |

2. Mounting and Assembly


- Cleanliness:


- When mounting the cylinder and in the vicinity
- of pipes and containers all traces of soiling, scales, sand, chips, etc. are to be cleaned before starting assembly
- hot-bent or welded pipes are to be finally pickled, cleaned and oiled.
- When cleaning use only non-linting cloths or special paper
- Do not use sealants such as hemp, putty or sealing tape

3. Start-up

3.1 Pressure Liquid

- Observe the set pressure and temperature ranges.
- Check whether the pressure liquid in the system matches the pressure liquid recommended for the hydraulic cylinder.
- The maximum temperature recommended by the oil manufacturer must not be exceeded.
In order to assure the system's constant operating performance, it is recommended to keep a constant pressure liquid temperature ($\pm 5^{\circ}\text{C}$).

	Assembly, Start-up and Maintenance of Hydraulic Cylinders	Datasheet No. HY-3910-4 Issued: 11/2002
• As a rule mineral oils (HL, HLP) as per DIN 51524 can be used Other pressure liquids only at request. 3.2 Filtering • A reliable form of filtering can increase the hydraulic cylinder's service life. Follow the recommendations for the maximum permissible fouling factor for the pressure liquid as per NAS 1638 / ISO DIS 4406. • Filters with electric soiling indicators are to be preferred. • When changing the filter make sure to provide for the cleanliness. 3.3 Bleeding • At idle run pressure loosen the bleeder screw or the bottom- or rod-side screw. • Let the air escape • Tighten the bleeder screw or the other relevant screws only when the outflowing oil is bubble-free. 4. Maintenance • Generally speaking, the hydraulic cylinder does not require any maintenance; make sure to lubricate the various bearing such as the swivel pins as well as the spindle carriers and ball-and-socket joints. • Check for the leak-proof closure at brief intervals • The motion seals are parts subject to wearing. Should the internal or external leakage become too great, we recommend that you change the seals or send the hydraulic cylinder to our factory so that the guides and the other parts can be checked during the changing of the seals.		



Assembly, Start-up and Maintenance of Hydraulic Cylinders

Datasheet No.
HY-3910-4
Issued: 11/2002

5. Usage limitations for sealing and guide elements


- Temperature range -20°C to $+80^{\circ}\text{C}$
- Max. sliding speeds
 - Chevron packings; grooved rings : 0.5 m/sec
 - Glydring seals : up to 15 m/sec
 - Scraper : 4 – 15 m/sec.
(manufacturer-specific)
 - Guide elements : min. 1 m/sec or higher
(manufacturer-specific)
- You can find the various pressure ratings and proof pressures in the assembly drawings.

6. Assembly of seals / scrapers / guide elements

6.1 Rod seals

6.1.1 Chevron packings

Chevron packing in an open chamber

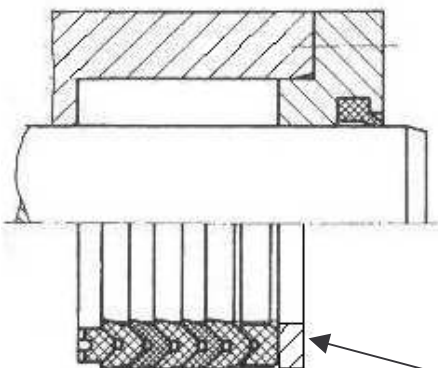


Chevron packing in a closed
chamber with support ring

Before mounting all of the single parts of the seal unit are to be greased. You can use mineral greases as long as these prove to be suitable for seals.

With rod diameters of 140 mm or more the chevron packings can be mounted in closed chambers. To compensate for the larger chamber a support ring is to be inserted.


Support ring with closed slot



Assembly, Start-up and Maintenance of Hydraulic Cylinders


Datasheet No.
HY-3910-4
Issued: 11/2002

6.1.2 Glydrings

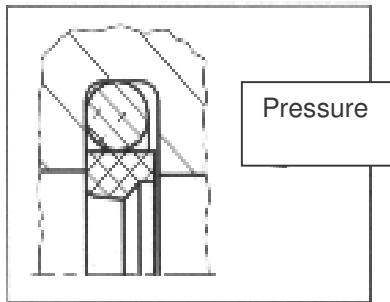

When mounting the Glydring seals the O-ring is to be positioned in the mounting groove and then the profile is deformed to assume a kidney-like shape and snaps into place. Make sure that the profile ring has no sharp bends and that the sealing edge is placed correctly according to the direction of the pressure exerted.


6.1.3 Grooved rings

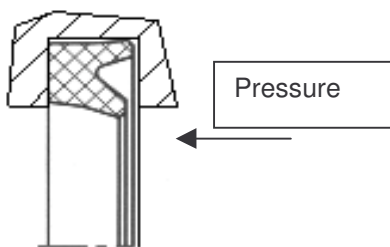

The grooved rings can be mounted by hand in the recessed grooves. Make sure that the sealing lip is not damaged and that the sealing lip is placed correctly according to the direction of the pressure exerted.


6.2 Piston Packings

6.2.1 Glydrings

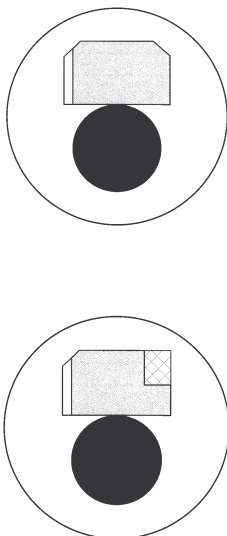

Glydring piston packings can be mounted on solid pistons. The O-ring is mounted first and then the profile ring is pushed on. Warming the profile ring in hot water or with a jet of hot air at about 80 °C – 100 °C makes the mounting easier. The gauging of the seal can be performed with the relevant cylinder tube. This operation must be performed immediately after fitting.


A special seal is the Glydring with gusset. The gusset is an additional, slotted support ring made of heat-resistant elastomer. When using this solution, follow the instructions provided in the assembly drawings.



Assembly, Start-up and Maintenance of Hydraulic Cylinders

Datasheet No.
HY-3910-4
Issued: 11/2002


6.2.2 Compact Seals



Multi-unit piston packings can be snapped on for the most part with the aid of tools. First the rubber elastic contact element is to be snapped on. Then the slotted support rings and welded-angle rings are to be inserted.


6.3 Scraper

6.3.1 Single-acting version




Generally speaking, the scrapers can be mounted quickly and easily thanks to their capacity to assume a kidney-like shape. The scrapers with metal retainers are pressed into an axially accessible housing space.

6.3.2 Double-acting version



One-part version



Two-part version


Double scrapers come into two different versions:

- One-part version (double-lip)
- Two-part version.

The thorough assembly of the equipment is the prerequisite for its proper functioning. Generally speaking, the scrapers can be mounted quickly and easily thanks to its capacity to assume a kidney-like shape.

The two-part double scrapers are composed of an oil control ring and an O-ring. Depending on the manufacturer even 2 O-rings can be used as the pretensioning element.


Follow carefully the assembly instructions in the drawings.



Assembly, Start-up and Maintenance of Hydraulic Cylinders


Datasheet No.
HY-3910-4
Issued: 11/2002

6.4 O-rings

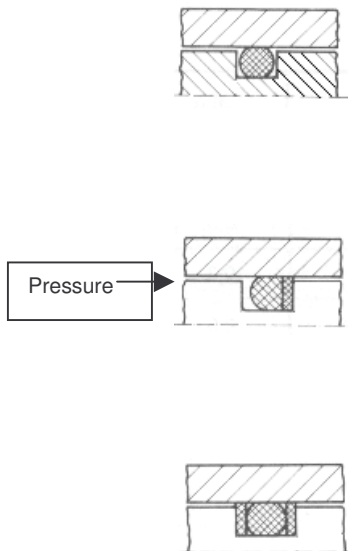

The O-rings must not be pulled over sharp edges or exposed shafts, threads, grooves, etc. It is recommended to cover the sharp spaces during assembly to prevent their damaging. The O-rings must not be twisted or drilled in the housing groove. They can be slightly stretched while being mounted. However, after mounting they must be left to rest to allow them to resume their original shape. To prevent extruding through the slot additional support rings can be mounted. Follow the instructions in the assembly drawing.

6.5 Guide Rings




Their purpose is that of guiding the piston and the rod, preventing metallic friction between the sliding components and supporting the resulting lateral forces. Follow the assembly instructions in the drawings.

7. Transportation and Storage

When handling the cylinder make sure that

- a) the cylinder is always completely run in to prevent the damaging of the piston rod
- b) Avoid knocking against the piston rod guide and the piston during handling to prevent the damaging of the guide elements and the piston rod.



Assembly, Start-up and Maintenance of Hydraulic Cylinders

Datasheet No.
HY-3910-4
Issued: 11/2002

- c) The hydraulic connections are to be sealed with screw plugs or other suitable caps or covers with O-rings to prevent the infiltration of soiling

In case of storage for long periods of time all of the bare surfaces are to be coated with Tectyl.

In case of storage periods lasting more than 6 months the hydraulic cylinder is to be filled with a preservative oil and seal.

We recommend for instance RENOLIN MR 15 by Fuchs Lubritech GmbH.

When starting the cylinder there is no need to remove this oil from the cylinder chamber. This oil blends perfectly with all mineral oils as per DIN 51124.

The hydraulic cylinder is to be kept in a dry and dustless room free from corrosive substances and dampness.

If possible, the hydraulic cylinders are to be kept in a vertical position in case of long storage periods.

8. Safety Specifications

The safety requirements envisaged in standard EN 982, para. 5.3.2, in its most recent valid version are to be applied.