




MIXER FEATURES

20/10 HP 1900/900 TEFC SANITARY DRIVE MOTOR.
480 VOLTS, 3 PHASE, 60 HERTZ WITH FULL 115 VOLT MAGNETIC CONTROLS.
NEMA 4X ELECTRICAL ENCLOSURE WITH CIRCUIT BREAKER
AND PROGRAMMABLE LOGIC CONTROLLER (AB SLC-500).
SOLID STAINLESS STEEL BOWL ASSEMBLY.
SOLID STAINLESS STEEL BOWL SHEET.
SOLID STAINLESS STEEL BOWL CANOPY.
SOLID STAINLESS STEEL AGITATOR AND SHAFT.
SOLID STAINLESS STEEL WELDED-IN DRIP PAN/FRONT PANEL.
SOLID STAINLESS STEEL EXTERIOR.
SOLID STAINLESS STEEL WATER JACKET ON BOWL SHEET.
SOLID STAINLESS STEEL LEGS.
SINGLE END CHAIN DRIVE WITH AUTOMATIC CHAIN OILER.
AGITATOR SPEEDS: 40 RPM LOW 80 RPM HIGH.
SANITARY REMOVABLE SHAFT SEALS.
HYDRAULIC POWERED BOWL TILT - 120°
FRONT BOWL SEAL.
SAFETY SWITCHES ON END DOORS.
MANUAL CENTRAL LUBRICATION SYSTEM.
SAFETY INGREDIENT DOOR - 15" X 24" OPENING WITH SAFETY GRIDS
CANOPY SCRAPER
STAINLESS STEEL LOUVERED REAR DRIVE COVER
LEXAN COVER OVER FRONT MIXER CONTROL PANEL ONLY.
REAR STAINLESS STEEL MIXER CONTROL PANEL
CAPPED 12" I.D. FLOUR INLET (NO GATE)
(2) Ø2" LIQUID INLETS
STAINLESS STEEL WRAP AROUND BUMPER BAR.


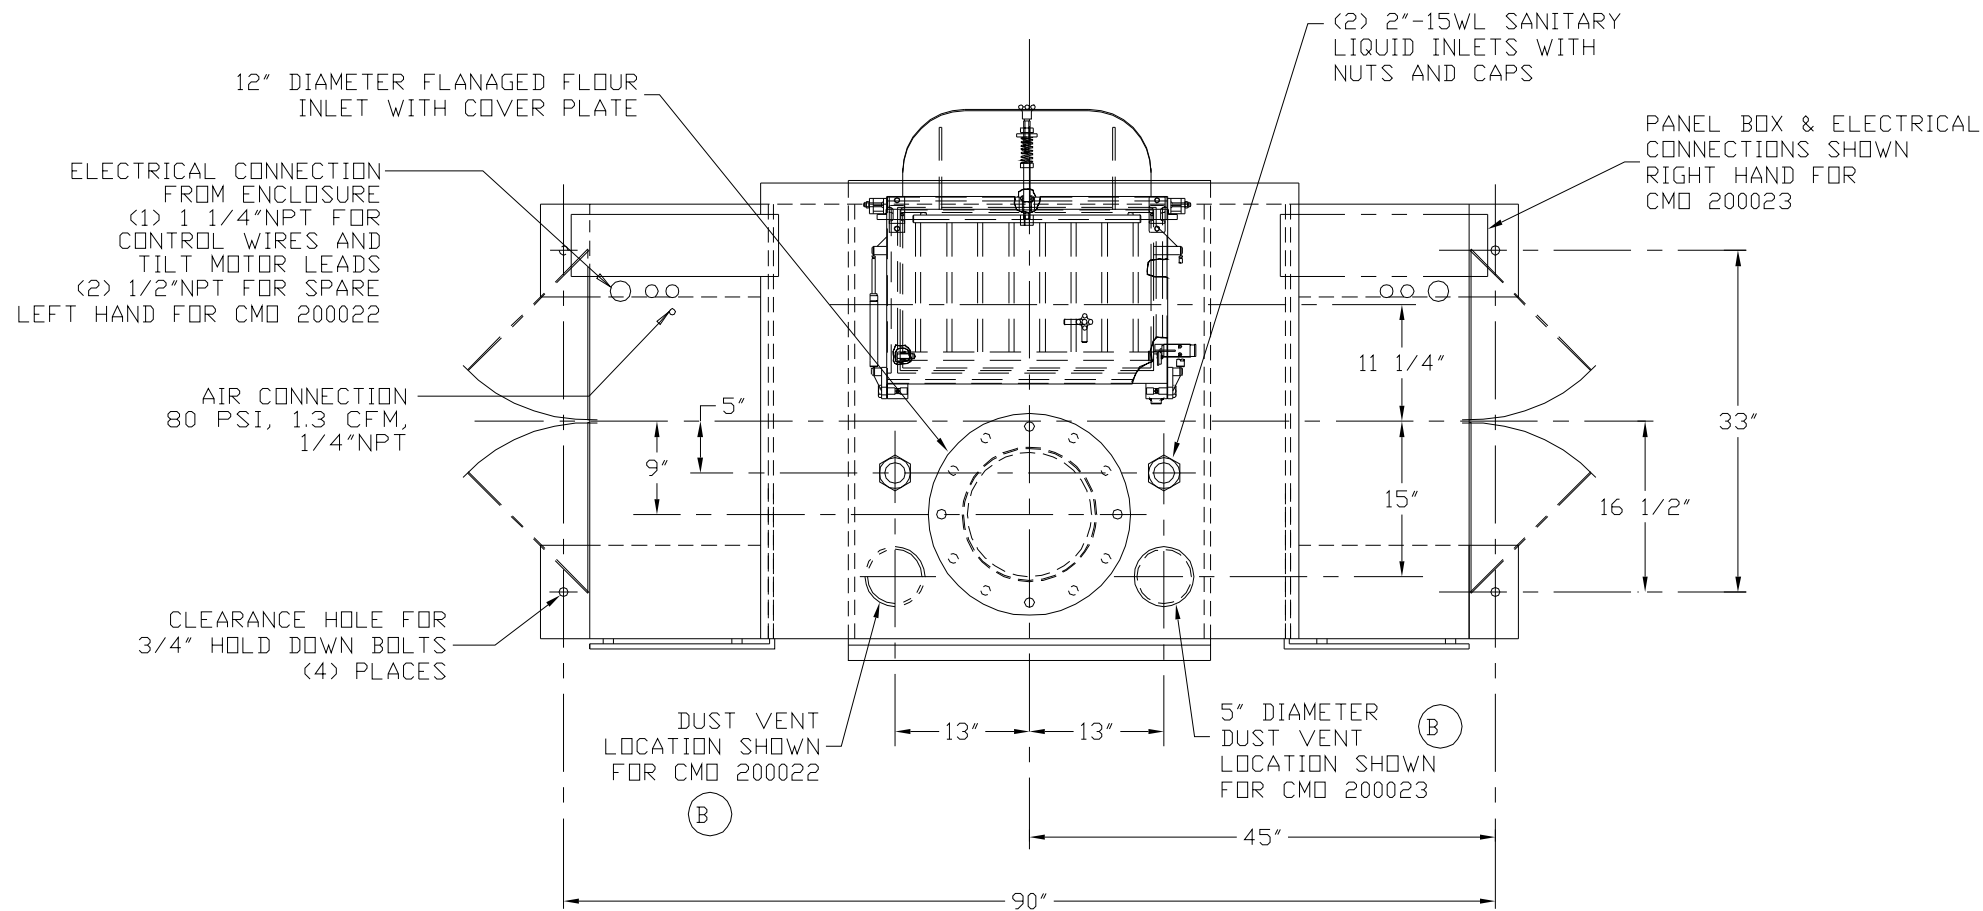


NEMA 4X STAINLESS STEEL ELECTRICAL ENCLOSURE WITH MIXER STOP, E-STOP, MANUAL ADD ACKNOWLEDGE PUSHBUTTON AND INDICATOR LIGHT (BLUE), AND START INDICATOR LIGHT (BLUE), AND START WATER PUSHBUTTON. WATER FLOW TOTALIZER (SUPPLIED BY OTHERS). RESET TIMER PUSHBUTTON, MIXER START PUSHBUTTON, DOUGH TEMPERATURE, LOW & HIGH SPEED TIMERS AND MOTOR LOAD METER

VIEW A-A

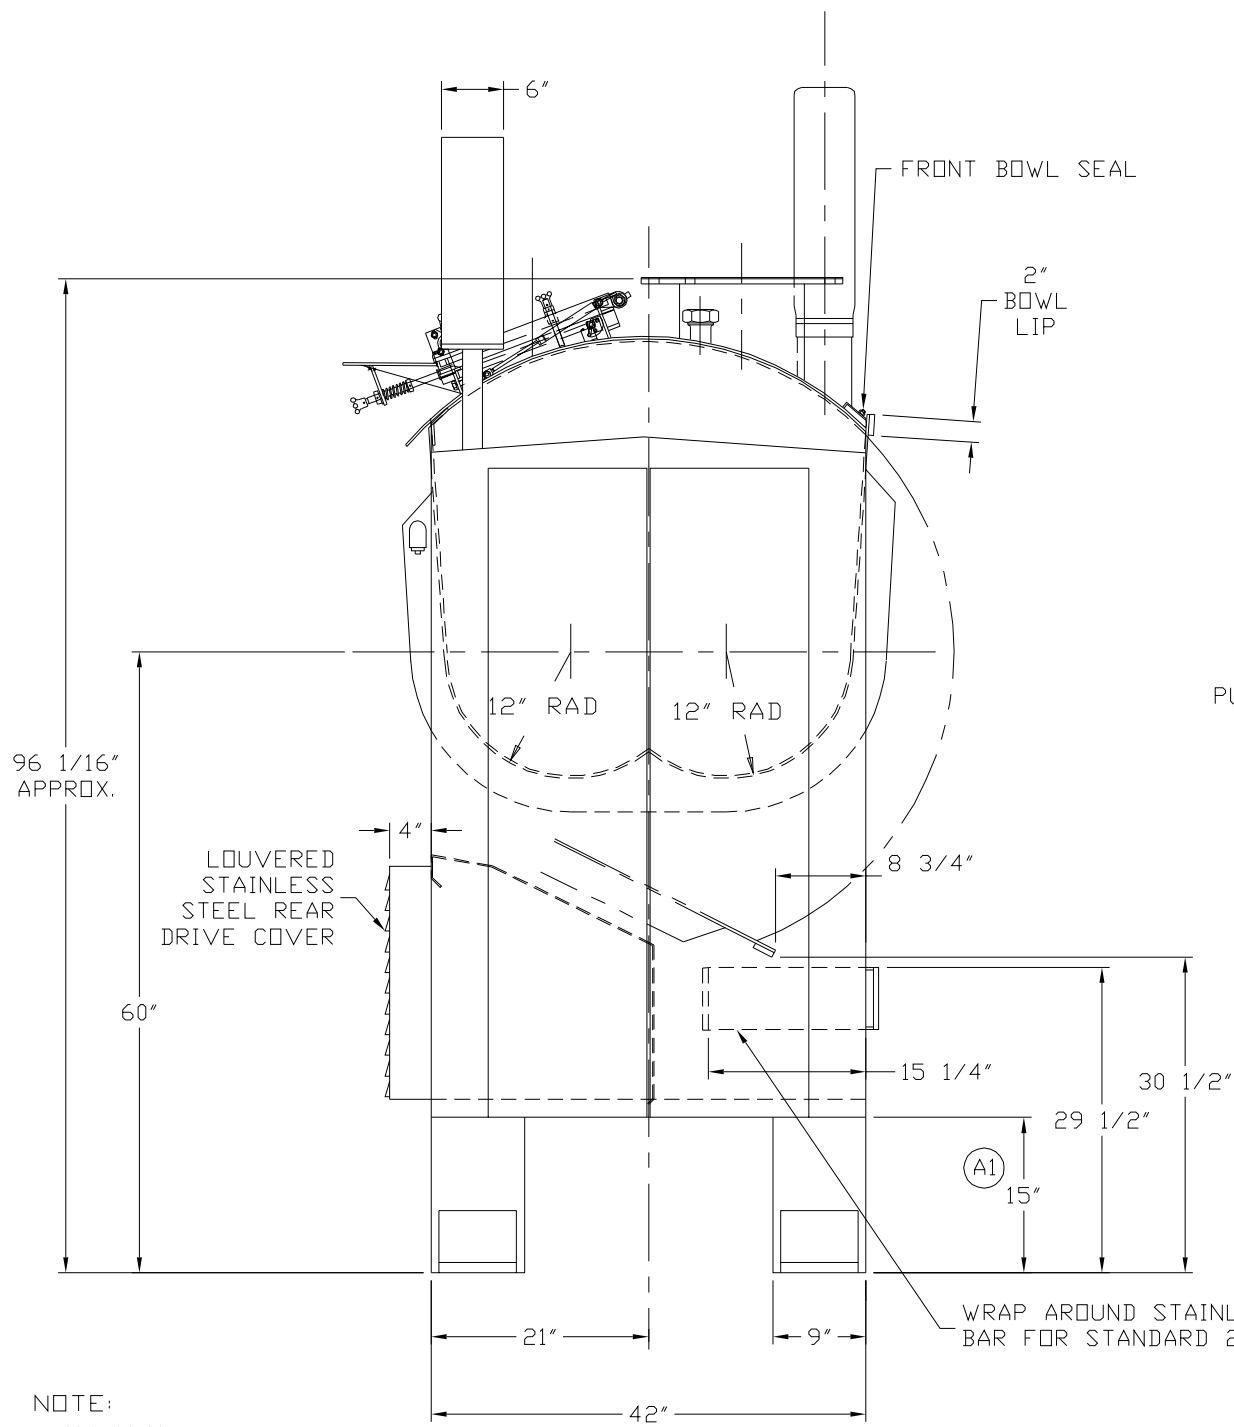

NOTE:
A MINIMUM OF 26"
IS NEEDED BEHIND MIXER
TO REMOVE DRIVE MOTOR.

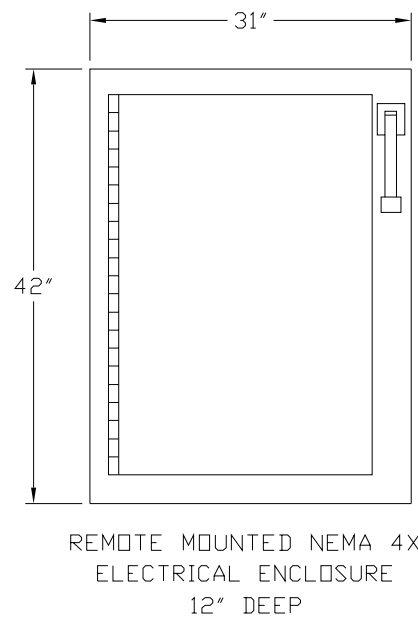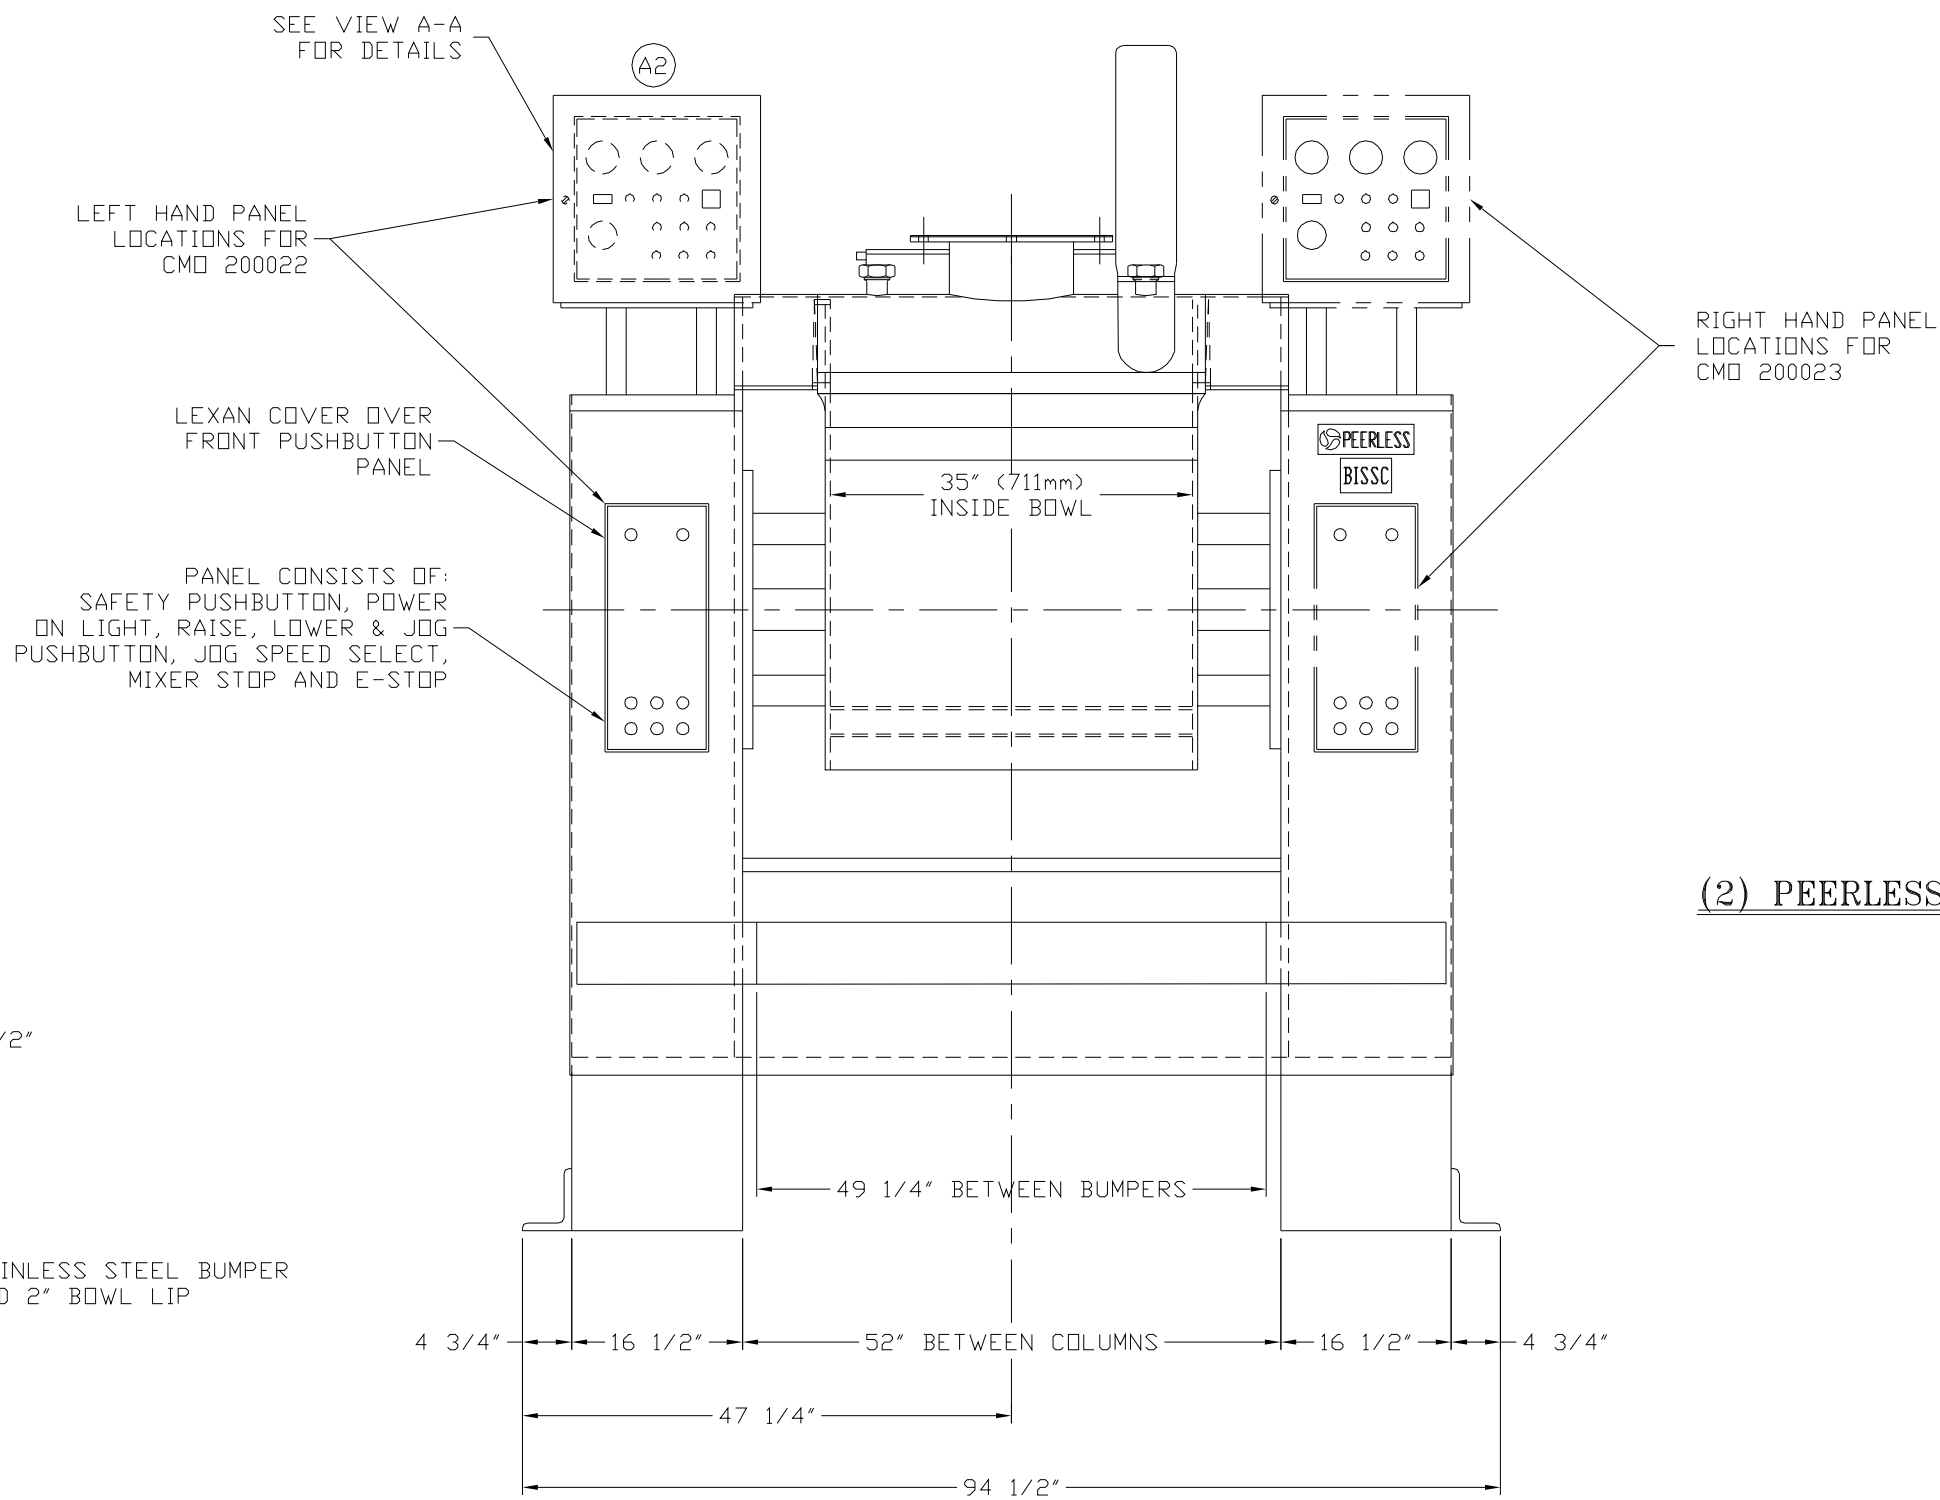

(2) PEERLESS MODEL DA150 DOUBLE SIGMA ARM MIXERS

FOR: H.C. BRILL - TUCKER, GA
CMD Nos: 200022 (LEFT HAND CONTROL)
AND 200023 (RIGHT HAND CONTROL)
P.O. No: 1689-0510

PEERLESS MACHINERY CORPORATION SIDNEY, OHIO			
TOLERANCES (UNLESS OTHERWISE SPECIFIED) DECIMAL .XX = ±.01 ANGLES ±1° FRACTIONAL ±1/32 XXX = ±.005 BREAK ALL EDGES			
MATERIAL		DRAWN BY	TW
		APPROVED BY	TEB
SCALE	TITLE		
1:12	CERTIFIED DATA SHEET		
DATE	DRAWING NUMBER	FILE NUMBER	
5/11/00	CDS-1587	D54-66	