

Physical Properties

Item	Unit	Thickness			Standard
		3 mm	4 mm	6 mm	
Density	g/cm ³	1.52	1.37	1.22	
Weight	kg/m ²	4.55	5.48	7.34	
Thermal Expansion(-20--600)	10-6/0C	22	24	25	ASTM D696
Thermal Conductivity (appearance)	w/m.k		0.15-9 0.1		ASTM C518
Temperature for thermal Deformation	oC		113		ASTM D648
Acoustic Insulation (100-3200HZ)	dB	24	26	27	ASTM E413

Mechanical Properties


Item	Unit	Thickness			Standard
		3 mm	4 mm	6 mm	
Tensile Strength	Mpa	45.8	48.0	38.2	ASTM D638
Yield Strength	Mpa	43.4	44.2	30.4	ASTM D638
Extension Rate	%	12	14	17	ASTM D638
Transverse Modules	X104Mpa	3.2	4.2	2.8	ASTM D638
Impact Resistant (Maximum Loading)	kg	1320	1670	2120	ASTM D732

Indobond Panel Dimension

Standard	1220 mm
----------	---------

Width	
Available Width	1220, 1500, 1550 mm
Standard Length	2440, 3100, 3660 mm
Available Length	Any Length up to 4800 mm
Available Thickness	1 mm, 2 mm, 3 mm, 4 mm, 5 mm, 6 mm

Production Composition

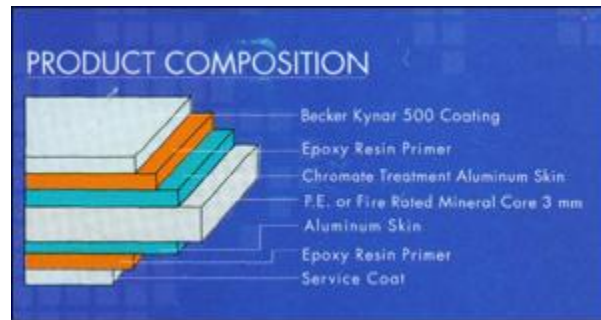

Our product INDOBOND Aluminium Composite Panel is composition of following materials:

Backer Kynar 500 coating

The INDOBOND aluminium composite panel's first layer is coated with Backer Kynar 500 coating. It is the best way to make metal worthy for exterior use. Besides rugged durability, such kind of coating remains flexible with the design of composite panel. It also adds aesthetic possibilities. Backer Kynar 500 is truly a functional and decorative coating for metal.

Epoxy Resin Primer

The second layer is made of epoxy primer that provides excellent corrosion resistance as a primer. This kind of primer, apart from primer as its basic nature, also provides sealing feature between two layers and excellent levelling with superior gloss retention to the topcoat.

Chromate Treatment Aluminium Skin

The third layer is the chromate treated aluminium skin. A chromate treatment is a great corrosion protection and bond coat. It wears superior resistance; however, it is lower than anodized coating. It is used to apply a high density of anti corrosion protection with a negligible change in the dimension of the component.

Fire Rate Mineral Core

The forth layer of INDOBOND Aluminium Composite Panel is made of PE or fire rated mineral core. Fire rating is all about length of time to which a material withstands complete combustion. Fire rate is the most popular test applied on variety of material such as appliance and furniture.

Aluminium Skin

INDOBOND Aluminium composite Panel's fifth layer is made of aluminium skin providing it rigidity and robustness. It provides better corrosion in various weather conditions.

Epoxy Resin Primer

The sixth layer is again made of epoxy primer providing excellent corrosion resistance as a primer. This kind of primer, apart from primer as its basic nature, also provides sealing feature between two layers and excellent levelling with superior gloss retention to the topcoat.

Service Coat

The last layer is service coat layer that protects all layers of aluminium composite panel.

Material For ACP Making

We also deal with the ACP production Line. We have also ready stocks of colour coated aluminium coils and mill finished coils made by South West Aluminium (Group) Co. Ltd., Adhesive Films (Dupont, USA), and Protective film.

Wide Application

INDOBOND Aluminium Composite Panel is available in variety of finishes. Broadly, they can be classified as Metallic range solid Colours, Brush finish, Mirror Finish and Stone Finish. Due to such diversity, INDOBOND Aluminium composite Panel is considered as a perfect material for following applications:

- Interiors and exteriors of homes and building
- New constructions and renovations.
- Industrial, commercial applications and entertainment industries.
- Building Facade, Display Units, Sign boards, Column Covers, Beam and Pillar Covers, Room Dividers, Ceilings and per requirement.
- Airports, Hotels, Healthcare Facilities, Multiplexes, Exhibition Halls, Multiplexes, Petrol Pumps, Shopping Malls, Banks,
- Showrooms, Institutions, Auto Dealers, Railway & Metro Stations

Features

We also deal with the ACP production Line. We have also ready stocks of colour coated aluminium coils and mill finished coils made by South West Aluminium (Group) Co. Ltd., Adhesive Films (Dupont, USA), and Protective film.

Lightweight and Rigid Construction

The rigidity of INDOBOND Aluminium Composite Panel is really excellent if compared with solid aluminium and even with steel. Now similar composite panels in similar resistance are available while the weight is decreased several times. It is stable and its improved rigidity makes it a suitable material for variety of structures.

Its light weight allows you to carry it with an ease and apply on applications with no extra efforts. Weight has also minimized the cost to some extent.

INDOBOND Aluminium Composite Panels provide better resistance against several weather conditions and even they have Ultraviolet resistance. Also, salty, sand, coastal or dusty atmospheres do not also affect Aluminium Composite Panels of brand INDOBOND.

Excellent Resistance against weather:

INDOBOND's Composite Aluminium Panel has improved resistance against all kind of weather conditions. It is weather proof and has very good ultra violet resistance. INDOBOND composite aluminium panels do not get affected in salty, sand, coastal or dusty atmospheres.

Outstanding Flatness:

With INDOBOND composite panel, you will never complain that it naturally gets bended. These are procured from the most advanced production process assuring them with long lasting flatness.

Versatility

In spite of outstanding flatness for a long time, you can use INDOBOND panels with full versatility. You can easily bend them, cut and drill as well as shape to achieve desired design.

Best performance, Strong composition, Durable life

Performance is up to the mark, surpassing other brands with no argument. Strong composition lets INDOBOND Aluminium Composite Panel withstand various weathers.

Colour Uniformity

Due to various weathers and over sun exposure, clients often complain that aluminium composite panels get fade but with INDOBOND panels, there is no such issue. Its colour is procured through new roll colour systems, providing best possible uniformity and durability in colour.

Easily and Quickly Installable

INDOBOND Aluminium Composite Panels are light in weight, flexible in nature which makes them easily and quickly installable.

Improved fire resistance

INDOBOND Aluminium Composite Panels have improved fire resistance as they meet with fire code requirements.

Maintenance free

No maintenance is required. Annual cleaning with mild detergent is enough to keep the surface shining as ever.

Advantages

Following are the advantages of INDOBOND Composite Panels over other brands available in the market.

ITEM	INDOBOND Panels	Other brands
Flatness	Long lasting flatness due to use of three roller technology	Bending and curving occur on surfaces after particular period
Colour and shade variability	Available in variety of colours and shade options as per the requirement of applications	Limited colour or shade option available
PVDE coating	Superfine quality of PVDE coating	Ordinary quality coating
Wastage	There is no waste, as these are prepared as per required size	Wastage increases the cost of project.
Sizes	INDOBOND panels are available in any cut to size.	Not too many sizes are available
Width	Panels are available in 1220, 1500, 1550, 1575 & 1600mm widths	Not too many widths are available
Length	Panels are available in any length up to 6000mm or more.	Not too many lengths are available
Thickness	Panels are available in all thickness of 1, 2, 3, 4, 5, & 6 mm for multiple and	Not too many thicknesses are available

convenient applications.

Availability	As per need produced by clients, all products are made in India itself and delivered within promised timeframe	Collected from different sources, and then delivered. Delay delivery increases project cost. Quality of one consignment varies from the second one.
--------------	--	---

Benefits

INDOBOND Aluminium Composite Panels just turns the dreams into reality! Other means of making a structure cannot deliver the result as INDOBOND Aluminium Composite Panel does. It is the preferred materials of architect planning interior & exterior of a structure. INDOBOND Aluminium Composite Panels have a number of benefits over panels of other brands.

- Adding true beauty to a structure
- An economical option
- Easily and quickly processed
- Long lasting durability
- Excellent weather resistance
- Outstanding thermal comfort
- Improved sound dampening
- Protecting the environment
- Least maintenance required

Design and Shapes

INDOBOND Aluminium Composite Panel is available in variety of finishes. Broadly, they can be classified as Metallic range, Solid Colours, Brush Finish, Wooden look, Mirror Finish, Stainless Steel Finish (Alloy 304) and stone finish.



Bright Silver



Champagne Silver



Champagne Gold



Copper Metallic



Egyptian Bronz



Emerald Green



Gold Brush



Gold Mirror



Green Jade



Ivory White



Jet Black



Lemon Yellow



Metallic Silver




Navy Blue



Pearl Copper



PureWhite

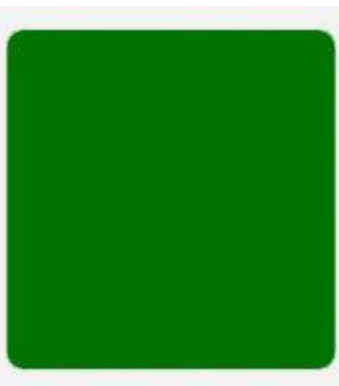

Refreshing Green



Refreshing Orange



Signal Blue




Signal Yellow



Signal Red



Silver Blue

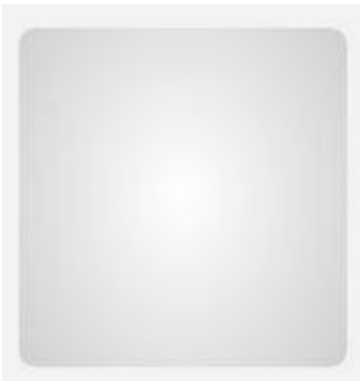

Silver Mirror



Slate Grey

