


SIGHT FLOW INDICATOR & DOUBLE WINDOW SIGHT GLASS

CONSTRUCTION OF MATERIALS	: Carbon Steels (M.S.) Stainless Steels, ASTM A 351 CF8 (SS 304) CF8M (SS 316)
TYPE	: Q.V.F.
GLASS	: Q.V.F. Toughened Borosilicate Glass Tube Long 4", 6" & 8"
PACKING	: P.T.F.E. Teflon
END	: Flanged BS10 Table
CONNECTION	: "E" "F" & ASA 150#Drilled
SIZE	: 15mm to 200mm

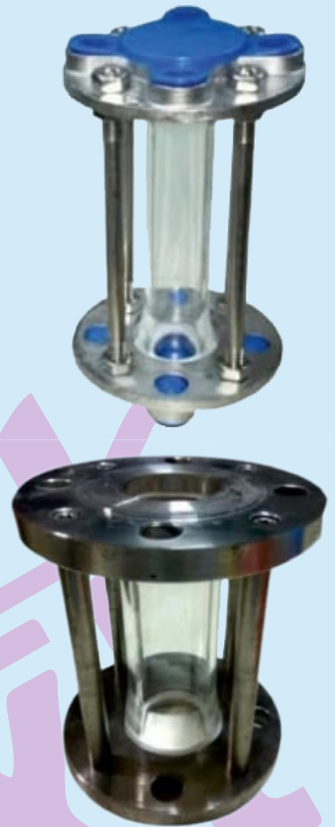

DOUBLE WINDOW STRAINER AND SIGHT GLASS FLOW INDICATOR

CONSTRUCTION OF MATERIALS	: Cast Steels ASTM A 216 WCB, Stainless Steels, ASTM A 351 CF8 (304)/CF8M (316)
TYPE	: Double Window
GLASS	: Round Toughened Glass
PACKING	: P.T.F.E. Teflon
END	: Flanged BS10 Table
CONNECTION	: "E" "F" & ASA 150#Drilled
PRESSURE RATING	: ASA 150/ 300 # Class
SIZE	: 25 mm to 200 mm

www.phonixtvalves.com

Mobile: 9820371207

atcomcor@gmail.com | atcomcorporation@gmail.com

Phonixt
Quality with Integrity

ATCOM CORPORATION

Manufacturer of **Phonixt** Industrial Valves • Strainers • Sight Glass

Regd. Off.: A-17, New Prem Nagar Building No.1, Opp. Prem Nagar Garden, Borivali (West), Mumbai - 400 092.

“Y” TYPE AND “BASKET” TYPE STRAINER

CONSTRUCTION	: Cast Steel (ASTM A 216 WCB), Stainless Steel ASTM A 351
OF MATERIALS	CF8 (Ss304), STM A 351 CF8M (SS316), Gun Metal, Cast Iron, Fabricated (C.S./S.S. 304 & 316)
TYPE	: “Y” Type / Port (T) Type / Basket Type
SCREEN	: SS 304/316, Brass
MESH	: 20Mesh To 500Mesh
RATING	: ASA 150#, 300#, DIN ND 16/25/40
END	: Screwed / Socket Welded / Flanged
SIZE	: 15mm to 400mm (“Y” Type) 25mm to 750mm (“I” / Basket Type) We are also making fabricated “Y” & “T” Type Strainers Flanged. “Y” TYPE Strainers, Duplex Filter Available.



www.phonixtvalves.com

Mobile: 9820371207

atcomcor@gmail.com | atcomcorporation@gmail.com

Phonixt
Quality with Integrity

ATCOM CORPORATION

Manufacturer of **Phonixt** Industrial Valves • Strainers • Sight Glass

Regd. Off.: A-17, New Prem Nagar Building No.1, Opp. Prem Nagar Garden,
Borivali (West), Mumbai - 400 092.

WAFER TYPE CHECK VALVES

DISC TYPE CHECK VALVE



CONSTRUCTION OF MATERIALS	: Cast Iron, Carbon Steels, S.S. 304- (Cf8) & 316 (CF8M)
COMPLIES TO DESIGN STD	: BS 1868 / API6D
TESTING STD	: BS 5146
RATING	: ASA 150 / 300 #, DIN/ND 10/16/25
SEAT	: Metal To Metal Seat.
SIZE	: 25mm To 600mm (Wafer Type)
SIZE	: 15mm To 200mm (Disc Type)
TYPE	: Plained or Spring Type
O RING	: Nitrile / Neoprene / Teflon
END	: Wafer Type / Disc Type Plain Ends, Suitable To ASA 150/ 300 # Class Flanged Ends

www.phonixtvalves.com

Mobile: 9820371207

atcomcor@gmail.com | atcomcorporation@gmail.com

Phonixt
Quality with Integrity

ATCOM CORPORATION

Manufacturer of **Phonixt** Industrial Valves • Strainers • Sight Glass

Regd. Off.: A-17, New Prem Nagar Building No.1, Opp. Prem Nagar Garden, Borivali (West), Mumbai - 400 092.