
Query

Where is the S-3's single point receptacle located?

Relevant Pages & Bounding Boxes

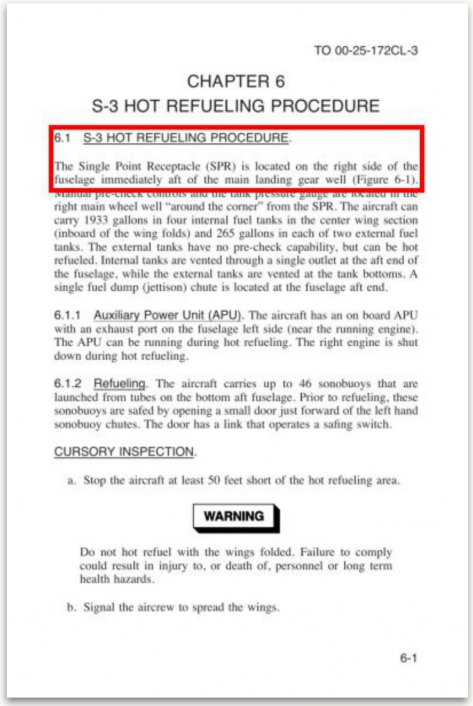

TO 00-25-172CL-3

CHAPTER 6
S-3 HOT REFUELING PROCEDURE

6.1 S-3 HOT REFUELING PROCEDURE.

The Single Point Receptacle (SPR) is located on the right side of the fuselage immediately aft of the main landing gear well (Figure 6-1). Manual pre-check controls and the tank pressure gauge are located in the right main wheel well "around the corner" from the SPR. The aircraft can carry 1933 gallons in four internal fuel tanks in the center wing section (inboard of the wing folds) and 265 gallons in each of two external fuel tanks. The external tanks have no pre-check capability, but can be hot refueled. Internal tanks are vented through a single outlet at the aft end of the fuselage, while the external tanks are vented at the tank bottoms. A single fuel dump (jettison) chute is located at the fuselage aft end.

6.1.1 Auxiliary Power Unit (APU). The aircraft has an on board APU with an exhaust port on the fuselage left side (near the running engine). The APU can be running during hot refueling. The right engine is shut down during hot refueling.

6.1.2 Refueling. The aircraft carries up to 46 sonobuoys that are launched from tubes on the bottom aft fuselage. Prior to refueling, these sonobuoys are safed by opening a small door just forward of the left hand sonobuoy chutes. The door has a link that operates a safing switch.

CURSORY INSPECTION.


a. Stop the aircraft at least 50 feet short of the hot refueling area.

WARNING

Do not hot refuel with the wings folded. Failure to comply could result in injury to, or death of, personnel or long term health hazards.

b. Signal the aircrew to spread the wings.


6-1

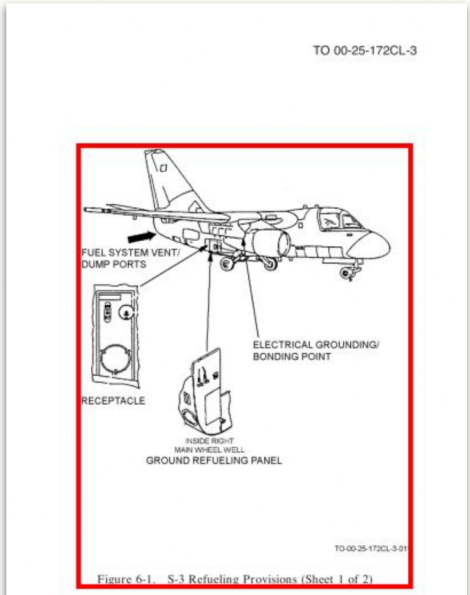

TO 00-25-172CL-3

Figure 6-1. S-3 Refueling Provisions (Sheet 1 of 2)

6-5

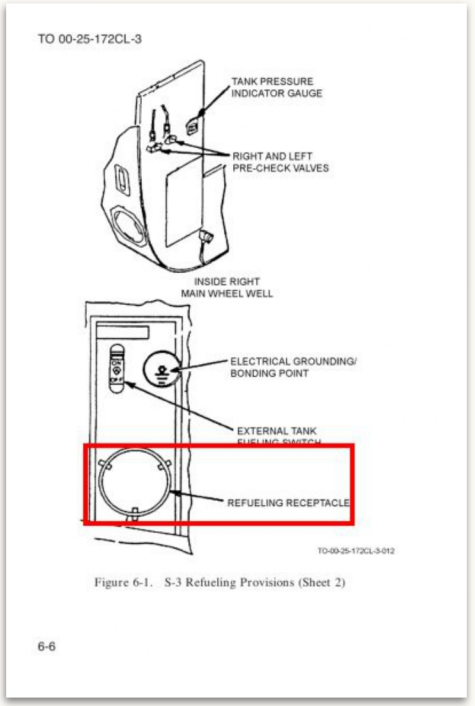

TO 00-25-172CL-3

Figure 6-1. S-3 Refueling Provisions (Sheet 2)

6-6

Answer

The S-3's single point receptacle (SPR) is located on the right side of the fuselage immediately aft of the main landing gear well.