

A Comparative Study of Audio Feature Extraction and Machine Learning Methods for Bird Species Classification^{*}

Kryspin Dziarek¹, Szymon Pająk¹ and Marcin Adamski¹

¹Faculty of Applied Mathematics, Silesian University of Technology, Kaszubska 23, 44100 Gliwice, POLAND

Abstract

do uzupełnienia **do uzupełnienia**

wstęp : 1 akapit o tym co zrobiono, jakie wyniki, minimum 180 słów

Keywords

Sound analysis, Birdsong, MFCC (Mel-Frequency Cepstral Coefficients), Random forest, Neural network

1. Introduction

Audio analysis is a process of examining and measuring sound signals to gain information, it has been a subject of research for many decades[1], and now, in the age of artificial intelligence, it has many more applications. It allows the interaction between humans and machines through sound, making advanced audio-based systems possible. Such systems include voice assistants, audio user interfaces (AUI) and voice verification. Machine learning has become an essential tool in audio signal processing, enabling the development of systems capable of analyzing and classifying sounds. Such systems are widely used in applications including speech recognition[2], music[3] and animal identification[4], often outperforming human perception of acoustic patterns[5].

There are many techniques for feature extraction from sound, one of the most commonly used being Mel-Frequency Cepstral Coefficients (MFCC). This method converts the raw audio signal into a set of coefficients representing the spectral characteristics of sound[6]. Previous studies have established standard configurations for this algorithm, such as the number of Mel filters and cepstral coefficients. However, optimal values depend on specific dataset and application, such as detection of breathing phase[7] or respiratory diseases[8].

In addition to sound recognition, various machine learning algorithms have been applied to audio classification tasks, each providing different levels of performance. Simpler algorithms, such as k-nearest neighbors and random forests, are faster, but often less accurate solutions, while the complex ones, like neural networks, provide higher accuracy at the cost of increased computational complexity.

SSI, project 2025/2026

✉ kd315963@student.polsl.pl (K. Dziarek); sp315960@student.polsl.pl (S. Pająk); ma315929@student.polsl.pl (M. Adamski)



© 2026 Copyright for this paper by its authors. Use permitted under Creative Commons License Attribution 4.0 International (CC BY 4.0).

 CEUR Workshop Proceedings (CEUR-WS.org)

This paper presents bird species recognition with sound analysis (using MFCC) and compares different approaches for this system. The sound analysis algorithm consists of many stages, two of them are especially important, because the values they provide depend on chosen data. The number of filters used to describe the frames and number of compressed coefficients strongly affects the performance of the result. Too many features may introduce noise and redundancy, while too few may lead to information loss. The experiments conducted on a common dataset aim to identify the most effective approach for extracting the MFCC features and developing simple classification models with the best performance.

2. Methodology

This section outlines the approach used to compare different configurations of MFCC in audio feature extraction and the development of machine learning models for identifying bird species.

2.1. Audio Feature Extraction

Audio feature extraction enables the transformation of birdsong recordings into numerical representations, which are crucial for training machine learning models. A custom library called *SoundFeatures* was developed to implement the full extraction pipeline. This section describes its structure and role within the experimental setup.

Audio files were converted from MP3 to FLAC format to provide a consistent and lossless compression of the signal. Although this conversion does not restore the data lost during MP3 compression, it eliminates decoding artifacts and ensures stable input for further signal processing [9].




Figure 1: Audio feature extraction process flowchart

The audio feature extraction process consists of the following steps (??):

1. **Framing** - Segmenting the signal into short, overlapping frames.
2. **Windowing** - Applying a window function to each frame to minimize spectral leakage at the boundaries. The experiments consisted of Hamming window function.

$$w_{\text{Hamming}}[k] = 0.54 - 0.46 \cos\left(\frac{2\pi k}{N-1}\right)$$

3. **Fast Fourier Transform (FFT)** - Mapping a time-domain signal into its frequency-domain representation.

$$A_k = \sum_{p=0}^{n-1} a_p e^{-\frac{i2\pi kp}{n}}$$

where:

- i - imaginary unit
- k - frequency bin index
- n - sample count in frame a (frame length)
- p - sample index in the time domain
- a_p - sample at index p in frame a

4. **Power Spectrum** - Computing the energy distribution representation.

$$\tilde{P}_k = \frac{|A_k|^2}{N}$$

where:

- A_k - output of the DFT at frequency bin k
- k - frequency bin index
- N - frame length
- $\tilde{P}_k$ - Normalized power spectrum

5. **Mel Filterbank Processing** - Constructing a set of triangular filters using Mel scale. This process consists of transferring a vector containing equally distributed Mel-frequency values in the range from $Mel(f_{min})$ to $Mel(f_{max})$ back to Herzian scale to develop the filterbank.

$$Mel(f) = 2595 \log_{10} \left(1 + \frac{f}{700} \right) \Rightarrow f = 700 \cdot 10^{\frac{Mel(f)}{2595} - 1}$$

where:

- f - frequency in Hz
- $Mel(f)$ - frequency in the Mel scale

$$H_m(k) = \begin{cases} 0, & k < f_{m-1} \vee k > f_{m+1} \\ \frac{k - f_{m-1}}{f_m - f_{m-1}}, & f_{m-1} \leq k \leq f_m \\ \frac{f_{m+1} - k}{f_{m+1} - f_m}, & f_m \leq k \leq f_{m+1} \end{cases}$$

where:

- m - filter number
- k - index of sample frequency
- f - vector of filters in Herzian scale
- H - Mel filterbank

6. **Log Energy Calculation** - Mapping the linear frequency spectrum to Mel scale using Mel filterbank.

$$S_m^{log} = \log_{10} \left(\sum_k P_k \cdot H_m(k) \right)$$

7. **Discrete Cosine Transform (DCT)** - Decorrelating the log energies to get Mel-Frequency Cepstral Coefficients

$$c_m = \sum_{p=0}^{k-1} S_m^{log} \cdot \cos\left(\frac{\pi m(p + 0.5)}{k}\right)$$

where:

- m - Mel coefficient index
- k - Chosen count of Mel coefficients
- c - Mel coefficient vector

2.2. Machine Learning Algorithms

do uzupełnienia

3. Experiments

brakuje opisu zbioru danych, podziału danych, jak również informacji o wykorzystanym sprzęcie do obliczeń

3.1. Audio Feature Extraction

To analyse the MFCC efficiency based on the number of Mel filters and extracted features the experiments were conducted on dataset which was reduced to 1148 records. Both the Random Forest and the Neural Network were applied to check the F1 score for every configuration.

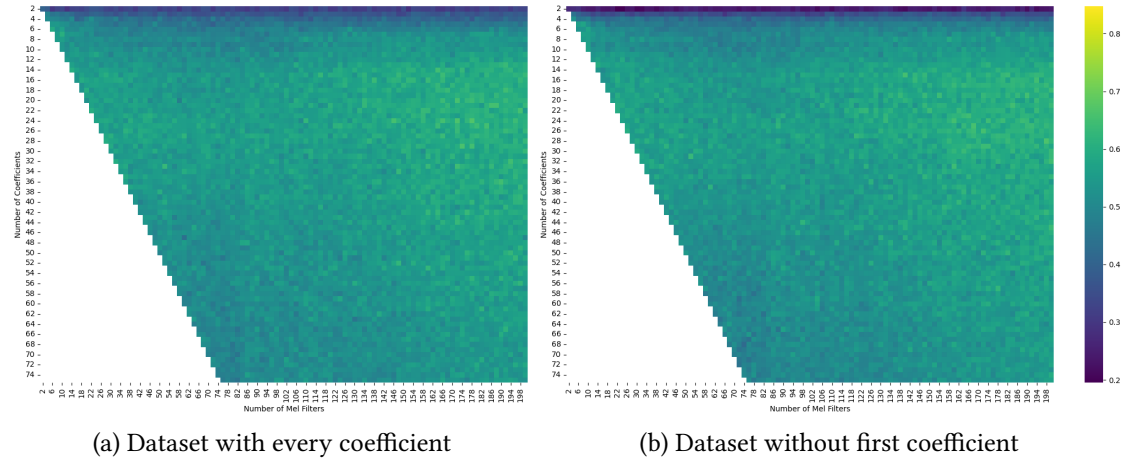


Figure 2: Random Forest F1 Score heatmaps for datasets with and without first coefficient

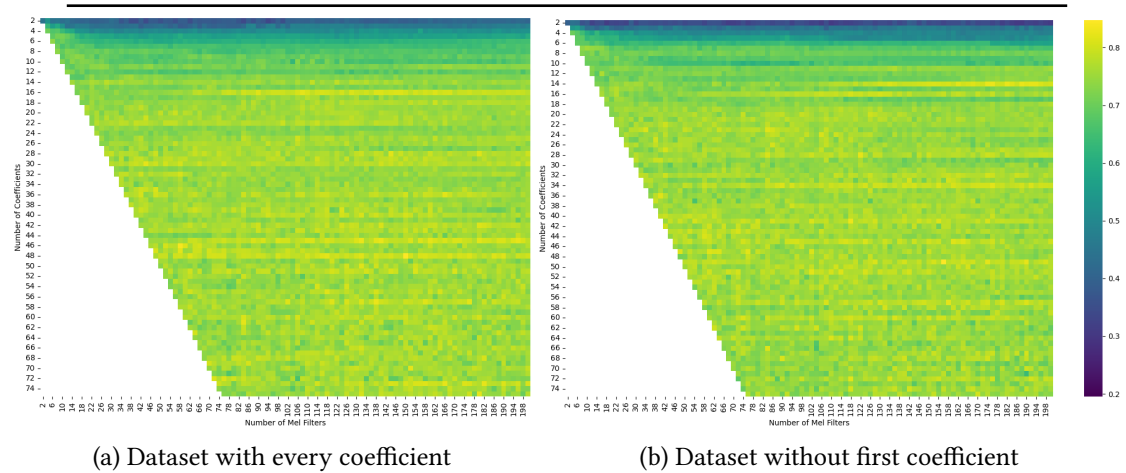


Figure 3: Neural Network F1 Score heatmaps for datasets with and without first coefficient

While standard speech recognition systems typically employ 13 Mel coefficients and between 26 and 40 Mel filters[10, 11, 12], our results demonstrate that bird species identification requires

Figure 4: Best results

Algorithm	N Coefficients	N Filters	First Coefficient Ignored	F1 Score
Random Forest	24	178	No	0.6669
Random Forest	28	198	Yes	0.6618
Neural Network	48	150	No	0.8472
Neural Network	49	156	Yes	0.8454

a higher spectral resolution. The optimal configuration for the Neural Network was observed in the range of 45-49 Mel coefficients with at least 58 Mel filters (3), whereas the Random Forest achieved its best performance with 21-25 Mel coefficients and at least 146 Mel filters (2). These results emphasize the fact that birdsong contains faster frequency modulations and more complex harmonic structures compared to human speech, requiring a denser filterbank to effectively capture significant parts of the sound, which is essential for accurate species discrimination. Both machine learning algorithms achieved higher results analysing every coefficient, including the first one, which represents the volume. The first coefficient often reaches massive values, dominating other coefficients and making machine learning performance dependent on the distance of microphone. However, experiments have shown, that including this coefficient in examined dataset actually improves the efficiency (4).

The difference in the optimal spectral resolutions between the two models highlights the higher sensitivity of the Random Forest to excessive feature counts, which can degrade its performance. In contrast, the Neural Network effectively manages high-dimensional inputs, achieving better performance by capturing more complex patterns within the given data.

proszę dodać ajką analizę innych metryk typu accuracy, error, analizę sieci neuronowej - ile warstw, dlaczego, co jeśli się zmniejszy ta ilość itd.

4. Conclusion

do uzupełnienia

References

- [1] J. D. Hollabaugh, Methods for phonemic recognition in speech processing (1963).
- [2] M. Zhu, C. Wang, A systematic review of research on ai in language education: Current status and future implications (2025).
- [3] S. Serrano, M. A. B. Sahbudin, C. Chaouch, M. Scarpa, A new fingerprint definition for effective song recognition, Pattern Recognition Letters 160 (2022) 135–141.
- [4] C. M. Wood, A. Barceinas Cruz, S. Kahl, Pairing a user-friendly machine-learning animal sound detector with passive acoustic surveys for occupancy modeling of an endangered primate, American Journal of Primatology 85 (2023) 269–307.
- [5] C. Spille, B. Kollmeier, B. T. Meyer, Comparing human and automatic speech recognition in simple and complex acoustic scenes, Computer Speech & Language 52 (2018) 123–140.

- [6] Z. K. Abdul, A. K. Al-Talabani, Mel frequency cepstral coefficient and its applications: A review, *Ieee Access* 10 (2022) 122136–122158.
- [7] A. K. Zhantleuova, Y. K. Makashev, N. T. Duzbayev, Optimizing mfcc parameters for breathing phase detection, *Sensors* 25 (2025) 5002.
- [8] Y. Yan, S. O. Simons, L. van Bommel, L. G. Reinders, F. M. Franssen, V. Urovi, Optimizing mfcc parameters for the automatic detection of respiratory diseases, *Applied Acoustics* 228 (2025) 110299.
- [9] G. Shi, Data compression for audio-based smart beekeeping (2024) 50–52.
- [10] S. C. Joshi, A. Cheeran, Matlab based feature extraction using mel frequency cepstrum coefficients for automatic speech recognition, *International Journal of Science, Engineering and Technology Research (IJSETR)* 3 (2014) 1820.
- [11] A. Mahmood, U. Köse, Speech recognition based on convolutional neural networks and mfcc algorithm, *Advances in Artificial Intelligence Research* 1 (2021) 6–12.
- [12] S. M. Al Sasongko, S. Tsauray, S. Ariessaputra, S. Ch, Mel frequency cepstral coefficients (mfcc) method and multiple adaline neural network model for speaker identification, *JOIV: International Journal on Informatics Visualization* 7 (2023) 2306–2312.