

# SYSTXCCUID01 – V Infinity™ Control



## Product Data



A06167

**NOTE:** Infinity Control compatible with Infinity rated indoor equipment only.

US Patents: Carrier® U.S. Pat No. 7,243,004, Carrier® U.S. Pat No. 7,775,452

### INFINITY™ CONTROL

Carrier specializes in creating a customized home comfort system tailored to your needs with our broad selection of residential heating and cooling products. The Infinity Control System is the ultimate control center for all of your system components. When you add an Infinity Control to a compatible variable speed furnace, fan coil, or small packaged product, you will enjoy longer heating and cooling cycles at lower fan speeds for a more consistent temperature throughout your home. By adding an Infinity or Performance compatible outdoor unit, your benefits will increase even more. Benefits include better humidity and temperature control as well as a more energy efficient comfort system.

### INDUSTRY LEADING

### FEATURES / BENEFITS

Carrier's revolutionary Infinity Control is the smart control of the future. The Infinity Control features a backlit liquid crystal display, making it easier to read the temperatures, even at night. Intuitive prompts let you program everything from humidity levels to fan speeds, giving you the ultimate control over your home comfort. Other features include.

- 4-wire installation from each component in the system
- Intuitive on screen prompts for ease of installation and service
- *Ideal Humidity™* settings are the default no longer requiring increased system setup
- Complete integration of the temperature, humidity and ventilation in every season
- 7-day programmability with 2 or 4 periods per day
- Easy timed-override schedule
- Simplified vacation schedules
- Day-at-a-glance programming for simplified ease of use
- Programmable fan by period
- TrueSense™ Dirty Filter Detection
- Indoor Air Quality pop up reminders
- General maintenance reminder messaging
- Optional Remote Access Kit can be added for access to your system from the Internet.

## MODEL NUMBER NOMENCLATURE

1 2 3 4 5 6 7 8 9 10 11 12 13 14  
S Y S T X C C U I D 0 1 - V

**Product Type**  
Infinity System

**Software Version**  
-V

**Brand**  
Carrier

**Packaged Quantity**  
01

### Model Type

UID - User Interface Deluxe

NIM - Network Interface Module

RCT - System Access Module (CAT5)

RWF - System Access Module (WiFi)

SYSTXCCUID01--V



INFINITY CONTROL

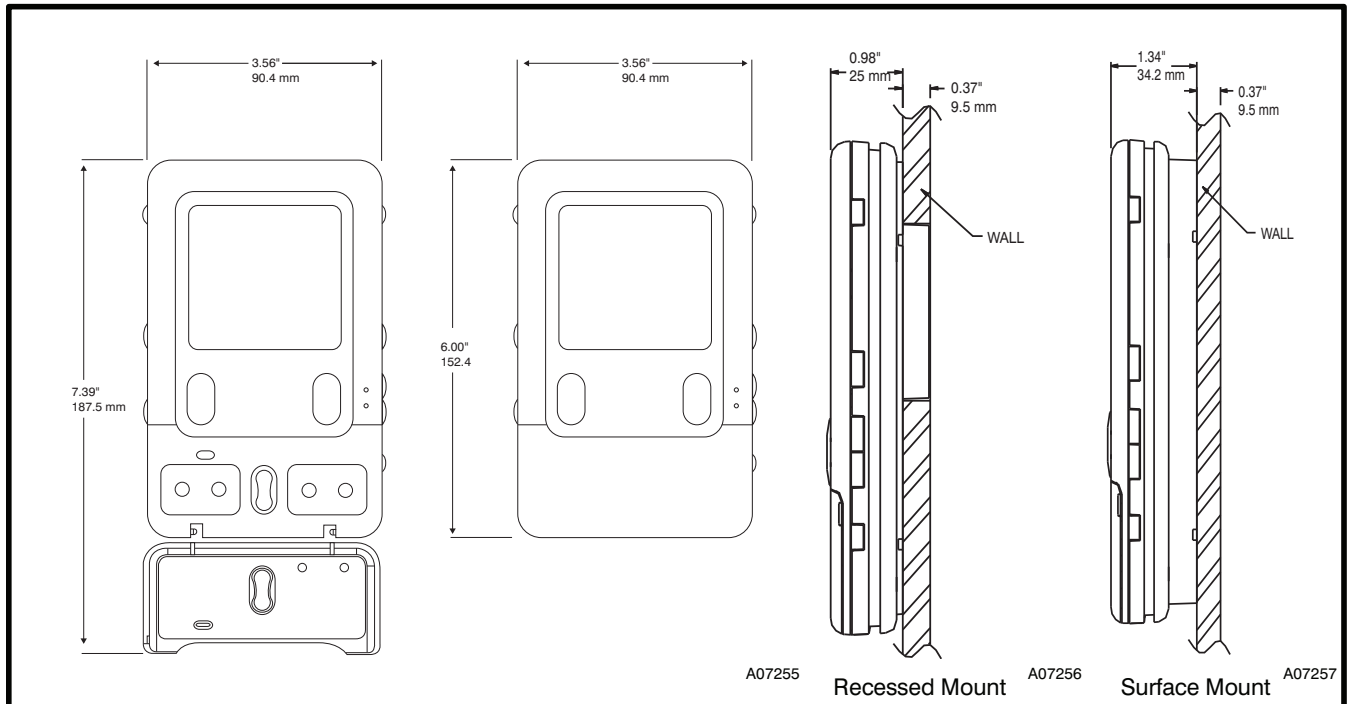


Fig. 1 - Unit Dimensions

## PRODUCT DATA INFORMATION

### Compatible Communicating Products

Air Conditioning units - 24ANB1, 24ANB7, 24ANB6  
 Heat Pumps - 25VNA, 25HNB5  
 Gas Furnace - 58MVB, 58MVC, 58CVA, 58CVX  
 Fan Coils - FE  
 Small Packaged Products - 50XL/XT, 48XL/XT

### Physical Characteristics

**Dimensions:** See drawing

**Appearance:** Plastic, white color, textured

### Electrical Characteristics/Communication

#### Input Volts/Amps 24VAC

Each device in the Infinity System has a four-pin connector labeled ABCD. It is recommended that the following color code be used when wiring each device:

- A — Green = Data A
- B — Yellow = Data B
- C — White = 24VAC (Com)
- D — Red = 24VAC (Hot)

### Environmental Requirements:

#### Operating Temperature/Relative Humidity:

User interface and all sensors: 32°F to 104°F / 0°C to 40°C, 95% rh non-condensing

#### Storage Temperature/Relative Humidity:

User interface: - 40°F to 134°F / -40°C to 56.7°C, 95% rh non-condensing

### Feature Specifications:

Temperature set point range: 40°F to 90°F / 4.4°C to 32.2°C  
 Separate heat and cool setpoints  
 Programming days: 7 day  
 Programming periods:  
     2-Day, Sleep  
     4-Wake, Day, Eve, Sleep  
 Non-Programmable  
 Auto changeover (may be disabled)  
 Programmable fan (installer selectable)  
 Humidity Sensor Offsets  
 Auto Changeover Timer (installer adjustable)  
 Smart Recovery (in heating and cooling)  
 Hold function  
 Copy functions: Copy period, day  
 Permanent memory  
 Humidity display and control  
 Temperature sensor offsets (indoor and outdoor)  
 TrueSense™ Dirty Filter Detection

### Wiring Requirements:

**Power supply:** Dedicated 24VAC, 40 va, 60 Hz, via indoor equipment ABCD Connector. Isolated transformer, field supplied.

**Wiring material:** Standard thermostat wire 18 to 24 gauge.

SYSTXCCUID01-V

## EQUIPMENT

| DESCRIPTION                                                        | PART NO.       |
|--------------------------------------------------------------------|----------------|
| Infinity Control (4-Wire User Interface w/ multiple functionality) | SYSTXCCUID01-V |
| Infinity Network Interface Module (NIM)                            | SYSTXCCNIM01*  |

\* Required for ventilator control  
 Required for Hybrid Heat applications with non-communicating heat pumps  
 Required for use with 2-stage (non-communicating) AC or HP (38TDB/38YDB)

## OPTIONAL ACCESSORIES

| DESCRIPTION                                                      | PART NO.       |
|------------------------------------------------------------------|----------------|
| Infinity Remote Room Sensor                                      | SYSTXCCRRS01*  |
| Infinity Large Decorative Backplate                              | SYSTXX0LBP01†  |
| 10 Pack Replacement – Green Indoor Unit Plug (ABCD Connector)    | SYSTXGRPLG10   |
| Infinity System Access Module (Remote Access Kit, Wired, CAT5)   | SYSTXCCRCT01   |
| Infinity System Access Module (Remote Access Kit, Wireless WiFi) | SYSTXCCRWF01   |
| Outdoor Sensor                                                   | TSTATXXSEN01-B |

\* Not required, but may be used to remote sense indoor room temperature.

† Backplate dimensions - 5.75" (146 mm) wide x 6" (152 mm) high.

