
Fluorescence versus the values used for classification
241016 / FoF 5 · largest component per original label

C1 gates: green > 0.003 and red > 0.0095 gives G2M. C2 reuses these two raw mean features and gate anchors.


1. Label 63 — Strongest green signal

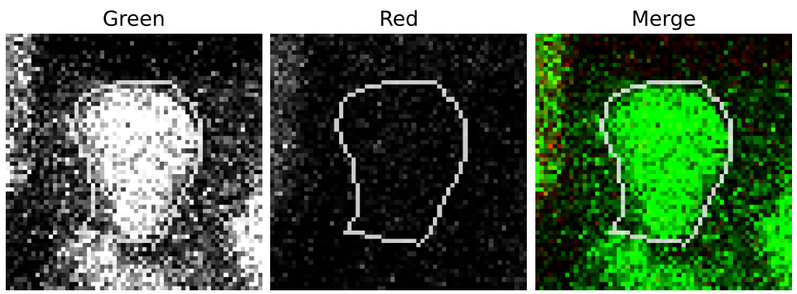

Measurement	Green	Red
Whole 3D mean	0.08869	0.01047
Slice z=35 mean	0.09360	0.01004
Local unmasked mean (3D)	0.02570	0.01075

C1: G2M C2: G2M Slice area: 916 pixels


2. Label 410 — Strongest red signal

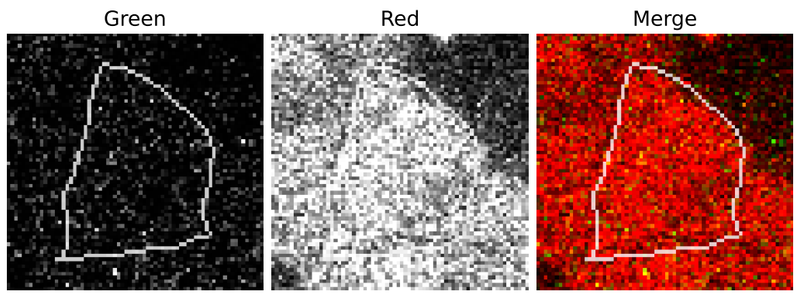

Measurement	Green	Red
Whole 3D mean	0.00832	0.05474
Slice z=35 mean	0.00971	0.06759
Local unmasked mean (3D)	0.00706	0.02655

C1: G2M C2: G2M Slice area: 1661 pixels


3. Label 42 — Dimmest C1 G2M example

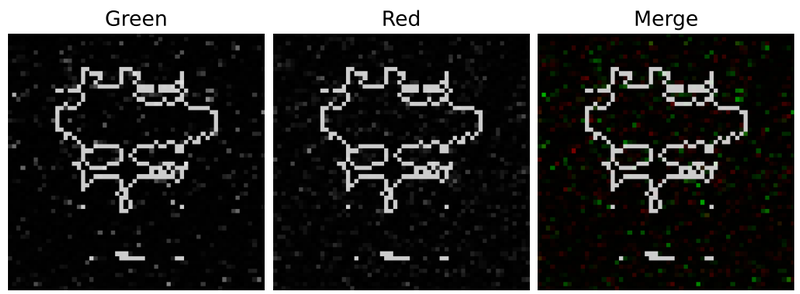

Measurement	Green	Red
Whole 3D mean	0.00492	0.00973
Slice z=35 mean	0.00435	0.00929
Local unmasked mean (3D)	0.00426	0.00921

C1: G2M C2: G1 Slice area: 642 pixels


4. Label 220 — Strongest green with C1 G1

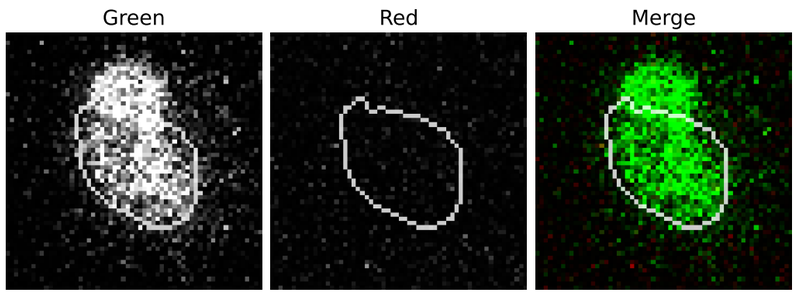

Measurement	Green	Red
Whole 3D mean	0.08356	0.00942
Slice z=35 mean	0.06192	0.00923
Local unmasked mean (3D)	0.01067	0.00978

C1: G1 C2: uncertain Slice area: 641 pixels


5. Label 127 — C1 G2M becomes C2 G1

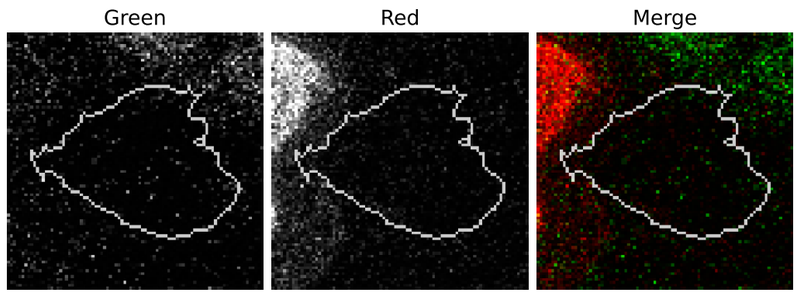

Measurement	Green	Red
Whole 3D mean	0.00432	0.01012
Slice z=35 mean	0.00404	0.00929
Local unmasked mean (3D)	0.00564	0.01066

C1: G2M C2: G1 Slice area: 2310 pixels

6. Label 16 — Strongest green with both calls G1

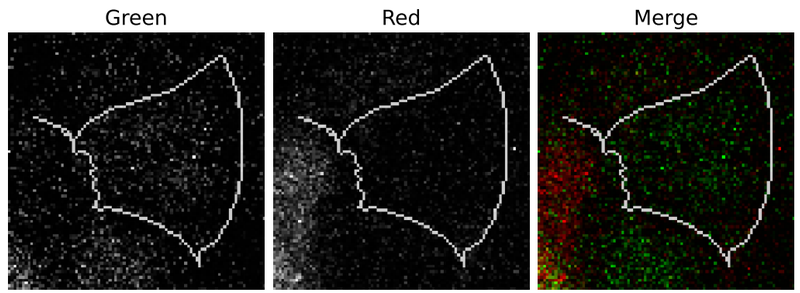

Measurement	Green	Red
Whole 3D mean	0.00642	0.00938
Slice z=35 mean	0.00701	0.00921
Local unmasked mean (3D)	0.00454	0.00957

C1: G1 C2: G1 Slice area: 2735 pixels

Channel display ranges are identical to panel A and fixed across examples. White outlines identify the measured component.

Local reference: unmasked pixels 3–12 pixels outside each slice of the object, pooled across its z extent; this may include diffuse fluorescence.

Examples require at least 100 mask pixels in this slice. All 180 visible units remain in the quantitative audit. No new phase calls were fitted.