

R&T

Cours Réseaux HSRP IPv6

HSRP pour IPv6

R&T



- Introduction
- Principes
- Configuration
- Exemple
- Conclusion

Introduction : HSRP IPv6

R&T



Hot Standby Router Protocol

- Propriétaire Cisco
- IPv6
- Version 2

HSRP IPv6 : Principes

R&T

- **UDP port 2029**
- **utilisation @LINK LOCAL**
- **@ MAC virtuelle spécifique**
 - 0005.73A0.0000 -> 0005.73A0.0FFF
- **@IP destination Multicast**
 - FF02::66


Commandes

R&T

- 
- 1. **enable**
 - 2. **configure terminal**
 - 3. **ipv6 unicast-routing**
 - 4. **interface** *type number*
 - 5. **standby** [*group-number*] **ipv6** {*ipv6-global-address* | *ipv6-address/prefix-length* | *ipv6-prefix/prefix-length* | *link-local-address* | **autoconfig**}
 - 6. **standby** [*group-number*] **preempt** [**delay** {**minimum** *seconds* | **reload** *seconds* | **sync** *seconds*}]
 - 7. **standby** [*group-number*] **priority** *priority*
 - 8. **exit**
 - 9. **show standby** [*type number* [*group*]] [**all** | **brief**]
 - 10. **show ipv6 interface** [**brief**] [*interface-type interface-number*] [**prefix**]

Example

R&T

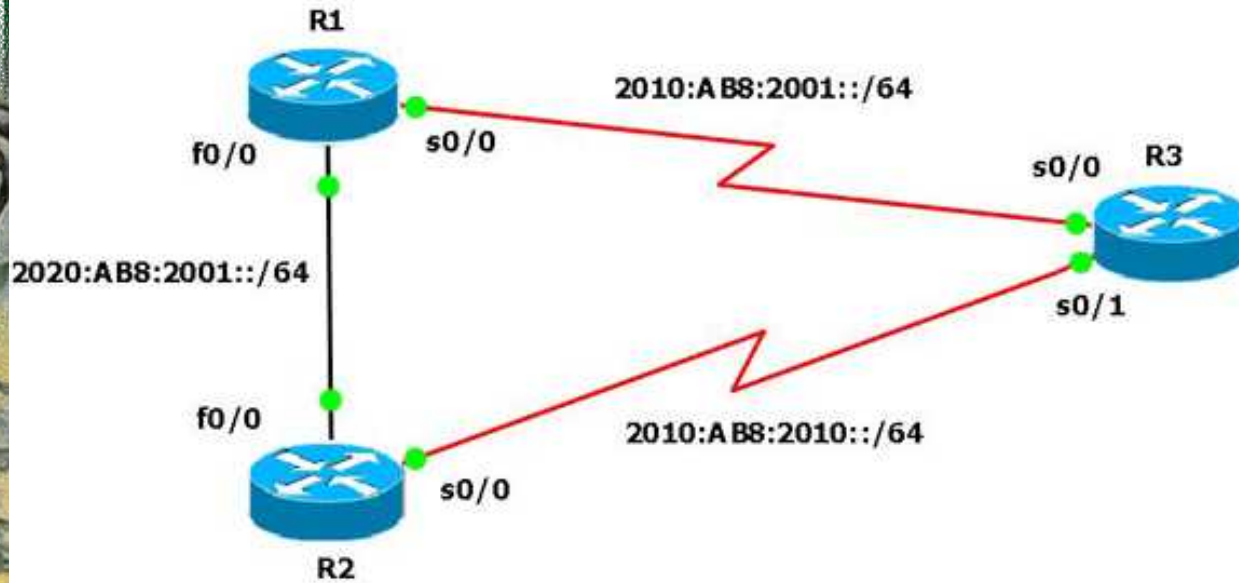

Exemple (R1)



R&T

- **ipv6 unicast-routing**
- interface FastEthernet0/0
- ipv6 address 2020:AB8:2001::1010/64
- ipv6 enable
- standby **version 2**
- standby 1 **ipv6 autoconfig**
- standby 1 priority 120
- standby 1 preempt delay minimum 30
- standby 1 track Serial0/0 90

Exemple(R2)



R&T

ipv6 unicast-routing

interface FastEthernet0/0

ipv6 address 2020:AB8:2001::1011/64

ipv6 enable

standby **version 2**

standby 1 **ipv6 autoconfig**

standby 1 preempt delay minimum 30

standby 1 track Serial0/0

Conclusion

R&T



- HSRP IPv6
- Même config
- Standby, priority, track
- Configuration multi-groupe