

LOW VOLTAGE AC 3-PHASE INVERTER DUTY ELECTRIC MOTORS		INDUCTION ASYNCHRONOUS				SYNCHRONOUS RELUCTANCE	PERMANENT MAGNET SYNCHRONOUS			INDUCTION ASYNCHRONOUS		
		HIGH PERFORMANCE		LOW INERTIA	LIQUID COOLING	HIGH EFFICIENCY	LOW INERTIA	HIGH EFFICIENCY	DIRECT DRIVE	GENERAL PURPOSE		
												
SERIES *		HQL	HQLa	HQLa-Li	LQ	QSR	BS / QLS	QS	LTS	LTS-TB	MTS / AS / GS	
FRAME SIZES		80 – 355	80 – 355	180 – 280	100 – 280	80 – 280	71 – 225	100 – 225	132 – 355	200 – 355	63 – 355	
POWER RANGE – DUTY S1	[kW]	0,6 – 690	0,9 – 1115	30 – 289	3,2 – 456	0,3 – 426	1 – 176	1,7 – 200	2,5 – 496	7,1 – 496	0,12 – 450	
TORQUE RANGE – DUTY S1	[Nm]	9 – 4141	12 – 6695	560 – 2865	40 – 2662	4 – 2486	5 – 2100	23 – 1400	114 – 14046	658 – 14046	0,63 – 3851	
NOMINAL SPEED	[rpm]	580 – 2600	580 – 2600	500 – 1000	580 – 2600	580 – 2600	500 – 3000	580 – 2600	100 – 700	100 – 350	750 – 3600	
MAX OPERATING SPEED	[rpm]	9000	9000	4300	12000	5000	4000	3600	1000	600	8000	
ROTOR INERTIA	[kgm²]	0,006 – 38	0,006 – 38	0,391 – 2,34	0,011 – 5,75	0,0053 – 5,03	0,00052 – 1,04	0,0075 – 3,8	0,054 – 35	0,65 – 51	0,00027 – 20,5	
PROTECTION DEGREE – COOLING SYSTEM	[IP – IC]	IP 54 – IC 416	IP 23 – IC 06	IP 23 – IC 06	IP 54 – IC 9W7	IP 54 – IC 416	IP 54 – IC 410/416	IP 54 – IC 416	IP 54 – IC 9W7	IP 54 – IC 9W7	IP 54 – IC 411/416	
NOMINAL VOLTAGE	[Vac]	400	400	400	400	360	300	360	330	330	230/400 – 400/690	
TORQUE/INERTIA RATIO												
HIGH SPEED OPERATIONS												
LOW SPEED OPERATIONS												
FULL TORQUE OPERATIONS AT ZERO SPEED												
MOTOR COMPACTNESS												
TYPICAL APPLICATIONS		Converting lines Spindles - Machining Handling equipment Textile machinery	Extrusion lines Wire/Tube machinery Strips processing Testing equipment	Rotary shear systems Flying cutoff Paper sheeters Testing equipment	Extrusion lines Spindles - Machining Recycling machines Testing equipment	Extrusion lines Metal forming machines Recycling machines Fluid engineering	Rotary shear systems Paper sheeters Forming machines Testing equipment	Extrusion lines Packaging machines Handling equipment Fluid engineering	Metal forming machines Converting lines Testing equipment Power generation	Extrusion lines Spindles - Machining Recycling machines Cooling Systems	Handling equipment Packaging machines Textile machinery Fluid engineering	









* Standard catalogue data, other configurations available on request

HIGHLY CUSTOMIZED SOLUTIONS

Focus on the design and implementation of customized electrical and mechanical solutions for motor configuration that meets customer requirements.


OPTIONS AND ACCESSORIES

- Dedicated winding design based on application requirements and inverter power/current size optimization
- Motor rated voltage range from 170Vac to 690Vac
- Flexible flange dimensions and extra-precise finishing
- Ball, roller, insulated and high-speed bearings
- Flexible shaft dimensions, type (with key, smooth or splined) and balancing degree (regular or superior)
- Parking brake with release lever and microswitch
- 1-ph and 3-ph blowers available in axial or radial configuration and in different mounting positions
- Wide selection of feedbacks (encoders, resolver)
- Protective coatings and treatments, IP degree increase

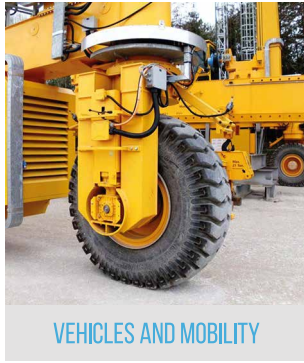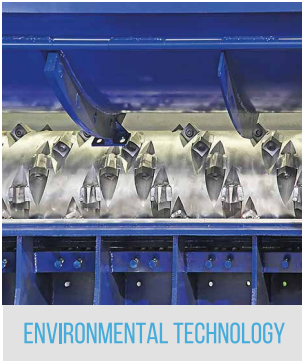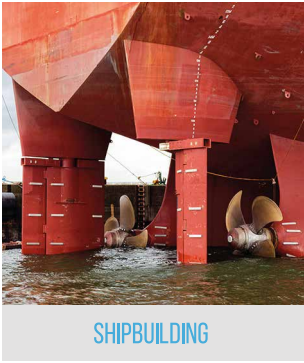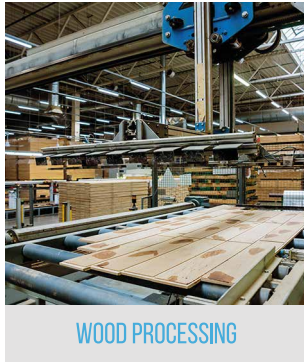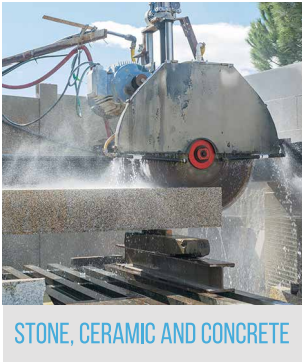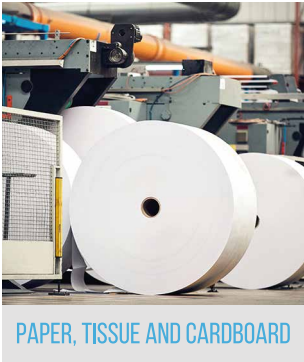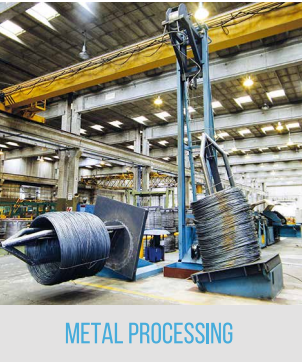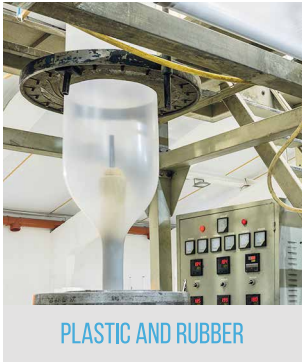


75

PRODUCTION OVERVIEW

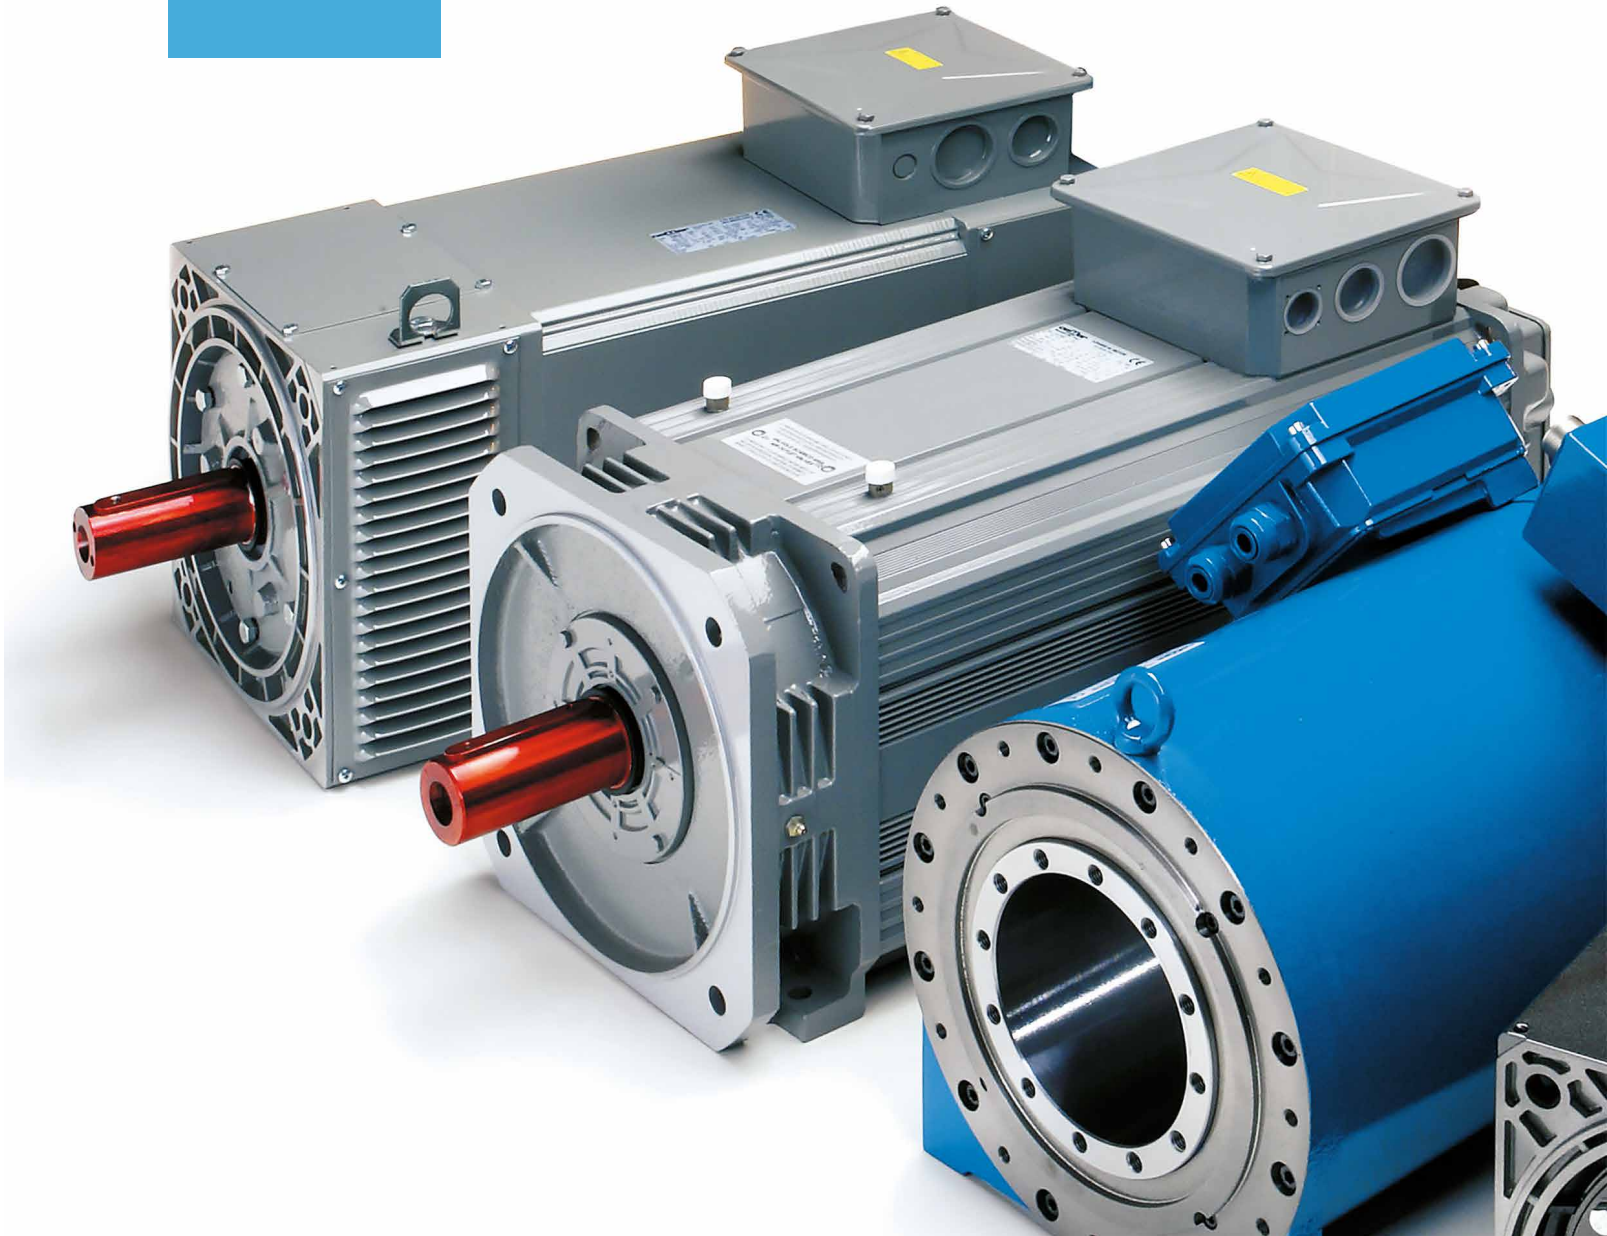

oemer
motori
elettrici s.p.a.

HIGH PERFORMANCE ELECTRIC MOTORS

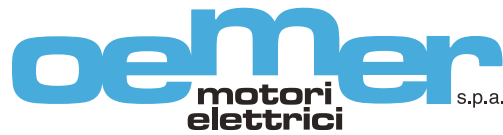

Operating since 1949 in Rescaldina (Milan), Italy, Oemer motori elettrici s.p.a. designs and manufactures high performance electric motors for industrial applications. The company combines long-standing engineering experience with advanced manufacturing technologies and a flexible production approach, enabling the rapid development of customized solutions tailored to specific application requirements.



4TH
GENERATION

family owned company

60
EMPLOYEES

R&D, production and sales

8.000
MOTORS

annual production capability


10.000
SQM

manufacturing plants

15
MLN EURO

annual revenues

MILESTONES

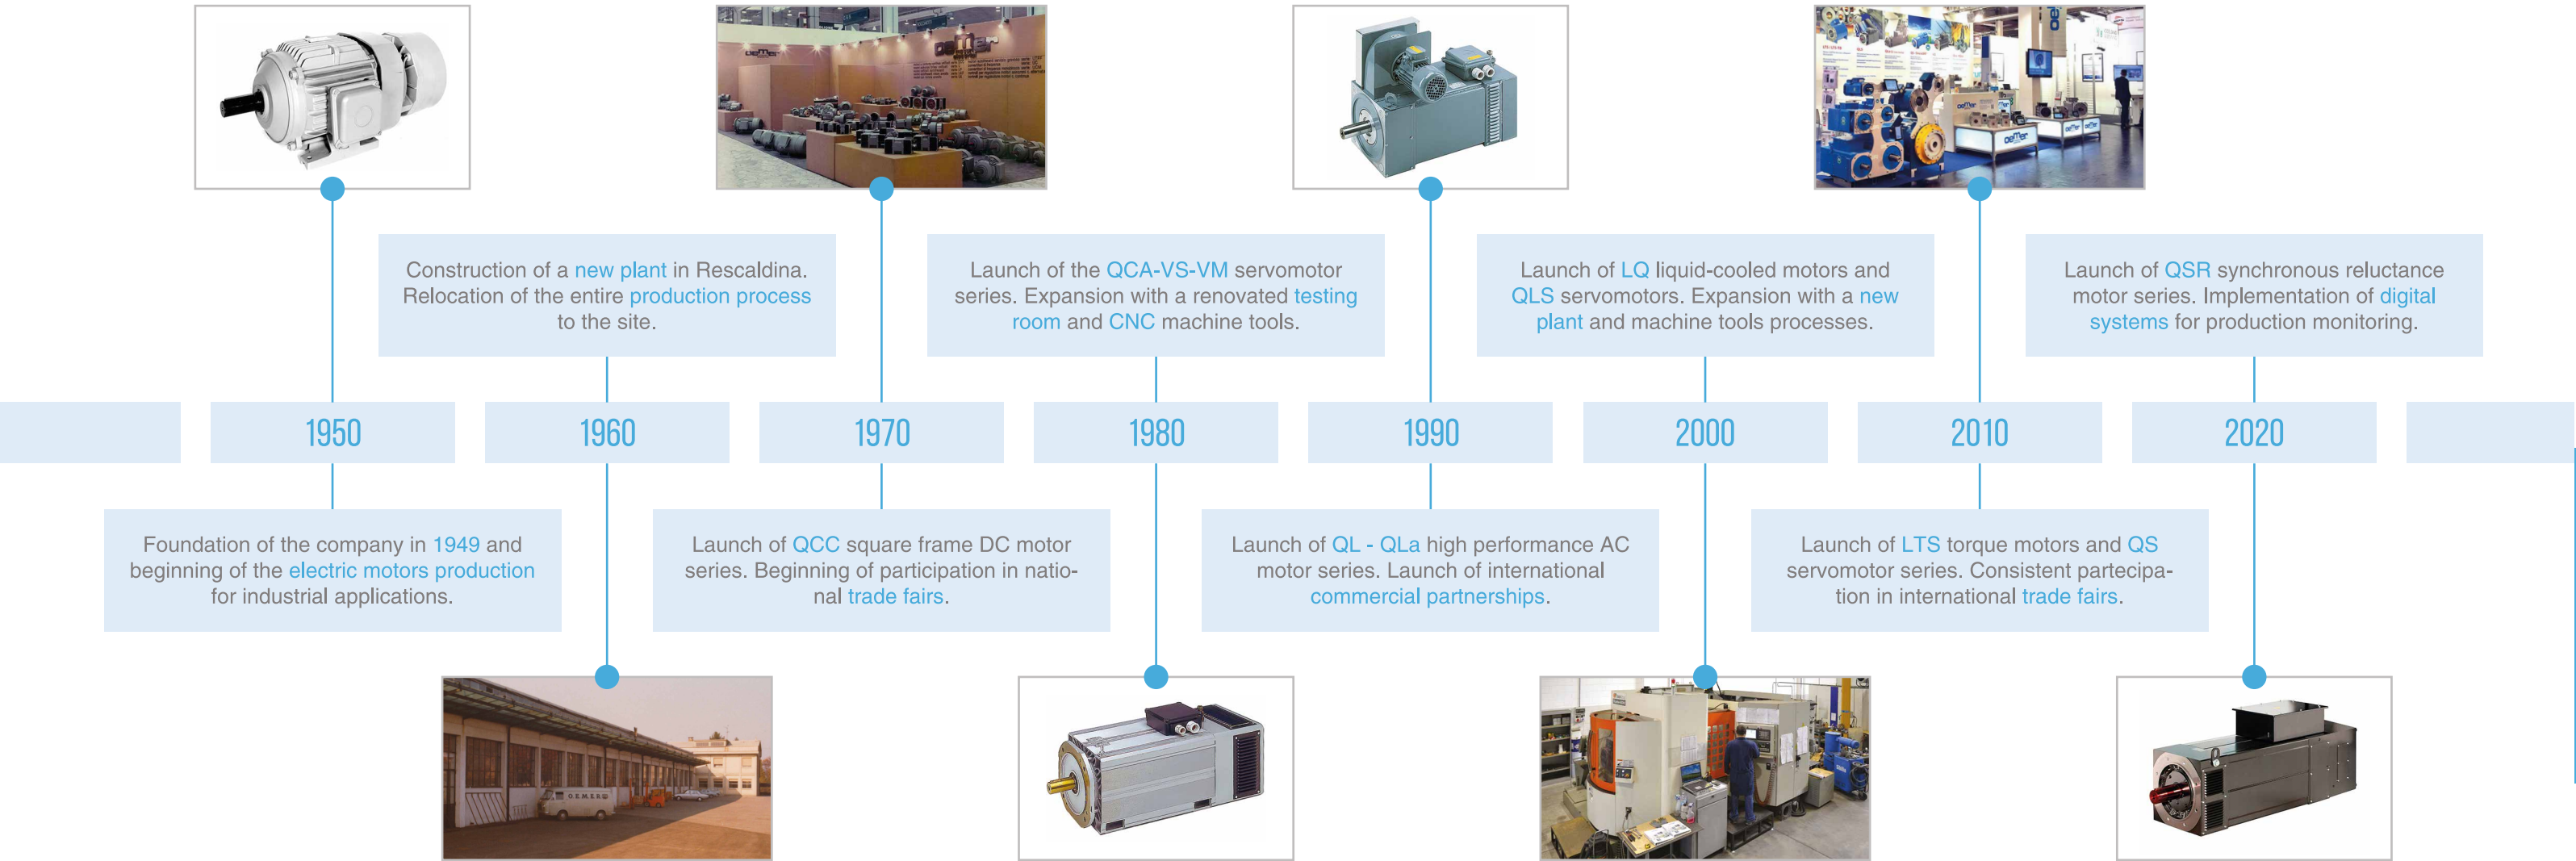

HIGH PERFORMANCE ELECTRIC MOTORS

The production capacity includes a complete range of AC 3-Phase inverter duty motors characterized by high power density, fast dynamic response and compact dimensions. All motor series are designed to guarantee high reliability, flexible configurations and operational stability.

PRODUCT QUALITY

Company decades-long knowledge of the electric motor sector, the continuous investments made over the years and the specialization in customized and challenging applications provide a significant know-how that guarantees the highest levels of product quality.

PROPRIETARY
R&D

100% in-house product development

DIRECT
CONTROL

of the entire production process

COMPLETE
OWNERSHIP

of structures, machines, equipment and tooling


DEEP
KNOWLEDGE

of the product, market and applications

Since 1999 the company complies with a Quality Management System according to UNI EN ISO 9001, in order to achieve its priority objectives of customer satisfaction, continuous improvement, professional growth and regulation compliance. Further details on our quality policy are available on our website.

TECHNICAL SUPPORT

Given the significant experience in many industrial sectors, the company provides maximum technical support regarding motor selection, sizing and configuration of additional options, based on the application required by the customer and the environmental conditions.

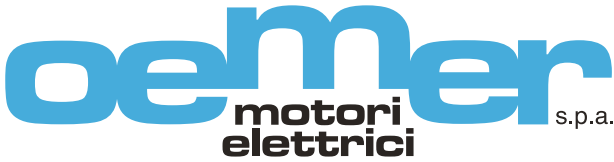

Headquarters:

OEMER MOTORI ELETTRICI S.P.A.

Partners and distributors:

SALES ORGANIZATION

SALE AND SERVICE

CONTACTS

WHERE

Via Legnano, 41
20027 Rescaldina
Milan
ITALY



WEB SITE

www.oemerspa.com

MAIL

info@oemerspa.com

PHONE

+39 0331 576063

Rev.1_05/2026

© OEMER MOTORI ELETTRICI S.P.A. 2026. All rights reserved.

Product specifications, features and availability are subject to change without prior notice.