PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
F38878

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71960013 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7196-0013-02	*	RFYP2120-JS_M	4514233329	DAIMLER TRUCK - XVK84

Applicable Terminals for this Tool:

7196-0013-02					

Anvil			Wire Crimper			Insulation Crimper		
7196-0013KACM		(N)	7196-0013KWM		(N)	7196-0013KICM		(N)
CW (c)	4.02	CW (i) 5.30	CW	4.00		CW	5.30	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.38 mm 0.38 - 0.76 mm	0.27 0.63		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.38 mm 0 - 0.38 mm	0.37 0.27		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 3 ° 0 - 3 °	0.1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 0.76 mm	0.7		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.06		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.5		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



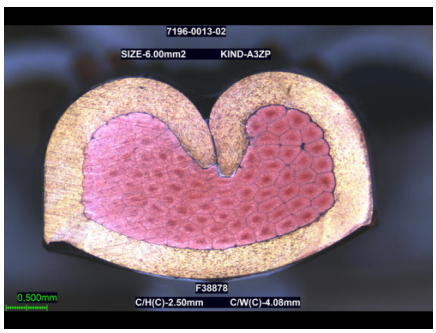

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2.15	2.15	3.31
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	2.5	2.51	4.96
	+/- 0.05		

REMARKS:

Applicable wire range-4.00~6.00mm2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 05/09/2025	Date: 04/09/2025	Date: 04/09/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

F38878

LOWER WIRE KIND & SIZE

C/W(I): 5.32 mm

Wire kind: A3ZP

Wire size: 4.00 mm²

Nominal Cr. Height:	2.15	4.3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	2.142	4.298
2	2.146	4.288
3	2.146	4.286
4	2.149	4.288
5	2.161	4.305
6	2.145	4.293
7	2.144	4.300
8	2.158	4.301
9	2.153	4.304
10	2.151	4.318
11	2.153	4.318
12	2.149	4.290
13	2.153	4.309
14	2.155	4.292
15	2.150	4.311
16	2.150	4.298
17	2.150	4.305
18	2.152	4.305
19	2.158	4.308
20	2.151	4.298
21	2.149	4.303
22	2.158	4.307
23	2.153	4.293
24	2.155	4.311
25	2.148	4.301
26	2.141	4.300
27	2.155	4.290
28	2.146	4.291
29	2.154	4.298
30	2.156	4.304
31	2.149	4.304
32	2.152	4.304
33	2.153	4.296
34	2.151	4.296
35	2.154	4.304
36	2.150	4.299
37	2.154	4.309
38	2.156	4.305
39	2.155	4.302
40	2.158	4.291
41	2.159	4.302
42	2.156	4.315
43	2.156	4.297
44	2.155	4.280
45	2.162	4.306
46	2.158	4.300
47	2.152	4.307
48	2.146	4.308
49	2.159	4.301
50	2.157	4.302
Average	2.15	4.30
Cmk	3.31	4.15

UPPER WIRE KIND & SIZE

C/W(I): 5.35 mm

Wire kind: A3ZP

Wire size: 6.00 mm²

Nominal Cr. Height:	2.5	4.8	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	2.508	4.794
2	2.507	4.794
3	2.509	4.800
4	2.510	4.809
5	2.504	4.800
6	2.508	4.796
7	2.514	4.804
8	2.509	4.800
9	2.507	4.794
10	2.501	4.796
11	2.507	4.796
12	2.508	4.802
13	2.510	4.809
14	2.505	4.801
15	2.507	4.799
16	2.509	4.802
17	2.510	4.813
18	2.505	4.812
19	2.507	4.796
20	2.512	4.805
21	2.508	4.796
22	2.510	4.794
23	2.506	4.789
24	2.510	4.789
25	2.507	4.784
26	2.509	4.798
27	2.508	4.791
28	2.505	4.803
29	2.507	4.804
30	2.505	4.787
31	2.505	4.807
32	2.504	4.802
33	2.505	4.805
34	2.509	4.808
35	2.508	4.802
36	2.507	4.800
37	2.508	4.817
38	2.508	4.801
39	2.505	4.807
40	2.507	4.804
41	2.506	4.811
42	2.506	4.803
43	2.511	4.802
44	2.506	4.799
45	2.512	4.794
46	2.518	4.810
47	2.513	4.810
48	2.508	4.814
49	2.510	4.819
50	2.508	4.801
Average	2.51	4.80
Cmk	4.96	4.35

Acceptance criteria: Cmk >= 2

END

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 10/07/2025

MODELLO
MODEL **RFYP2120-JS_M**
TYPE
MODELE

TERMINALE
TERMINAL **7196-0013-02**
KONTAKT
COSSE

MATRICOLA
SERIAL NUMBEI F **F38878**
REGISTRIERNUMMER
MATRICULE


CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
991320003	1	175
870620001	1	180
880480008	1	190
871980007	1	200
990010016	1	240
P0138	0,4	245
600050020	2	260
991310001	1	270
610110308	1	300
991280008	1	310
991350000	1	330
650242004	2	340
991160033	2	360
600050020	1	370
610101005	1	380
600052016	1	390
600050020	2	460
600041012	1	470
990400003	1	520
620081030	1	530
640060020	2	550
991290010	1	585
991290010	1	587
600050012	4	590
901120003	1	610
791640006	1	625
911090003	1	630
600061010	2	640
600061016	2	650
600030016	3	660
600040014	1	665
610101004	1	667
901100014	1	670
901170000	1	690
610101005	2	692
610101005	1	695
600052030	1	710
840010014	1	720
790400003	1	730
790340005	1	740
790420004	1	750
790340003	5	760
790340002	1	765


CODICE	Qt.	Rif
95127 0207	1	001
90113 0016	1	100
99101 0031	1	120
95127 0046	1	140
90002 0002	1	160
90114 0005	1	170
62008 5240	1	280
99132 0007	1	620
99017 0000	1	320
90109 0000	1	350
90124 0001	1	430
90125 0002	1	440
64006 0020	2	444
90126 0046	1	450
88146 0018	1	455
88146 0019	1	462
60004 0006	4	465
90111 0001	1	480
90137 0006	1	490
60004 0008	3	500
60004 0016	2	510
90104 0027	1	540
90107 0002	1	570
60005 0012	2	580
90018 0011	1	680
90121 0013	1	675
Person. **F_A50-Y**		
98146 2659	**1**	**1000**
98145 2414	**1**	**1010**
99948 0610	1	1030
60008 1025	1	1050
90133 0369	**1**	**1060**
99150 0570	1	1065
60004 0010	2	1070
90134 0101	**1**	**1100**
90135 0105	**1**	**1110**
90129 0000	1	1120
60005 0025	2	1125
98127 3732	**1**	**1130**
60004 0010	1	1137


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


F_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 180) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 180) between the ram and the applicator it must be removed before using.

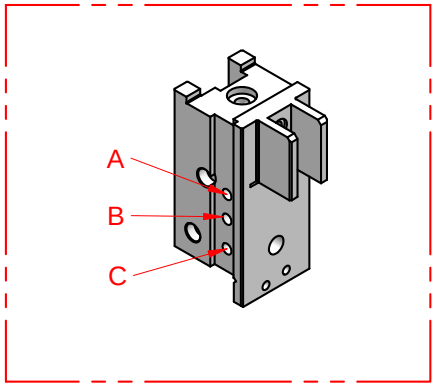


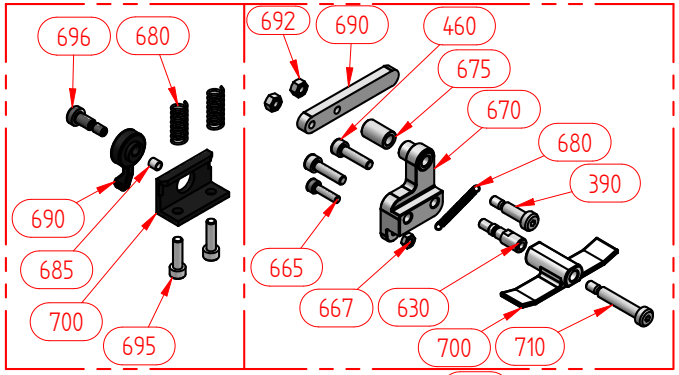



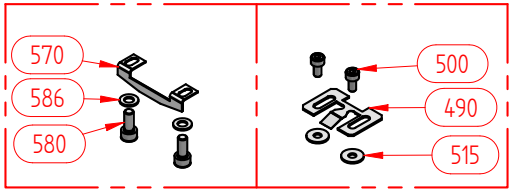

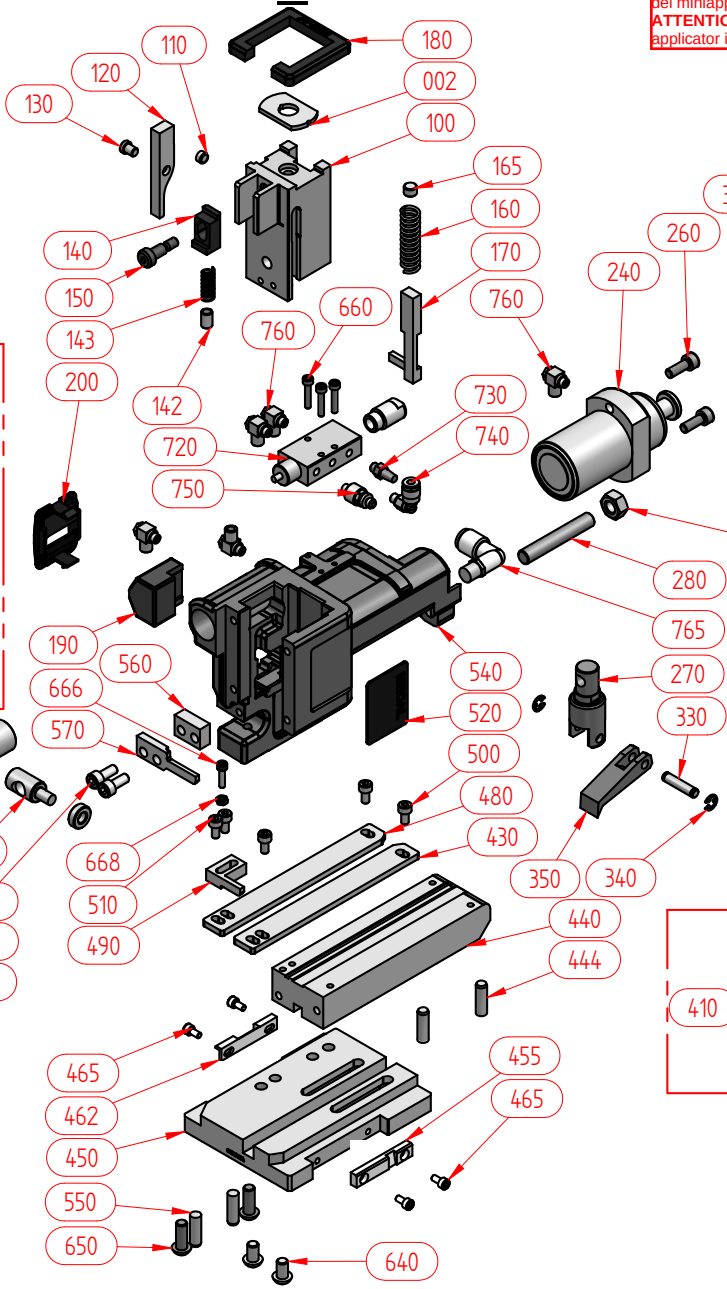

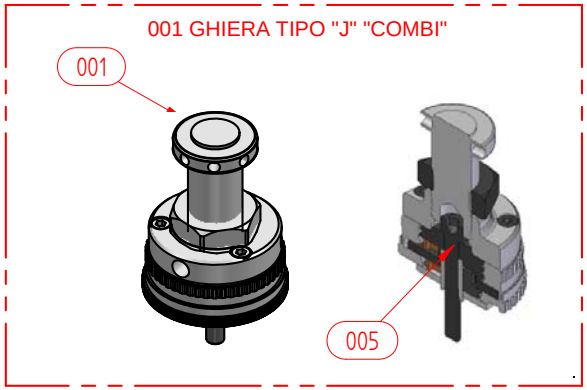

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

F_A50-Y

