PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1703E099

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961296 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7296-1296-06	7158-3038-70	MXDR	4514226758	BENZ - MFA2

Applicable Terminals for this Tool:

7296-1296-02	7296-1296-06			

Anvil		
7296-1296XAD		(N)
CW (c) 1.62	*CW (i)* 3.13	

Wire Crimper		
7296-1296XW		(N)
CW 1.6		

Insulation Crimper		
7296-1296XID		(N)
CW 3.13		

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.15 - 0.45 mm	0.1 0.42		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.24		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 3 ° 0 - 3 °	1.4		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 3 mm	0.3		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.8		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.16		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.


(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

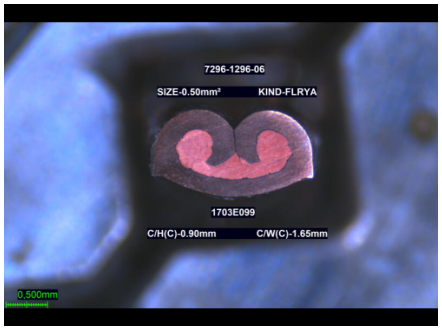

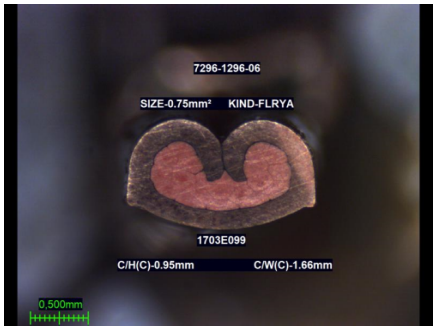

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.9	0.90	3.13
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	0.95	0.95	4.63
	+/- **0.03**		

REMARKS:

Applicable wire range 0.50mm²~0.75mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº18388
Date: 23/06/2025	Date: 20/06/2025	Date: 18/06/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

1703E099

LOWER WIRE KIND & SIZE

C/W(I): 3.00 mm

Wire kind: FLRYA

Wire size: 0.5 mm²

Nominal Cr. Height:	0.9	2.9	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.901	2.900
2	0.900	2.897
3	0.903	2.903
4	0.902	2.896
5	0.900	2.901
6	0.899	2.900
7	0.901	2.898
8	0.900	2.906
9	0.899	2.899
10	0.903	2.903
11	0.897	2.896
12	0.900	2.906
13	0.902	2.897
14	0.899	2.905
15	0.901	2.898
16	0.900	2.905
17	0.899	2.900
18	0.902	2.903
19	0.900	2.897
20	0.897	2.896
21	0.899	2.900
22	0.901	2.896
23	0.900	2.905
24	0.903	2.900
25	0.897	2.898
26	0.899	2.905
27	0.900	2.902
28	0.903	2.905
29	0.901	2.896
30	0.899	2.903
31	0.900	2.898
32	0.903	2.905
33	0.897	2.900
34	0.899	2.905
35	0.887	2.902
36	0.903	2.905
37	0.899	2.901
38	0.901	2.899
39	0.900	2.905
40	0.901	2.897
41	0.899	2.898
42	0.897	2.896
43	0.900	2.909
44	0.897	2.905
45	0.899	2.901
46	0.903	2.905
47	0.903	2.896
48	0.899	2.897
49	0.887	2.900
50	0.903	2.909
Average	0.90	2.90
Cmk	3.13	8.90

UPPER WIRE KIND & SIZE

C/W(I): 3.05 mm

Wire kind: FLRYA

Wire size: 0.75 mm²

Nominal Cr. Height:	0.95	3	mm
+/-	0.03	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.952	3.000
2	0.953	3.009
3	0.948	2.997
4	0.952	3.007
5	0.953	3.005
6	0.952	2.997
7	0.948	3.005
8	0.952	3.008
9	0.949	3.005
10	0.947	3.007
11	0.952	2.999
12	0.948	3.009
13	0.952	3.000
14	0.949	2.997
15	0.952	2.999
16	0.952	3.005
17	0.953	3.008
18	0.952	3.000
19	0.948	3.009
20	0.952	3.005
21	0.947	3.007
22	0.949	3.008
23	0.953	3.005
24	0.952	2.999
25	0.952	2.997
26	0.948	3.009
27	0.952	3.005
28	0.949	3.000
29	0.953	3.006
30	0.952	3.009
31	0.949	3.005
32	0.952	3.008
33	0.948	3.007
34	0.952	3.005
35	0.953	3.000
36	0.952	3.008
37	0.952	2.999
38	0.949	3.000
39	0.952	3.008
40	0.947	3.009
41	0.947	3.005
42	0.952	3.000
43	0.951	3.006
44	0.949	3.000
45	0.953	3.005
46	0.952	3.007
47	0.948	3.009
48	0.947	3.008
49	0.948	2.999
50	0.953	3.007
Average	0.95	3.00
Cmk	4.63	7.95

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-7119	TERMINAL No. 端子品番	7296-1296 ① DD
共通品番	– – – – – – – –		

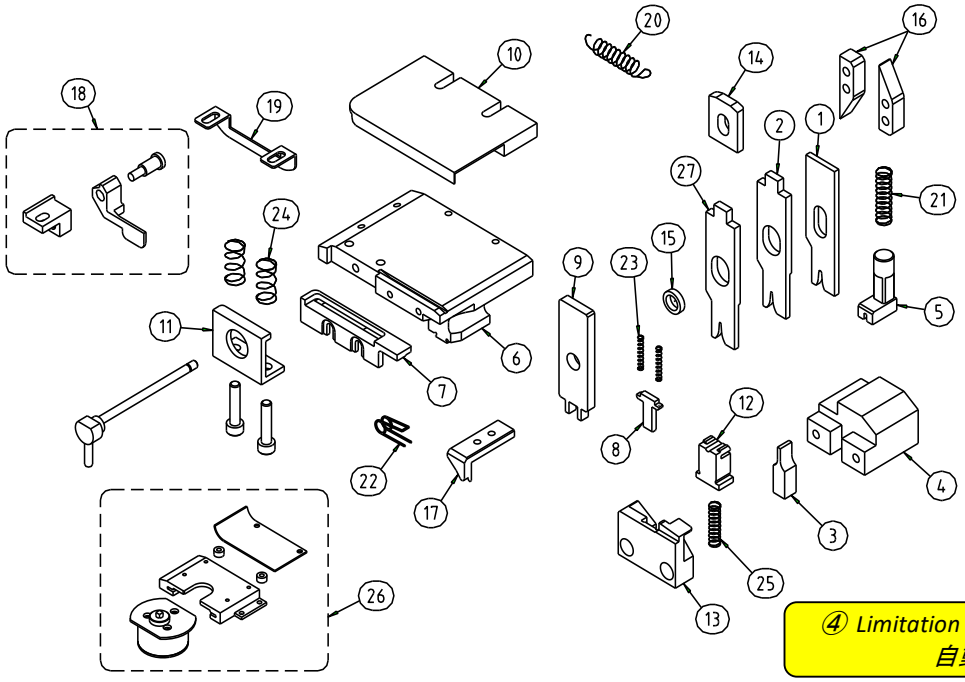

④ Limitation automatic machine
自動機限定

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-1296XW ①		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-1296XID ①		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7296-1296XAD ①		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-1296XJE ①		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7296-1296XYY ①		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7296-1296XYB ①		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7296-1296XYH ①		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7296-1296XKP ①		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27	~~7296-1296XQ ①~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-023 ③	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	-032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-001	FEEDING CAM 送りｶﾑ	13	48A47025	-028 ②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
④	26/01/2023	Add Automatic machine annotation	PTC	D.Tavares	DESIGNED DATE 設計日		
③	29/01/2020	48A19007020 → 48A19007023	PTC	F.Loureiro	27/05/2017		
②	04/11/2019	Add centering type Outer Shearblade	PTC	F.Loureiro	APPROVED 承認	DESIGNED 設計	
①	09/10/2017	Change No.7216-5879-9 → 7296-1296	PTC	C.F.Almeida	H.Hasegawa	C.F.Almeida	
					27/05/2017	27/05/2017	