PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0201676

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70032907 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7003-2907-02	*	**BC**	**YSD-3500186738**	*

Anvil		
7003-2907BAN/7003-2907BAP		(N/N)
CW (c) 14.45	*CW (i)* 16.55	


Wire Crimper		
7003-2907BW		(N)
CW	14.45	

Insulation Crimper		
7003-2907BI		(N)
CW	16.55	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	NA
	Not found any burr in the cutting carrier.	NA
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

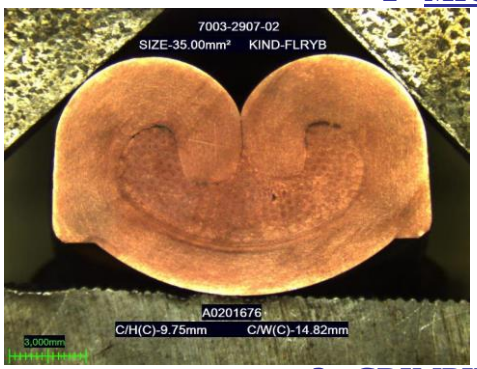
O - ok **X** - ng **NA** - not aplicable

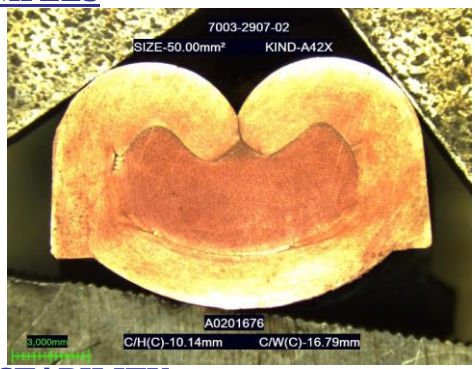
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	NA
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9.7	9.74	10.48
	+/-0.2		

	NOMINAL	AVERAGE	Cmk
mm	10.1	10.13	7.92
	+/-0.2		

REMARKS:

Aplicable Wire Range 35.00mm²~50.00mm²
Wire 35.00mm² C/W(I)-16.36mm
Wire 50.00mm² C/W(I)-16.69mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 5061	PREPARED (Operator) nº 678
Date: 2020/Oct/20	Date: 2020/Oct/20	Date: 2020/Oct/20

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0201676

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 35 mm²

Nominal Cr. Height:	9.7	14.9	mm
+/-	0.2	0.2	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	9.751	14.894
2	9.742	14.891
3	9.738	14.897
4	9.745	14.903
5	9.748	14.902
6	9.753	14.899
7	9.756	14.894
8	9.750	14.894
9	9.743	14.906
10	9.739	14.900
11	9.740	14.891
12	9.747	14.890
13	9.751	14.890
14	9.748	14.895
15	9.743	14.902
16	9.741	14.903
17	9.742	14.900
18	9.747	14.892
19	9.738	14.889
20	9.737	14.886
21	9.747	14.894
22	9.750	14.904
23	9.750	14.906
24	9.744	14.902
25	9.740	14.897
26	9.739	14.889
27	9.737	14.889
28	9.736	14.900
29	9.745	14.906
30	9.748	14.907
31	9.743	14.902
32	9.740	14.897
33	9.740	14.891
34	9.744	14.891
35	9.749	14.900
36	9.751	14.903
37	9.745	14.891
38	9.742	14.889
39	9.742	14.885
40	9.746	14.885
41	9.753	14.889
42	9.745	14.890
43	9.743	14.886
44	9.742	14.886
45	9.742	14.898
46	9.738	14.896
47	9.741	14.890
48	9.747	14.888
49	9.737	14.897
50	9.737	14.901
Average	9.74	14.90
Cmk	10.48	10.16

UPPER WIRE KIND & SIZE

Wire kind: A42X

Wire size: 50 mm²

Nominal Cr. Height:	10.1	15.3	mm
+/-	0.2	0.2	mm

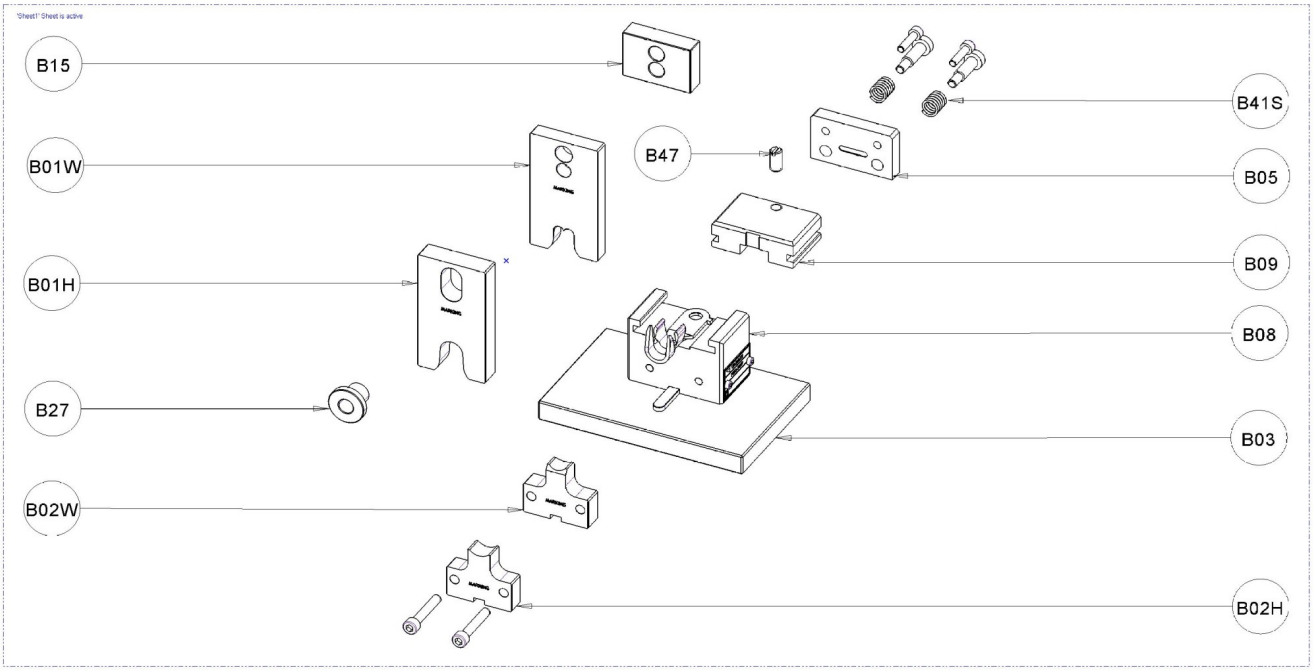
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	10.130	15.338
2	10.136	15.350
3	10.131	15.346
4	10.138	15.342
5	10.139	15.350
6	10.126	15.347
7	10.120	15.337
8	10.114	15.331
9	10.121	15.327
10	10.128	15.324
11	10.133	15.334
12	10.134	15.343
13	10.129	15.338
14	10.134	15.335
15	10.144	15.329
16	10.144	15.337
17	10.133	15.349
18	10.128	15.356
19	10.125	15.341
20	10.129	15.337
21	10.133	15.333
22	10.138	15.332
23	10.136	15.347
24	10.133	15.352
25	10.128	15.355
26	10.133	15.354
27	10.140	15.341
28	10.142	15.338
29	10.136	15.326
30	10.132	15.334
31	10.130	15.343
32	10.140	15.345
33	10.144	15.333
34	10.145	15.327
35	10.130	15.324
36	10.125	15.336
37	10.133	15.339
38	10.141	15.335
39	10.133	15.328
40	10.128	15.324
41	10.138	15.333
42	10.145	15.344
43	10.139	15.348
44	10.128	15.346
45	10.124	15.338
46	10.141	15.333
47	10.143	15.330
48	10.139	15.342
49	10.130	15.346
50	10.129	15.333
Average	10.13	15.34
Cmk	7.92	6.29

Acceptance criteria: Cmk>= 2.0

END

APP BATTERY CABLE CONSUMABLE PART LIST

A0201676	7003-2907



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01H	***7003-2907BI***	INSULATION CRIMPER	1
B01W	***7003-2907BW***	WIRE CRIMPER	1
B02H	***7003-2907BAP***	INSULATION ANVIL	1
B02W	***7003-2907BAN***	WIRE ANVIL	1
B03	7003-2907 B03	DIE BASE	1
B05	7003-2907 B05	STOPPER PLATE	1
B08	7003-2907 B08	MAIN BLOCK	1
B09	7003-2907 B09	SLIDER	1
B15	7003-2907 B15	FRAME SPACER	1
B27	***7003-2907BYC***	BUSH	1
B41S	***41P00000811***	SPRING	2
B47	M8 x 16	SPRING PLUNGER	1