PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A0201677

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70037570 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7003-7570-02	*	**BC**	**YSD-3500186738**	*





Anvil		
7003-7570BAN/7003-7570BAP		(N/N)
CW (c) 14.20	*CW (i)* 17.50	




Wire Crimper	
7003-7570BW	(N)
CW 14.20	

Insulation Crimper	
7003-7570BI	(N)
CW 17.50	

1 - VISUAL CHECK ITEMS

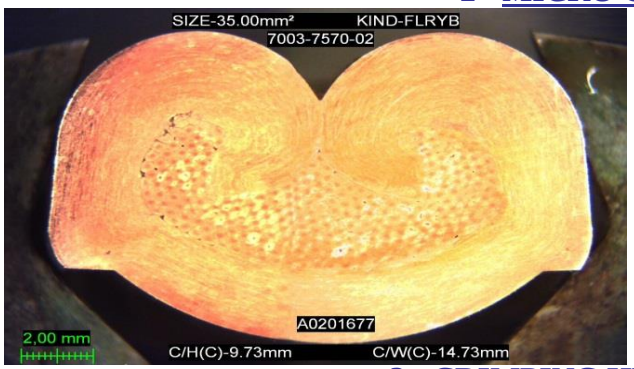
O - ok **X** - ng **NA** - not aplicable

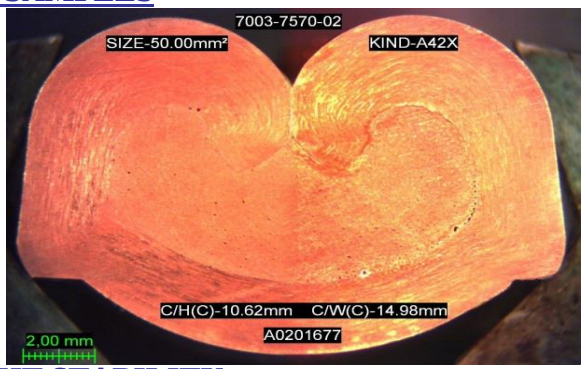
	The two sides of the insulation grips are in the correct position.	NA
	Not found any Bell Mouth in the insulation area.	NA
	The lance height and shape are not deformed.	NA
	Not found any burr in the cutting carrier.	NA
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	NA
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	9.75	9.73	3.51
	+/-0.1		

	NOMINAL	AVERAGE	Cmk
mm	10.6	10.63	3.03
	+/-0.1		

REMARKS:

Aplicable Wire Range 35.00mm²~50.00mm²
Wire 35.00mm² C/W(I)-16.78mm
Wire 50.00mm² C/W(I)-17.43mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2020/Oct/19	Date: 2020/Oct/19	Date: 2020/Oct/19

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A0201677

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 35 mm²

Nominal Cr. Height:	9.75	13.9	mm
+/-	0.1	0.5	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	9.734	13.990
2	9.734	13.929
3	9.738	13.942
4	9.730	13.942
5	9.730	13.938
6	9.729	13.936
7	9.723	13.947
8	9.734	13.947
9	9.737	13.940
10	9.739	13.938
11	9.744	13.932
12	9.734	13.931
13	9.730	13.941
14	9.726	13.946
15	9.730	13.949
16	9.741	13.939
17	9.735	13.937
18	9.729	13.934
19	9.727	13.931
20	9.724	13.944
21	9.723	13.947
22	9.733	13.950
23	9.735	13.941
24	9.725	13.934
25	9.723	13.932
26	9.721	13.935
27	9.721	13.951
28	9.730	13.946
29	9.737	13.945
30	9.739	13.939
31	9.731	13.935
32	9.729	13.929
33	9.723	13.934
34	9.722	13.944
35	9.740	13.946
36	9.746	13.950
37	9.747	13.943
38	9.736	13.936
39	9.735	13.934
40	9.736	13.931
41	9.746	13.929
42	9.746	13.937
43	9.741	13.942
44	9.739	13.945
45	9.746	13.941
46	9.748	13.937
47	9.746	13.934
48	9.743	13.932
49	9.748	13.944
50	9.738	13.942
Average	9.73	13.94
Cmk	3.51	16.22

UPPER WIRE KIND & SIZE

Wire kind: A42X

Wire size: 50 mm²

Nominal Cr. Height:	10.6	16	mm
+/-	0.1	0.5	mm

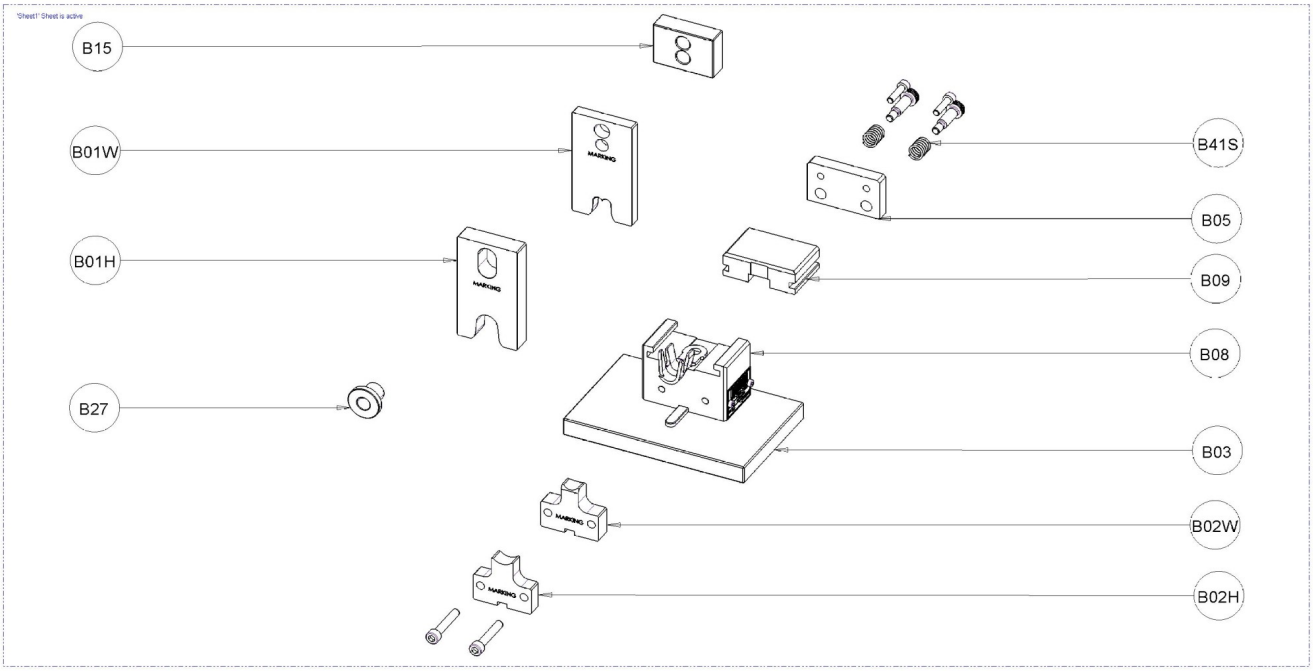
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	10.625	16.020
2	10.617	16.038
3	10.621	16.028
4	10.629	16.023
5	10.622	16.018
6	10.618	16.025
7	10.609	16.036
8	10.619	16.033
9	10.625	16.026
10	10.629	16.023
11	10.624	16.021
12	10.623	16.020
13	10.621	16.024
14	10.628	16.027
15	10.633	16.016
16	10.634	16.009
17	10.627	16.010
18	10.624	16.007
19	10.616	16.017
20	10.631	16.024
21	10.635	16.030
22	10.628	16.024
23	10.624	16.014
24	10.622	16.014
25	10.622	16.029
26	10.636	16.027
27	10.630	16.021
28	10.624	16.016
29	10.631	16.016
30	10.638	16.026
31	10.637	16.034
32	10.644	16.033
33	10.645	16.023
34	10.631	16.020
35	10.635	16.023
36	10.638	16.030
37	10.642	16.022
38	10.633	16.019
39	10.637	16.014
40	10.641	16.014
41	10.639	16.026
42	10.627	16.030
43	10.627	16.025
44	10.631	16.018
45	10.637	16.013
46	10.634	16.013
47	10.631	16.018
48	10.629	16.025
49	10.632	16.035
50	10.638	16.034
Average	10.63	16.02
Cmk	3.03	21.40

Acceptance criteria: Cmk>= 2.0

END

APP BATTERY CABLE CONSUMABLE PART LIST

7003-7570



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
B01H	***7003-7570BI***	INSULATION CRIMPER	1
B01W	***7003-7570BW***	WIRE CRIMPER	1
B02H	***7003-7570BAP***	INSULATION ANVIL	1
B02W	***7003-7570BAN***	WIRE ANVIL	1
B03	7003-7570 B03	DIE BASE	1
B05	B05	STOPPER PLATE	1
B08	7003-7570 B08	MAIN BLOCK	1
B09	7003-7570 B09	SLIDER	1
B15	7003-7570 B15	FRAME SPACER	1
B27	***7003-7570BYC***	BUSH	1
B41S	***41P00000811***	SPRING	2