APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700701

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70096821 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-6821-02	*	**ADB**	**YSD 3500178542**	*






Anvil		
7009-6821-00DAN/7009-6821-00DAP		(N)
CW (c) 4.22	*CW (i)* 5.00	



Wire Crimper	
7009-6821-00DW	(N)
CW 4.20	

Insulation Crimper	
7009-6821-00DI	(N)
CW 5.00	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

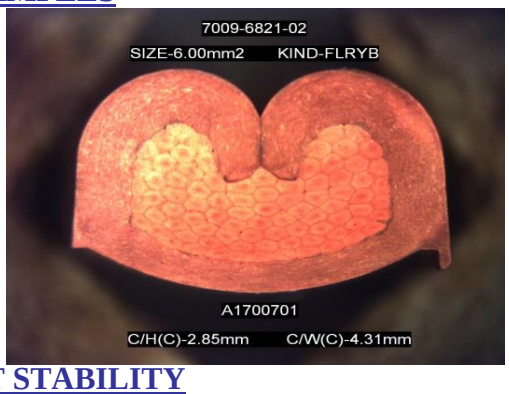
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	NA
	Not found any burr in the cutting carrier.	NA
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	NA
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2.40	2.41	3.96
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	2.85	2.86	3.55
	+/-0.05		

REMARKS:

Aplicable wire range-4.00~6.00mm^2
Size 4.00mm^2 C/W(I)-5.01mm
Size 6.00mm^2 C/W(I)-5.14mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 18388	PREPARED (Operator) nº 2624
Date: 2020/Aug/06	Date: 2020/Jul/29	Date: 2020/Jul/24

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700701

LOWER WIRE KIND & SIZE

Wire kind: C-FLR2XB

Wire size: 4 mm²

Nominal Cr. Height:	2.40	4.70	mm
+/-	0.05	0.10	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.419	4.719
2	2.419	4.716
3	2.415	4.713
4	2.414	4.709
5	2.415	4.714
6	2.418	4.715
7	2.417	4.712
8	2.413	4.715
9	2.409	4.718
10	2.410	4.714
11	2.410	4.710
12	2.414	4.706
13	2.416	4.702
14	2.414	4.704
15	2.412	4.708
16	2.413	4.712
17	2.414	4.708
18	2.418	4.706
19	2.417	4.702
20	2.416	4.704
21	2.413	4.707
22	2.414	4.711
23	2.419	4.710
24	2.419	4.708
25	2.416	4.705
26	2.413	4.707
27	2.414	4.710
28	2.417	4.712
29	2.417	4.709
30	2.418	4.706
31	2.414	4.703
32	2.411	4.704
33	2.412	4.709
34	2.413	4.711
35	2.416	4.708
36	2.412	4.705
37	2.408	4.702
38	2.410	4.701
39	2.410	4.703
40	2.413	4.706
41	2.413	4.706
42	2.411	4.703
43	2.408	4.699
44	2.410	4.703
45	2.414	4.706
46	2.414	4.708
47	2.413	4.706
48	2.409	4.702
49	2.410	4.698
50	2.413	4.700
Average	2.41	4.71
Cmk	3.96	6.28

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

Nominal Cr. Height:	2.85	5.30	mm
+/-	0.05	0.10	mm

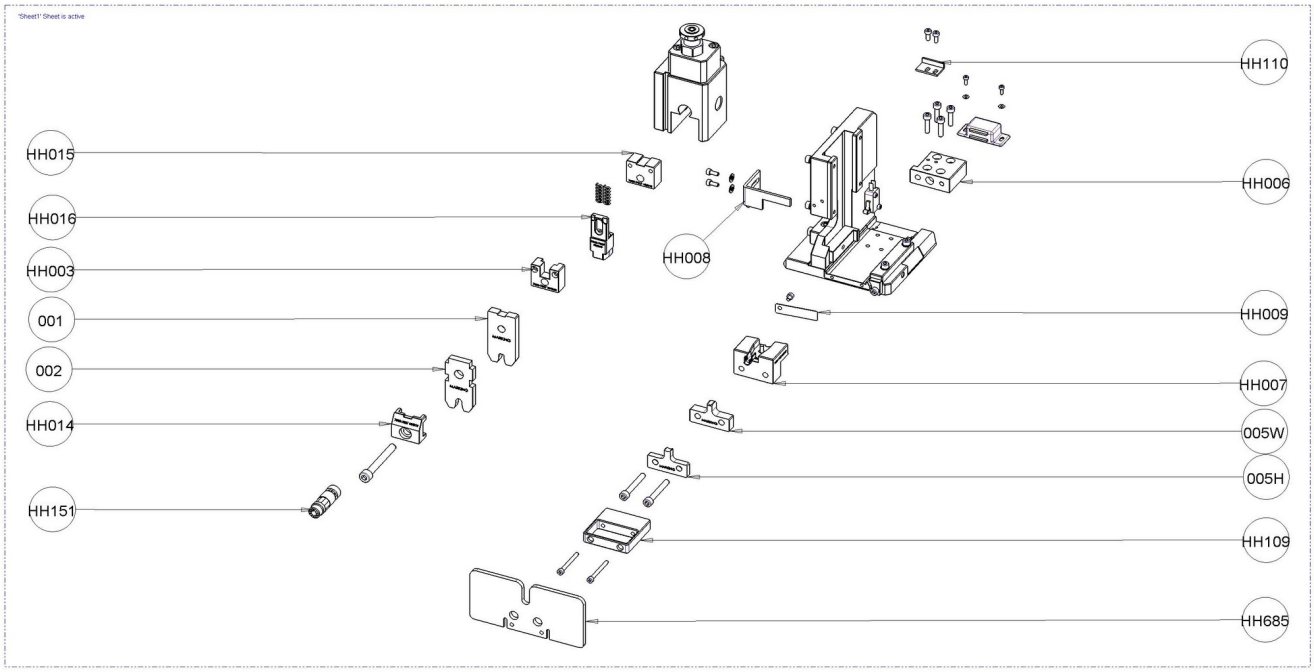
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.869	5.289
2	2.869	5.293
3	2.866	5.298
4	2.862	5.296
5	2.864	5.293
6	2.868	5.295
7	2.866	5.297
8	2.862	5.297
9	2.859	5.295
10	2.860	5.300
11	2.860	5.299
12	2.866	5.296
13	2.865	5.296
14	2.863	5.300
15	2.859	5.303
16	2.858	5.303
17	2.859	5.301
18	2.864	5.299
19	2.864	5.297
20	2.865	5.299
21	2.863	5.300
22	2.860	5.302
23	2.856	5.299
24	2.858	5.297
25	2.858	5.300
26	2.861	5.301
27	2.860	5.302
28	2.858	5.304
29	2.855	5.302
30	2.856	5.299
31	2.860	5.298
32	2.860	5.299
33	2.862	5.302
34	2.859	5.302
35	2.855	5.300
36	2.862	5.296
37	2.862	5.297
38	2.859	5.300
39	2.855	5.303
40	2.856	5.300
41	2.862	5.296
42	2.864	5.301
43	2.863	5.301
44	2.858	5.300
45	2.856	5.294
46	2.857	5.288
47	2.858	5.300
48	2.861	5.301
49	2.860	5.300
50	2.856	5.297
Average	2.86	5.30
Cmk	3.55	9.73

Acceptance criteria: Cmk>= 2.0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700701 | **7009-6821**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7009-6821-00DW***	WIRE CRIMPER	1
002	***7009-6821-00DI***	INSULATION CRIMPER	1
005H	***7009-6821-00DAP***	INSULATION ANVIL	1
005W	***7009-6821-00DAN***	WIRE ANVIL	1
HH003	7009-6821 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7009-6821 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	7009-6821 HH014	CRIMPER HOLDER	1
HH015	HH015	SPACER B	1
HH016	7009-6821 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	HP81-0009A	INSULATION ADJUSTER DIAL	1
HH158	HH685	RAM NUT	1