PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
A1700741

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70097192 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-7192-02	*	**ADB**	**YSD-3500206820**	*





Anvil		
7009-7192-00DAN/7009-7192-00DAP		(N)
CW (c) 5.92	*CW (i)* 6.50	



Wire Crimper		
7009-7192-00DW		(N)
CW 5.90		

Insulation Crimper		
7009-7192-00DI		(N)
CW 7.00		

1 - VISUAL CHECK ITEMS

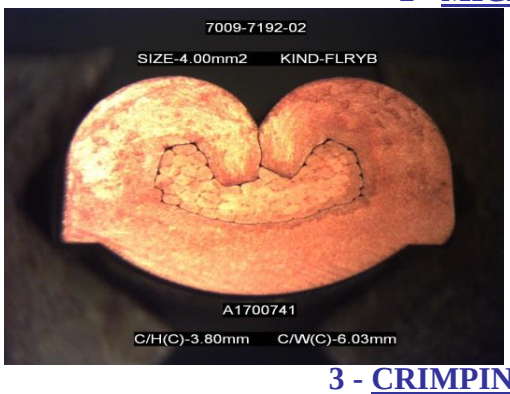
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	NA
	Not found any burr in the cutting carrier.	NA
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	NA
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3.8	3.80	8.95
	+/-0.1		

	NOMINAL	AVERAGE	Cmk
mm	4.12	4.12	7.05
	+/-0.1		

REMARKS:

Aplicable wire range-4.00~6.00mm^2
Size 4.00mm^2 C/W(I)-6.86mm
Size 6.00mm^2 C/W(I)-6.95mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2021/Mar/15	Date: 2021/Mar/08	Date: 2021/Mar/03

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
A1700741

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 4 mm²

Nominal Cr. Height:	3.8	6.15	mm
+/-	0.1	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3.797	6.138
2	3.801	6.140
3	3.806	6.144
4	3.802	6.149
5	3.798	6.144
6	3.800	6.140
7	3.804	6.145
8	3.807	6.150
9	3.805	6.154
10	3.801	6.158
11	3.802	6.152
12	3.805	6.147
13	3.808	6.144
14	3.804	6.150
15	3.798	6.154
16	3.803	6.159
17	3.807	6.161
18	3.810	6.153
19	3.805	6.147
20	3.801	6.142
21	3.799	6.150
22	3.802	6.154
23	3.807	6.158
24	3.810	6.151
25	3.804	6.145
26	3.800	6.142
27	3.798	6.148
28	3.801	6.154
29	3.805	6.158
30	3.810	6.152
31	3.804	6.146
32	3.799	6.142
33	3.803	6.149
34	3.806	6.152
35	3.811	6.157
36	3.808	6.150
37	3.804	6.144
38	3.799	6.148
39	3.803	6.154
40	3.806	6.150
41	3.809	6.145
42	3.807	6.150
43	3.804	6.151
44	3.805	6.146
45	3.807	6.144
46	3.804	6.148
47	3.801	6.151
48	3.805	6.153
49	3.807	6.146
50	3.808	6.148
Average	3.80	6.15
Cmk	8.95	6.20

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

Nominal Cr. Height:	4.12	6.5	mm
+/-	0.1	0.1	mm

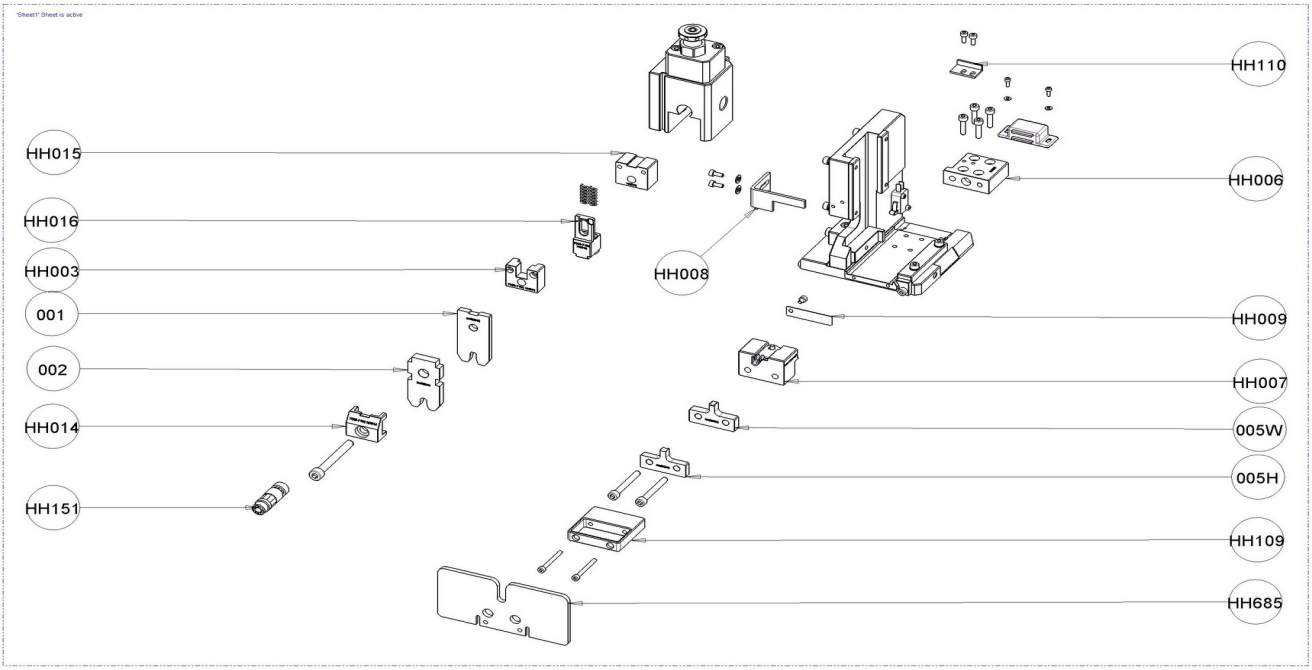
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	4.120	6.494
2	4.117	6.500
3	4.110	6.504
4	4.116	6.507
5	4.118	6.504
6	4.122	6.501
7	4.122	6.499
8	4.117	6.502
9	4.115	6.506
10	4.117	6.509
11	4.119	6.506
12	4.123	6.502
13	4.126	6.498
14	4.122	6.501
15	4.118	6.504
16	4.113	6.509
17	4.118	6.512
18	4.121	6.507
19	4.126	6.503
20	4.129	6.500
21	4.123	6.503
22	4.119	6.505
23	4.113	6.509
24	4.120	6.507
25	4.123	6.503
26	4.127	6.501
27	4.130	6.505
28	4.120	6.507
29	4.116	6.511
30	4.118	6.506
31	4.123	6.502
32	4.127	6.499
33	4.129	6.500
34	4.123	6.505
35	4.118	6.509
36	4.115	6.505
37	4.119	6.500
38	4.123	6.497
39	4.127	6.501
40	4.128	6.504
41	4.122	6.504
42	4.118	6.501
43	4.112	6.504
44	4.116	6.509
45	4.119	6.504
46	4.122	6.500
47	4.124	6.504
48	4.120	6.504
49	4.115	6.500
50	4.116	6.500
Average	4.12	6.50
Cmk	7.05	8.59

Acceptance criteria: Cmk>= 2.0

END

APP 90 HAND FEED CONSUMABLE PART LIST

A1700741 | **7009-7192G1**



NUMBER	PARTS NUMBER	PARTS NAME	QUANTITY
001	***7009-7192-00DW***	WIRE CRIMPER	1
002	***7009-7192-00DI***	INSULATION CRIMPER	1
005H	***7009-7192-00DAP***	INSULATION ANVIL	1
005W	***7009-7192-00DAN***	WIRE ANVIL	1
HH003	7009-7192 HH003	SPACER A	1
HH006	HH006	ANVIL SUPPORTER	1
HH007	7009-7192 HH007	TERMINAL HOLDER	1
HH008	HH008-3	STRIPPER	1
HH009	HH009	TERMINAL GUIDE	1
HH014	7009-7192 HH014	CRIMPER HOLDER	1
HH015	HH015	SPACER B	1
HH016	7009-7192 HH016	HOLD DOWN	1
HH109	HH109	LEVER	1
HH110	HH110	SWITCH LEVER	1
HH151	***HP81-0009A***	INSULATION ADJUSTER DIAL	1
HH685	HH685	SAFETY COVER FC143685	1