PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L142256

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72125190 Y1 SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7212-5190-02	7157-3036-60	RSP	4514417511	DAIMLER TRUCK - BEV







Applicable Terminals for this Tool:

7212-5190-02	7212-5190-06			

Anvil			Wire Crimper			Insulation Crimper		
7212-5190-00XADM		(N)	7212-5190-00XWM		(N)	7212-5190-00XIDM		(N)
CW (c)	1.42	*CW (i)* 2.80	*CW*	1.40		*CW*	2.80	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable


			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.1 - 0.4 mm	0.17 0.33		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.24		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.25 mm 0 - 0.25 mm	0.05		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.7 mm	0.61		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 °	0.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.25 mm	0.04		The body of the terminal is not twisted.	O


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

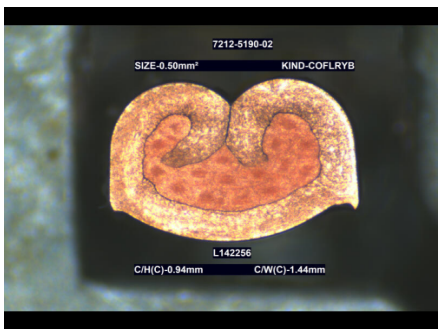

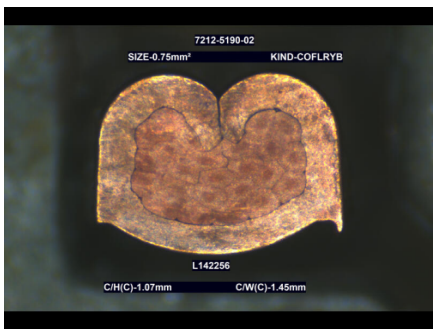

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	2.60
	+/- **0.03**		

	NOMINAL	AVERAGE	Cmk
mm	1.07	1.08	3.59
	+/- **0.03**		

REMARKS:

Applicable wire range 0.50mm²~0.75mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº33664
Date: 31/08/2026	Date: 28/08/2026	Date: 27/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

L142256

LOWER WIRE KIND & SIZE

C/W(I): 2.75 mm

Wire kind: COFLRYB

Wire size: 0.50 mm²

Nominal Cr. Height:	0.93	2.9	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.932	2.898
2	0.934	2.899
3	0.935	2.896
4	0.939	2.896
5	0.940	2.896
6	0.933	2.896
7	0.935	2.897
8	0.933	2.901
9	0.934	2.896
10	0.932	2.897
11	0.929	2.903
12	0.940	2.899
13	0.930	2.901
14	0.936	2.894
15	0.932	2.901
16	0.932	2.899
17	0.929	2.901
18	0.933	2.898
19	0.927	2.905
20	0.936	2.897
21	0.930	2.901
22	0.929	2.910
23	0.935	2.906
24	0.932	2.901
25	0.935	2.906
26	0.932	2.903
27	0.934	2.913
28	0.934	2.904
29	0.937	2.907
30	0.935	2.935
31	0.935	2.907
32	0.936	2.907
33	0.940	2.903
34	0.940	2.935
35	0.933	2.912
36	0.934	2.907
37	0.932	2.915
38	0.935	2.906
39	0.937	2.931
40	0.931	2.902
41	0.932	2.917
42	0.938	2.901
43	0.931	2.908
44	0.935	2.907
45	0.934	2.901
46	0.931	2.902
47	0.937	2.906
48	0.938	2.906
49	0.933	2.899
50	0.943	2.905
Average	0.93	2.90
Cmk	2.60	3.55

UPPER WIRE KIND & SIZE

C/W(I): 2.83 mm

Wire kind: COFLRYB

Wire size: 0.75 mm²

Nominal Cr. Height:	1.07	2.9	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.079	2.913
2	1.079	2.910
3	1.071	2.914
4	1.079	2.904
5	1.070	2.909
6	1.073	2.930
7	1.078	2.929
8	1.076	2.911
9	1.073	2.905
10	1.079	2.912
11	1.079	2.926
12	1.078	2.924
13	1.070	2.912
14	1.073	2.913
15	1.073	2.929
16	1.076	2.929
17	1.078	2.910
18	1.074	2.914
19	1.078	2.912
20	1.073	2.914
21	1.077	2.911
22	1.075	2.929
23	1.078	2.914
24	1.076	2.912
25	1.076	2.922
26	1.075	2.914
27	1.076	2.925
28	1.075	2.915
29	1.077	2.914
30	1.075	2.912
31	1.077	2.910
32	1.076	2.917
33	1.076	2.916
34	1.074	2.915
35	1.077	2.926
36	1.074	2.918
37	1.079	2.913
38	1.075	2.916
39	1.076	2.925
40	1.074	2.914
41	1.076	2.909
42	1.074	2.917
43	1.077	2.923
44	1.076	2.915
45	1.076	2.913
46	1.077	2.924
47	1.076	2.913
48	1.077	2.916
49	1.074	2.916
50	1.078	2.916
Average	1.08	2.92
Cmk	3.59	4.28

Acceptance criteria: Cmk >= 2

END

MECAL

DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 17/08/2026

MODELLO
MODEL RSYP1465-JG1_A
TYPE
MODELE

TERMINALE
TERMINAL 7212-5190-02
KONTAKT
COSSE

MATRICOLA
SERIAL NUI L 142256
REGISTRIERNUMMER
MATRICULE


CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0138	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041006	1	450
650242004	2	460
991350000	1	480
990010015	1	530
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
91112 0035	1	100
99101 0039	1	120
95127 0047	1	140
99132 0007	1	240
99128 0008	1	250
91103 0049	1	290
91117 0053	1	320
91118 0263	1	330
60005 0012	1	339
99017 0019	1	343
60005 2010	1	344
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0006	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
62008 5240	1	490
99131 0001	1	550
91108 0062	1	600
91011 0000	2	610
91124 0228	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0000	1	630
60003 0008	2	640
91148 0360	1	650
60004 1012	2	660
91148 0381	1	655
91148 0382	1	656
63010 4104	2	665
Personal. **L_H06-Y**		
98146 5296	**1**	**1000**
98145 4427	**1**	**1010**
99951 0370	1	1030
91130 0293	1	1040
60008 1025	1	1055
60004 0010	1	1058
98127 8032	**1**	**1060**
91134 0177	**1**	**1070**
91133 0170	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
91145 0025	1	1095
91141 0372	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0089	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0001	1	1120
91146 0001	1	1125
60004 0016	1	1130


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

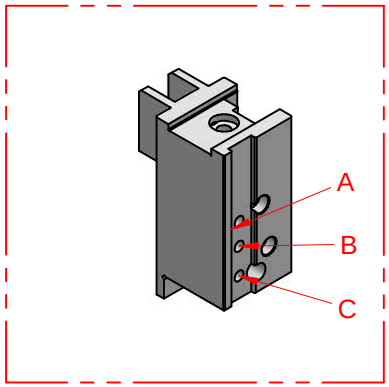













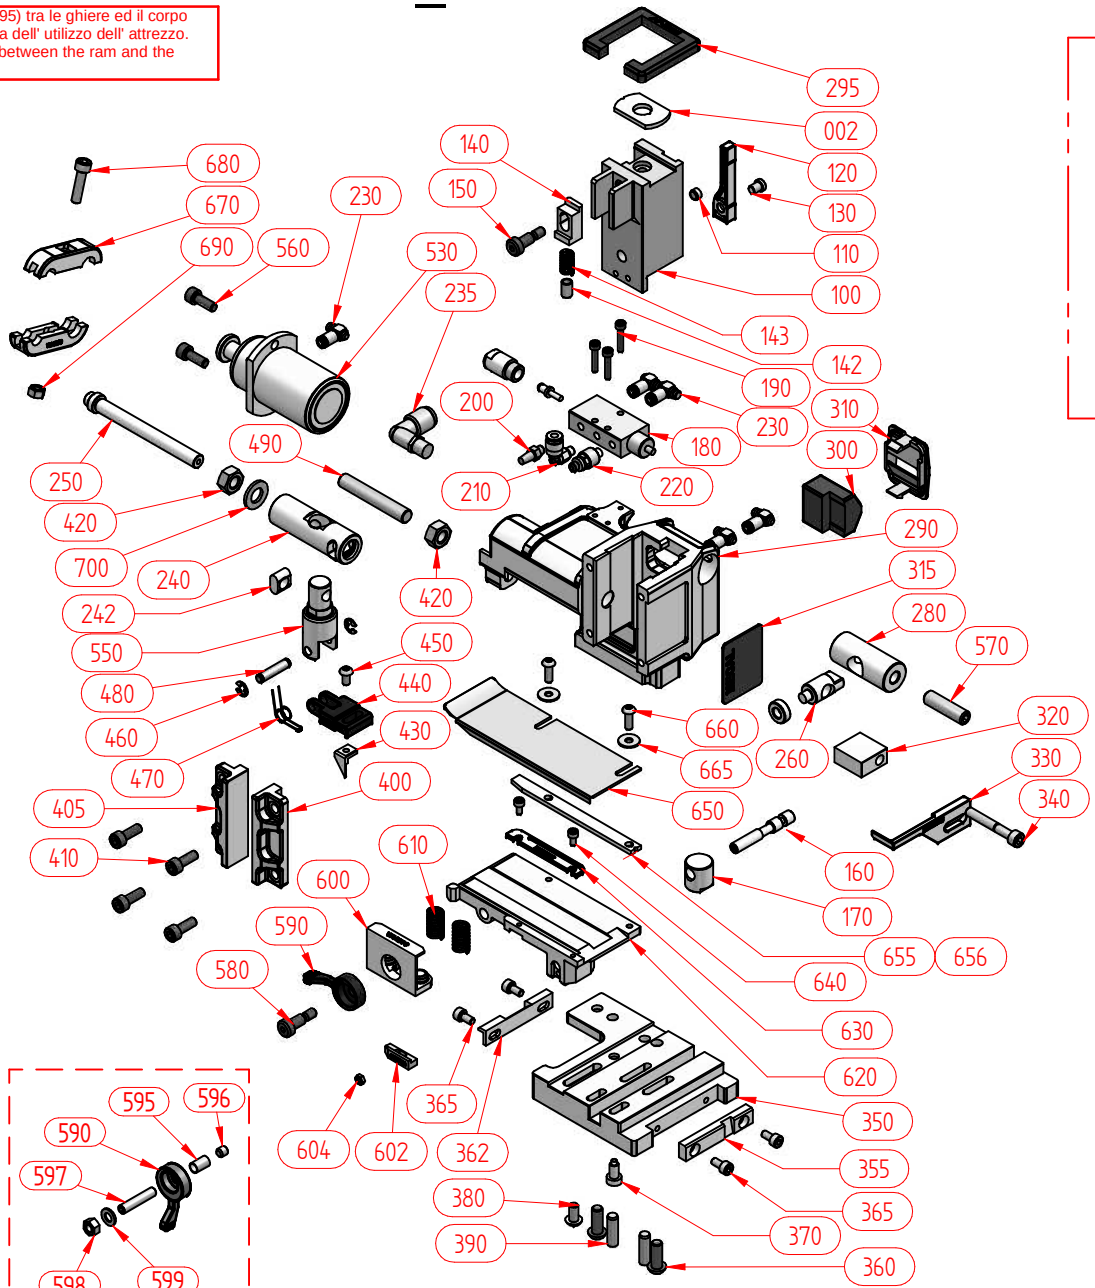

001 GHIERA TIPO "J" "COMBI"

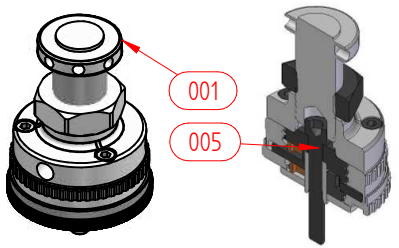

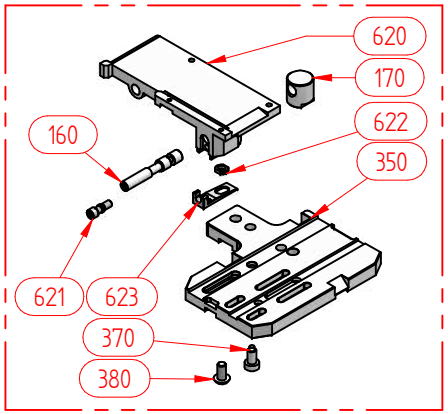

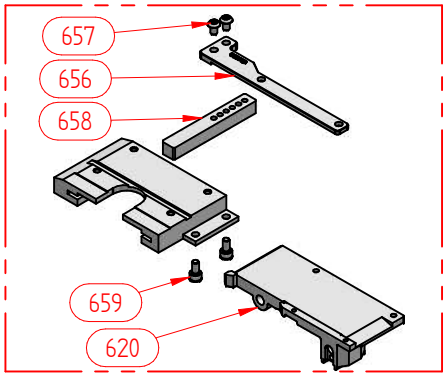

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_H06-Y

