PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L89778

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71165799 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-5799-06	**7158-3477-90**	**RSYP1497-JGAP_M**	**YSD-3500308094**	*







Anvil			
7116-5799KADM			(N)
CW (c)	3,22	*CW (i)*	6,76







Wire Crimper		
7116-5799KWM		(N)
CW	3,20	

Insulation Crimper		
7116-5799KIDM		(N)
CW	6,76	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,35	2,36	2,93
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range >2.50mm²~4.00mm².
Size 4.00mm² C/W(I)-6.78mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2023/mai/11	Date: 2023/mai/10	Date: 2023/mai/08

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L89778

LOWER WIRE KIND & SIZE

Wire kind:	FLRYB		
Wire size:	4		mm^2
Nominal Cr. Height:	2,35	6,35	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,345	6,362
2	2,352	6,348
3	2,345	6,348
4	2,353	6,346
5	2,351	6,351
6	2,355	6,354
7	2,353	6,344
8	2,346	6,353
9	2,352	6,352
10	2,355	6,344
11	2,350	6,352
12	2,355	6,354
13	2,357	6,347
14	2,349	6,352
15	2,346	6,356
16	2,354	6,356
17	2,357	6,345
18	2,356	6,349
19	2,353	6,356
20	2,357	6,355
21	2,359	6,349
22	2,348	6,357
23	2,354	6,358
24	2,360	6,344
25	2,361	6,353
26	2,366	6,363
27	2,358	6,350
28	2,352	6,344
29	2,355	6,355
30	2,360	6,356
31	2,357	6,354
32	2,350	6,360
33	2,359	6,348
34	2,352	6,353
35	2,358	6,358
36	2,361	6,351
37	2,359	6,353
38	2,351	6,358
39	2,357	6,346
40	2,362	6,346
41	2,363	6,353
42	2,351	6,358
43	2,354	6,347
44	2,358	6,351
45	2,361	6,356
46	2,356	6,360
47	2,362	6,351
48	2,365	6,350
49	2,349	6,357
50	2,352	6,358
Average	2,36	6,35
Cmk	2,93	6,50

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR P.E. LDA	RSYP1497-JGAP_M		L 89778	
	Cod. KIT K	K012284		
ORDER	**TERMINAL TO BE CRIMPED**			**A#**
4513864017	7116-5799-06			

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)
Load Cal. (Kg.) =	850		

	Setup	Fixing. Ref.▼
POSITIVE CAM (Terminal present)	X	C
NEGATIVE CAM (Terminal absent)		B
		Fixing. Ref.▲


FEEDING POINT OF THE TERMINAL				
Hole	Slot	Wire wing	Insulation wing	Other
	X			

	MECAL	S.C.	S.T.M.	Note
Specification		X		
Terminal Samples		X		
Wire Samples		X		
Housing Samples				
Seal Samples		X		7158-3477-90
Applicounter			No	
Mobile Ejector			No	
Carrier strip to be cut			Yes	
Automatic machine				


CMK	Crimp Height	Pull Force	Section	Photo
			2,50	X

Setup on	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = (mm)



CRIMPING


WIRE	INSULATION	BARREL
 F	 C	
Profile dimension Wire C. Profile Width (mm.) 3,2 (toll. +) 0,02	Profile dimension Insulation C. Profile Width (mm.) 6,76 (toll. +) 0,02	Profile dimension Barrel C. Profile Width (mm.) (toll. +)

WIRE CHARACTERISTICS


CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05	0,05		Index Insulation	0,10	0,10					Toll. ± 2 % (N.)	C.F.A. (KN.)
4,00				2,11	2,35	3,30	3,31	1,03	6,86	6,86	6,93				500	6,38
2,50				2,54	2,00	3,30	3,27	1,15	6,10	6,86	6,82				350	7,82

CHECK

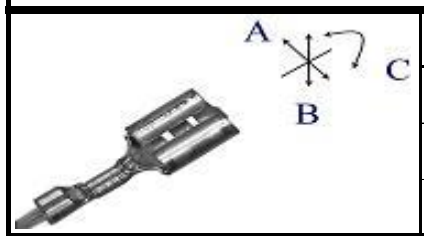

Description		Rif.	Test
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK

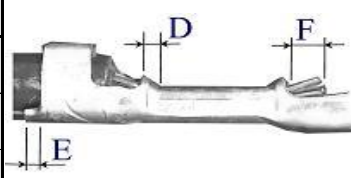

Description		Rif.	Test
Bellmouth	(0.4-0.8)	D	OK
Cut-off (max)	0.3	E	OK
Wire overlay(min.)	0.1~0.6	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
18/4/2023	*Valinotto*	*P.Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics.

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR P.E. LDA | **WIRE** | **RSYP1497-JGAP_M** | **89778**

	Terminal
	7116-5799-06
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

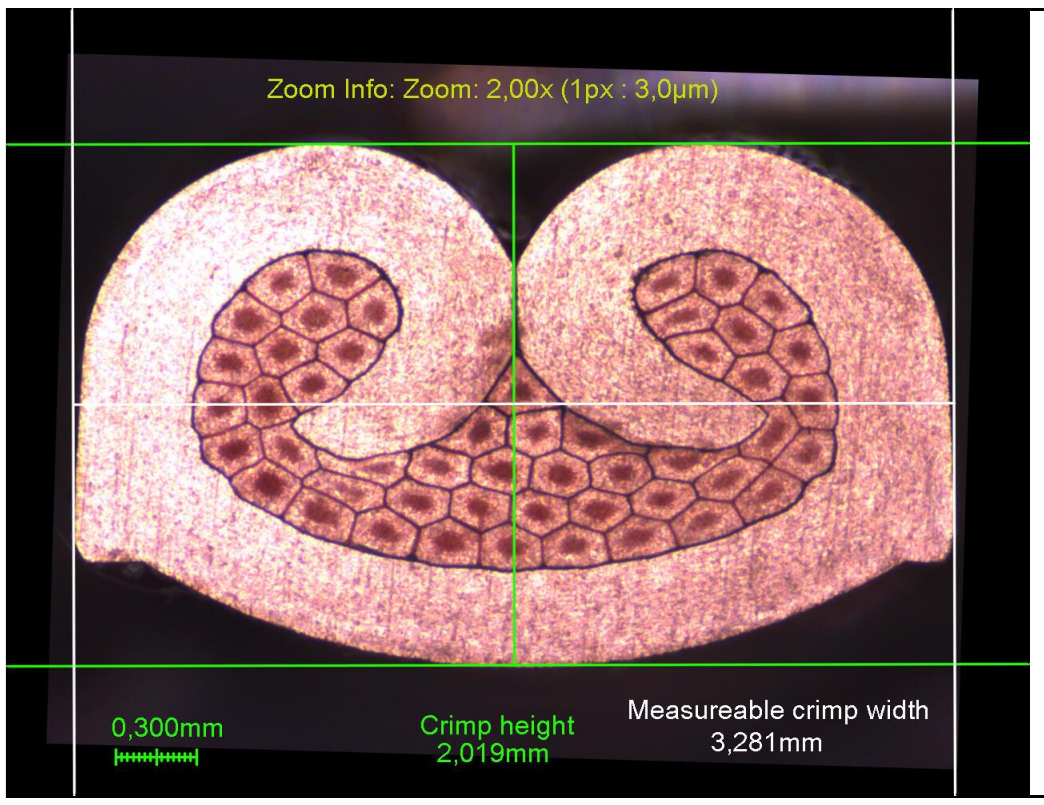

	Terminal
	7116-5799-06
Wire Section.	2,50
CH. (mm.)	2,00
C.W. (mm.)	3,27
Material Compression (%)	21,6
Wire Compression	
Terminal Compression	

	Terminal
	7116-5799-06
Wire Section.	2,50
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
18/4/2023	*Valinotto*	*P.Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA 18/04/2023

MODELLO
MODEL **RSYP1497-JGAP_M**
TYPE
MODELE

TERMINALE
TERMINAL **7116-5799-06**
KONTAKT
COSSE

MATRICOLA
SERIAL NUI **L 89778**
REGISTRIERNUMMER
MATRICULE

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0138	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041006	1	450
650242004	2	460
991350000	1	480
990010015	1	530
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
91112 0035	1	100
99101 0039	1	120
95127 0046	1	140
99132 0007	1	240
99128 0008	1	250
91103 0043	1	290
91117 0007	1	320
91118 0130	1	330
60005 0035	1	339
91125 0074	1	350
88146 0018	1	355
88146 0019	1	362
60004 0006	4	365
91106 0008	1	430
91105 0018	1	440
99017 0000	1	470
62008 5230	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0228	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0000	1	630
60003 0008	2	640
91148 0369	1	650
60004 1012	2	660
91148 0383	1	655
91148 0385	1	656
63010 4104	2	665
Personal. **L_H173-Y**		
98146 2662	**1**	**1000**
98145 2415	**1**	**1010**
99141 0150	1	1022
99951 0410	1	1030
91130 0294	1	1040
60008 1025	1	1055
60004 0010	1	1058
98127 3735	**1**	**1060**
91134 0195	**1**	**1070**
91133 0194	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0016	2	1090
60003 0006	1	1093
91145 0025	1	1095
91141 0359	1	1096
60004 0010	1	1097
62104 0010	1	1098
60004 0016	2	1100
91143 0118	1	1105
64002 0008	1	1110
91042 0000	1	1115
91145 0000	1	1120
91146 0000	1	1125
60004 0016	1	1130


REV	DATE	DESCRIPTION	REQUIRED	FITMENT
01	23/03/2023	RSYP4691-J_M	YAZAKI	
01	23/03/2023	RSYP1497-JGAP_M	YAZAKI	


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

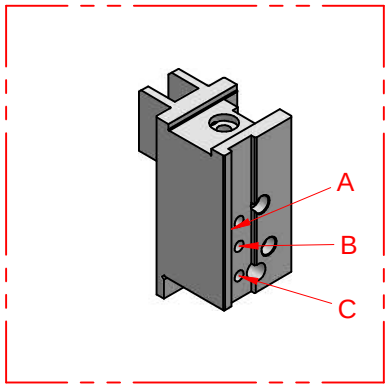













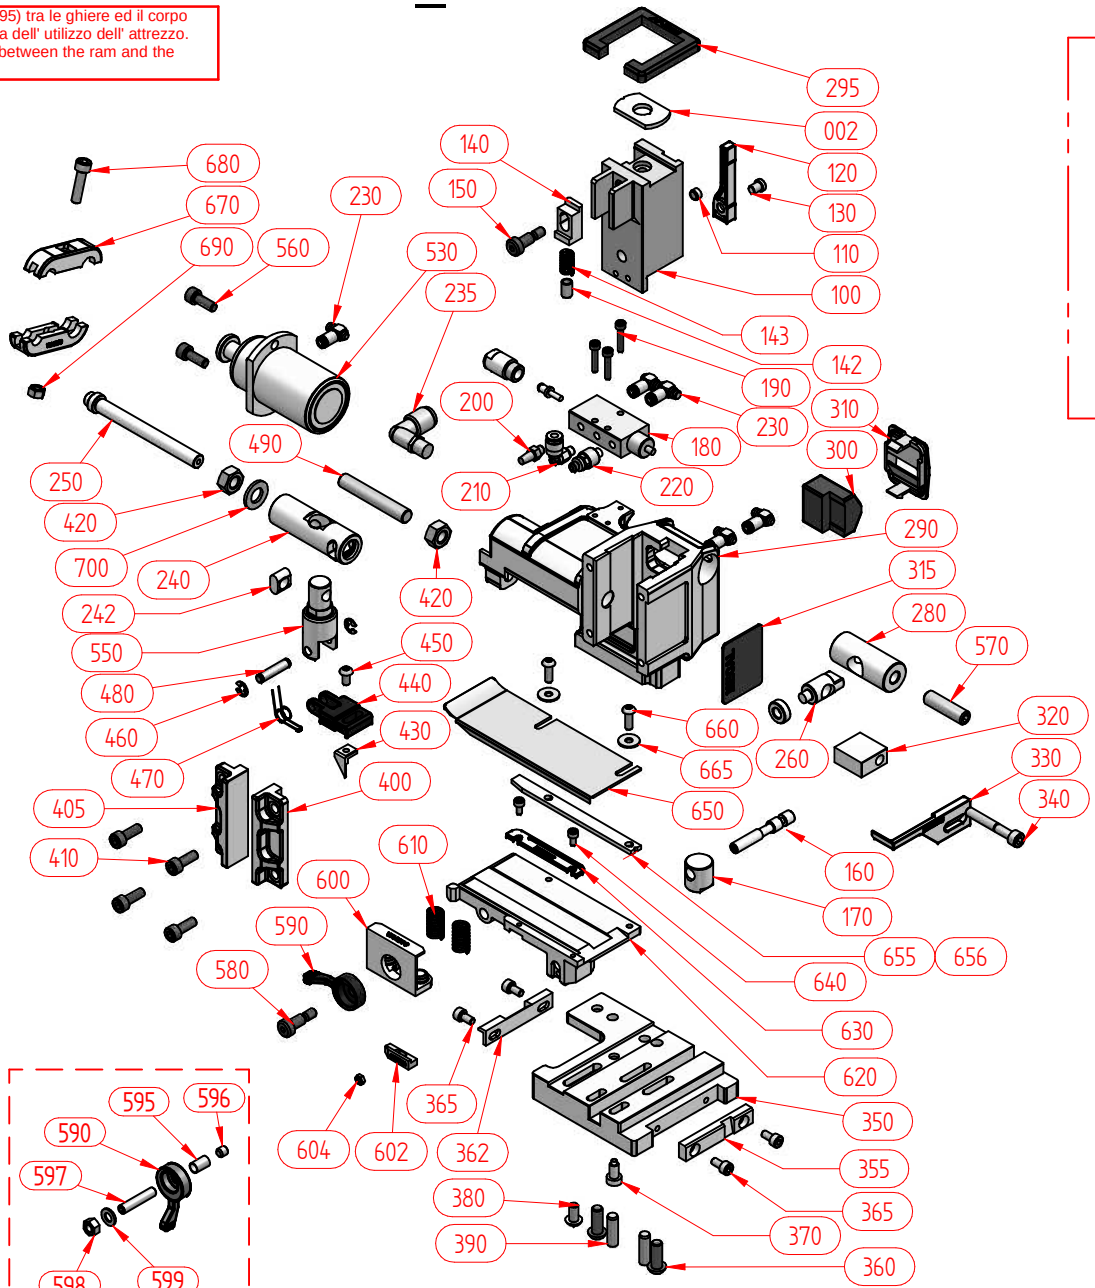

001 GHIERA TIPO "J" "COMBI"

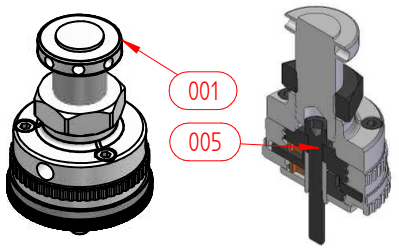


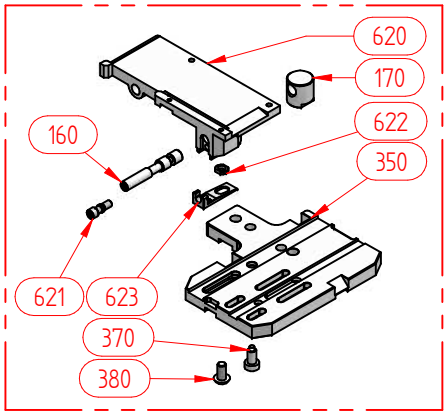


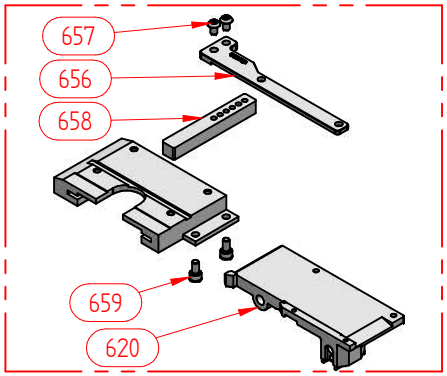

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_H173-Y

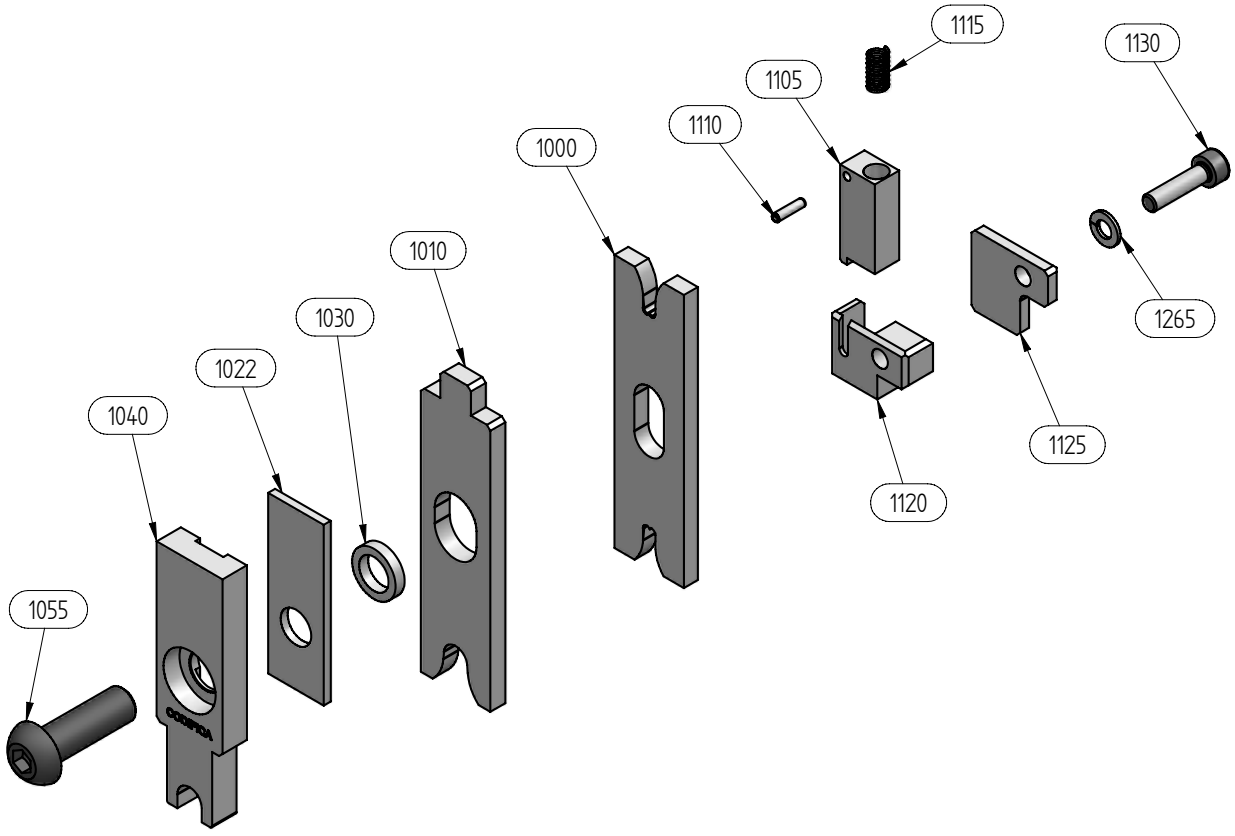

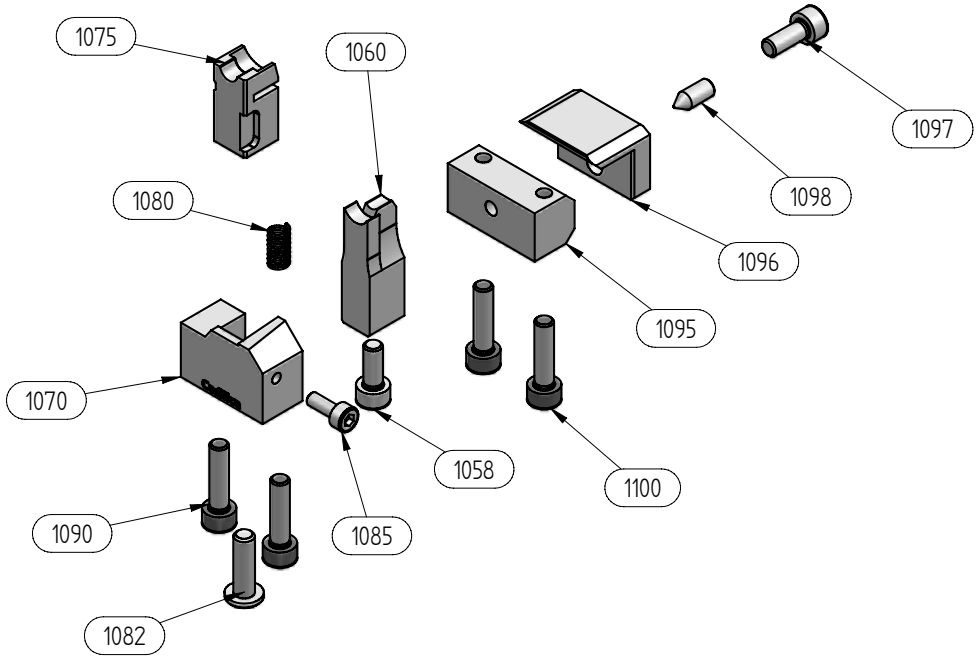

Dichiarazione di incorporazione
Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

Il fabbricante
The manufacturer

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

dichiara
declares

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

che la quasi macchina
the partly completed machinery

Miniapplicatore - Stampo Mod. RSYP1497-JGAP_M Matr. L89778 anno 2023

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

Applica e rispetta i requisiti essenziali di sicurezza
1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I
e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB

It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE

It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE

e autorizza
and authorizes

Claudio Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

a costituire il fascicolo tecnico
to compile the technical file

luogo e data 18/04/2023
place and date

Fubine

Mecal s.r.l.
Claudio Aluffo

