A2	PROSOIL	BOREHOLE NO: A-2	
		LOCATION : Near Godown Quater At 8th km Over Railway Crossing On Old Dhaka-Chitagong Road (Z-1031), Feni.	
PROJECT : 459.832m (1*39.634m+11*30.488m+3*24.400m) Long P.C. Grider Railway Overpass And 259.086 (133.996m+125.090m) Ramp.		DEPTH OF BORING : 39.0m	Chainage: 7+106 R. L. : 4.88m
CLIENT : Road Division, Feni.		DATE OF BORING : 14-05-2015.	B. W. T : 7.79m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	RL	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
4.5m	Steel casing pipe.		0	D-1	9		
4.5m	Gray 7.5 (6/1), Micaceous, silty Sand, SM.			D-2	20		
				D-3	23		
				D-4	36		
4.5m	Gray 7.5YR (5/1), medium dense to very dense, silty Sand, SM.		-5	D-5	33		
				D-6	13		
				D-7	24		
3.0m	Gray 7.5YR (5/1), Micaceous, silty Sand, SM.		-10	D-8	25		
				D-9	46		
3.0m	Gray 7.5YR (5/1), dense to very dense, fine Sand, SM.			D-10	50		OVER
3.0m	Light Gray 7.5YR (7/1), dense to very dense, fine Sand, SM.		-15	D-11	16		
				D-12	22		
7.5m	Very pale Brown 10YR (8/2), very dense, silty Sand, SM.		-20	D-13	50		OVER
				D-14	50		OVER
				D-15	50		OVER
				D-16	50		OVER
				D-17	50		OVER
			-25	D-18	50		OVER
3.0m	Gray 7.5YR (5/1), very dense, fine Sand, SM.			D-19	50		OVER
				D-20	50		OVER
6.45m	Light Gray 7.5YR (6/1), very dense, fine Sand, SM.		-30	D-21	50		OVER
				D-22	50		OVER
				D-23	50		OVER
			-35	D-24	50		OVER

RL WITH REPECT TO TOPOGRAPHY SURVEY.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY	SILT	PEAT/HIGHLY ORGANIC SOIL	UNDISTURBED SAMPLE
MICACEOUS FINE SAND/SILT	SAND	SHALE	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

A2	PROSOIL	BOREHOLE NO: P-13
		LOCATION : Near Godown Quater At 8th km Over Railway Crossing On Old Dhaka-Chitagong Road (Z-1031), Feni.
PROJECT : 459.832m (1*39.634m+11*30.488m+3*24.400m) Long P.C. Grider Railway Overpass And 259.086 (133.996m+125.090m) Ramp.		DEPTH OF BORING : 40.5m — Chainage: 7+806
CLIENT : Road Division, Feni.		DATE OF BORING : 21-05-2015. — R. L. : 5.0m — B. W. T : 7.65m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	RL	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
4.5m	Steel casing pipe.		0	D-1	12		
3.0m	Gray 7.5 (5/1), Micaceous, silty Sand, SM.			D-2	12		
7.5m	Gray 7.5YR (5/1), dense to very dense, fine Sand, SM.		-5	D-3 D-4 D-5 D-6 D-7	20 30 34 32 25		
3.0m	Gray 7.5YR (5/1), Micaceous, fine Sand, SM.		-10	D-8	23		
3.0m	Gray 7.5YR (5/1), medium dense to very dense, silty Sand, SM.			D-9 D-10	27 50		OVER
3.0m	Gray 7.5YR (5/1), medium dense to very dense, fine Sand, SM.		-15	D-11 D-12 D-13	30 9 20		
3.0m	Very pale Brown 10YR (8/2), very dense, silty Sand, SM.		-20	D-14 D-15	31 50		OVER
9.0m	Gray 7.5YR (5/1), very dense, fine Sand, SM.		-25	D-16 D-17 D-18 D-19	50 50 50 50		OVER OVER OVER OVER
3.0m	Very pale Brown 10YR (8/2), very dense, fine Sand, SM.			D-20 D-21	50 50		OVER OVER
6.45m	Light Gray 7.5YR (7/1), very dense, fine Sand, SM.		-30 -35	D-22 D-23 D-24 D-25	50 50 50 50		OVER OVER OVER OVER

RL WITH REPECT TO TOPOGRAPHY SURVEY.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')


PLASTIC CLAY	SILT	PEAT/HIGHLY ORGANIC SOIL	UNDISTURBED SAMPLE
MICACEOUS FINE SAND/SILT	SAND	SHALE	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

A2	PROSOIL	BOREHOLE NO: P-14	
		LOCATION : Near Godown Quater At 8th km Over Railway Crossing On Old Dhaka-Chitagong Road (Z-1031), Feni.	
PROJECT : 459.832m (1*39.634m+11*30.488m+3*24.400m) Long P.C. Grider Railway Overpass And 259.086 (133.996m+125.090m) Ramp.		DEPTH OF BORING : 40.5m	Chainage: 7+456 R. L. : 4.90m
CLIENT : Road Division, Feni.		DATE OF BORING : 18-05-2015.	B. W. T : 7.50m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	RL	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration

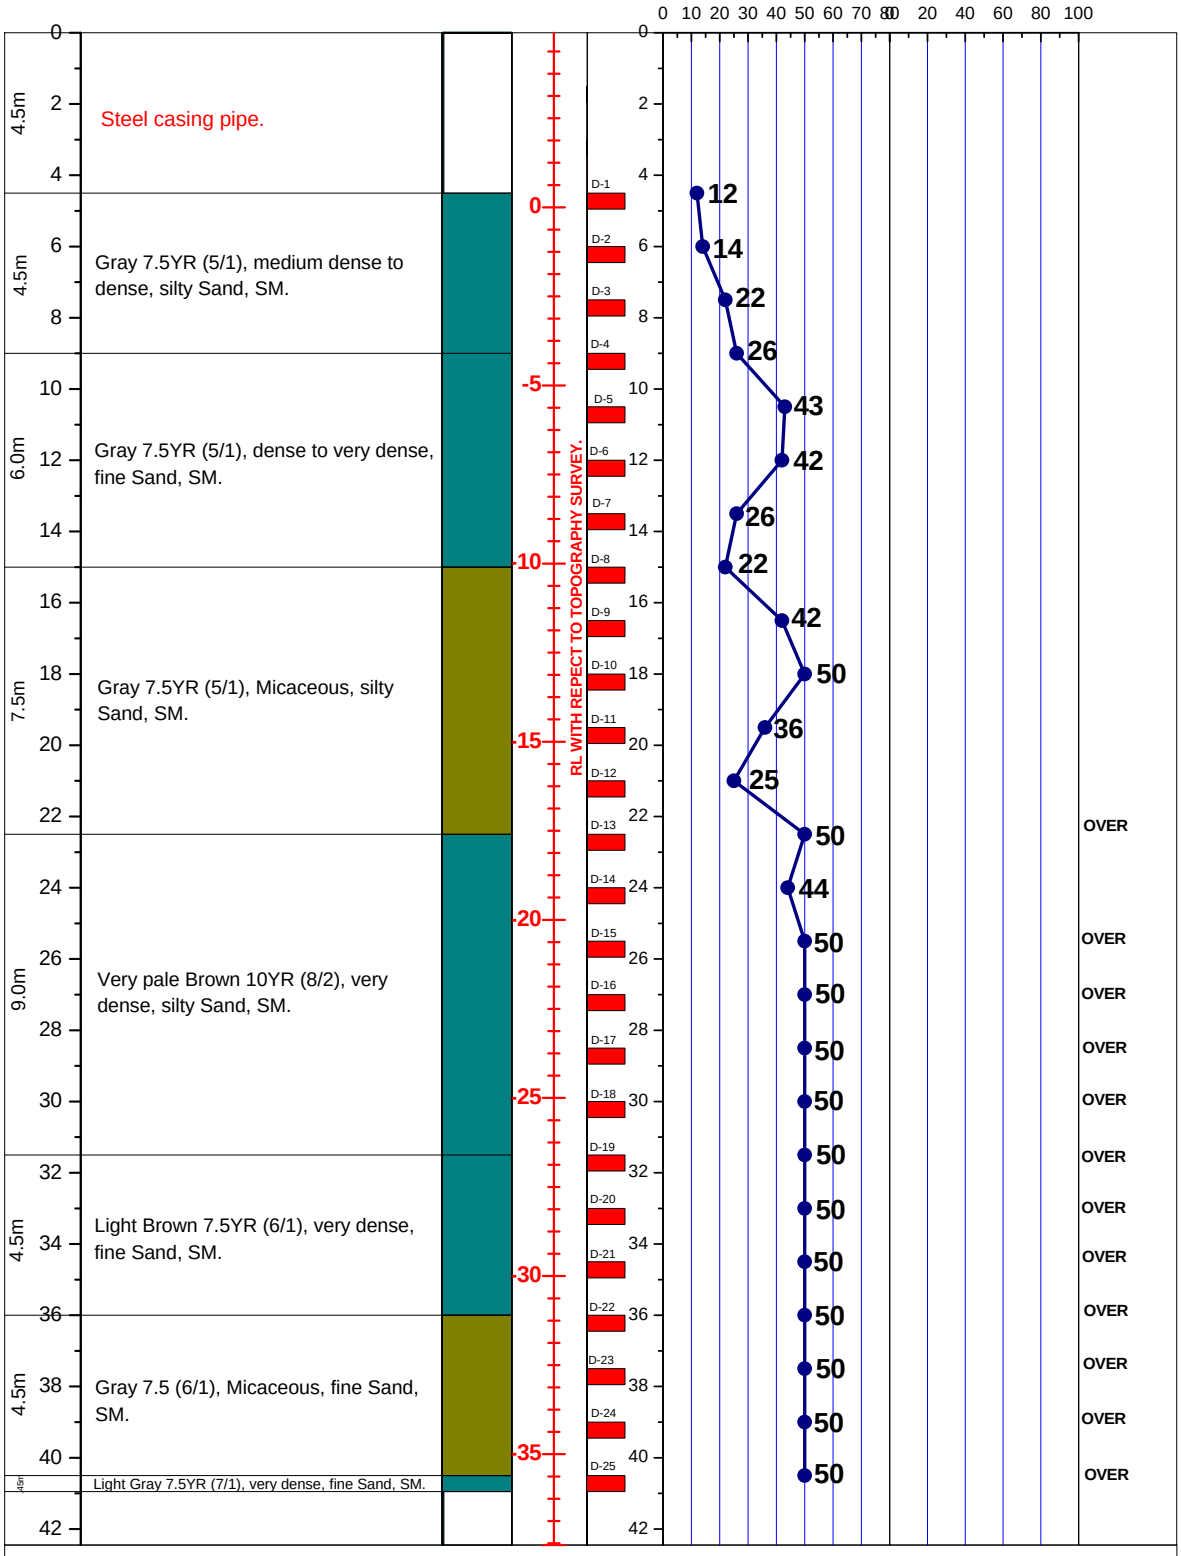

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY	SILT	PEAT/HIGHLY ORGANIC SOIL	UNDISTURBED SAMPLE
MICACEOUS FINE SAND/SILT	SAND	SHALE	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED