A2	PROSOIL	BOREHOLE NO: BH_BRRL_CTG-04	Longitude: E 91°32'44.66"	Latitude: N 22°45'38.09"
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.13m below From Road Level.
Location: Mitha Chara Bazar.		Commencement Date: 8-06-2016	Completed Date: 9-06-2016	G. W. T : 3.65m Below from E. G. L.

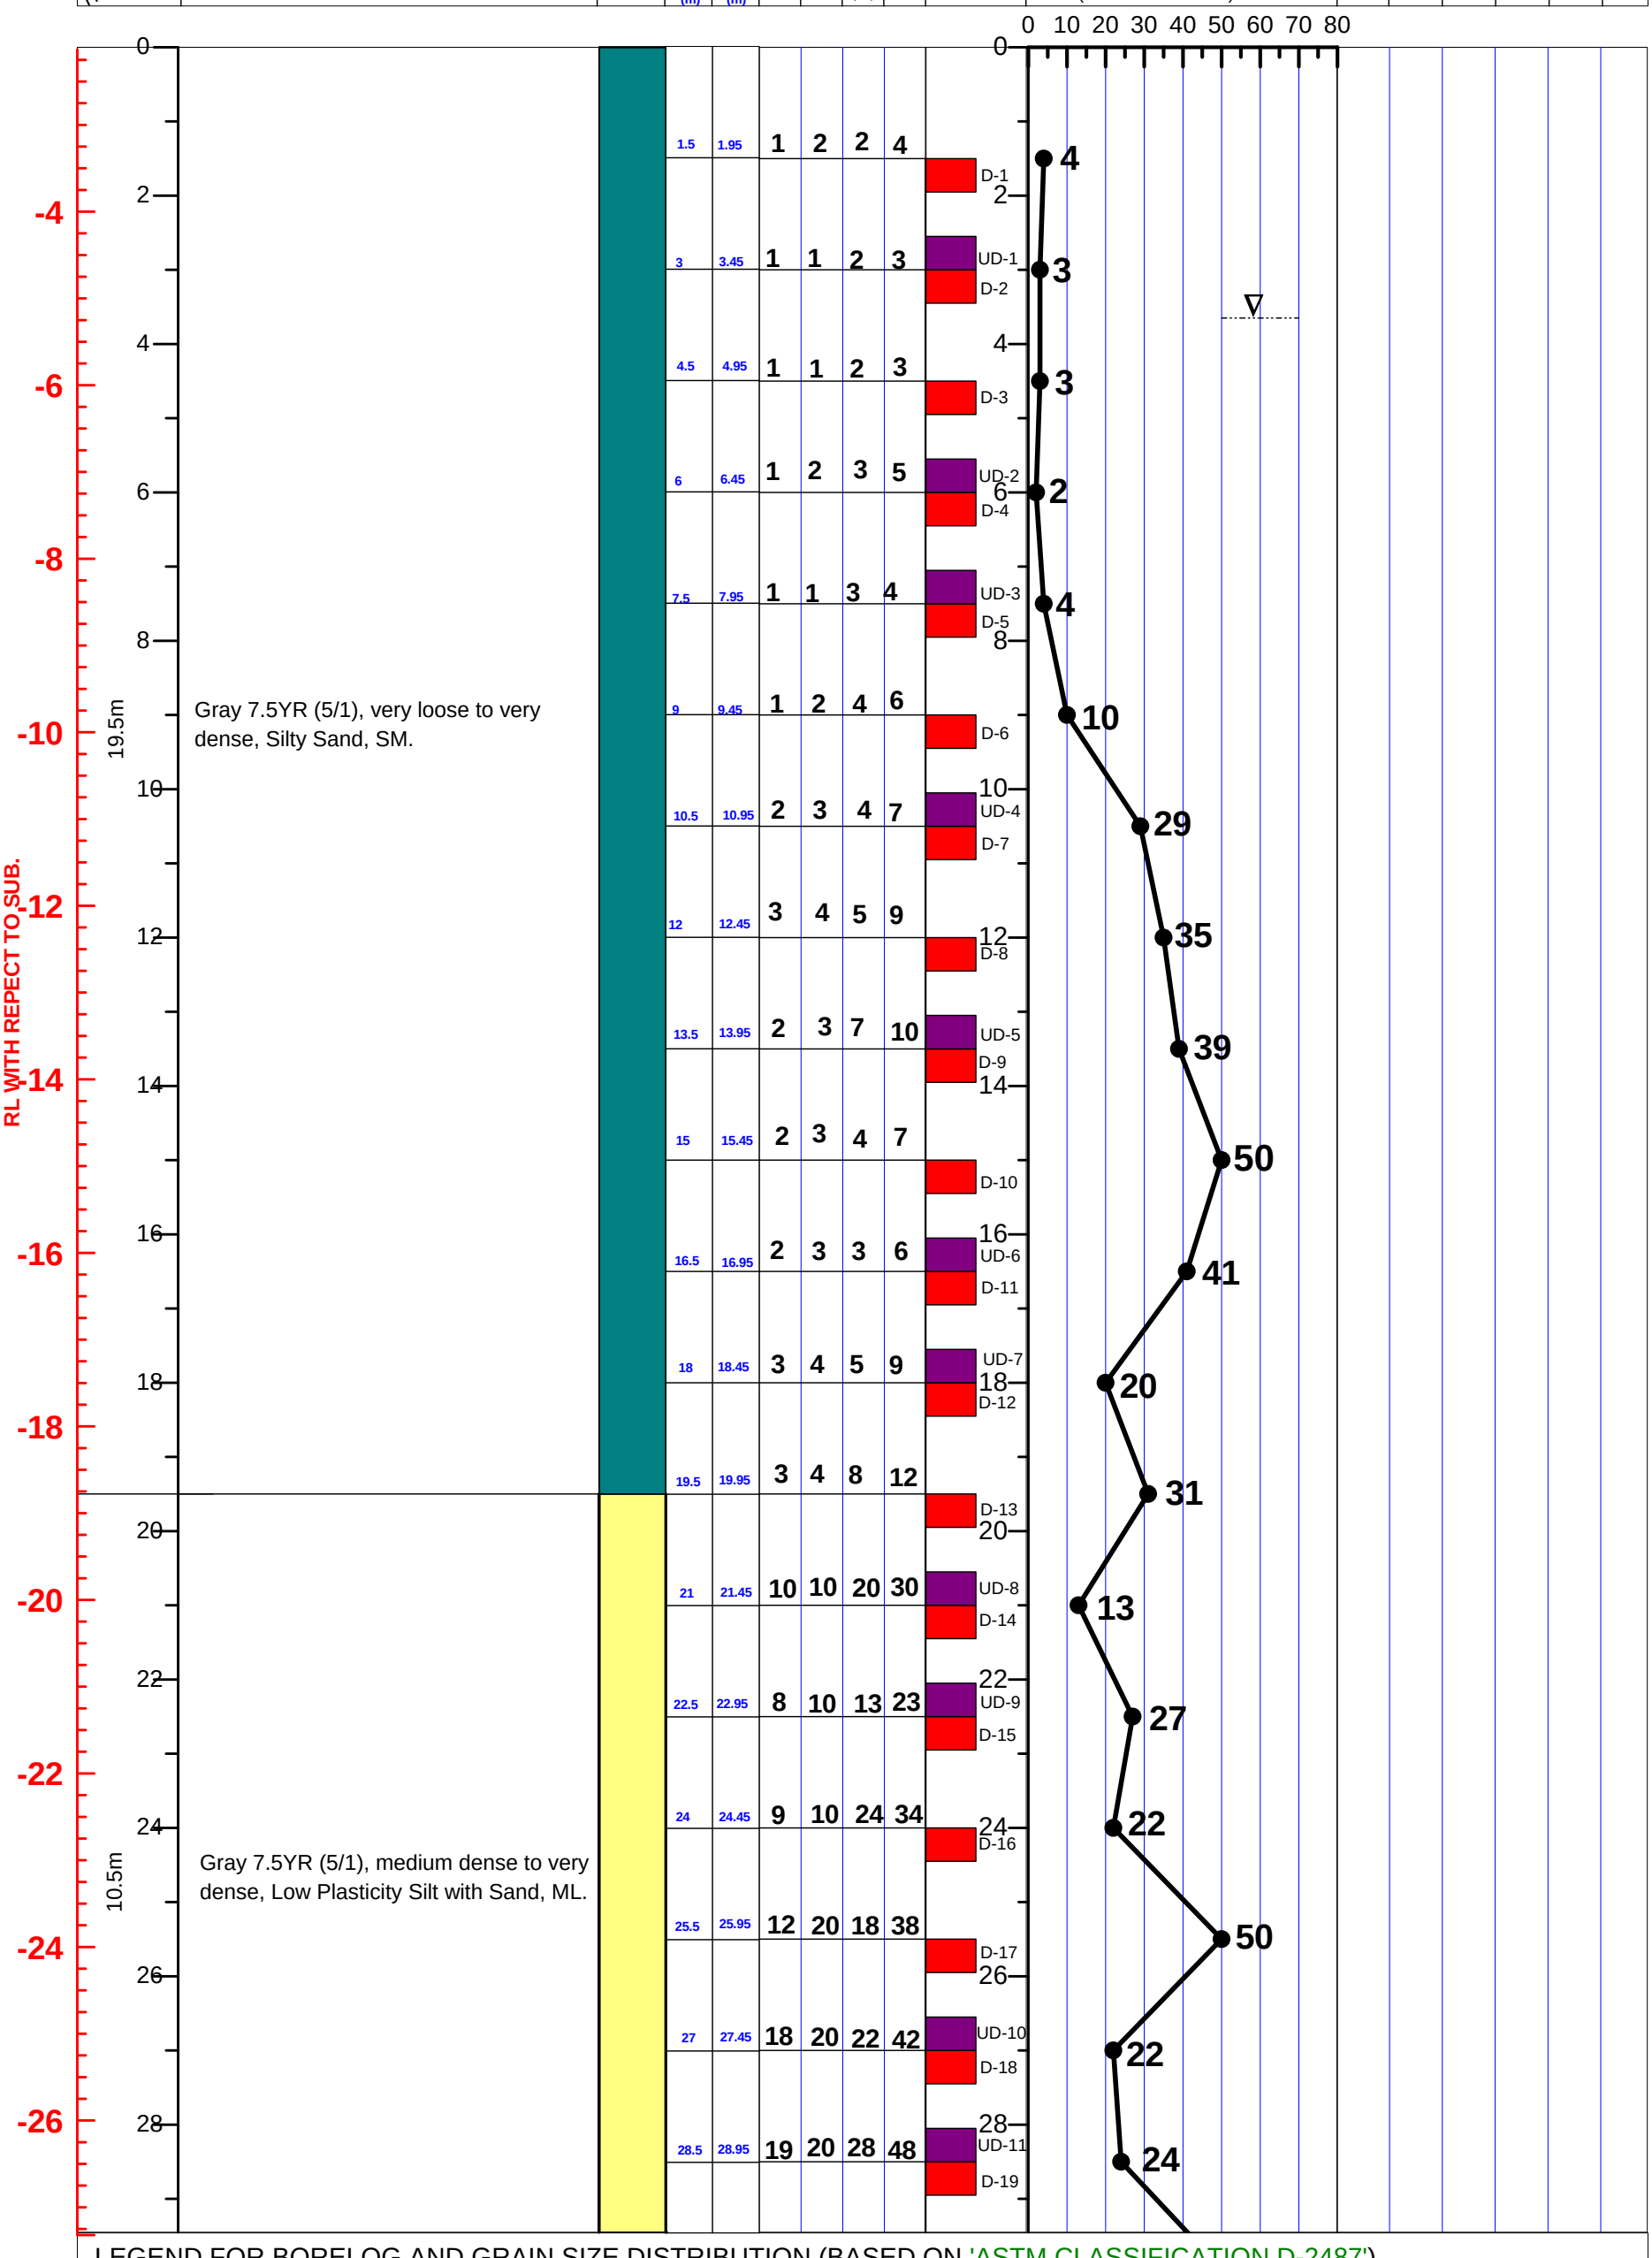

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm

01	BRRL PROSOIL	BOREHOLE NO: BH_BRRL_CTG-04	Longitude: E 91°32'44.66"	Latitude: N 22°45'38.09"
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.13m below From Road Level.
Location: Mitha Chara Bazar.		Commencement Date: 8-06-2016	Completed Date: 09-06-2016	G. W. T : 3.65m Below from E. G. L.

THICKNESS	SOIL STRATA	BORE LOG	SAMPLING From (m)	SAMPLING To (m)	SPT-N Value Blow/300mm N1=150 (mm)	N2=300 (mm)	N3=450 (mm)	N=N2+N3	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	% Sand	% Passing 200	% LL	% PI	SP Gravity	% W_n
10.5m	Gray 7.5YR (5/1), medium dense to very dense, Low Plasticity Silt with Sand, ML.		28.5	28.95	2	7	17	24	UD-11	50						
									D-19							
			30	30.45	6	2	49	51	D-20	51						
			31.5	31.95	1	11	16	27	UD-12	27						
									D-21							
			33	33.45	5	4	23	27	D-22	27						
			34.5	34.95	3	1	29	30	UD-13	30						
									D-23							
			36	36.45	1	2	23	25	UD-14	25						
									D-24							
21.45m	Gray 7.5YR (5/1), dense to very dense, Silty Sand, SM.		37.5	37.95	1	7	12	19	D-25	19						
			39	39.45	1	2	22	24	D-26	24						
			40.5	40.95	8	13	37	50	D-27	50						
			42	42.45	2	17	33	50	UD-15	50						
									D-28							
			43.5	43.95	2	6	12	18	D-29	18						
			45	45.45	11	11	21	32	D-30	32						
			46.5	46.95	5	5	19	24	D-31	24						
			48	48.45	17	17	33	50	UD-16	50						
									D-32							
			49.5	49.95	16	16	34	50	D-33	50						
			51	51.45	17	17	33	50	D-34	50						

RL WITH REPECT TO SUB.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm