A2	Tarique Hasan & Associates Ltd.	BOREHOLE NO: 32	Easting: 691375	Northing: 2851519
		LOCATION : Saidpur Airport, Saidpur, Nilphamari.		
PROJECT : Consultancy Services for Development of Saidpur, Barisal and Osmani International Airport Projects (Design Phase)		DEPTH OF BORING : 39.5m		R. L. : m
CLIENT : Civil Aviation Authority of Bangladesh.		DATE OF BORING : 14-10-2018 to 16-10-2018		B. W. T : 2.5m below from E. G. L.

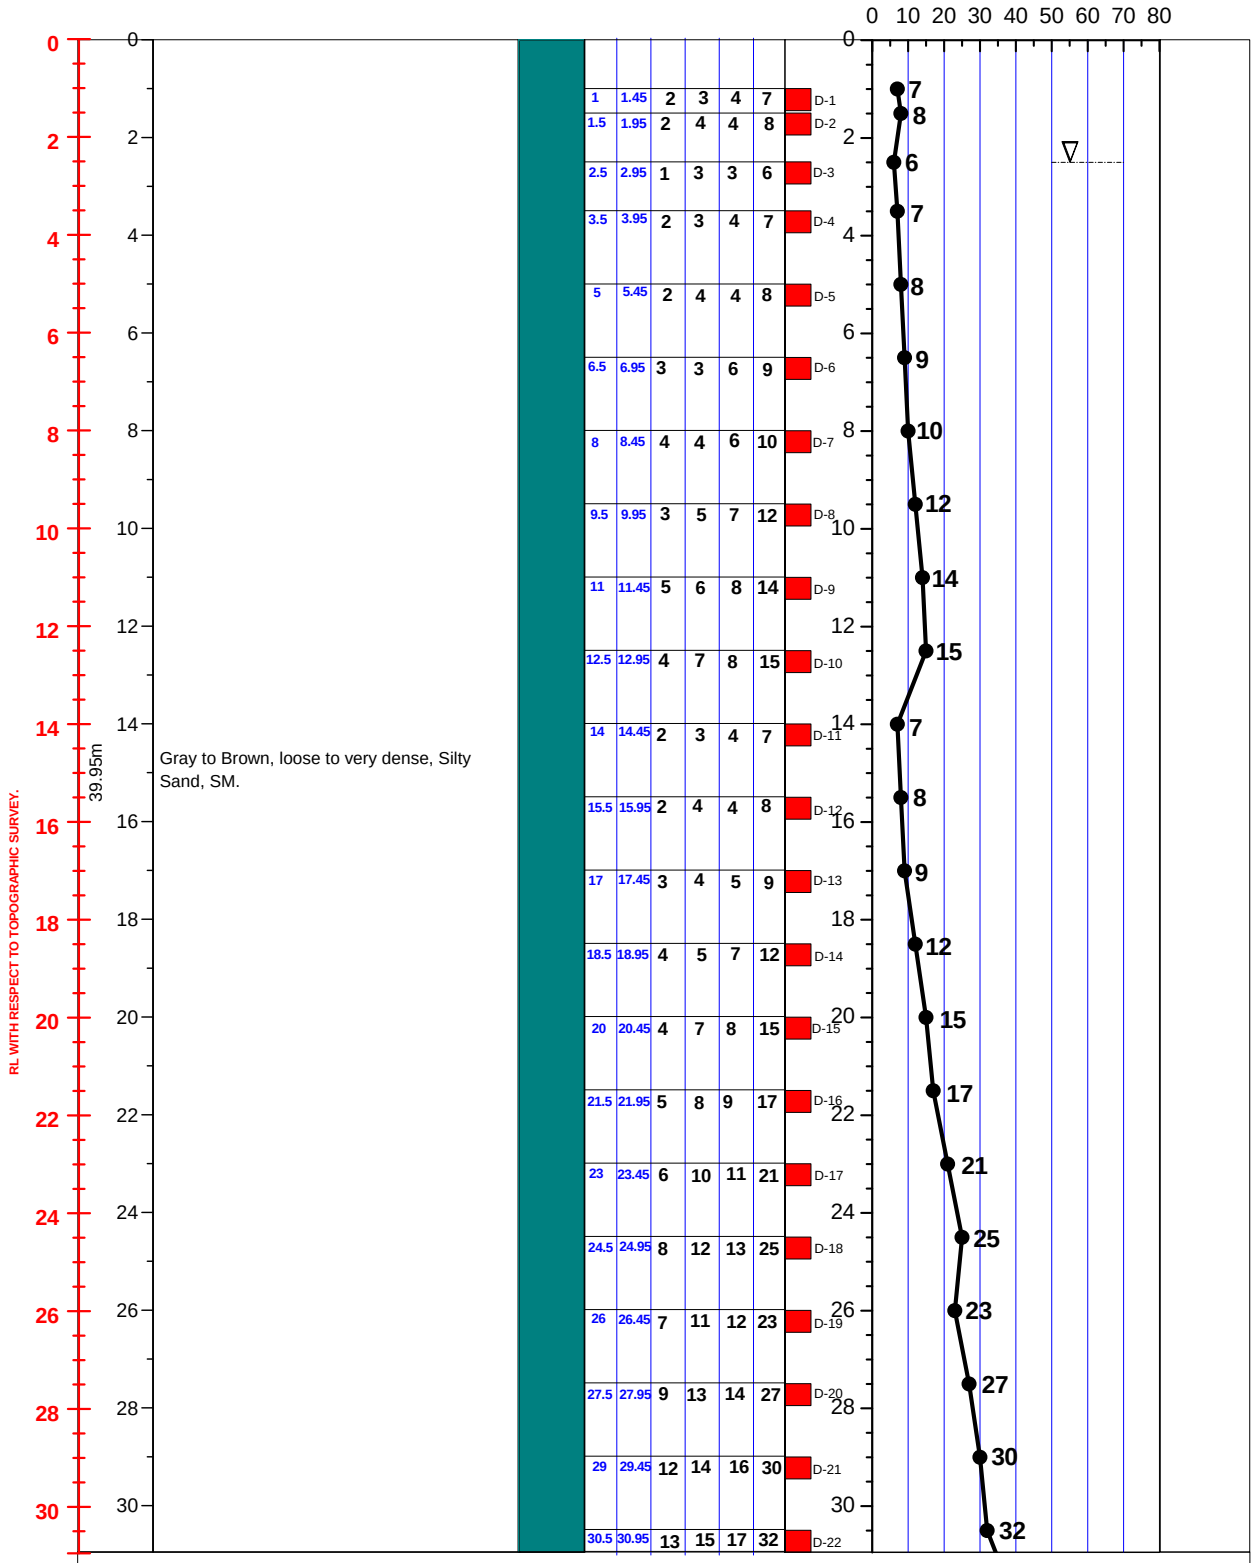

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^m PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

A2	Tarique Hasan & Associates Ltd.	BOREHOLE NO: 32	Easting: 691375	Northing: 2851519
		LOCATION : Saidpur Airport, Saidpur, Nilphamari.		
PROJECT : Consultancy Services for Development of Saidpur, Barisal and Osmani International Airport Projects (Design Phase)		DEPTH OF BORING : 39.5m		R. L. : m.
CLIENT : Civil Aviation Authority of Bangladesh.		DATE OF BORING : 14-10-2018 to 16-10-2018		B. W. T : 2.5m below from E. G. L.

RL/ THICKNESS	SOIL STRATA	BORELOG	SAMPLING FROM (m)	SAMPLING TO (m)	SPT-N Value Blow/300mm 0-150 (mm)	150-300 (mm)	300-450 (mm)	N	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Max^{m} Penetration
39.95m	Gray to Brown, loose to very dense, Silty Sand, SM.		30.5	30.95	13	15	17	32	D-22	32	
			32	32.45	17	19	21	40	D-23	40	
			33.5	33.95	15	17	20	37	D-24	37	
			35	35.45	18	20	22	42	D-25	42	
			36.5	36.95	15	26	24	50	D-26	50/270	
			38	38.45	19	27	23	50	D-27	50/250	
			39.5	39.95	20	31	19	50	D-28	50/225	

RL WITH RESPECT TO TOPOGRAPHIC SURVEY.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED