


PROCESS PUMP MOTORS

Reliable Induction Motor Solutions for Dosing, Transfer and Process Pumping

Engineered for OEM integration with custom shaft, flange and pump-duty mechanical interfaces.

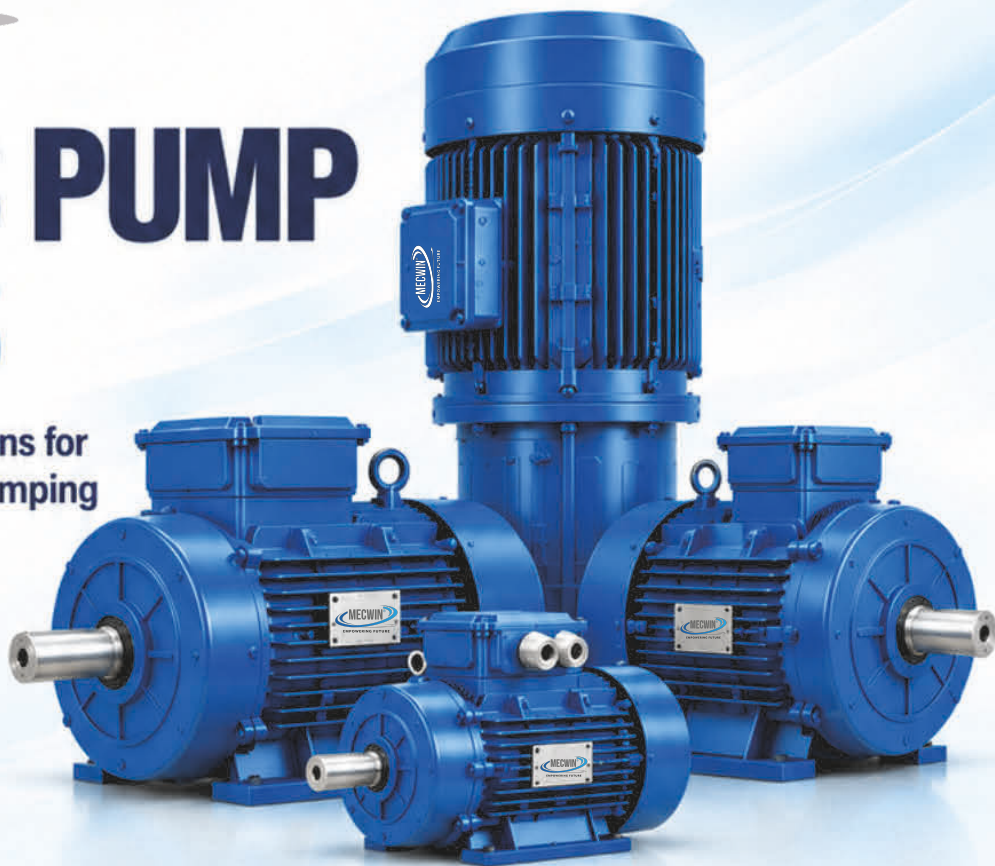

01 DIAPHRAGM & METERING PUMPS



Compact 4-pole motors for dosing systems and controlled metering duty.

02 CHEMICAL TRANSFER PUMPS



4-pole platforms for rotary gear, chemical transfer and close-coupled applications.

03 VERTICAL MULTISTAGE PUMPS



High-speed 2-pole motors for vertical multistage water and process transfer systems.

04 PROCESS CENTRIFUGAL PUMPS



2-pole and 4-pole motors for stainless, end-suction and general process pumping.



0.12 – 10 kW
Process-pump range



2 & 4 pole
50 Hz platforms



IE3
Efficiency class



IP55
Standard protection



Class F
Insulation



TECHNICAL MODEL SELECTION

Process Pump Motor Catalogue • 50 Hz • IE3



2-POLE • HIGH-SPEED PROCESS DUTY

Vertical multistage • end-suction • transfer pumps

Sl. No	Model	kW	Poles	RPM	Frame	Mat.
1	T3A631-2	0.18	2	2850	63	Al
2	T3A632-2	0.25	2	2840	63	Al
3	T3A711-2	0.37	2	2860	71	Al
4	T3A712-2	0.55	2	2860	71	Al
5	T3A801-2	0.75	2	2890	80	Al
6	T3A802-2	1.10	2	2900	80	Al
7	T3A803-2	1.50	2	2910	80	Al
8	T3A90L1-2	2.20	2	2910	90L	Al
9	T3A90L2-2	3.00	2	2910	90L	Al
10	T3A100L2-2	4.00	2	2910	100L	Al
11	T3A112M2-2	5.50	2	2920	112M	Al
12	T3A132S2-2	7.50	2	2930	132S	Al
13	T3A132M1-2	9.20	2	2930	132M	Al
14	T3A132M2-2	11.0	2	2930	132M	Al
15	T3C160M2-2	15.0	2	2940	160M	CI
16	T3C160L-2	18.5	2	2940	160L	CI
17	T3C180M-2	22.0	2	2945	180M	CI
18	T3C200L1-2	30.0	2	2945	200L	CI
19	T3C200L2-2	37.0	2	2945	200L	CI
20	T3C225M-2	45.0	2	2950	225M	CI
21	T3C250M-2	55.0	2	2960	250M	CI
22	T3C280S-2	75.0	2	2960	280S	CI
23	T3C280M-2	90.0	2	2960	280M	CI

COMMON SPECS	3-phase 50 Hz IE3 IP55 Class F S1 IC411
MOUNTING	B3 / B5 / B35
VOLTAGE	≤100: 230Δ/400Y • ≥112: 400Δ/690Y

Al = Aluminium housing | CI = Cast iron housing

Project-specific: B14 / B34 / V1 / V18, 415 V, VFD, PTC/PT100, special shaft/flange and hazardous-area configuration.

TECHNICAL MODEL SELECTION

Process Pump Motor Catalogue • 50 Hz • IE3



4-POLE • DOSING & TRANSFER DUTY

Metering • diaphragm • gear & chemical-transfer pumps

Sl. No	Model	kW	Poles	RPM	Frame	Mat.
24	T3A631-4	0.12	4	1385	63	Al
25	T3A632-4	0.18	4	1400	63	Al
26	T3A633-4	0.25	4	1395	63	Al
27	T3A712-4	0.37	4	1420	71	Al
28	T3A801-4	0.55	4	1430	80	Al
29	T3A802-4	0.75	4	1430	80	Al
30	T3A803-4	1.10	4	1430	80	Al
31	T3A90L1-4	1.50	4	1440	90L	Al
32	T3A100L1-4	2.20	4	1450	100L	Al
33	T3A100L2-4	3.00	4	1450	100L	Al
34	T3A112M1-4	4.00	4	1450	112M	Al
35	T3A112M2-4	5.50	4	1450	112M	Al
36	T3A132M1-4	7.50	4	1460	132M	Al
37	T3A132M2-4	9.20	4	1460	132M	Al
38	T3A132M3-4	11.0	4	1460	132M	Al
39	T3C160L-4	15.0	4	1450	160L	CI
40	T3C180M-4	18.5	4	1460	180M	CI
41	T3C180L-4	22.0	4	1460	180L	CI
42	T3C200L-4	30.0	4	1470	200L	CI
43	T3C225S-4	37.0	4	1470	225S	CI
44	T3C225M-4	45.0	4	1470	225M	CI
45	T3C250M-4	55.0	4	1470	250M	CI
46	T3C280S-4	75.0	4	1480	280S	CI

COMMON SPECS 3-phase | 50 Hz | IE3 | IP55 | Class F | S1 | IC411

MOUNTING B3 / B5 / B35

VOLTAGE ≤100: 230Δ/400Y • ≥112: 400Δ/690Y

Al = Aluminium housing | CI = Cast iron housing

Project-specific: B14 / B34 / V1 / V18, 415 V, VFD, PTC/PT100, special shaft/flange and hazardous-area configuration.

CONTACT US

Our Service & Support team are directly accessible in 18+ states in India. MECWIN's trained service engineers can help with site survey, system sizing, installation, commissioning and on time service support.



Mecwin Technologies India Pvt.Ltd

Manufacturing Plant

Mecwin Infinity Tech Park, #42/2, Opp. Machohalli Lake, K.G. Lakkenahalli Road, Machohalli Village, Dasanapura-2 Hobli, Bengaluru North Taluk, 560091, India

Overseas Office

12 Amber Close, Rugby CV22 5GE, United Kingdom.

Customer Care No : + 91 97412 29797

Email : marketing@mecwinindia.com



Scan to Reach Us