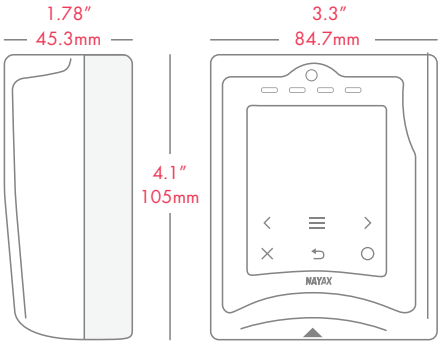


## A complete payment solution and remote secure terminal for unattended automated machine operators.

Benefit from easy installation, clearance, monitoring and management.

| Installation Environment | |
|---|---|
| Operating Temperature | -20°C to +55°C / -4°F to +131°F |
| Storage Temperature | -30°C to +85°C / -22°F to +185°F |
| Humidity | 25% to 95% (non-condensing) |
| Dust & Water Resistance | IP 55 |
| Flammability | UL-94 V0 |
| Safety | CE, FCC, RoHS |

| Physical Dimensions | |
|---|---|
| Hight | 105 mm / 4.1 inch |
| Width | 84.7 mm / 3.3 inch |
| Depth | 45.3 mm / 1.78 inch |
| Weight | 230 grams / 8.1 ounces |

| Interface & Management | |
|---|---|
| Display | Color Touch LCD screen 2.4 inch, 320 x 240 Pixels + 4 LEDs + 6 touch buttons |
| Architecture | ARM Technology – 2 x Cortex, 32 bit, 180/216MHz |
| Audio | Speaker + Buzzer |
| Localization | Multi language support - LCD text & voice audio instructions |
| Security | Support DES, 3DES, AES, RSA, ECC, SHA1 algorithms, Random Number Generator |
| Power Supply | 12-42V DC, 12-24V AC; 5 Watts. Recommended External Power Supply: 24V DC / 2Amp |
| Anti-vandal | Internal shock/tilt detector, anti-vandal Dragontrail glass |
| Power Loss Protection | Super Caps with safe shutdown mechanism |
| External Interface | Ethernet, 2 X RS232 (RS232 or TTL level through SW), External reader, 1 X door open sensor, 1 X temperature sensor |
| Pulse Input/Output | 6 pulse input/output interfaces + 1 Inhibit input |
| Communication | 3G/4G/Ethernet/NFC |
| Vending Machine Protocols | MDB / DEX / DDCMP / Pulse / VCCS / ccTalk / JVMA |

| Payment Support | |
|---|---|
| Contact | EMV Level 1 , EMV Level 2 |
| Magnetic Stripe | ISO 7811 and JIS I Tracks 1,2,3 JIS I |
| Other Cards Supported | 13.56 MHz : NFC, MIFARE, ISO 14443 Type A and B, ISO 15693, SONY® FeliCa |
| Contactless | Level 2: Visa payWave, MasterCard PayPass, Interac Flash,UnionPay qPBOC, AMEX ExpressPay, JCBJ/Speedy, FeliCa, Interac Flash, , Discover D-PAS, CUP QuickPass, SuiCa |

**Let Nayax help your business maximize your profits!**

# VPOS Touch

All-in-one card reader and telemetric terminal

## Engage your consumer. Promote your business.

A complete M2M telemetry and cashless payment solution ideally suited for unattended machines in multiple markets.

### One device that accepts all cashless payments and transmits data in real time.

- Debit and Credit cards
- Mobile and NFC Payments
- Swipe, contact and contactless
- Prepaid cards and closed environment solutions
- QR codes

## 01 Part of a complete solution

- Seamlessly integrated with telemetry, cashless clearance, monitoring, management and BI
- Monitor machines in real-time with continuously updated information on all aspects of operation
- Inventory, cash monitoring, alerts and reports
- Switch to technician mode to monitor visits

## 02 Communicate with your consumers

- Voice interaction, in local language
- Multi-language display capability
- Enables mobile payments and NFC
- Customizable color touchscreen

## 03 Marketing and loyalty promotions

- Increase consumer engagement
- Boost sales for regular customers
- Punch cards, discounts, gamification and more

## 04 Plug and Play

- Easy to install
- Remote software updates
- Durable and highly secured to prevent vandalism
- Applicable to all automated machines