

Battery Shipments Authorized for International Ocean Transport to/from US

Packing Instruction P903

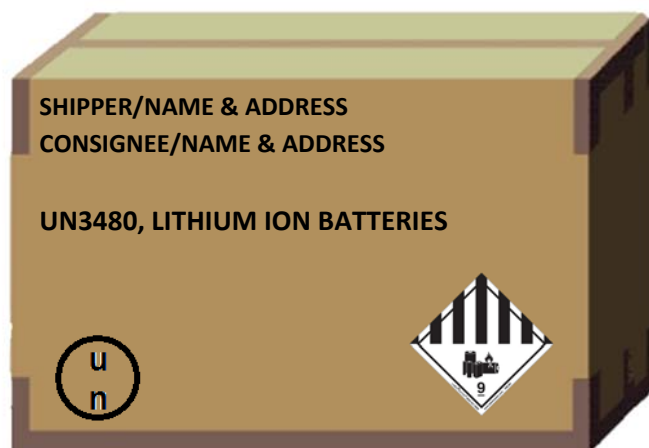
Customer Defined Shipment Specifications



- Watt-hour rating is ≤ 20 Wh/cell or ≤ 100 Wh/battery
- The gross weight of the package exceeds 30 kg (66 lbs.)

Packaging Requirements

- Cells and batteries protected to prevent short circuits, movement, and accidental activation
- Inner packagings that completely enclose the cell or battery
- Completed packagings must meet Packing Group II standards, except:
 - Lithium batteries that weigh 12 kg (26.5 pounds) or more and have a strong, impact-resistant outer casing may be placed in strong outer packagings; protective enclosures; or on pallets or other handling devices, instead of UN performance packaging

Marking and Labeling Requirements



UN3480, LITHIUM ION BATTERIES	UNID, Proper Shipping Name
	Appropriate UN Certification marking
	Class 9 Lithium Battery label



Battery Shipments Authorized for International Ocean Transport to/from US

Packing Instruction P903

Documentation Requirements

1. Include document (any form) with the following information:
 - Contains all of the information required by the IMDG code
 - Emergency response information required as per 49 CFR, Subpart G of Part 172
2. Additional emergency response information or documentation may be required as per carrier(s)

10 Vessel/Flight & Date	11 Port/Place Handling	2 Additional Handling Information 24 Hour Emergency Contact Name: XXXXX 24 Hour Emergency Contact Number: xxx-xxx-xxxx		
12 Port/Place of Discharge	13 Destination			
14 Shipping Marks	*Number & Kind of Packages, Description of Goods	NW	GW (kg)	CUBE (m³)
1 box	UN3480, Lithium Ion Batteries, 9, F-A, S-I		35 kg G	

