1.5mm²-2.5mm² Halogen free Polycarbonate insulated pin terminal 7.8mm pin length blue
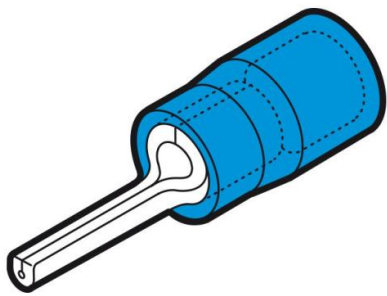
Technical

Conductor Size Min (mm²)	1.5
Conductor Size Max (mm²)	2.5
Conductor Type	Copper
Terminal Type	Insulated pin
Pin Length (mm)	7.8
Max. Voltage Rating (kV)	0.6
Inspection Hole	N/A
Suitable for Indoor Use? (no exposure to water or moisture)	Yes
Suitable for Outdoor Use? (exposure to water and moisture)	No
Insulated?	Partially
Insulation Material	Polycarbonate
Insulation Colour	Blue
Halogen Free?	Yes
Flammability Rating (UL94)	V0
Max. Operating Temperature (°C)	115
Surge Operating Temperature (°C)	130
Min. Operating Temperature (°C)	-20
UL Listed?	Yes
UL Listing File Number	E125401
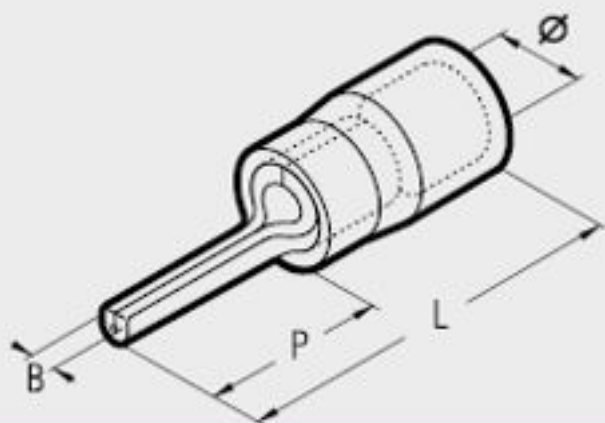
Ref.	Dimensions mm			
	Ø	B	P	L
VP-P 10	3,0	1,0	9,8	20,2
RP-P 8	4,0	1,6	7,8	17,9
RP-P 10	4,0	1,6	9,8	19,9
RP-P 12	4,0	1,6	12,0	22,1
BP-P 8	4,9	1,7	7,8	17,9
BP-P 10	4,9	1,8	9,8	19,9
BP-P 12	4,9	1,8	11,8	21,9
GP-P 10	6,6	2,2	10,4	24,5
GP-P 12	6,6	2,2	12,6	26,7
GP-P 14	6,6	2,2	14,6	28,7