


M6e Family Hardware Guide

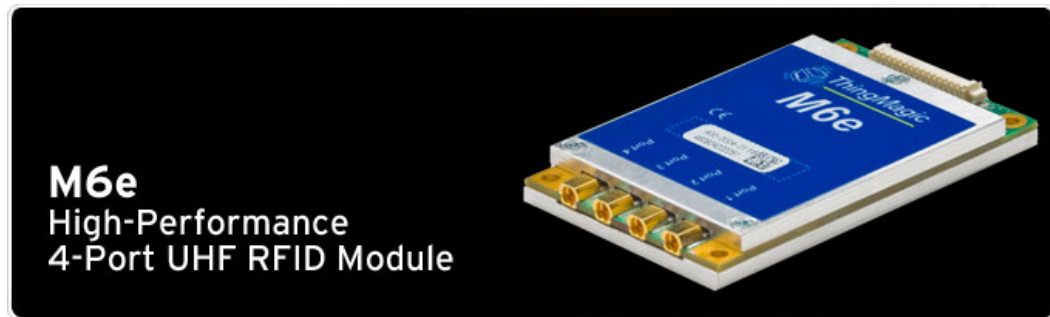

**For: M6e, M6e-a, M6e-PRC, and M6e-JIC modules
Firmware Ver. 1.19.0 and later
(M6e-JIC module requires firmware version 1.21.0 or higher)**

Government Limited Rights Notice: All documentation and manuals were developed at private expense and no part of it was developed using Government funds.

The U.S. Government's rights to use, modify, reproduce, release, perform, display, or disclose the technical data contained herein are restricted by paragraph (b)(3) of the Rights in Technical Data — Noncommercial Items clause (DFARS 252.227-7013(b)(3)), as amended from time-to-time. Any reproduction of technical data or portions thereof marked with this legend must also reproduce the markings. Any person, other than the U.S. Government, who has been provided access to such data must promptly notify ThingMagic.

ThingMagic, Mercury, Reads Any Tag, and the ThingMagic logo are trademarks or registered trademarks of ThingMagic, A Division of Trimble.

Other product names mentioned herein may be trademarks or registered trademarks of Trimble or other companies.

©2013 ThingMagic – a division of Trimble Navigation Limited. ThingMagic and The Engine in RFID are registered trademarks of Trimble Navigation Limited. Other marks may be protected by their respective owners. All Rights Reserved.

ThingMagic, A Division of Trimble
1 Merrill Street
Woburn, MA 01801

Tel: 886-833-4069 / +1.617.499.4090

09 Revision A
March, 2016

Revision Table

Date	Version	Description
4/2010	01 RevA	First Draft for Beta release
8/2010	01 RevB	<ul style="list-style-type: none">• Updated GPIO content• Added FCC regulation info section
12/2010	02 Rev1	Updated for GA release <ul style="list-style-type: none">• new devkit content• added approved antennas list• updated power consumption data• updated Gen2 settings
2/2011	02 Rev2	Updated Regulatory info
5/2011	03 RevA	<ul style="list-style-type: none">• Added M6e-A info• updated ESD info
1/2012	04 RevA	<ul style="list-style-type: none">• updated devkit getting started section• added new M6e-PRC frequency range info• new ISO6b settings, including delimiter specific info
2/2012	05 RevA	<ul style="list-style-type: none">• fixed ISO6b delimiter information
7/2012	06 RevA	<ul style="list-style-type: none">• added warnings about using TTL interface in continuous reading mode.• Added new 128 byte limit to tag read data metadata• added info on new Universal Reader Assistant 2.
2/2013	07 RevA	<ul style="list-style-type: none">• Corrected default bootloader/RESET mode baud rate to 115200• Corrected RESET line pull-down resistance to 1.5kohms
9/2013	08 RevA	<ul style="list-style-type: none">• added antenna detection requirements info

Date	Version	Description
3/2016	09 RevA	<ul style="list-style-type: none">• Incorporated more information about module variants - M6e-A, M6e-PRC, M6e-JIC• Mentioned antenna detection via return loss measurement, introduced in FW 1.19.0• Mentioned saving settings and autonomous operation, introduced in FW 1.19.0.• Removed notes on limitations, which have since been eliminated by subsequent firmware revisions (see release notes for details)• Updated address in cover copyright• All references to “CN” region changed to “PRC2”

Contents

Communication Regulation Information	11
M6e	12
Federal Communication Commission Interference Statement	12
Industry Canada	14
Industrie Canada 15	
Authorized Antennas	16
M6e-A	17
Federal Communication Commission Interference Statement	17
Industry Canada	19
Industrie Canada 20	
Mercury6e Introduction	21
Hardware Overview	23
Hardware Interfaces	24
Antenna Connections	24
Antenna Requirements	24
Digital/Power Connector	25
Control Signal Specification	26
General Purpose Input/Output (GPIO)	27
Reset Line	29
Power Requirements	30
RF Power Output	30
Special RF Power Output Requirements for the M6e-A	30
Power Settings for Authorized Antennas and Cables	30
Power Supply Ripple	31
Power Consumption	32
Environmental Specifications	33
Operating Temperature	33
Electro-Static Discharge (ESD) Specification	33
Assembly Information	34
Cables and Connectors	34
Digital Interface	34
Antennas	34

M6e Mechanical Drawing	35
Authorized Antennas	36
M6e-A Authorized Cables	37
Firmware Overview	39
Boot Loader	40
Application Firmware	41
Programming the M6e	41
Upgrading the M6e	41
Verifying Application Firmware Image	41
Custom On-Reader Applications	42
Communication Protocol	43
Serial Communication Protocol	44
Host-to-Reader Communication	44
Reader-to-Host Communication	45
CCITT CRC-16 Calculation	45
User Programming Interface	46
Functionality of the Mercury6e	47
Regulatory Support	48
Supported Regions	48
Frequency Setting	49
Frequency Units	50
Frequency Hop Table	51
Protocol Support	53
ISO 18000-6C (Gen2)	53
Protocol Configuration Options	53
Protocol Specific Functionality	54
I-PX	54
Protocol Configuration Options	54
ISO 18000-6B	54
Protocol Configuration Options	54
Antenna Ports	56
Using a Multiplexer	56
Port Power and Settling Time	58
Tag Handling	60
Tag Buffer	60

Tag Streaming/Continuous Reading	60
Tag Read Metadata	62
Power Management	63
Power Modes	63
Transmit Modes	63
DRM Compliant Mode	64
Power Save Mode (non-DRM Compliant)	64
Performance Characteristics	65
Event Response Times	65
Save and Restore Configuration	66
Appendix A: Error Messages	67
Common Error Messages	67
FAULT_MSG_WRONG_NUMBER_OF_DATA – (100h)	67
FAULT_INVALID_OPCODE – (101h)	67
FAULT_UNIMPLEMENTED_OPCODE – 102h	68
FAULT_MSG_POWER_TOO_HIGH – 103h	68
FAULT_MSG_INVALID_FREQ_RECEIVED (104h)	69
FAULT_MSG_INVALID_PARAMETER_VALUE - (105h)	69
FAULT_MSG_POWER_TOO_LOW - (106h)	69
FAULT_UNIMPLEMENTED_FEATURE - (109h)	69
FAULT_INVALID_BAUD_RATE - (10Ah)	70
Bootloader Faults	71
FAULT_BL_INVALID_IMAGE_CRC – 200h	71
FAULT_BL_INVALID_APP_END_ADDR – 201h	71
Flash Faults	72
FAULT_FLASH_BAD_ERASE_PASSWORD – 300h	72
FAULT_FLASH_BAD_WRITE_PASSWORD – 301h	72
FAULT_FLASH_UNDEFINED_ERROR – 302h	73
FAULT_FLASH_ILLEGAL_SECTOR – 303h	73
FAULT_FLASH_WRITE_TO_NON_ERASED_AREA – 304h	73
FAULT_FLASH_WRITE_TO_ILLEGAL_SECTOR – 305h	73
FAULT_FLASH_VERIFY_FAILED – 306h	74
Protocol Faults	75
FAULT_NO_TAGS_FOUND – (400h)	76
FAULT_NO_PROTOCOL_DEFINED – 401h	76
FAULT_INVALID_PROTOCOL_SPECIFIED – 402h	76
FAULT_WRITE_PASSED_LOCK_FAILED – 403h	77
FAULT_PROTOCOL_NO_DATA_READ – 404h	77

FAULT_AFE_NOT_ON – 405h	77
FAULT_PROTOCOL_WRITE_FAILED – 406h	78
FAULT_NOT_IMPLEMENTED_FOR_THIS_PROTOCOL – 407h	78
FAULT_PROTOCOL_INVALID_WRITE_DATA – 408h	78
FAULT_PROTOCOL_INVALID_ADDRESS – 409h	78
FAULT_GENERAL_TAG_ERROR – 40Ah	79
FAULT_DATA_TOO_LARGE – 40Bh	79
FAULT_PROTOCOL_INVALID_KILL_PASSWORD – 40Ch	79
FAULT_PROTOCOL_KILL_FAILED – 40Eh	79
FAULT_PROTOCOL_BIT_DECODING_FAILED – 40Fh	80
FAULT_PROTOCOL_INVALID_EPC – 410h	80
FAULT_PROTOCOL_INVALID_NUM_DATA – 411h	80
FAULT_GEN2_PROTOCOL_OTHER_ERROR – 420h	80
FAULT_GEN2_PROTOCOL_MEMORY_OVERRUN_BAD_PC – 423h	81
FAULT_GEN2_PROTOCOL_MEMORY_LOCKED – 424h	81
FAULT_GEN2_PROTOCOL_INSUFFICIENT_POWER – 42Bh	81
FAULT_GEN2_PROTOCOL_NON_SPECIFIC_ERROR – 42Fh	82
FAULT_GEN2_PROTOCOL_UNKNOWN_ERROR – 430h	82
Analog Hardware Abstraction Layer Faults	83
FAULT_AHAL_INVALID_FREQ – 500h	83
FAULT_AHAL_CHANNEL_OCCUPIED – 501h	83
FAULT_AHAL_TRANSMITTER_ON – 502h	83
FAULT_ANTENNA_NOT_CONNECTED – 503h	83
FAULT_TEMPERATURE_EXCEED_LIMITS – 504h	84
FAULT_POOR_RETURN_LOSS – 505h	84
FAULT_AHAL_INVALID_ANTENA_CONFIG – 507h	84
Tag ID Buffer Faults	86
FAULT_TAG_ID_BUFFER_NOT_ENOUGH_TAGS_AVAILABLE – 600h	86
FAULT_TAG_ID_BUFFER_FULL – 601h	86
FAULT_TAG_ID_BUFFER_REPEATED_TAG_ID – 602h	87
FAULT_TAG_ID_BUFFER_NUM_TAG_TOO_LARGE – 603h	87
System Errors	88
FAULT_SYSTEM_UNKNOWN_ERROR – 7F00h	88
FAULT_TM_ASSERT_FAILED – 7F01h	88
Appendix B: Getting Started - Devkit	89
Devkit Hardware	89
Included Components	89
Setting up the DevKit	89
Connecting the Antenna	90

Powering up and Connecting to a PC	90
Devkit USB Interfaces	91
USB/RS232	91
Native USB	91
Devkit Jumpers	92
Devkit Schematics	93
Demo Application	94
Notice on Restricted Use of the DevKit	95
Appendix C: Environmental Considerations	97
ElectroStatic Discharge (ESD) Considerations	97
ESD Damage Overview	97
Identifying ESD as the Cause of Damaged Readers	98
Common Installation Best Practices	99
Raising the ESD Threshold	100
Further ESD Protection for Reduced RF Power Applications	100
Variables Affecting Performance	101
Environmental	101
Tag Considerations	101
Multiple Readers	102

Communication Regulation Information

The M6e module is available in two variants. The corresponding regulatory information follows:

- ♦ [M6e](#) - This module is covered under an FCC Modular Approval license and is limited to 30dBm RF Output power when used in the FCC/NA Region.
- ♦ [M6e-A](#) - This module is covered under an FCC Limited Modular Approval license and can be operated at the full 31.5dBm RF Output Power with certain restrictions.

M6e

EMC FCC 47 CFR, Part 15
 Industrie Canada RSS-210

M6e Regulatory Information

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- ◆ Reorient or relocate the receiving antenna.
- ◆ Increase the separation between the equipment and receiver.
- ◆ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ◆ Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.



W A R N I N G !



Operation of the M6e module requires professional installation to correctly set the TX power for the RF cable and antenna selected.

This transmitter module is authorized to be used in other devices only by OEM integrators under the following conditions:

1. The antenna(s) must be installed such that a minimum separation distance of 25cm is maintained between the radiator (antenna) & user's/nearby people's body at all times.
2. The transmitter module must not be co-located with any other antenna or transmitter.

As long as the two conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

Note

In the event that these conditions can not be met (for certain configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user manual of the end product.

User Manual Requirement

The user manual for the end product must include the following information in a prominent location;

"To comply with FCC's RF radiation exposure requirements, the antenna(s) used for this transmitter must be installed such that a minimum separation distance of 25cm is maintained between the radiator (antenna) & user's/nearby people's body at all times and must not be co-located or operating in conjunction with any other antenna or transmitter."

AND

"The transmitting portion of this device carries with it the following two warnings:

"This device complies with Part 15..."

AND

"Any changes or modifications to the transmitting module not expressly approved by ThingMagic Inc. could void the user's authority to operate this equipment" "

End Product Labeling

The final end product must be labeled in a visible area with the following:

“Contains Transmitter Module FCC ID: QV5MERCURY6E”

or

“Contains FCC ID: QV5MERCURY6E.”

Industry Canada

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

This device has been designed to operate with the antennas listed in [Authorized Antennas](#) table. Antennas not included in these lists are strictly prohibited for use with this device.

To comply with IC RF exposure limits for general population/uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 25 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

End Product Labeling

The final end product must be labeled in a visible area with the following:

"Contains ThingMagic Inc. Mercury6e (or appropriate model number you're filing with IC) transmitting module FCC ID: QV5MERCURY6E-A (IC: 5407A-MERCURY6EA)"

Industrie Canada

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur

Le fonctionnement de l'appareil est soumis aux deux conditions suivantes:

1. Cet appareil ne doit pas perturber les communications radio, et
2. cet appareil doit supporter toute perturbation, y compris les perturbations qui pourraient provoquer son dysfonctionnement.

Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas celle nécessaire pour une communication réussie.

L'appareil a été conçu pour fonctionner avec les antennes énumérés dans les tables Antennes Autorisées. Il est strictement interdit de l'utiliser l'appareil avec des antennes qui ne sont pas inclus dans ces listes.

Au but de conformer aux limites d'exposition RF pour la population générale (exposition non-contrôlée), les antennes utilisés doivent être installés à une distance d'au moins 25 cm de toute personne et ne doivent pas être installés en proximité ou utilisés en conjonction avec un autre antenne ou transmetteur.

Marquage sur l'étiquette du produit complet dans un endroit visible: "Contient ThingMagic transmetteur, FCC ID: QV5MERCURY6E (IC:5407A-MERCURY6E)"

Authorized Antennas

This device has been designed to operate with the antennas listed in [Authorized Antennas](#). Antennas not included in this list are strictly prohibited for use with this device.

M6e-A

EMC FCC 47 CFR, Part 15
 Industrie Canada RSS-210

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- ♦ Reorient or relocate the receiving antenna.
- ♦ Increase the separation between the equipment and receiver.
- ♦ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ♦ Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.



W A R N I N G !



Operation of the M6e-a module requires professional installation to correctly set the TX power for the RF cable and antenna selected.

This transmitter module is authorized to be used in other devices only by OEM integrators under the following conditions:

3. The antenna(s) must be installed such that a minimum separation distance of 25cm is maintained between the radiator (antenna) & user's/nearby people's body at all times.

4. The transmitter module must not be co-located with any other antenna or transmitter.

As long as the two conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

Note

In the event that these conditions can not be met (for certain configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user manual of the end product.

User Manual Requirement

The user manual for the end product must include the following information in a prominent location;

“To comply with FCC’s RF radiation exposure requirements, the antenna(s) used for this transmitter must be installed such that a minimum separation distance of 25cm is maintained between the radiator (antenna) & user’s/nearby people’s body at all times and must not be co-located or operating in conjunction with any other antenna or transmitter.”

AND

“The transmitting portion of this device carries with it the following two warnings:

“This device complies with Part 15...”

AND

“Any changes or modifications to the transmitting module not expressly approved by ThingMagic Inc. could void the user’s authority to operate this equipment” “

End Product Labeling

The final end product must be labeled in a visible area with the following:

“Contains Transmitter Module FCC ID: QV5MERCURY6E-A”

or

“Contains FCC ID: QV5MERCURY6E-A.”

Industry Canada

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This radio transmitter (identify the device by certification number, or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

This device has been designed to operate with the antennas and cables listed in [Authorized Antennas](#) and [M6e-A Authorized Cables](#) tables. Antennas or cables not included in these lists are strictly prohibited for use with this device.

To comply with IC RF exposure limits for general population/uncontrolled exposure, the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 25 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

End Product Labeling

The final end product must be labeled in a visible area with the following:

“Contains ThingMagic Inc. Mercury6e (or appropriate model number you’re filing with IC) transmitting module FCC ID: QV5MERCURY6E-A (IC: 5407A-MERCURY6EA)”

Industrie Canada

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Le présent émetteur radio (identifier le dispositif par son numéro de certification ou son numéro de modèle s'il fait partie du matériel de catégorie I) a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Le fonctionnement de l'appareil est soumis aux deux conditions suivantes:

1. Cet appareil ne doit pas perturber les communications radio, et
2. cet appareil doit supporter toute perturbation, y compris les perturbations qui pourraient provoquer son dysfonctionnement.

Pour réduire le risque d'interférence aux autres utilisateurs, le type d'antenne et son gain doivent être choisis de façon que la puissance isotrope rayonnée équivalente (PIRE) ne dépasse pas celle nécessaire pour une communication réussie.

L'appareil a été conçu pour fonctionner avec les antennes et les câbles énumérés dans les tables Antennes Autorisées et Câbles Autorisés. Il est strictement interdit de l'utiliser l'appareil avec des antennes ou câbles qui ne sont pas inclus dans ces listes.

Au but de conformer aux limites d'exposition RF pour la population générale (exposition non-contrôlée), les antennes utilisés doivent être installés à une distance d'au moins 25 cm de toute personne et ne doivent pas être installés en proximité ou utilisés en conjonction avec un autre antenne ou transmetteur.

Marquage sur l'étiquette du produit complet dans un endroit visible: "Contient ThingMagic transmetteur, FCC ID: QV5MERCURY6E-A (IC:5407A-MERCURY6EA)"

Mercury6e Introduction

The ThingMagic® Mercury6e® (M6e) embedded module is an RFID engine that you can integrate with other systems to create RFID-enabled products. There are four hardware variations of this module.

- ♦ M6e module: Designed to operate in the North American (902-928 MHz) and European (865-858 MHz) regulatory regions. The North American region is limited to a transmit power of +30 dBm to conform to FCC regulations for unrestricted use of a module of this type.
- ♦ M6e-a module: Operates in the same bands as the M6e module, but will transmit at power levels up to +31.5 dBm in the North American region. There are additional restrictions that a user must adhere to in order to operate a module of this power level in regions that adhere to FCC regulations.
- ♦ M6e-PRC module: This module was designed for the Chinese market and operates in both the high China band (920 to 925 MHz) and the low China band (840 to 845 MHz). It will be replaced by the M6e-JIC module at some point in 2016.
- ♦ M6e-JIC module: This module is designed to meet the demanding requirements for high power UHF RFID modules in China (920 to 925 MHz band), Japan (916.8 to 920.8 MHz band), and Israel (915 to 917 MHz).

“M6e” will be used to designate the entire product family in this document. If there are exceptions for the special-purpose modules, they will be noted.

Applications to control the M6e modules and derivative products can be written using the high level MercuryAPI. The MercuryAPI supports Java, .NET and C programming environments. The MercuryAPI Software Development Kit (SDK) contains sample applications and source code to help developers get started demoing and developing functionality. For more information on the MercuryAPI see the *MercuryAPI Programmers Guide* and the *MercuryAPI SDK*, available in the Support area of the ThingMagic website.

This document is intended for hardware designers and software developers. It describes the hardware specifications and firmware functionality and provides guidance on how to incorporate the M6e module within a third-party host system. The document is broken down into the following sections:

- ♦ [Hardware Overview](#) - This section provides detailed specifications of the M6e hardware. This section should be read in its entirety before designing hardware or

attempting to operate the M6e module in hardware other than the ThingMagic DevKit.

- ♦ [Firmware Overview](#) - This section describes provides a detailed description of the M6e firmware components including the bootloader and application firmware.
- ♦ [Communication Protocol](#) - This section provides an overview of the low level serial communications protocol used by the M6e.
- ♦ [Functionality of the Mercury6e](#) - This section provides detailed descriptions of the M6e features and functionality that are supported through the use of the MercuryAPI.
- ♦ [Appendix A: Error Messages](#) - This appendix lists and provides causes and suggested solutions for M6e Error Codes.
- ♦ [Appendix B: Getting Started - Devkit](#) - QuickStart guide to getting connected to the M6e Developer's Kit and using the Demo Applications included with the MercuryAPI SDK.

Hardware Overview

The following section provides detailed specifications of the M6e hardware including:

- ♦ [Hardware Interfaces](#)
- ♦ [Power Requirements](#)
- ♦ [Environmental Specifications](#)
- ♦ [Assembly Information](#)

Hardware Interfaces

Antenna Connections

The M6e supports four monostatic bidirectional RF antennas through four MMCX connectors: labeled J1 through J4 on the module. See [Cables and Connectors](#) for more information on antenna connector parts.

The maximum RF power that can be delivered to a 50 ohm load from each port is 1.4 Watts, or +31.5 dBm (regulatory requirements permitting).

Note

The RF ports are only energized one at a time.

Note

FCC/NA Region max RF power is 30 dBm for the M6e module. For 31.5 dBm operation in the FCC/NA Region the M6e-a module must be purchased.

Antenna Requirements

The performance of the M6e is affected by antenna quality. Antennas that provide good 50 ohm match at the operating frequency band perform best. Specified sensitivity performance is achieved with antennas providing 17 dB return loss or better across the operating band. (A higher numerical value indicates a better match.) Damage to the module will not occur for any return loss of 1 dB or greater. Damage may occur if antennas are disconnected during operation or if the module sees an open or short circuit at its antenna port.

Antenna Detection

To minimize the chance of damage due to antenna disconnection, the M6e supports antenna detection. Detection can be done automatically or manually, the choice of which is configured through API calls.

- ♦ Automatically if the antenna passes DC current
- ♦ Manually by doing periodic checks of the ability of ports to pass DC

- ♦ Manually by doing periodic checks to determine if the return loss is below a value that indicates an antenna is present (a value of -10 dBm is a good threshold).

Regardless of how it's used it is generally recommend that antenna detection be enabled as it helps protect the module from possible damage due to return losses less than 1 dB.

In order for antennas to be detected automatically by the M6e the antenna must pass some DC current across the center pin and ground, i.e. must present between 0 Ohms and 10 kOhms DC resistance.

Digital/Power Connector

The digital connector provides power, serial communications signals, shutdown and reset signals to the M6e module, and access to the GPIO inputs and outputs. These signals are provided through connector part number: *Molex 53261-1571* - 1.25mm pin centers, 1 amp per pin rating. which mates with Molex housing *p/n 51021-1500* with crimps *p/n 63811-0300*. See [Cables and Connectors](#) for more information on typical cable parts.

M6e Digital Connector Signal Definition

Molex 53261-1571 Pin Number	Signal	Signal Direction (In/Out of M6e)	Notes
1	GND	P/S Return	Must connect both GND pins to ground
2	GND	P/S Return	
3	+5VDC	P/S Input	Must connect both 5V supplies
4	+5 VDC	P/S Input	
5	GPIO1	Bi-directional	Input 5VDC tolerant, 16mA Source/Sink
6	GPIO2	Bi-directional	
7	GPIO3	Bi-directional	
8	GPIO4	Bi-directional	
9	UART_RX_TTL	In	In (Pull-down with +10k Ohm to Ground)
10	UART_TX_TTL	Out	Out
11	USB_DM	Bi-directional	USB Data (D-) signal
12	USB_DP	Bi-directional	USB Data (D+) signal

M6e Digital Connector Signal Definition

Molex 53261-1571 Pin Number	Signal	Signal Direction (In/Out of M6e)	Notes
13	USB_5VSENSE	In	Input 5V to tell module to talk on USB
14	SHUTDOWN	In	Pull LOW to enable module. Set HIGH to disable all 5V Inputs and shutdown module.
15	RESET	Bi-directional	HIGH output indicates Boot Loader is running LOW output indicates Application Firmware is running Note: Not 5V tolerant.

Control Signal Specification

TTL Level UART Interface

The module communicates to a host processor via a TTL logic level UART serial port or via a USB port. Both ports are accessed on the 15-pin [Digital/Power Connector](#). The TTL logic level UART supports complete functionality. The USB port supports complete functionality except the lowest power operational mode.

Note

[Power Consumption](#) specifications apply to control via the TTL UART.

Note

It is not recommended to use the TTL interface when planning to operate the module in [Tag Streaming/Continuous Reading](#) mode. The TTL interface (both the module side and the host side) cannot detect physical disconnections, as can the [USB Interface](#), simplifying reconnection.

TTL Level TX

V-Low: Max 0.4 VDC
 V-High: 2.1 to 3.3 VDC
 8 mA max

TTL Level RX

V-Low: -0.3 to 0.6 VDC
V-High: 2.2 to 5 VDC
(Tied to ground through a 10kOhm pull-down resistor.)

A level converter could be necessary to interface to other devices that use standard 12V RS232. Only three pins are required for serial communication (TX, RX, and GND). Hardware handshaking is not supported. The M6e serial port has an interrupt-driven FIFO that empties into a circular buffer.

The connected host processor's receiver must have the capability to receive up to 256 bytes of data at a time without overflowing.

Baud rates supported:

- 9600
- 19200
- 38400
- 115200
- 230400
- 460800
- 921600

Note

The baudrate in the [Boot Loader](#) mode depends on whether the module entered the bootloader mode after a power-up or through an assert or “boot bootloader” user command. Upon power up if the [Reset Line](#) is LOW then the default baud rate of 115200 will be used. If the module returns to the bootloader from [Application Firmware](#) mode, then the current state and baudrate will be retained.

USB Interface

Supports USB 2.0 full speed device port (12 Megabits per second) using the two USB pins (USB_DM and USB_DP).

General Purpose Input/Output (GPIO)

The four GPIO connections, provided through the [M6e Digital Connector Signal Definition](#), may be configured as inputs or outputs using the MercuryAPI. The GPIO pins connect

through 100 ohm resistors to the high current PA0 to PA3 pins of the AT91SAM7X processor. The processor data sheet can be consulted for additional details.

Pins configured as inputs must not have input voltages that exceed voltage range of -0.3 volts to +5.5 volts. In addition, during reset the input voltages should not exceed 3.3V.

Outputs may source and sink 16 mA. Voltage drop in the series 100 ohm resistor will reduce the delivered voltage swing for output loads that draw significant current.

Input Mode

- TTL compatible inputs,
- Logic low < 0.8 V,
- Logic high > 2.0V.
- 5V tolerant

Output Mode

- 3.3 Volt CMOS Logic Output with 100 ohms in series.
- Greater than 1.9 Volts when sourcing 8 mA.
- Greater than 2.9 Volts when sourcing 0.3 mA.
- Less than 1.2 Volts when sinking 8 mA.
- Less than 0.2 Volts when sinking 0.3 mA.

Module power consumption can be adversely affected by incorrect GPIO configuration. Similarly, the power consumption of external equipment connected to the GPIOs can also be adversely affected. The following instructions will yield specification compliant operation.

On power up, the M6E module configures its GPIOs as inputs to avoid contention from user equipment that may be driving those lines. The input configuration is as a 3.3 volt logic CMOS input and will have a leakage current not in excess of 400 nA. The input is in an undetermined logic level unless pulled externally to a logic high or low. **Module power consumption for floating inputs is unspecified.** With the GPIOs configured as inputs and individually pulled externally to either high or low logic level, module power consumption is as listed in the [M6e Power Consumption](#) table.

GPIOs may be reconfigured individually after power up to become outputs. This configuration takes effect either at API execution or a few tens of milliseconds after power up if the configuration is stored in nonvolatile memory. The configuration to outputs is defeated if the module is held in the boot loader by [Reset Line](#) being held low. Lines configured as outputs consume no excess power if the output is left open. Specified module power consumption is achieved for one or more GPIO lines set as output and left open. Users who are not able to provide external pull ups or pull downs on any given

input, and who do not need that GPIO line, may configure it as an output and leave it open to achieve specified module power consumption.

Configuring GPIO Settings

The GPIO lines are configured as inputs or outputs through the MercuryAPI by setting the reader configuration parameters `/reader/gpio/inputList` and `/reader/gpio/outputList`. Once configured as inputs or outputs the state of the lines can be Get or Set using the `gpiGet()` and `gpiSet()` methods, respectively. See the language specific reference guide for more details.

Reset Line

Upon power up the RESET (pin 15) line is configured as an input. The input value will determine whether the [Boot Loader](#) (pulled LOW) will wait for user commands or immediately load the [Application Firmware](#) (left open) image and enter application mode. After that action is completed, this line is configured as an output line. While the unit continues to be in bootloader the line is driven high.

Once in application mode, the RESET line is driven low. if the module returns to the bootloader mode, either due to an assert or “boot bootloader”, the RESET line will again be driven high.

To minimize power consumption in the application, the RESET line should be either left open or pulled weakly low (1.5k Ohm to ground).

See Note about baud rate applicable when using [TTL Level UART Interface](#).

Power Requirements

RF Power Output

The M6e supports separate read and write power level which are command adjustable via the MercuryAPI. Power levels must be between:

- Minimum RF Power = +5 dBm
- Maximum RF Power = +31.5 dBm (+/- 0.5 dB accuracy above +15 dBm)

Note

Maximum power may have to be reduced to meet regulatory limits, which specify the combined effect of the module, antenna, cable and enclosure shielding of the integrated product.

Note

FCC regulations limit the maximum RF Power to 30 dBm in NA Region. For 31.5 dBm operation in the NA Region the M6e-A must be purchased.

Special RF Power Output Requirements for the M6e-A



W A R N I N G !



Operation requires professional installation to correctly set the TX power for the RF cable and antenna selected.

Power Settings for Authorized Antennas and Cables

The M6e-A has been designed to operate with the antennas listed in [Authorized Antennas](#) list using the cables in the [M6e-A Authorized Cables](#) list. For any combination of antenna and cable the maximum RF power is determined from antenna gain (Max Linear Gain value from antenna list) and antenna cable loss (Insertion Loss value from cable list) using the formula:

$$P_{max} = 36 \text{ dBm} - \text{Antenna Gain} + \text{Cable Loss}$$

For example, for the Laird S8658WPL and the ThingMagic CBL-P6 6ft cable the following calculation can be performed:

$$\text{Max linear antenna gain} = 6 \text{ dBiL}$$

Minimum cable insertion loss = 0.8 dB

$$P_{max} = 36 - 6 + 0.8 = 30.8 \text{ dBm}$$

The maximum RF power that may be set using this configuration is 30.8 dBm (see Warning above).

Power Supply Ripple

The following are the minimum requirements to avoid module damage and to insure performance and regulatory specifications are met. Certain local regulatory specifications may require tighter specifications.

- ♦ 5 Volt +/- 5%,
- ♦ Less than 25 mV pk-pk ripple all frequencies,
- ♦ Less than 11 mV pk-pk ripple for frequencies less than 100 kHz,
- ♦ No spectral spike greater than 5 mV pk-pk in any 1 kHz band.
- ♦ Power supply switching frequency equal or greater than 500 kHz.



C A U T I O N !



Operation in the EU Region (under ETSI regulatory specs) may need tighter ripple specifications to meet ETSI mask requirements.

Power Consumption

The following table defines the power/transmit mode settings and power consumption specifications for the M6e. Additional details about Power/Transmit Modes can be found in the [Power Management](#) section.

M6e Power Consumption

Operation Power/Transmit Mode	RF Transmit Power Setting (dBm)	Max Power¹ (Watts)	Voltage (Volts)	Current (mA)
<i>Transmit CW</i> Transmit Mode = DRM	+31.5	7.5 ²	5.0 +/- 5%	1400
<i>Tag Reading</i> Transmit Mode = DRM	+31.5	7.5 ²	5.0 +/- 5%	1400
<i>Tag Reading</i> Transmit Mode = Power Save	+30	5.8	5.0 +/- 5%	1060
<i>Tag Reading</i> Transmit Mode = DRM + PreDistortion	+30	6.2	5.0 +/- 5%	1200
<i>Tag Reading</i> Transmit Mode = DRM	+17 and below	4	5.0 +/- 5%	800
<i>No Tag Reading (M6e idle)</i> Power Mode = FULL	N/A	0.35	5.0 +/- 5%	60
<i>No Tag Reading (M6e idle)</i> Power Mode = MINSAVE	N/A	0.12	5.0 +/- 5%	20
<i>No Tag Reading (M6e idle)</i> Power Mode = SLEEP	N/A	0.005	5.0 +/- 5%	1.0
<i>Boot</i>	N/A	0.12	5.0 +/- 5%	20
<i>Shut Down</i>	N/A	< 0.001	5.0 +/- 5%	< 200uA
<i>In Rush Current and Power, M6e Power up and/or any state change</i>	N/A	7.5	5.0 +/- 5%	1500 Max
<p>Note: 1 - Power consumption is defined for TTL RS232 operation. Power consumption may vary if the USB interface is connected.</p> <p>Note: 2 - Power consumption is defined for operation into a 17dB return loss load or better. Power consumption may increase, up to 8.2W, during operation into return losses worse than 17dB and high ambient temperatures.</p>				

Environmental Specifications

Operating Temperature

The M6e module may be considered as a single electronic component. It is designed so that all the internal components have safe margins to their thermal limits when the heat spreading plate (bottom, non-labeled side) does not exceed 70°C. The heat spreading plate temperature must not exceed 70 degrees C. Heat sinking will be required for high duty cycle applications.

When heat spreading plate reaches 70°C, the RF Shield (top, antenna connector side) may exceed 70°C, this is acceptable.

Electro-Static Discharge (ESD) Specification

IEC-61000-4-2 and MIL-883 3015.7 discharges direct to operational antenna port tolerates max 1200 Volt pulse.

Note

Survival level varies with antenna return loss and antenna characteristics. See [ElectroStatic Discharge \(ESD\) Considerations](#) for methods to increase ESD tolerances.



W A R N I N G !



The M6e antenna ports may be susceptible to damage from Electrostatic Discharge (ESD). Equipment failure can result if the antenna or communication ports are subjected to ESD. Standard ESD precautions should be taken during installation and operation to avoid static discharge when handling or making connections to the M6e reader antenna or communication ports. Environmental analysis should also be performed to ensure static is not building up on and around the antennas, possibly causing discharges during operation.

Assembly Information

Cables and Connectors

The following are the cables and connectors used in the M6e Developer's Kit interface board:

Digital Interface

The cable assembly used consists of the following parts:

- ♦ 2 Connector Shells [Molex 51021-1500] with 15 Crimp Contacts each [Molex 50079-8100]
- ♦ 1 Wire (#28 AWG 7x36 - Black, Teflon) for Pin 1 connection [Alpha 284/7-2]
- ♦ 14 Wires (#28 AWG 7x36 - White, Teflon) for other connections [Alpha 284/7-1]

Note


Pin numbers and assignments are shown in the [M6e Digital Connector Signal Definition](#) table.

Antennas

The cable assembly used to connect the “external” RP-TNC connectors on the M6e Devkit to the M6e MMCX connectors consists of the following parts:

- ♦ 1 Reverse TNC Bulkhead Jack Connector
- ♦ 1 LMR-100A Coaxial Cable
- ♦ 1 MMCX Right Angle Plug Connector

M6e Mechanical Drawing

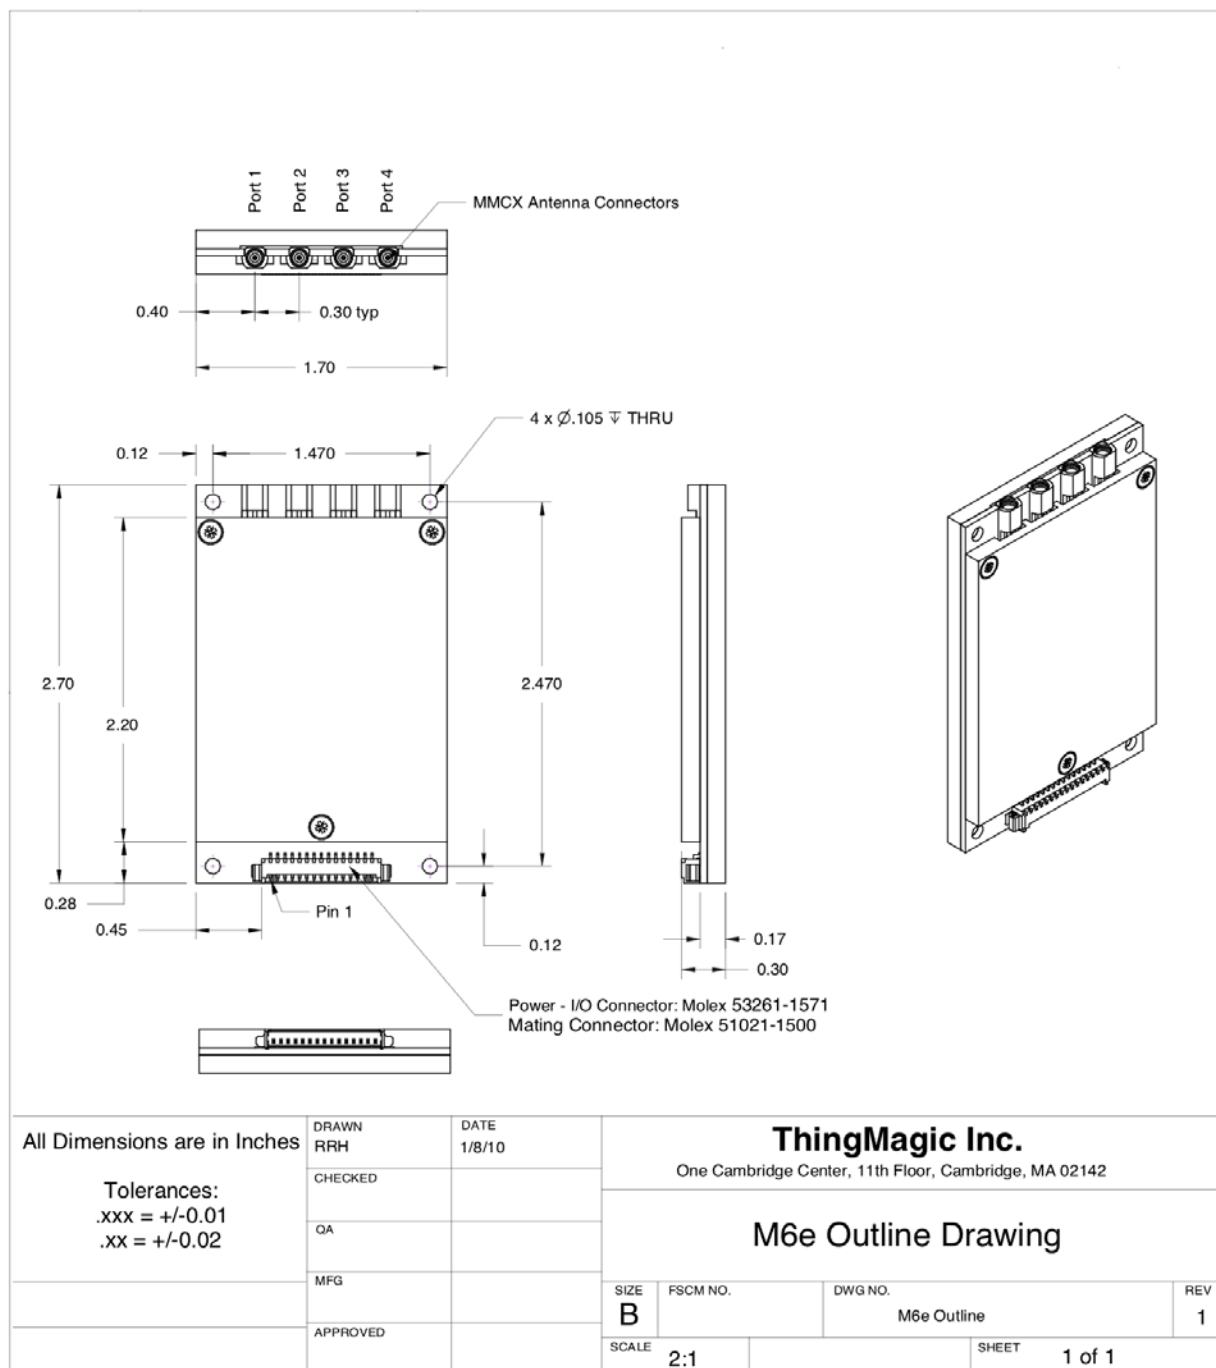

Authorized Antennas

This device has been designed to operate with the antennas listed below, and having a maximum gain of 6 dBiL. Antennas not included in this list or having a gain greater than 6 dBiL are strictly prohibited for use with this device. The required antenna impedance is 50 ohms.

Vendor	Model	Linear Gain ¹ (dBi)
ThingMagic	ANT-WB-6-2025	5.1
ThingMagic	ANT-NA-9025	3.4
ThingMagic	ANT-NB-7-2031	6.0
ThingMagic	ANT-WB-12-2043	6.0
ThingMagic	ANT-WB-10-2048	6.0
Note: 1 - These are all circularly polarized antennas, but since most tag antennas are linearly polarized, the equivalent linear gain of the antenna should be used for all calculations.		

M6e-A Authorized Cables

The following table contains the cable loss values for authorized shielded coaxial cables provided by ThingMagic

Cable Description	ThingMagic Part Number	Insertion Loss
6' RTNC to RTNC Cable	CBL-P6	0.8 dB
12' RTNC to RTNC Cable	CBL-P12	1.5 dB
20' RTNC to RTNC Cable	CBL-P20	2.4 dB
20' RTNC to RTNC Plenum Cable	CBL-P20-PL	2.4 dB
25' RTNC to RTNC Cable	CBL-P25	3.0 dB

Firmware Overview

The following section provides detailed description of the M6e firmware components:

- ♦ [Boot Loader](#)
- ♦ [Application Firmware](#)
- ♦ [Custom On-Reader Applications](#)

Boot Loader

The boot loader provides low-level functionality. This program provides the low level hardware support for configuring communication settings, loading [Application Firmware](#) and storing and retrieving data to/from flash.

When a module is powered up or reset, the boot loader code is automatically loaded and executed.

Note

Unlike previous ThingMagic modules (M4e and M5e) the M6e bootloader should effectively be invisible to the user. The M6e is by default configured to auto-boot into application firmware and for any operations that require the module be in bootloader mode the MercuryAPI will handle the switching automatically.

Application Firmware

The application firmware contains the tag protocol code along with all the command interfaces to set and get system parameters and perform tag operations. The application firmware is, by default, started automatically upon power up.

Programming the M6e

Applications to control the M6e module and derivative products are written using the high level MercuryAPI. The MercuryAPI supports Java, .NET and C programming environments. The MercuryAPI Software Development Kit (SDK) contains sample applications and source code to help developers get started demoing and developing functionality. For more information on the MercuryAPI see the *MercuryAPI Programmers Guide* and the *MercuryAPI SDK*, available on the ThingMagic website.

Upgrading the M6e

New features developed for the M6e are made available to existing modules through an Application Firmware upgrade, along with corresponding updates to the MercuryAPI to make use of the new features. Firmware upgrades can be applied using the MercuryAPI to build the functionality into custom applications or using the MercuryAPI SDK demo utilities.

Verifying Application Firmware Image

The application firmware has an image level Cyclic Redundancy Check (CRC) embedded in it to protect against corrupted firmware during an upgrade process. (If the upgrade is unsuccessful, the CRC will not match the contents in flash.) When the boot loader starts the application FW, it first verifies that the image CRC is correct. If this check fails, then the boot loader does not start the application firmware and an error is returned.

Custom On-Reader Applications

The M6e does not support installing customer applications on the module. All reader configuration and control is performed using the documented MercuryAPI methods in applications running on a host processor.

The M6e does support Autonomous Operation, where configuration settings and a basic read plan can be stored in the module and executed whenever the module is power up, or whenever it is both powered up and a selected GPI line is asserted.

Communication Protocol

The following section provides an overview of the low level serial communications protocol used by the M6e.


Serial Communication Protocol

The serial communication between a computer (host) and the M6e is based on a synchronized command-response/master-slave mechanism. Whenever the host sends a message to the reader, it cannot send another message until after it receives a response. The reader never initiates a communication session; only the host initiates a communication session.

This protocol allows for each command to have its own timeout because some commands require more time to execute than others. The host must manage retries, if necessary. The host must keep track of the state of the intended reader if it reissues a command.


Host-to-Reader Communication

Host-to-reader communication is packetized according to the following diagram. The reader can only accept one command at a time, and commands are executed serially, so the host waits for a reader-to-host response before issuing another host-to-reader command packet.

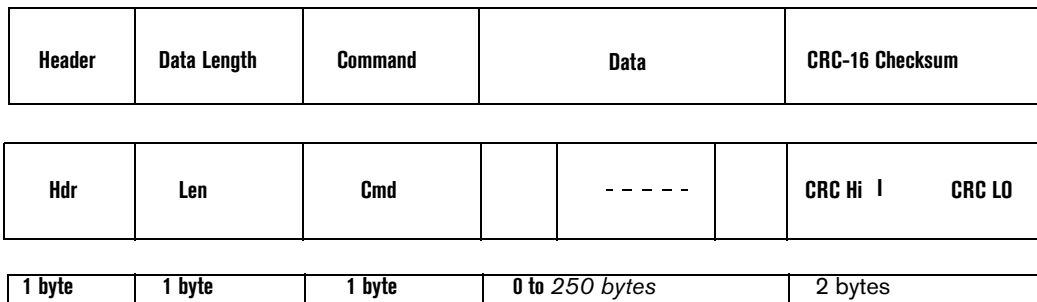

Reader-to-Host Communication

The following diagram defines the format of the generic Response Packet sent from the reader to the host. The Response Packet is different in format from the Request Packet.

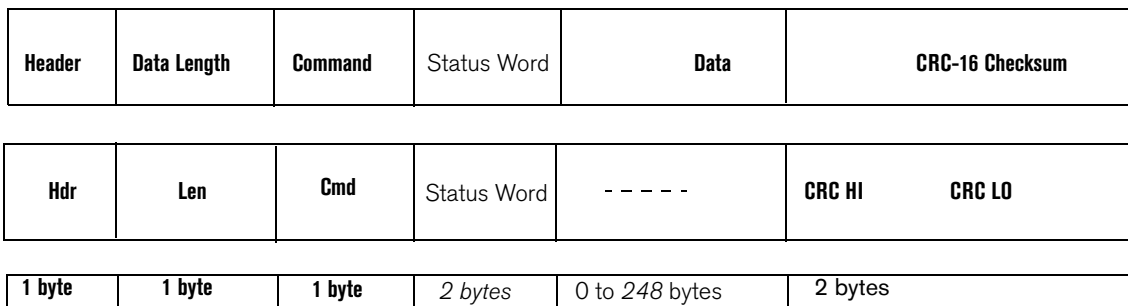

CCITT CRC-16 Calculation

The same CRC calculation is performed on all serial communications between the host and the reader. The CRC is calculated on the Data Length, Command, Status Word, and Data bytes. The header is not included in the CRC.

User Programming Interface

The M6e does not support programming to the serial protocol directly. All user interaction with the M6e must be performed using the MercuryAPI.

The MercuryAPI supports Java, .NET and C programming environments. The MercuryAPI Software Development Kit (SDK) contains sample applications and source code to help developers get started demoing and developing functionality. For more information on the MercuryAPI see the *MercuryAPI Programmers Guide* and the *MercuryAPI SDK*, available on the ThingMagic website.

Functionality of the Mercury6e

The following section provides detailed descriptions of the M6e module family features and functionality that are supported through the use of the MercuryAPI.

Regulatory Support

Supported Regions

The M6e has differing levels of support for operation and use under the laws and guidelines of several regions. The regional support is shown in the following table.

Supported Regions

Region	Regulatory Support	Notes
North America (NA)	FCC 47 CFG Ch. 1 Part 15 Industrie Canada RSS-210	Supported in M6e and M6e-a modules only.
European Union (EU3)	Revised ETSI EN 302 208	<p>Supported in M6e and M6e-a modules only.</p> <p>By default EU3 will use four channels. EU3 region can also be used in a single channel mode. These two modes of operation are defined as:</p> <p>Single Channel Mode</p> <ul style="list-style-type: none"> Set by manually setting the frequency hop table to a single frequency. In this mode the module will occupy the set channel for up to four seconds, after which it will be quiet for 100ms before transmitting on the same channel again. <p>Multi Channel Mode</p> <ul style="list-style-type: none"> Set by leaving the default or manually setting more than one frequency in the hop table. In this mode the module will occupy one of the configured channels for up to four seconds, after which it may switch to another channel and immediately occupy that channel for up to four seconds. This mode allows for continuous operation.
Korea (KR2)	KCC (2009)	The first frequency channel (917,300kHz) of the KR2 region will be derated to +22dBm to meet the new Korea regulatory requirements. All other channels operate up to +30dBm. In the worst case scenario, each time the derated channel is used it will stay on that channel for 400ms. The fastest it will move to the next channel, in the case where no tags are found using that frequency, it will move to the next channel after 10 empty query rounds, approximately 120ms.

Supported Regions

People's Republic of China (PRC & PR2)	SRRC, MII	<p>The PRC specifications limits channels 920 to 920.5MHz and 924.5 to 925.0MHz to transmitting at 100mW or below. The default hop table uses only the center channels which allow 2W ERP, 1W conducted, power output. If the hop table is modified to use the outer, lower power channels the RF level will be limited to the outer channels limit, 100mW or +20dBm</p> <p>Note: With the M6e-PRC hardware the 840 to 845MHz band is also supported as the PR2 region. It is not supported on the standard M6e, the M6e-a nor the M6e-JIC modules.</p>
Australia (AU)	ACMA LIPD Class Licence Variation 2011 (No. 1)	
New Zealand (NZ)	Radiocommunications Regulations (General User Radio Licence for Short Range Devices) Notice 2011	
Open Region	No regulatory compliance enforced	<p>Allows the module to be manually configured within the full capabilities supported by the hardware, see Regional Frequency Quantization table. No regulatory limits, including: frequency range, channel spacing and transmit power limits, are enforced. The Open Region should be used with caution.</p>

The regional functionality is set using the MercuryAPI. Setting the region of operation configures the regional default settings including:

- ♦ Loads the [Frequency Hop Table](#) with the appropriate table for the selected region.
- ♦ Sets the PLL [Frequency Setting](#) to the first entry in the hop table, even if the RF is off.
- ♦ Selects the transmit filter, if applicable.

Frequency Setting

The modules have a PLL synthesizer that sets the modulation frequency to the desired value. Whenever the frequency is changed, the module must first power off the modulation, change the frequency, and then turn on the modulation again. Since this can take several milliseconds, it is possible that tags are powered off during a frequency hop. In addition to setting the default regional settings, the M6e has commands that allow the transmit frequency to be set manually.

**C A U T I O N !**

**Use these commands with extreme caution.
It is possible to change the module's compliance with the regional regulations.**

Frequency Units

All frequencies in the M6e are expressed in kHz using unsigned 32-bit integers. For instance, a carrier frequency of 915 MHz is expressed as 915000 kHz.

The hop table for any region may consist of any permitted channels within the frequency limits for that region. A permitted channel is one that is at the lowest permitted frequency or is a multiple of the minimum channel step size, up to the highest permitted frequency. The following table gives the frequency limits and minimum channel step size for all regions.

Regional Frequency Quantization

Region	Min Channel Separation	Minimum Frequency	Maximum Frequency	Modules Supported
NA	250 kHz	902,000 kHz	928,000 kHz	M6e, M6e-a
EU3	100 kHz	865,600 kHz	867,600 kHz	M6e, M6e-a
IN	100 kHz	865,000 kHz	867,000 kHz	M6e, M6e-a
KR2	100 kHz	917,000 kHz	923,500 kHz	M6e, M6e-a
PRC	250 kHz	920,125 kHz	924,875 kHz	M6e, M6e-a, M6e-PRC, M6e-JIC
PRC2	250 kHz	840,000 kHz ¹	845,000 kHz ¹	M6e-PRC
AU	250 kHz	920,750 kHz	925,250 kHz	M6e, M6e-a
NZ	250 kHz	922,250 kHz	927,250 kHz	M6e, M6e-a
IS	250 kHz	915,000 kHz	917,000 kHz	M6e-JIC
JP	100 kHz	916,800 kHz	920,800 kHz	M6e-JIC
Open	25 kHz	865,000 kHz 902,000 kHz	869,000 kHz 928,000 kHz	M6e, M6e-a (See Note)
Note: M6e-PRC and M6e-JIC have different ranges for their Open region. 840 to 845 MHz and 920 to 925 MHz for M6e-PRC, 915 to 925 MHz for the M6e-JIC.				

The user may define channels in a hop table to the nearest kHz (within the high and low frequency limits) without receiving an error message, but if that request is not for a permitted channel, the actual frequency used by the reader will be the first permitted channel below the requested frequency.

For example: In the NA region, setting a frequency of 902,999 kHz results in a setting of 902,750 kHz.

An error message will result if an attempt is made to set channels outside of the allowed frequency range for a region. Changing regions will automatically re-install the default hop table for that region, erasing any custom channels which may have been defined.

Frequency Hop Table

The frequency hop table determines the frequencies used by the M6e when transmitting. The hop table characteristics are:

-
- ◆ Contains up to 62 frequencies.
 - ◆ Frequencies are within the range of the region currently selected.
 - ◆ Changes are currently not stored in flash, thus changes made are not retained after a power cycle or a restart of the boot loader. (That said, the ability to save a hop table under Autonomous Operation is under consideration - see upcoming release notes to determine if this feature has been added.)
 - ◆ No ability to change individual entries after uploading without reloading the entire table.
 - ◆ Frequencies are used in the order of entries in the table. If regulatory requirements state that channels must be hopped in random order, then the frequency list of channels must be randomized before downloading the hop table into the module.

All hop tables for pre-configured regions are already randomized except for the Open region.

Protocol Support

The M6e has the ability to support many different tag protocols. Using the MercuryAPI ReadPlan classes the M6e can be configured to single or multi-protocol Read operations. The current protocols supported are (some may require a license to enable):

- ♦ [ISO 18000-6C \(Gen2\)](#)
- ♦ [I-PX](#)
- ♦ [ISO 18000-6B](#)

ISO 18000-6C (Gen2)

Protocol Configuration Options

The M6e supports multiple ISO-18000-6C profiles including the ability to specify the Link Frequency, encoding schemes, Tari value and modulation scheme. The protocol options are set in the MercuryAPI Reader Configuration Parameters (/reader/gen2/*). The following table shows the supported combinations:

ISO-18000-6C Protocol Options

Backscatter Link Frequency (kHz)	Encoding	Tari (usec)	Modulation Scheme	Notes
250	M=8, M=4, M=2, FM0	25	PR-ASK	BLF-250, M=4, Tari=25, PR-ASK is the default
250	M=8, M=4, M=2, FM0	12.5	PR-ASK	
250	M=8, M=4, M=2, FM0	6.25	PR-ASK	
640	FM0	6.25	PR-ASK	

Note

For serial connections, a rough rule of thumb is that the `/reader/baudRate` should be is greater than `/reader/gen2/BLF`, in equivalent frequency units. If its not then the reader could be reading data faster than the transport can handle and send, and the reader's buffer might fill up.

Protocol Specific Functionality

See the *MercuryAPI Programmers Guide* and language specific reference guides for details on supported Gen2 command functionality.

I-PX

Protocol Configuration Options

The M6e supports multiple I-PX profiles including the ability to specify the Return Link Frequency, encoding and modulation scheme. The two profiles are treated as distinct protocols, the individual parameters are not configurable as with the other protocols. The following table shows the supported combinations:

ISO-18000-6B Protocol Options

Return Link Freq (kHz)	Modulation Scheme	Notes
64	PWM	Protocol ID = TagProtocol.IPX64
256	PWM	Protocol ID = TagProtocol.IPX256

Note

The two link rates are effectively two different protocols and treated as such. I-PX tags are fixed to one of the two frequencies and cannot communicate on the other, unlike ISO 18000-6B/C tags which can operate under multiple profiles.

ISO 18000-6B

Protocol Configuration Options

The M6e supports multiple ISO-18000-6B profiles including the ability to specify the Return Link Frequency, encoding, Forward Link Rate and modulation scheme. The protocol options are set in the MercuryAPI Reader Configuration Parameters (/reader/iso18000-6b/*). The following table shows the supported combinations:

ISO-18000-6B Protocol Options

Return Link Freq (kHz)	Return Encoding	Forward Link Freq (kHz)	Forward Encoding	Modulation Depth
40	FM0	10	Manchester	11%

ISO-18000-6B Protocol Options

40	FM0	10	Manchester	99%
160	FM0	40	Manchester	11%
160	FM0	40	Manchester	99% (default)

Delimiter

ISO18000-6B tags support two delimiter settings on the transmitter. Not all tags support both delimiters, some tags require the delimiter be set to 1, the default is 4.

The delimiter setting is set using the MercuryAPI Reader Configuration Parameter:

```
/reader/iso180006b/delimiter
```

In addition to setting the delimiter to 1, a `TagFilter` of the class `ISO180006b.Select` must be used in order to read certain ISO18000-6b tags, specifically one of the following options must be used:

- `GROUP_SELECT_EQ`
- `GROUP_SELECT_NE`
- `GROUP_SELECT_GT`
- `GROUP_SELECT_LT`
- `GROUP_UNSELECT_EQ`
- `GROUP_UNSELECT_NE`
- `GROUP_UNSELECT_GT`
- `GROUP_UNSELECT_LT`

Antenna Ports

The M6e has four monostatic antenna ports. Each port is capable of both transmitting and receiving. The modules also support [Using a Multiplexer](#), allowing up to 16 total logical antenna ports, controlled using two GPIO lines and the internal physical port J1/J2/J3/J4 switching.

Note

The M6e does not support bistatic (separate transmit and receive antenna) operation.

Using a Multiplexer

Multiplexer switching is controlled through the use of the internal module physical port J1/J2/J3/J4 switch along with the use of one or more of the [General Purpose Input/Output \(GPIO\)](#) lines. In order to enable automatic multiplexer port switching the module must be configured to use *Use GPIO as Antenna Switch* in `/reader/antenna/portSwitchGpos`.

Once the GPIO line(s) usage has been enabled the following control line states are applied when the different Logical Antenna settings are used. The tables below show the mapping that results using GPIO 1 and 2 for multiplexer control (as is used by the ThingMagic 1 to 4 multiplexer) allowing for 16 logical antenna ports.

Note

The Logical Antenna values are static labels indicating the available control line states. The specific physical antenna port they map to depends on the control line to antenna port map of the multiplexer in use. The translation from Logical Antenna label to physical port must be maintained by the control software.

GPIO 1 & 2 Used for Antenna Switching

Logical Antenna Setting	GPIO Output 1 State	GPIO Output 2 State	Active M6e Physical Port
1	Low	Low	J1
2	Low	Low	J2
3	Low	Low	J3
4	Low	Low	J4
5	Low	High	J1
6	Low	High	J2
7	Low	High	J3
8	Low	High	J4
9	High	Low	J1
10	High	Low	J2
11	High	Low	J3
12	High	Low	J4
13	High	High	J1
14	High	High	J2
15	High	High	J3
16	High	High	J4

If only one GPIO Output line is used for antenna control, the combinations of the available output control line states (the GPIO line in use and the module port) result in a subset of logical antenna settings which can be used.

ONLY GPIO 1 Used for Antenna Switching

Logical Antenna Setting	GPIO Output 1 State	Active M6e Physical Port
1	Low	J1
2	Low	J2

Logical Antenna Setting	GPIO Output 1 State	Active M6e Physical Port
3	Low	J3
4	Low	J4
9	High	J1
10	High	J2
11	High	J3
12	High	J4

Note

The “missing” logical antenna settings are still usable when only one GPIO line is used for antenna control and simply results in redundant logical antenna settings. For example, using only GPIO 1, logical setting 4 and 8 both result in GPIO1=Low and M6e port J4 active.

ONLY GPIO 2 Used for Antenna Switching

Logical Antenna Setting	GPIO Output 2 State	Active M6e Physical Port
1	Low	J1
2	Low	J2
3	Low	J3
4	Low	J4
5	High	J1
6	High	J2
7	High	J3
8	High	J4

Port Power and Settling Time

The M6e allows the power and settling time for each logical antenna to be set using the reader configuration parameters `/reader/radio/portReadPowerList` and `/`

`reader/antenna/settlingTimeList`, respectively. The order the antennas settings are defined does not affect search order.

Note

Settling time is the time between the control lines switching to the next antenna setting and RF turning on for operations on that port. This allows time for external multiplexer's to fully switch to the new port before a signal is sent, if necessary. Default value is 0.

Tag Handling

When the M6e performs inventory operations (MercuryAPI Read commands) data is stored in a [Tag Buffer](#) until retrieved by the client application, or streamed directly to the client if operating in [Tag Streaming/Continuous Reading](#) mode.

Tag Buffer

The M6e uses a dynamic buffer that depends on EPC length and quantity of data read. As a rule of thumb it can store a maximum of 1024 96-bit EPC tags in the TagBuffer at a time. Since the M6e supports streaming of read results the buffer limit is, typically, not an issue. Each tag entry consists of a variable number of bytes and consists of the following fields:

Tag Buffer Entry

Total Entry Size	Field	Size	Description
68 bytes (Max EPC Length = 496bits)	EPC Length	2 bytes	Indicates the actual EPC length of the tag read.
	PC Word	2 bytes	Contains the Protocol Control bits for the tag.
	EPC	62 bytes	Contains the tag's EPC value.
	Tag CRC	2 bytes	The tag's CRC.
Tag Read Metadata			

The Tag buffer acts as a First In First Out (FIFO) — the first Tag found by the reader is the first one to be read out.

Tag Streaming/Continuous Reading

When reading tags during asynchronous inventory operations (MercuryAPI `Reader.StartReading()`) using an `/reader/read/asyncOffTime=0` the M6e “streams” the tag results back to the host processor. This means that tags are pushed out of the buffer as soon as they are processed by the M6e and put into the buffer. The buffer is put into a circular mode that keeps the buffer from filling. This allows for the M6e to perform continuous search operations without the need to periodically stop reading and fetch the contents of the buffer. Aside from not seeing “down time” when performing a read operation this behavior is essentially invisible to the user as all tag handling is done by the MercuryAPI.

Note

It is recommended the [USB Interface](#) be used when operating the M6e in continuous reading mode. When the [TTL Level UART Interface](#) is used it is not possible for the module to detect a broken communications interface connection and stop streaming the tag results.

Tag Read Metadata

In addition to the tag EPC ID resulting from M6e inventory operation each `TagReadData` (see MercuryAPI for code details) contains metadata about how, where and when the tag was read. The specific metadata available for each tag read is as follows:

Tag Read Metadata

Metadata Field	Description
Antenna ID	The active antenna when the tag was read. If the same tag is read with more than one antenna there will be a tag buffer entry for each antenna on which the tag was read. When Using a Multiplexer , if appropriately configured, the Antenna ID entry will contain the logical antenna port of the tag read.
Read Count	The number of times the tag was read on the same antenna.
Timestamp	The time the tag was read. The module reports the time, in milliseconds, from when it received the command to read and the API adds its knowledge of “real” time. If the Tag Read Metadata is not retrieved from the Tag Buffer between read commands there will be no way to distinguish order of tags read with different read command invocations.
Tag Data	When reading an embedded <code>TagOp</code> is specified for a <code>ReadPlan</code> the <code>TagReadData</code> will contain the first 128 words of data returned for each tag. Note: Tags with the same <code>TagID</code> but different <code>Tag Data</code> can be considered unique and each get a <code>Tag Buffer</code> entry if set in the reader configuration parameter <code>/reader/tagReadData/uniqueByData</code> . By default it is not.
Frequency	The frequency on which the tag was read
Tag Phase	Average phase of tag response in degrees (0°-180°)
LQI/RSSI	The receive signal strength of the tag response in dBm.
GPIO Status	The signal status (High or Low) of all GPIO pins when tag was read.

Power Management

The M6e is designed for power efficiency and offers several different power management modes. The following power management modes affect the power consumption during different periods of M6e usage and impact performance in different ways. The available power management modes are:

- ♦ [Power Modes](#) - set in `/reader/powerMode` - Controls the power savings when the M6e is idle.
- ♦ [Transmit Modes](#) - set in `/reader/radio/enablePowerSave` - controls power savings while transmitting.

Power Modes

The Power Mode setting (set in `/reader/powerMode`) allows the user to trade off increased RF operation startup time for additional power savings. The details of the amount of power consumed in each mode is shown in the table under [Power Consumption](#). The behavior of each mode and impact on RF command latency is as follows:

- ♦ **PowerMode.FULL** – In this mode, the unit operates at full power to attain the best performance possible. This mode is only intended for use in cases where power consumption is not an issue. This is the default Power Mode at startup.
- ♦ **PowerMode.MINSAVE** – This mode may add up to 50 ms of delay from idle to RF on when initiating an RF operation. It performs more aggressive power savings, such as automatically shutting down the analog section between commands, and then restarting it whenever a tag command is issued.
- ♦ **PowerMode.SLEEP** – This mode essentially shuts down the digital and analog boards, except to power the bare minimum logic required to wake the processor. This mode may add up to 100 ms of delay from idle to RF on when initiating an RF operation. **PowerMode.SLEEP is not supported when using the USB interface.** Using the setting `PowerMode.MEDSAVE` is the same as SLEEP.

Note

See additional latency specifications under [Event Response Times](#).

Transmit Modes

The Transmit Mode setting (set in `/reader/radio/enablePowerSave`) allows the user to trade off RF spectral compliance with the Gen2 DRM Mask for increased power

savings while transmitting. The details of the amount of power consumed in each mode is shown in the table under [Power Consumption](#). The behavior of each mode is as follows:

DRM Compliant Mode

This mode maximizes performance in dense reader environments, minimizing interference when used with other M6e or similar DRM-compliant readers, and is fully compliant with the Gen2 DRM spectral mask.

Power Save Mode (non-DRM Compliant)

This mode reduces the power consumption during RF operations but is not 100% compliant with the DRM spectral mask. This can result increased interference with other readers and reduce overall systems performance.

Performance Characteristics

Event Response Times

The following table provides some metrics on how long common M6e operations take. An event response time is defined as the maximum time from the end of a command (end of the last bit in the serial stream) or event (e.g. power up) to the response event the command or event causes.

Event Response Times

Start Command/ Event	End Event	Time (msecs)	Notes
Power Up	Application Active (with CRC check)	1500	This longer power up period should only occur for the first boot with new firm-ware.
Power Up	Application Active	120	Once the firmware CRC has been veri- fied subsequent power ups do not require the CRC check be performed, saving time.
Tag Read	RF On	20	When in Power Mode = FULL
Tag Read	RF On	50	When in Power Mode = MINSAVE
Tag Read	RF On	120	When in Power Mode = SLEEP
Change to MINSAVE	PowerMode.MINSAVE	5	From Power Mode = FULL
Change to SLEEP	PowerMode.SLEEP	5	From Power Mode = FULL

Save and Restore Configuration

The M6e supports saving module and protocol configuration parameters to the module flash to provide configuration persistence across boots. This was introduced to support Autonomous Operation, but can also be used to reduce the amount of communication necessary to bring a module up to operating state following a reboot. The parameters that can be saved include:

- ♦ Region
- ♦ Baud Rate (for serial interface)
- ♦ Default Protocol
- ♦ RF power
- ♦ Antenna search list
- ♦ Gen2 “M” value
- ♦ Gen2 BLF (Tari will be 25 usec if BLF=250 and 6.25 usec if BLF=640)
- ♦ Gen2 Session
- ♦ Gen2 target
- ♦ Autonomous Trigger
- ♦ Autonomous Read Plan

Two settings that are under serious consideration for an upcoming release are:

- ♦ Hop Table (necessary to operate legally in some regions)
- ♦ Duty Cycle for Autonomous Read Plan (to limit temperature rise given that only continuous reading is supported for a saved Autonomous Read Plan)

See the *MercuryAPI Programmers Guide* and sample applications for details on saving and restoring reader configuration. The *Autonomous Configuration Tool* provides an easy way to store and restore settings in the module.

Appendix A: Error Messages

Common Error Messages

The following table lists the common faults discussed in this section.

Fault Message	Code
FAULT_MSG_WRONG_NUMBER_OF_DATA – (100h)	100h
FAULT_INVALID_OPCODE – (101h)	101h
FAULT_UNIMPLEMENTED_OPCODE – 102h	102h
FAULT_MSG_POWER_TOO_HIGH – 103h	103h
FAULT_MSG_INVALID_FREQ_RECEIVED (104h)	104h
FAULT_MSG_INVALID_PARAMETER_VALUE - (105h)	105h
FAULT_MSG_POWER_TOO_LOW - (106h)	106h
FAULT_UNIMPLEMENTED_FEATURE - (109h)	109h
FAULT_INVALID_BAUD_RATE - (10Ah)	10Ah

FAULT_MSG_WRONG_NUMBER_OF_DATA – (100h)

Cause

If the data length in any of the Host-to-M5e/M5e-Compact messages is less than or more than the number of arguments in the message, the reader returns this message.

Solution

Make sure the number of arguments matches the data length.

FAULT_INVALID_OPCODE – (101h)

Cause

The opCode received is invalid or not supported in the currently running program (bootloader or main application) or is not supported in the current version of code.

Solution

Check the following:

- ♦ Make sure the command is supported in the currently running program.
- ♦ Check the documentation for the opCode the host sent and make sure it is correct and supported.
- ♦ Check the previous module responses for an assert (0x7F0X) which will reset the module into the bootloader.

FAULT_UNIMPLEMENTED_OPCODE – 102h

Cause

Some of the reserved commands might return this error code.

This does not mean that they always will do this since ThingMagic reserves the right to modify those commands at anytime.

Solution

Check the documentation for the opCode the host sent to the reader and make sure it is supported.

FAULT_MSG_POWER_TOO_HIGH – 103h

Cause

A message was sent to set the read or write power to a level that is higher than the current HW supports.

Solution

Check the HW specifications for the supported powers and insure that the level is not exceeded.

The M5e 1 Watt units support power from 5 dBm to 30 dBm.

The M5e-Compact units support power from 10 dBm to 23 dBm.

FAULT_MSG_INVALID_FREQ_RECEIVED (104h)

Cause

A message was received by the reader to set the frequency outside the supported range

Solution

Make sure the host does not set the frequency outside this range or any other locally supported ranges.

FAULT_MSG_INVALID_PARAMETER_VALUE - (105h)

Cause

The reader received a valid command with an unsupported or invalid value within this command.

For example, currently the module supports four antennas. If the module receives a message with an antenna value other than 1 to 4, it returns this error.

Solution

Make sure the host sets all the values in a command according to the values published in this document.

FAULT_MSG_POWER_TOO_LOW - (106h)

Cause

A message was received to set the read or write power to a level that is lower than the current HW supports.

Solution

Check the HW specifications for the supported powers and insure that level is not exceeded. The M6e supports powers between 5 and 31.5 dBm.

FAULT_UNIMPLEMENTED_FEATURE - (109h)

Cause

Attempting to invoke a command not supported on this firmware or hardware.

Solution

Check the command being invoked against the documentation.

FAULT_INVALID_BAUD_RATE - (10Ah)

Cause

When the baud rate is set to a rate that is not specified in the Baud Rate table, this error message is returned.

Solution

Check the table of specific baud rates and select a baud rate.

Bootloader Faults

The following table lists the common faults discussed in this section.

Fault Message	Code
FAULT_BL_INVALID_IMAGE_CRC	200h
FAULT_BL_INVALID_APP_END_ADDR	201h

FAULT_BL_INVALID_IMAGE_CRC – 200h

Cause

When the application firmware is loaded the reader checks the image stored in flash and returns this error if the calculated CRC is different than the one stored in flash.

Solution

The exact reason for the corruption could be that the image loaded in flash was corrupted during the transfer or corrupted for some other reason.

To fix this problem, reload the application code in flash.

FAULT_BL_INVALID_APP_END_ADDR – 201h

Cause

When the application firmware is loaded the reader checks the image stored in flash and returns this error if the last word stored in flash does not have the correct address value.

Solution

The exact reason for the corruption could be that the image loaded in flash got corrupted during the transfer or, corrupted for some other reason.

To fix this problem, reload the application code in flash.

Flash Faults

The following table lists the common faults discussed in this section.

Fault Message	Code
FAULT_FLASH_BAD_ERASE_PASSWORD – 300h	300h
FAULT_FLASH_BAD_WRITE_PASSWORD – 301h	301h
FAULT_FLASH_UNDEFINED_ERROR – 302h	302h
FAULT_FLASH_ILLEGAL_SECTOR – 303h	303h
FAULT_FLASH_WRITE_TO_NON_ERASED_AREA – 304h	304h
FAULT_FLASH_WRITE_TO_ILLEGAL_SECTOR – 305h	305h
FAULT_FLASH_VERIFY_FAILED – 306h	306h

FAULT_FLASH_BAD_ERASE_PASSWORD – 300h

Cause

A command was received to erase some part of the flash but the password supplied with the command was incorrect.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_BAD_WRITE_PASSWORD – 301h

Cause

A command was received to write some part of the flash but the password supplied with the command was not correct.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_UNDEFINED_ERROR – 302h

Cause

This is an internal error and it is caused by a software problem in module.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_ILLEGAL_SECTOR – 303h

Cause

An erase or write flash command was received with the sector value and password not matching.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_WRITE_TO_NON_ERASED_AREA – 304h

Cause

The module received a write flash command to an area of flash that was not previously erased.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_WRITE_TO_ILLEGAL_SECTOR – 305h

Cause

The module received a write flash command to write across a sector boundary that is prohibited.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_FLASH_VERIFY_FAILED – 306h

Cause

The module received a write flash command that was unsuccessful because data being written to flash contained an uneven number of bytes.

Solution

When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

Protocol Faults

The following table lists the common faults discussed in this section.

Fault Message	Code
FAULT_NO_TAGS_FOUND - (400h)	400h
FAULT_NO_PROTOCOL_DEFINED - 401h	401h
FAULT_INVALID_PROTOCOL_SPECIFIED - 402h	402h
FAULT_WRITE_PASSED_LOCK_FAILED - 403h	403h
FAULT_PROTOCOL_NO_DATA_READ - 404h	404h
FAULT_AFE_NOT_ON - 405h	405h
FAULT_PROTOCOL_WRITE_FAILED - 406h	406h
FAULT_NOT_IMPLEMENTED_FOR_THIS_PROTOCOL - 407h	407h
FAULT_PROTOCOL_INVALID_WRITE_DATA - 408h	408h
FAULT_PROTOCOL_INVALID_ADDRESS - 409h	409h
FAULT_GENERAL_TAG_ERROR - 40Ah	40Ah
FAULT_DATA_TOO_LARGE - 40Bh	40Bh
FAULT_PROTOCOL_INVALID_KILL_PASSWORD - 40Ch	40Ch
FAULT_PROTOCOL_KILL_FAILED - 40Eh	40Eh
FAULT_PROTOCOL_BIT_DECODING_FAILED - 40Fh	40Fh
FAULT_PROTOCOL_INVALID_EPC - 410h	410h
FAULT_PROTOCOL_INVALID_NUM_DATA - 411h	411h
FAULT_GEN2_PROTOCOL_OTHER_ERROR - 420h	420h
FAULT_GEN2_PROTOCOL_MEMORY_OVERRUN_BAD_PC - 423h	423h
FAULT_GEN2_PROTOCOL_MEMORY_LOCKED - 424h	424h
FAULT_GEN2_PROTOCOL_INSUFFICIENT_POWER - 42Bh	42Bh
FAULT_GEN2_PROTOCOL_NON_SPECIFIC_ERROR - 42Fh	42Fh
FAULT_GEN2_PROTOCOL_UNKNOWN_ERROR - 430h	430h

FAULT_NO_TAGS_FOUND – (400h)

Cause

A command was received (such as like read, write, or lock) but the operation failed. There are many reasons that can cause this error to occur.

Here is a list of possible reasons that could be causing this error:

- ♦ No tag in the RF field
- ♦ Read/write power too low
- ♦ Antenna not connected
- ♦ Tag is weak or dead

Solution

Make sure there is a good tag in the field and all parameters are set up correctly. The best way to check this is to try few tags of the same type to rule out a weak tag. If none passed, then it could be SW configuration such as protocol value, antenna, and so forth, or a placement configuration like a tag location.

FAULT_NO_PROTOCOL_DEFINED – 401h

Cause

A command was received to perform a protocol command but no protocol was initially set. The reader powers up with no protocols set.

Solution

A protocol must be set before the reader can begin RF operations.

FAULT_INVALID_PROTOCOL_SPECIFIED – 402h

Cause

The protocol value was set to a protocol that is not supported with the current version of SW.

Solution

This value is invalid or this version of SW does not support the protocol value. Check the documentation for the correct values for the protocols in use and that you are licensed for it.

FAULT_WRITE_PASSED_LOCK_FAILED – 403h

Cause

During a Write Tag Data for ISO18000-6B or UCODE, if the lock fails, this error is returned. The write command passed but the lock did not. This could be a bad tag.

Solution

Try to write a few other tags and make sure that they are placed in the RF field.

FAULT_PROTOCOL_NO_DATA_READ – 404h

Cause

A command was sent but did not succeed.

Solution

The tag used has failed or does not have the correct CRC. Try to read a few other tags to check the HW/SW configuration.

FAULT_AFE_NOT_ON – 405h

Cause

A command was received for an operation, like read or write, but the AFE was in the off state.

Solution

Make sure the region and tag protocol have been set to supported values.

FAULT_PROTOCOL_WRITE_FAILED – 406h

Cause

An attempt to modify the contents of a tag failed. There are many reasons for failure.

Solution

Check that the tag is good and try another operation on a few more tags.

FAULT_NOT_IMPLEMENTED_FOR_THIS_PROTOCOL – 407h

Cause

A command was received which is not supported by a protocol.

Solution

Check the documentation for the supported commands and protocols.

FAULT_PROTOCOL_INVALID_WRITE_DATA – 408h

Cause

An ID write was attempted with an unsupported/incorrect ID length.

Solution

Verify the Tag ID length being written.

FAULT_PROTOCOL_INVALID_ADDRESS – 409h

Cause

A command was received attempting to access an invalid address in the tag data address space.

Solution

Make sure that the address specified is within the scope of the tag data address space and available for the specific operation. The protocol specifications contain information about the supported addresses.

FAULT_GENERAL_TAG_ERROR – 40Ah

Cause

This error is used by the GEN2 module. This fault can occur if the read, write, lock, or kill command fails. This error can be internal or functional.

Solution

Make a note of the operations you were performing and contact ThingMagic at <http://support.thingmagic.com>

FAULT_DATA_TOO_LARGE – 40Bh

Cause

A command was received to Read Tag Data with a data value larger than expected or it is not the correct size.

Solution

Check the size of the data value in the message sent to the reader.

FAULT_PROTOCOL_INVALID_KILL_PASSWORD – 40Ch

Cause

An incorrect kill password was received as part of the Kill command.

Solution

Check the password.

FAULT_PROTOCOL_KILL_FAILED - 40Eh

Cause

Attempt to kill a tag failed for an unknown reason

Solution

Check tag is in RF field and the kill password.

FAULT_PROTOCOL_BIT_DECODING_FAILED - 40Fh

Cause

Attempt to operate on a tag with an EPC length greater than the Maximum EPC length setting.

Solution

Check the EPC length being written.

FAULT_PROTOCOL_INVALID_EPC – 410h

Cause

This error is used by the GEN2 module indicating an invalid EPC value has been specified for an operation. This fault can occur if the read, write, lock, or kill command fails.

Solution

Check the EPC value that is being passed in the command resulting in this error.

FAULT_PROTOCOL_INVALID_NUM_DATA – 411h

Cause

This error is used by the GEN2 module indicating invalid data has been specified for an operation. This fault can occur if the read, write, lock, or kill command fails.

Solution

Check the data that is being passed in the command resulting in this error.

FAULT_GEN2_PROTOCOL_OTHER_ERROR - 420h

Cause

This is an error returned by Gen2 tags. Its a catch-all for error not covered by other codes.

Solution

Check the data that is being passed in the command resulting in this error. Try with a different tag.

FAULT_GEN2_PROTOCOL_MEMORY_OVERRUN_BAD_PC - 423h

Cause

This is an error returned by Gen2 tags. The specified memory location does not exist or the PC value is not supported by the Tag.

Solution

Check the data that is being written and where its being written to in the command resulting in this error.

FAULT_GEN2_PROTOCOL_MEMORY_LOCKED - 424h

Cause

This is an error returned by Gen2 tags. The specified memory location is locked and/or permalocked and is either not writable or not readable.

Solution

Check the data that is being written and where its being written to in the command resulting in this error. Check the access password being sent.

FAULT_GEN2_PROTOCOL_INSUFFICIENT_POWER - 42Bh

Cause

This is an error returned by Gen2 tags. The tag has insufficient power to perform the memory-write operation.

Solution

Try moving the tag closer to the antenna. Try with a different tag.

FAULT_GEN2 PROTOCOL_NON_SPECIFIC_ERROR - 42Fh

Cause

This is an error returned by Gen2 tags. The tag does not support error specific codes.

Solution

Check the data that is being written and where its being written to in the command resulting in this error. Try with a different tag.

FAULT_GEN2 PROTOCOL_UNKNOWN_ERROR - 430h

Cause

This is an error returned by M6e when no more error information is available about why the operation failed.

Solution

Check the data that is being written and where its being written to in the command resulting in this error. Try with a different tag.

Analog Hardware Abstraction Layer Faults

FAULT_AHAL_INVALID_FREQ – 500h

Cause

A command was received to set a frequency outside the specified range.

Solution

Check the values you are trying to set and be sure that they fall within the range of the set region of operation.

FAULT_AHAL_CHANNEL_OCCUPIED – 501h

Cause

With LBT enabled an attempt was made to set the frequency to an occupied channel.

Solution

Try a different channel. If supported by the region of operation turn LBT off.

FAULT_AHAL_TRANSMITTER_ON – 502h

Cause

Checking antenna status while CW is on is not allowed.

Solution

Do not perform antenna checking when CW is turned on.

FAULT_ANTENNA_NOT_CONNECTED – 503h

Cause

An attempt was made to transmit on an antenna which did not pass the antenna detection when antenna detection was turned on.

Solution

Connect a detectable antenna (antenna must have some DC resistance).

FAULT_TEMPERATURE_EXCEED_LIMITS – 504h

Cause

The module has exceeded the maximum or minimum operating temperature and will not allow an RF operation until it is back in range.

Solution

Take steps to resolve thermal issues with module:

- ♦ Reduce duty cycle
- ♦ Add heat sink
- ♦ Use [Power Save Mode \(non-DRM Compliant\)](#)

FAULT_POOR_RETURN_LOSS – 505h

Cause

The module has detected a poor return loss and has ended RF operation to avoid module damage.

Solution

Take steps to resolve high return loss on receiver:

- ♦ Make sure antenna VSWR is within module specifications
- ♦ Make sure antennas are correctly attached before transmitting
- ♦ Check environment to ensure no occurrences of high signal reflection back at antennas.

FAULT_AHAL_INVALID_ANTENA_CONFIG – 507h

Cause

An attempt to set an antenna configuration that is not valid.

Solution

Use the correct antenna setting or change the reader configuration.

Tag ID Buffer Faults

The following table lists the common faults discussed in this section.

Fault Message	Code
FAULT_TAG_ID_BUFFER_NOT_ENOUGH_TAGS_AVAILABLE - 600h	600h
FAULT_TAG_ID_BUFFER_FULL - 601h	601h
FAULT_TAG_ID_BUFFER_REPEATED_TAG_ID - 602h	602h
FAULT_TAG_ID_BUFFER_NUM_TAG_TOO_LARGE - 603h	603h

FAULT_TAG_ID_BUFFER_NOT_ENOUGH_TAGS_AVAILABLE – 600h

Cause

A command was received to get a certain number of tag ids from the tag id buffer. The reader contains less tag ids stored in its tag id buffer than the number the host is sending.

Solution

Send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_TAG_ID_BUFFER_FULL – 601h

Cause

The tag id buffer is full.

Solution

Make sure the baud rate is set to a higher frequency than the /reader/gen2/BLF frequency. Send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_TAG_ID_BUFFER_REPEATED_TAG_ID – 602h

Cause

The module has an internal error. One of the protocols is trying to add an existing TagID to the buffer.

Solution

Send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_TAG_ID_BUFFER_NUM_TAG_TOO_LARGE – 603h

Cause

The module received a request to retrieve more tags than is supported by the current version of the software.

Solution

Send a testcase reproducing the behavior to support@thingmagic.com.

System Errors

FAULT_SYSTEM_UNKNOWN_ERROR – 7F00h

Cause

The error is internal.

Solution

Send a testcase reproducing the behavior to support@thingmagic.com.

FAULT_TM_ASSERT_FAILED – 7F01h

Cause

An unexpected Internal Error has occurred.

Solution

The error will cause the module to switch back to Bootloader mode. When this occurs make note of the operations you were executing, save FULL error response and send a testcase reproducing the behavior to support@thingmagic.com.

Appendix B: Getting Started - Devkit

Devkit Hardware

Included Components

With the devkit, you will receive the following components:

- ♦ The M6e module and power/interface developers board
- ♦ One USB cable
- ♦ One antenna
- ♦ One coax cable
- ♦ One 9V power supply
- ♦ International power adapter kit
- ♦ Sample tags
- ♦ One paper insert:
 - *QuickStart Guide* - Details on which documents and software to download to get up and running quickly, along with details on how to register for and contact support.

Setting up the DevKit

When setting up the DevKit, use the following procedures:

- ♦ [Connecting the Antenna](#)
- ♦ [Powering up and Connecting to a PC](#)

Connecting the Antenna

ThingMagic supplies one antenna that can read tags from 20' away with most of the provided tags. The antenna is monstatic. Use the following procedure to connect the antenna to the DevKit.

1. Connect one end of the coax cable to the antenna.
2. Connect the other end of the cable to the antenna port 1 connector on the DevKit.

Powering up and Connecting to a PC

After connecting the antenna you can power up the DevKit and establish a host connection.

1. Connect the USB cable (use only the black connector) from a PC to the developer's kit. There are two [Devkit USB Interfaces](#) options.
2. Plug the power supply into the DevKit's DC power input connector.
3. The LED next to the DC input jack, labeled DS1, should light up. If it doesn't light up check jumper [J17](#) to make sure the jumper is connecting pins 2 and 3
4. Follow the steps based on the [Devkit USB Interfaces](#) used and make note of the COM port or /dev device file, as appropriate for your operating system the USB interface is assigned.
5. To start reading tags start the [Demo Application](#) (Universal Reader Assistant).

**W A R N I N G !**

While the module is powered up, do not touch components. Doing so may be damaged the devkit and M6e module.

Devkit USB Interfaces

USB/RS232

The USB interface (connector labeled **USB/RS232**) closest to the power plug is to the RS232 interface of the M6e through an FTDI USB to serial converter. The drivers for it are available at

<http://www.ftdichip.com/Drivers/VCP.htm>

Please follow the instructions in the installation guide appropriate for your operating system.

Native USB

To use the M6e native USB interface (connector labeled **USB**), if on Windows, a few installation steps are required for Windows to recognize the M6e and properly configure the communications protocol. In order to use the USB interface with Windows you must have the m6eultra.inf file (available for download from rfid.thingmagic.com/devkit). The installation steps are:

1. Plug in the USB cable to the M6e (devkit) and PC.
2. Windows should report it has “Found New Hardware - Mercury6eUltra” and open the Hardware Installation Wizard.
3. Select the Install from a list or specific location (Advanced) option, click Next.
4. Select Don’t search..., click Next, then Next again.
5. Click Have Disk and navigate to where the m6eultra.inf file is stored and select it, click Open, then OK.
6. “Mercury6eUltra” should now be shown under the Model list. Select it and click Next then Finished.

Note

The M6e driver file has not been Microsoft certified so compatibility warnings will be displayed. These can be ignored and clicked through.

7. A COM port should now be assigned to the M6e. If you aren’t sure what COM port is assigned you can find it using the Windows Device Manager:
 - a. Open the Device Manager (located in Control Panel | System).
 - b. Select the Hardware tab and click Device Manager.

- c. Select View I Devices by Type I Ports (COM & LPT) The device appears as Mercury6eUltra (COM#).

Devkit Jumpers

J8

Jumpers to connect M6e I/O lines to devkit.

J9

Header for alternate power supply. Make sure DC plug (J1) is not connected if using J9.

J10, J11, J13, J15

Jump pins OUT to GPIO# to connect M6e GPIO lines to output LEDs. Jump pins IN to GPIO# to connect M6e GPIO to corresponding input switches SW [3 - 6] GPIO#. Make sure GPIO lines are correspondingly configured as input or outputs (see [Configuring GPIO Settings](#)).

J14

Can be used to connect GPIO lines to external circuits. If used jumpers should be removed from [J10, J11, J13, J15](#).

J16

Jump pins 1 and 2 or 2 and 3 to reset devkit power supply. Same as using switch SW1 except allows for control by external circuit.

J17

Jump pins 1 and 2 to use the 5V INPUT and GND inputs to provide power. Jump pins 2 and 3 to use the DevKit's DC power jack and power brick power.

J19

Jump SHUTDOWN to GND to enable module. While grounded SHUTDOWN pushbutton (SW2) will break circuit and shutdown the M6e (see [M6e Digital Connector Signal Definition](#)). AUTO_BOOT controls [Reset Line](#).

Devkit Schematics

Available upon request from support@thingmagic.com.

Demo Application

A demo application which supports multi-protocol reading and writing is provided in the MercuryAPI SDK package and as a standalone application, both are available on www.thingmagic.com/manuals-firmware. The executable for this example is included in the MercuryAPI SDK package under `/cs/samples/exe/Universal-Reader-Assistant2.0.exe`.

See the *Universal-Reader-Assistant 2.0 User Guide* (on www.thingmagic.com/manuals-firmware) for usage details.

See the *MercuryAPI Programming Guide* for details on using the MercuryAPI.

Notice on Restricted Use of the DevKit

The Mercury6e Developers Kit (DevKit) is intended for use solely by professional engineers for the purpose of evaluating the feasibility of applications.

The user's evaluation must be limited to use within a laboratory setting. This DevKit has not been certified for use by the FCC in accordance with Part 15 of the FCC regulations, ETSI, KCC or any other regulatory bodies and may not be sold or given for public use.

Distribution and sale of the DevKit is intended solely for use in future development of devices which may be subject to regional regulatory authorities governing radio emission. This DevKit may not be resold by users for any purpose. Accordingly, operation of the DevKit in the development of future devices is deemed within the discretion of the user and the user shall have all responsibility for any compliance with any regional regulatory authority governing radio emission of such development or use, including without limitation reducing electrical interference to legally acceptable levels. All products developed by user must be approved by the appropriate regional regulatory authority governing radio emission prior to marketing or sale of such products and user bears all responsibility for obtaining the prior appropriate regulatory approval, or approval as needed from any other authority governing radio emission.

Appendix C: Environmental Considerations

This Appendix details environmental factors that should be considered relating to reader performance and survivability.

ElectroStatic Discharge (ESD) Considerations



W A R N I N G !



The M6e antenna ports may be susceptible to damage from Electrostatic Discharge (ESD). Equipment failure can result if the antenna or communication ports are subjected to ESD. Standard ESD precautions should be taken during installation to avoid static discharge when handling or making connections to the M6 reader antenna or communication ports. Environmental analysis should also be performed to ensure static is not building up on and around the antennas, possibly causing discharges during operation.

ESD Damage Overview

In M6e-based reader installations where readers have failed without known cause, based on anecdotal information ESD has been found to be the most common cause. Failures due to ESD tend to be in the M6e power amplifier section (PA). PA failures typically manifest themselves at the software interface in the following ways:

- ♦ RF operations (read, write, etc.) respond with **Assert - 7F01** - indicating a fatal error. This is typically due to the module not being able to reach the target power level due to PA damage.
- ♦ RF operations (read, write, etc.) respond with **No Antenna Connected/Detected** even when a known good antenna is attached.
- ♦ Unexpected **Invalid Command errors**, indicating command not supported, when that command had worked just fine shortly before. The reason a command becomes suddenly not supported is that the reader, in the course of its self protection routines,

has returned to the bootloader to prevent any further damage. This jump to boot loader caused by power amp damage occurs at the start of any read tag commands.

Ultimately determining that ESD is the root cause of failures is difficult because it relies on negative result experiments, i.e. it is the lack of failure after a configuration change, rather than a positive flag wave that says “I’m ESD”. Such flag waves are sometimes, but only sometimes, available at the unpackaged transistor level under high power microscopy. The remoteness of microscopic examination from the installed field failures is indicative of the high cost of using such analysis methods for chasing down ESD issues. Therefore most ESD issue resolutions will be using the negative result experiments to determine success.

ESD discharges come with a range of values, and like many things in life there is the “matter of degree”. For many installations, the M6e has been successfully deployed and operates happily. For these, there is no failure issue, ESD or otherwise. For a different installation that with bare M6e, has a failure problem from ESD, there will be some distribution of ESD intensities occurring. Without knowledge of a limit in the statistics of those intensities, there may always be the bigger zap waiting in the wings. For the bare M6e equipped with the mitigation methods described below, there will always be the rouge ESD discharge that exceeds any given mitigation, and results in failure. Fortunately, many installations will have some upper bound on the value of ESD events given the geometry of that installation.

Several sequential steps are recommended for a) determining the ESD is the likely cause of a given group of failures, and b) enhancing the M6e’s environment to eliminate ESD failures. The steps vary depending on the required M6e output power in any given application.

Identifying ESD as the Cause of Damaged Readers

The following are some suggested methods to determine if ESD is a cause of reader failures, i.e. ESD diagnostics. Please remember- some of these suggestions have the negative result experiment problem.

- ♦ Return failed units for analysis. Analysis should be able to say if it is the power amplifier that has in fact failed, but won’t be able to definitively identify that the cause is ESD. However, ESD is one of the more common causes of PA failure.
- ♦ Measure ambient static levels with static meter. *AlphaLabs SVM2* is such a meter, but there are others. You may be surprised at the static potentials floating detected. However, high static doesn’t necessarily mean discharges, but should be considered cause for further investigation. High levels that keep changing are highly indicative of discharges.
- ♦ Touch some things around the antenna, and operating area. If you feel static discharges, that qualitatively says quite a bit about what is in front of the antenna.

What actually gets to the M6e is also strongly influenced by the antenna installation, cabling, and grounding discussed above.

- ♦ Use the mean operating time statistic before and after one or more of the changes listed below to quantitatively determine if the change has resulted in an improvement. Be sure to restart your statistics after the change.

Common Installation Best Practices

The following are common installation best practices which will ensure the readers isn't being unnecessarily exposed to ESD in even low risk environments. These should be applied to all installations, full power or partial power, ESD or not:

- ♦ Insure that M6e, M6e enclosing housing (e.g. Vega reader housing), and antenna ground connection are all grounded to a common low impedance ground.
- ♦ Verify R-TNC knurled threaded nuts are tight and stay tight. Don't use a thread locking compound that would compromise the grounding connection of the thread to thread mate. If there is any indication that field vibration might cause the R-TNC to loosen, apply RTV or other adhesive externally.
- ♦ Use antenna cables with double shield outer conductors, or even full metallic shield semirigid cables. ThingMagic specified cables are double shielded and adequate for most applications. ESD discharge currents flowing ostensibly on the outer surface of a single shield coaxial cable have been seen to couple to the inside of coaxial cables, causing ESD failure. Avoid RG-58. Prefer RG-223.
- ♦ Minimize ground loops in coaxial cable runs to antennas. Having the M6e and antenna both tied to ground (per item 1) leads to the possibility of ground currents flowing along antenna cables. The tendency of these currents to flow is related to the area of the conceptual surface marked out by the antenna cable and the nearest continuous ground surface. When this conceptual surface has minimum area, these ground loop current are minimized. Routing antenna cables against grounded metallic chassis parts helps minimize ground loop currents.
- ♦ Keep the antenna radome in place. It provides significant ESD protection for the metallic parts of the antenna, and protects the antenna from performance changes due to environmental accumulation.
- ♦ Keep careful track of serial numbers, operating life times, numbers of units operating. You need this information to know that your mean operating life time is. Only with this number will you be able to know if you have a failure problem in the first place, ESD or otherwise. And then after any given change, whether things have improvement or not. Or if the failures are confined to one instantiation, or distributed across your population.

Raising the ESD Threshold

For applications where full M6e power is needed for maximum tag read range and ESD is suspected the following components are recommended additions to the installation to raise the level of ESD the reader can tolerate:

- ♦ Select or change to an antenna with all radiating elements grounded for DC. The MTI MT-262031-T(L,R)H-A is such an antenna. The Laird IF900-SF00 and CAF95956 are not such antennas. The grounding of the antenna elements dissipates static charge leakage, and provides a high pass characteristic that attenuates discharge events. (This also makes the antenna compatible with the M6e antenna detect methods.)
- ♦ Install a Minicircuits SHP600+ high pass filter in the cable run at the M6e (or Vega or other finished reader) end. This additional component will reduce transmit power by 0.4 dB which may affect read range in some critical applications. However the filter will significantly attenuate discharges and improve the M6e ESD survival level.

Note

The SHP600+ is not rated for the full +31.5 dBm output of the M6e reader at +85 degree C. Operation at reduced temperature has been anecdotally observed to be OK, but has not been fully qualified by ThingMagic.

- ♦ Install a Diode Clamp* circuit immediately outboard from the SHP600 filter. This will reduce transmit power by an additional 0.4 dB, but in combination with the SHP600 will further improve the M6e ESD survival level. * Not yet productized. Needs DC power, contact support@thingmagic.com for details.

Further ESD Protection for Reduced RF Power Applications

In addition to the protective measures recommended above, for applications where reduced M6e RF power is acceptable and ESD is suspected the following protective measures can also be applied:

- ♦ Install a one watt attenuator with a decibel value of +30 dBm minus the dBm value needed for tag power up. Then run the reader at +30 dBm instead of reduced transmit power. This will attenuate inbound ESD pulses by the installed decibel value, while keeping the tag operation generally unchanged. Attenuators of 6 dB have been shown to not adversely effect read sensitivity. Position the attenuator as close to the M6e as feasible.
- ♦ As described above add the SHP600 filter immediately adjacent to the attenuator, on the antenna side.
- ♦ Add Diode Clamp, if required, adjacent to the SHP600, on the antenna side.

Variables Affecting Performance

Reader performance may be affected by the following variables, depending on the site where your Reader is being deployed:

- ♦ [Environmental](#)
- ♦ [Tag Considerations](#)
- ♦ [Multiple Readers](#)

Environmental

Reader performance may be affected by the following environmental conditions:

- ♦ Metal surfaces such as desks, filing cabinets, bookshelves, and wastebaskets may enhance or degrade Reader performance.
- ♦ Antennas should be mounted far away from metal surfaces that may adversely affect the system performance.
- ♦ Devices that operate at 900 MHz, such as cordless phones and wireless LANs, can degrade Reader performance. The Reader may also adversely affect the performance of these 900 MHz devices.
- ♦ Moving machinery can interfere the Reader performance. Test Reader performance with moving machinery turned off.
- ♦ Fluorescent lighting fixtures are a source of strong electromagnetic interference and if possible should be replaced. If fluorescent lights cannot be replaced, then keep the Reader cables and antennas away from them.
- ♦ Coaxial cables leading from the Reader to antennas can be a strong source of electromagnetic radiation. These cables should be laid flat and not coiled up.

Tag Considerations

There are several variables associated with tags that can affect Reader performance:

- ♦ **Application Surface:** Some materials, including metal and moisture, interfere with tag performance. Tags applied to items made from or containing these materials may not perform as expected.

- ♦ Tag Orientation: Reader performance is affected by the orientation of the tag in the antenna field. The ThingMagic antenna is circularly polarized, so it reads face-to but not edge-to.
- ♦ Tag Model: Many tag models are available. Each model has its own performance characteristics.

Multiple Readers

The Reader adversely affect performance of 900 MHz devices. These devices also may degrade performance of the Reader.

- ♦ Antennas on other Readers operating in close proximity may interfere with one another, thus degrading performance of the Readers.
- ♦ Interference from other antennas may be eliminated or reduced by using either one or both of the following strategies:
 - w Affected antennas may be synchronized by a separate user application using a time-multiplexing strategy.
 - w Antenna power can be reduced by reconfiguring the RF Transmit Power setting for the Reader.

Note

Performance tests conducted under typical operating conditions at your site are recommended to help you optimize system performance.