



Safety Plan Lane Assistance

Document Version: [Version]
Template Version 1.0, Released on 2017-06-21



Document history

[Instructions: Fill in the date, version and description fields. You can fill out the Editor field with your name if you want to do so. Keep track of your editing as if this were a real world project.

For example, if this were your first draft or first submission, you might say version 1.0. If this is a second submission attempt, then you'd add a second line with a new date and version 2.0]

Date	Version	Editor	Description
2018-3-9	1.0	Mike Ni	First Attempt

Table of Contents

[Instructions: We have provided a table of contents. If the table of contents is not showing up correctly in your word processor of choice, please update it. The table of contents should show each section of the document and page numbers or links. Most word processors can do this for you. In Google Docs, you can use headings for each section and then go to Insert > Table of Contents. Microsoft Word has similar capabilities]

Document history

Table of Contents

Introduction

Purpose of the Safety Plan

Scope of the Project

Deliverables of the Project

Item Definition

Goals and Measures

Goals

<u>Measures</u>

Safety Culture

Safety Lifecycle Tailoring

Roles

Development Interface Agreement

Confirmation Measures

Introduction

Purpose of the Safety Plan

[Instructions: Answer what is the purpose of a safety plan?]

The purpose of this safety plan is to provide an overall framework for the Lane Assistance item, and to assign roles and responsibilities for functional safety for this item

Scope of the Project

[Instructions: Nothing to do here. This is for your information.]

For the lane assistance project, the following safety lifecycle phases are in scope:

Concept phase
Product Development at the System Level
Product Development at the Software Level

The following phases are out of scope:

Product Development at the Hardware Level Production and Operation

Deliverables of the Project

[Instructions: Nothing to do here. This is for your information.]

The deliverables of the project are:

Safety Plan
Hazard Analysis and Risk Assessment
Functional Safety Concept
Technical Safety Concept
Software Safety Requirements and Architecture

Item Definition

[Instructions:
REQUIRED
Discuss these key points about the system:
What is the item in question, and what does the item do?
What are its two main functions? How do they work?
Which subsystems are responsible for each function?
What are the boundaries of the item? What subsystems are inside the item? What elements or subsystems are outside of the item?
OPTIONAL

OPTIONAL

Optionally, include information about these points as well. These were not included in the lectures, but you might be able to find this information online:

- Operational and Environmental Constraints. This could especially be limited to camera performance; lane lines are difficult to detect in snow, fog, etc
- Legal requirements in your country for lane assistance technology
- National and International Standards Related to the Item
- Records of previously known safety-related incidents or behavioral shortfalls

1

The lane assistance item alerts the driver that the vehicle has accidentally departed its lane ,and attempts to steer the vehicle back toward the center of the lane


The Lane Assistance System will have two functions:

- 1. Lane departure warning;
- 2. Lane keeping assistance.

The lane departure warning function shall apply an oscillating steering to torque to provide the driver a haptic feedback.

The lane keeping assistance function shall apply the steering torque when active in order to stay in ego lane.

The camera subsystem, the electronic power steering subsystem, and the car display system are each responsible for each of the functions.

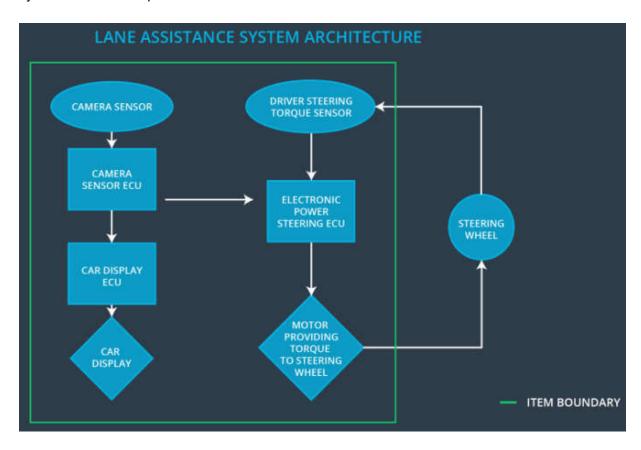

Goals and Measures

Goals

[Instructions:

Describe the major goal of this project; what are we trying to accomplish by analyzing the lane assistance functions with ISO 26262?]

There are two safety goals:

- 1. The oscillating steering torque from the lane departure warning function shall be limited
- The lane keeping assistance function shall be time limited, and the additional steering torque shall end after a given time interval so that the driver cannot misuse the system for autonomous driving.

Measures

[Instructions:

Fill in who will be responsible for each measure or activity. Hint: The lesson on Safety Management Roles and Responsibilities.

The options are:
All Team Members
Safety Manager
Project Manager
Safety Auditor
Safety Assessor

Measures and Activities	Responsibility	Timeline
Follow safety processes	All Team Members	Constantly
Create and sustain a safety culture	All Team Members	Constantly
Coordinate and document the planned safety activities	Safety Manager	Constantly

Allocate resources with adequate functional safety competency	Project Manager	Within 2 weeks of start of project	
Tailor the safety lifecycle	Safety Manager	Within 4 weeks of start of project	
Plan the safety activities of the safety lifecycle	Safety Manager	Within 4 weeks of start of project	
Perform regular functional safety audits	Safety Auditor	Once every 2 months	
Perform functional safety pre- assessment prior to audit by external functional safety assessor	Safety Manager	3 months prior to main assessment	
Perform functional safety assessment	Safety Assessor	Conclusion of functional safety activities	

Safety Culture

[Instructions:

Describe the characteristics of your company's safety culture. How do these characteristics help maintain your safety culture. Hint: See the lesson about Safety Culture

]

My company have following characteristics:


- High priority: safety has the highest priority among competing constraints like cost and productivity
- **Accountability**: processes ensure accountability such that design decisions are traceable back to the people and teams who made the decisions
- Rewards: the organization motivates and supports the achievement of functional safety
- Penalties: the organization penalizes shortcuts that jeopardize safety or quality
- **Independence**: teams who design and develop a product should be independent from the teams who audit the work
- Well defined processes: company design and management processes should be clearly defined
- Resources: projects have necessary resources including people with appropriate skills
- **Diversity**: intellectual diversity is sought after, valued and integrated into processes
- Communication: communication channels encourage disclosure of problems

Safety Lifecycle Tailoring

[Instructions:

Describe which phases of the safety lifecycle are in scope and which are out of scope for this particular project. Hint: See the Introsection of this document

We are working on updating an lane assistance system that already exists. Hazard Analysis and Risk Assessment , Functional Safety Concept , Product Development at the System Level , Product Development at the Software Level , Safety Validation are in scope. Initiation of the Safety Lifecycle , Product Development at the Hardware Level ,Function Assessment ,Release for Production ,Production and Operation are out of scope.

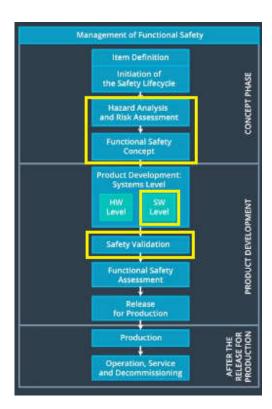

Roles

[Instructions:

This section is here for your reference. You do not need to do anything here. It is provided to help with filling out the development interface agreement section.

Role Org	
----------	--

Functional Safety Manager- Item Level	OEM
Functional Safety Engineer- Item Level	OEM
Project Manager - Item Level	ОЕМ
Functional Safety Manager- Component Level	Tier-1
Functional Safety Engineer- Component Level	Tier-1
Functional Safety Auditor	OEM or external
Functional Safety Assessor	OEM or external

Development Interface Agreement

[Instructions:

Assume in this project that you work for the tier-1 organization as described in the above roles table. You are taking on the role of both the functional safety manager and functional safety engineer.

Please answer the following questions:

1. What is the purpose of a development interface agreement?

A DIA (development interface agreement) defines the roles and responsibilities between companies involved in developing a product. All involved parties need to agree on the contents of the DIA before the project begins.

2. What will be the responsibilities of your company versus the responsibilities of the OEM? Hint: In this project, the OEM is supplying a functioning lane assistance system. Your company needs to analyze and modify the various sub-systems from a functional safety viewpoint.

i

- Responsibilities of Tier-1 is to analyze and modify three sub-systems (Camera system, Electronic Power Steering system, Car Display system) from a functional safety viewpoint.
- Responsibilities of OEM is to design and develop the Lane Assistance system in Item level and to audit and assess this project.

Confirmation Measures

[Instructions:

Please answer the following questions:

- 1. What is the main purpose of confirmation measures?
- 2. What is a confirmation review?
- 3. What is a functional safety audit?
- 4. What is a functional safety assessment?

]

- 1. Confirmation measures serve two purposes:
- that a functional safety project conforms to ISO 26262, and
- that the project really does make the vehicle safer.

2.Confirmation review

Ensures that the project complies with ISO 26262. As the product is designed and developed, an independent person would review the work to make sure ISO 26262 is being followed.

3. Functional safety audit

Checking to make sure that the actual implementation of the project conforms to the safety plan is called a functional safety audit.

4. Functional safety assessment

Confirming that plans, designs and developed products actually achieve functional safety is called a functional safety assessment.

A safety plan could have other sections that we are not including here. For example, a safety plan would probably contain a complete project schedule.

There might also be a "Supporting Process Management" section that would cover "Part 8: Supporting Processes" of the ISO 26262 functional safety standard. This would include descriptions of how the company handles requirements management, change management, configuration management, documentation management, and software tool usage and confidence.

Similarly, a confirmation measures section would go into more detail about how each confirmation will be carried out.