

STM32CubeIDE user guide

Introduction

STM32CubeIDE is an all-in-one multi-OS development tool, and is part of the [STM32Cube](#) software ecosystem. It contains an advanced C/C++ development platform supporting software development of STM32-based products.

This document details the STM32CubeIDE features and usage, including how to get started, create and build projects, debug with standard and advanced techniques, and many other software analysis solutions. STM32CubeIDE is based on the Eclipse C/C++ Development Tools™ (CDT™) and GCC toolchain, which cannot be entirely described in this user manual. Additional information on Eclipse® is available from the STM32CubeIDE embedded help system. Special documents covering the details of the toolchain and GDB servers are included within the product.



1 Getting started

STM32CubeIDE supports STM32 products based on the Arm® Cortex® processor. Refer to STMicroelectronics documents listed in [Section 12 References](#) for details.

Note: *Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.*



1.1 Product information

STM32CubeIDE is an advanced C/C++ development platform with peripheral configuration, code generation, code compilation, linking, and debug features. It is based on the Eclipse®/CDT™ framework and GCC toolchain for the development, and GDB for the debugging. It allows the integration of the hundreds of existing plugins that complete the features of the Eclipse® IDE.

STM32CubeIDE integrates ST MCUFinder ([ST-MCU-FINDER-PC](#)) and [STM32CubeMX](#) functionalities to offer all-in-one tool experience. It makes it easy to create new STM32 MCU or board projects and build them using the included GCC toolchain.

STM32CubeIDE includes a build analyzer and a static stack analyzer that provide the user with useful information about project status and memory requirements.

STM32CubeIDE also includes standard and advanced debugging features including views of CPU core registers, memories, and peripheral registers, as well as live variable watch, and serial wire viewer interface. A fault analyzer displays error information if an error is triggered by the STM32 processor during a debug session.

Figure 1. STM32CubeIDE key features

Device support			Project			Debugging															
Integrated ST-MCU-FINDER	Integrated STM32CubeMX	STMicroelectronics STM32 products	Import Workbench for STM32	Import Atollic® TrueSTUDIO®	Build Analyzer	Static Stack Analyzer	SFRs view	Live Expressions view	SWV and ITM views	Multi-core and multi-board debugging	ST-LINK GDB server										
Project wizard				Debug configuration and launch																	
GNU toolchain				GDB debugger																	
Eclipse® plugins		Modified plugins				C/C++ development tools (CDT)															
Eclipse® core platform																					
Supporting Windows®, Linux®, and macOS®																					

Legend:

Specific STM32CubeIDE functions

Open-based updated by ST

Base technology platform

STM32CubeIDE main function groups

Third-party solutions

Operating systems

DT64654V1

1.1.1 System requirements

STM32CubeIDE is tested and verified on the Microsoft® Windows®, Linux®, and macOS® operating systems.

Important: STM32CubeIDE supports only 64-bit OS versions. For more details about supported versions of operating systems, refer to [ST-02].

Note: macOS® is a trademark of Apple Inc., registered in the U.S. and other countries and regions.
Linux® is a registered trademark of Linus Torvalds.

1.1.2 Downloading the latest STM32CubeIDE version

The latest version of STM32CubeIDE is available for free download from the www.st.com/stm32softwaretools website.

1.1.3 Installing STM32CubeIDE

The STM32CubeIDE installation guide [ST-04] gives directions on how to install on supported versions of Windows®, Linux® and macOS®. It is possible to have several versions of STM32CubeIDE installed in parallel. Read the installation guide if STM32CubeIDE is not already installed or if a new version must be installed.

[Installing updates and additional Eclipse® plugins](#) in this manual also provides information on how to install updates.

1.1.4 License

STM32CubeIDE is delivered under the *Mix Ultimate Liberty+OSS+3rd-party V1* software license agreement (SLA0048).

For more details about the license agreement of each component, refer to [ST-02].

1.1.5 Support

There are several different support options provided by STMicroelectronics. For instance, the ST Community is offering places to meet people with similar mind-set all over the world at any time. Choose the support option by visiting www.st.com/content/st_com/en/support/support-home.html.

1.2 Using STM32CubeIDE

1.2.1 Basic concept and terminology

The basic concept using STM32CubeIDE and Eclipse® terminology is outlined in this section.

Workspaces

When starting STM32CubeIDE, a workspace is selected. The workspace contains the development environment to be used. Technically, the workspace is a directory that may hold projects. The user may access any project within the active workspace.

A project contains files, which may be organized into sub-directories. Files existing somewhere else on the computer can also be linked to the project.

A single computer may hold several workspaces at various locations in the file system. The user may switch between workspaces, but only one workspace can be active at a time. Switching workspace is a quick way of switching from one set of projects to another.

In practice, the workspace and project model facilitate a well-structured hierarchy of workspaces, containing projects, which in turn contain files.

Information center

The first time STM32CubeIDE is started and a workspace is selected, the *Information Center* is opened. The *Information Center* provides quick access to start a new project, get access to videos, read STM32CubeIDE documentation, or get access to ST support and community. The *Information Center* can be easily accessed at any time via the *Information Center* toolbar button or from the *Help* menu.

Perspectives, menu bar, toolbar

When the *Information Center* is closed, STM32CubeIDE displays a perspective, which contains a menu bar, toolbar, views and editors. Each perspective is optimized for a special type of work. For instance, the *C/C++ perspective* is meant for creating, editing and building projects. The *Debug perspective* is intended to be used when debugging code on hardware.

Each perspective can be customized according to the user's need. It is possible to reset the perspective at any time if, for instance, too many views are opened or if the views are reordered. It is also possible to create new perspectives.


Views and editors

A perspective normally displays many views. Each view is developed to present specific information, which for instance can be collected from the project or from an embedded system under debug.

A perspective has one editor area. The editor can be used to edit project files. Many files can be edited in different tabs in the editor.

STM32CubeIDE window

Figure 2. STM32CubeIDE window

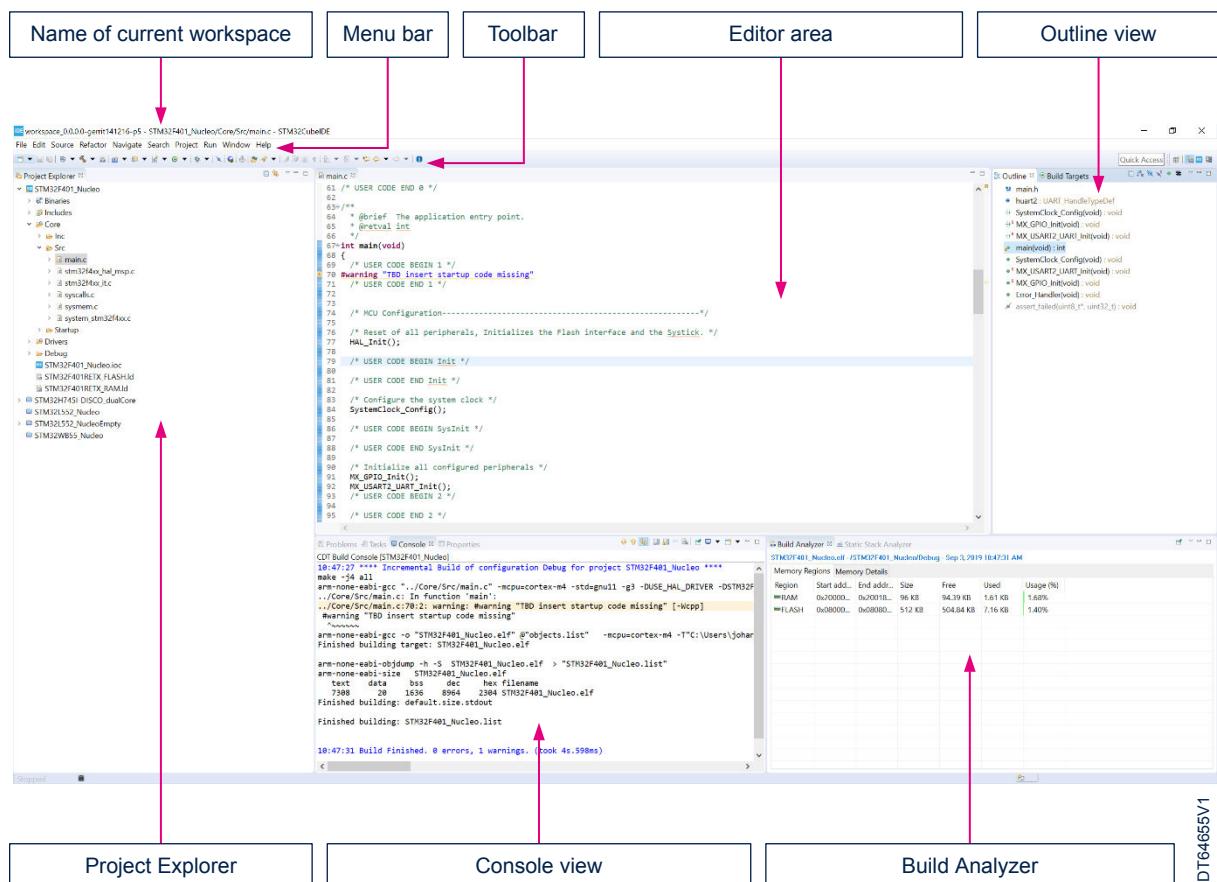

1.2.2 Starting STM32CubeIDE

Start STM32CubeIDE by performing the following steps depending on the operating system used.

Windows®

If a desktop shortcut is created during the installation of the product, the shortcut can be used to start STM32CubeIDE. The product can also be started from the Windows® start menu under STMicroelectronics programs.

Otherwise:

1. Locate where STM32CubeIDE is installed, for instance in C:\ST\STM32CubeIDE_1.0.2
2. Open the STM32CubeIDE folder
3. Start the `stm32cubeide.exe` program

Linux® or macOS®

When using Linux® or macOS®, the program can be started in a similar way by opening the STM32CubeIDE folder where the product is installed.


STM32CubeIDE Launcher

When the product is started, it displays the *STM32CubeIDE Launcher* dialog with workspace selection. The first time the product is started, it presents a default location and workspace name. The dialog enables the user to select the name and location of the active workspace for holding all the projects currently accessible by the user. Any newly created project is stored in this workspace. The workspace is created if it does not yet exist.

Note:

If Windows® is used, avoid locating the workspace folder too many levels below the file system root to avoid exceeding the Windows® path length character limitations. Build errors occur if the file paths become longer than what Windows® can handle.

Figure 3. STM32CubeIDE Launcher – Workspace selection

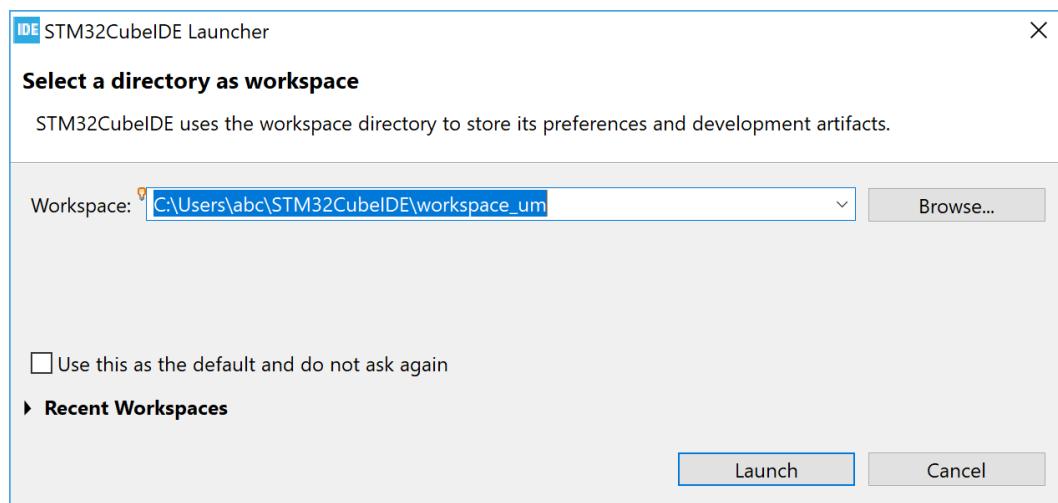


Click on the [Launch] button to launch STM32CubeIDE. The first time, it opens the *Information Center*, which is described in Section 1.3 *Information Center*.

1.2.3 Help system

The *Help* menu provides several different help systems as seen in [Figure 4](#). The *Information Center* contains links to all available STM32CubeIDE documentation. It is also recommended for new users to try different Eclipse® built-in help systems to get an understanding of Eclipse® basics.

[Figure 4. Help menu](#)

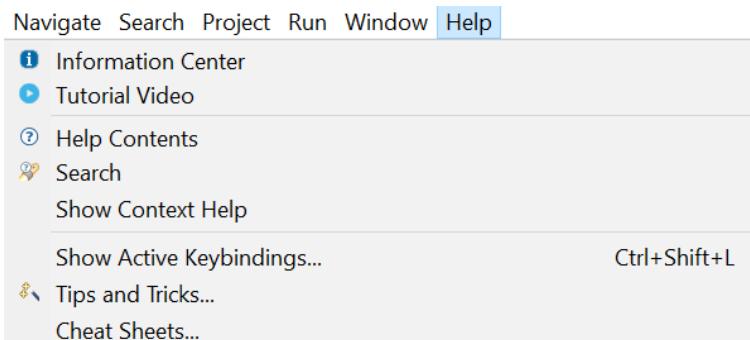

1.3 Information Center

The *Information Center* provides quick access to:


1. Start a new project
2. Import an existing project
3. Get access to videos
4. Read STM32CubeIDE documentation
5. Get access to *Getting Started with STM32CubeIDE (STM32CubeIDE quick start guide [ST-03])*
6. Explore the STM32 MPU and MCU wikis
7. Get access to STMicroelectronics support and community on Twitter™, Facebook™, YouTube™, or ST community at [community.st.com](#)
8. Explore the STMicroelectronics application tools

It is not required to read all material before using the product for the first time. Rather, it is recommended to consider the *Information Center* as a collection of reference information to return to, whenever required.

1.3.1 Accessing the *Information Center*

The *Information Center* can easily be accessed at any time, from any perspective, using the [[Information Center](#)] toolbar button . This icon is located at the right of the toolbar. It is also possible to open the *Information Center* from the [[Help](#)]>[[Information Center](#)] menu command.


[Figure 5. Help - Information Center menu](#)

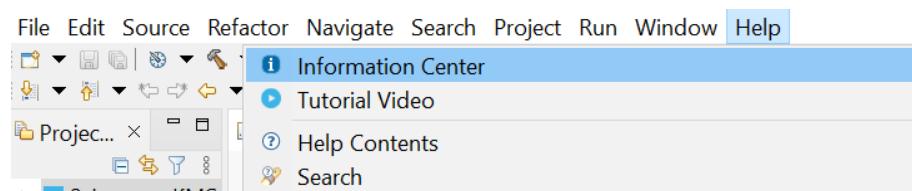

1.3.2 Home page

When the *Information Center* is opened, the *Home* page is displayed. It contains links to start a new project, import projects, read documentation and access STMicroelectronics support and community.

Figure 6. Information Center – Home page

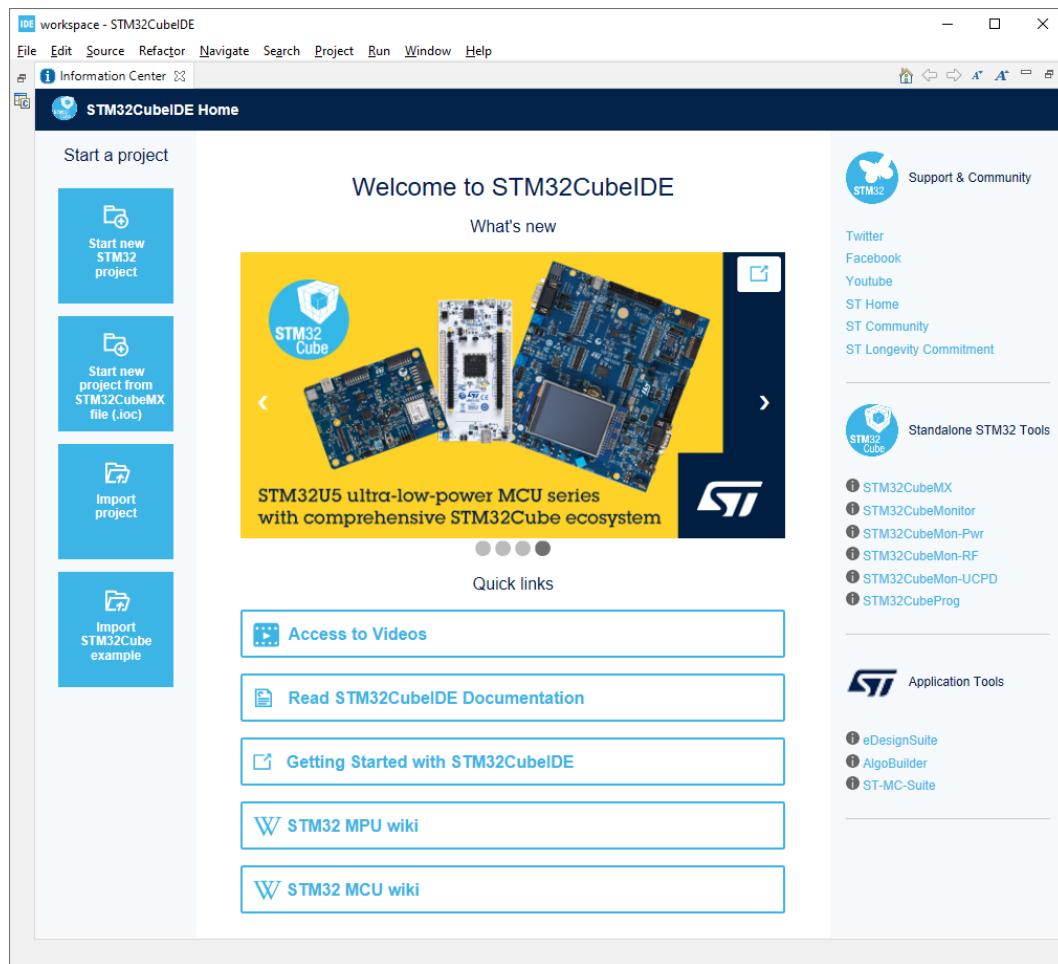

When using an old workspace, the *Information Center* may not display valid information, showing “*This page can't be displayed*” or opening old manuals when accessing documents. In such case, reload the page by clicking on the [Home] button at the top right corner of the *Information Center* window.

1.3.3

Videos

The *Information Center* also contains a video browser page (shown in Figure 8), which is opened from the *Home* page when clicking on the *Access to videos* link. A shortcut in the *Help* menu also provides quick access to the videos, as shown in Figure 7.

Figure 7. Help – Tutorial video



Figure 8. Information Center – Video browser page

This screenshot shows the 'Videos' page within the STM32CubeIDE Information Center. The page is organized into three main sections:

- How to use STM32CubeIDE:** This section contains a single video thumbnail titled "How to use STM32CubeIDE" with a duration of 4:58. It includes a brief description: "Find out more information on our website: <http://bit.ly/STM32CubeIDE>. To read our blog: <http://bit.ly/Blog-STM32CubeIDE>".
- STM32CubeIDE Tutorials:** This section displays five video thumbnails, each with a duration and a brief description:
 - STM32CubeIDE - STM32Cube projects (2:50)
 - STM32CubeIDE - Empty projects (3:54)
 - STM32CubeIDE - Tips and tricks (10:01)
 - STM32CubeIDE - Build configuration (7:36)
 - STM32CubeIDE - Launch configuration (6:34)
- STM32CubeMX:** This section displays five video thumbnails, each with a duration and a brief description:
 - Getting Started with X-CUBE-AZRTOS-H7 (14:32)
 - Getting Started with X-CUBE-BLE1 (12:59)
 - Getting Started with X-CUBE-BLE2 (16:14)
 - Getting Started with X-CUBE-GNSS1 (14:30)
 - Getting Started with X-CUBE-MEMS1 (12:31)
- Discover your STM32 with STM32CubeIDE:** This section displays five video thumbnails, each with a duration and a brief description:
 - How to use STM32CubeIDE (4:58)
 - STM32CubeIDE basics - 01 Introduction (6:28)
 - STM32CubeIDE basics - 02 Board information (2:38)
 - STM32CubeIDE basics - 03 GPIO HAL lab (17:50)
 - STM32CubeIDE basics - 04 EXTI HAL lab (16:34)

Scroll through the *Videos* page and click on a video thumbnail in the list to open it in a web browser. The videos are listed in groups:

- *STM32CubeIDE Tutorials*
- *STM32CubeMX*
- *Discover your STM32 with STM32CubeIDE*

To navigate back to the *Home* page, press *STM32CubeIDE Home* at the top left of the *Information Center*.

The new videos are marked with the keyword “New”. The videos are available from two servers: the YouTube™ server and a dedicated server for China.

1.4

Perspectives, editors and views

STM32CubeIDE is a powerful product with many views, loaded with various features. Displaying all views simultaneously would overload the user with information that may not be relevant to the task at hand.


To overcome such a situation, views can be organized in perspectives, where a perspective contains a number of predefined views and an editor area visible by default. A perspective typically handles one development task, such as *C/C++ Code Editing* or *Debugging*.

1.4.1

Perspectives

The perspectives can be customized according to the user's need; Views can be moved, resized and new views can be opened. It is possible to reset the perspective at any time if, for instance, too many views are opened or if the views are reordered. The perspective is reset by right-clicking the perspective icon in the toolbar and selecting [**Reset**] from the list. This resets the views; Added views in the perspective are closed and the default views are moved to their original location.

Figure 9. Reset perspective

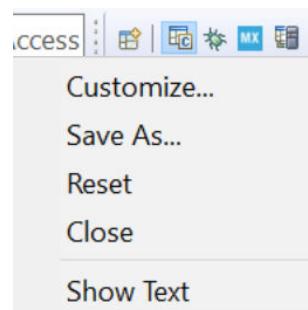

As seen in Figure 9, it is also possible to customize a perspective and save the perspective with a new name. Switching from one perspective to another is a quick way to hide some views and display others. To switch perspective, select the [**Open Perspective**] toolbar buttons at the right of the toolbar.

Figure 10. Toolbar buttons for switching perspective




Another way to switch perspective is to use the menu command [**Window**]>[**Perspective**]>[**Open Perspective**]>[**Other...**] and select the perspective to use.

1.4.1.1

C/C++ perspective

The C/C++ perspective is intended for creating new projects, editing files, and building the project. The left part of the perspective contains the *Project Explorer* view. The editor is located in the middle. The right part contains some views for the project (*Outline* and *Build Targets* views). At the bottom in the example illustrated in Figure 11, there are the *Problems*, *Tasks*, *Console* and *Properties* views. At the lowest right, the *Build analyzer* and *Static stack analyzer* views are displayed.


Figure 11. C/C++ perspective

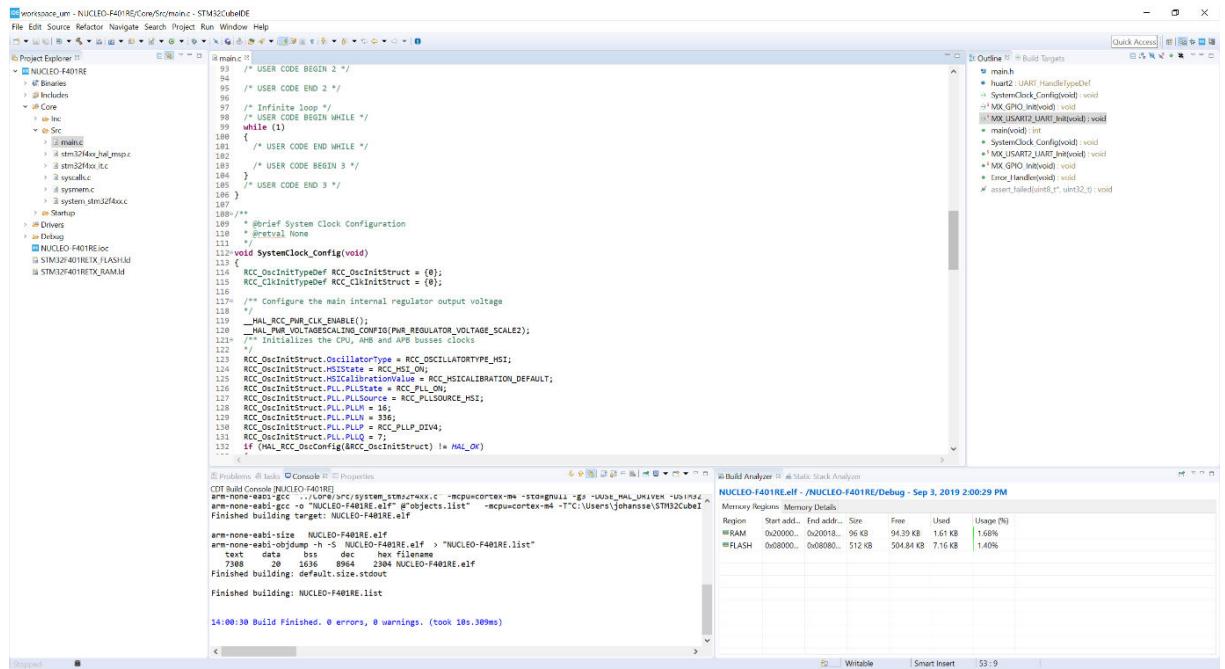

1.4.1.2 Debug perspective

The *Debug* perspective is intended for debugging the code. The *Debug* perspective is normally opened automatically when a new debug session is started. Later, when the debug session is closed, the perspective is switched back to the *C/C++* perspective.


Figure 12. Debug perspective

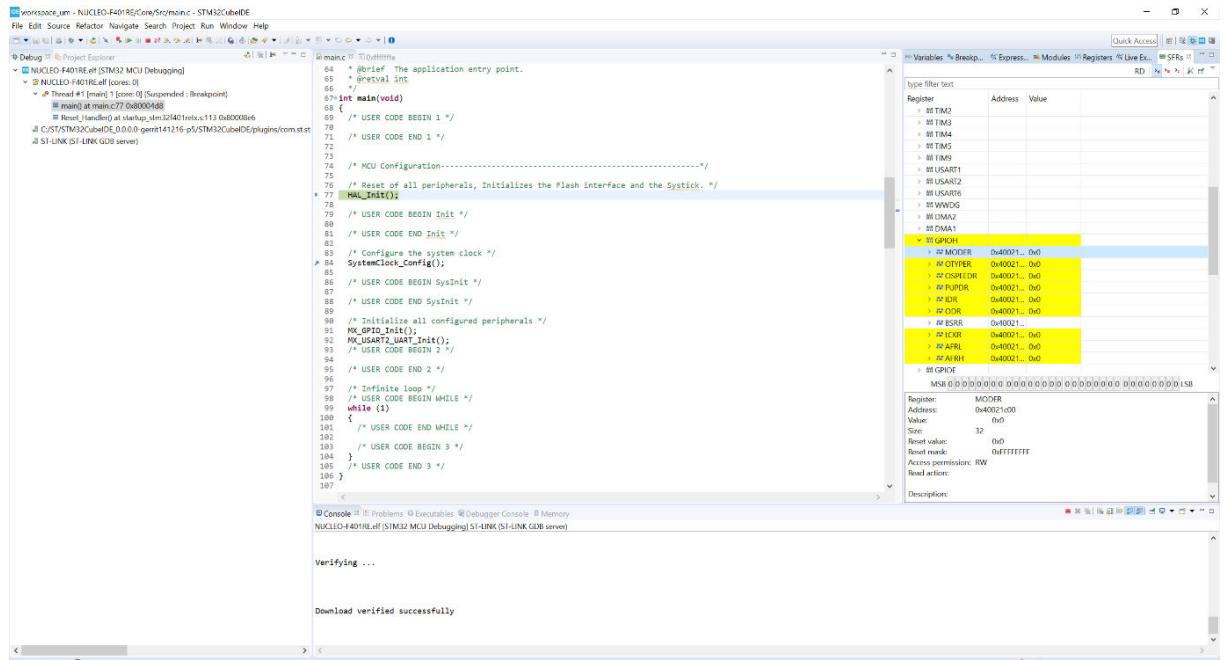

1.4.1.3 Device Configuration Tool perspective

The *Device Configuration Tool* perspective contains the STM32CubeMX device configuration tool integrated in STM32CubeIDE. This perspective is used for device configuration. When an *.ioc file is opened in an editor and the *Device Configuration Tool* perspective is used, the device can be configured in this perspective. How the device configuration is made is described in [ST-14].


Figure 13. Device Configuration Tool perspective

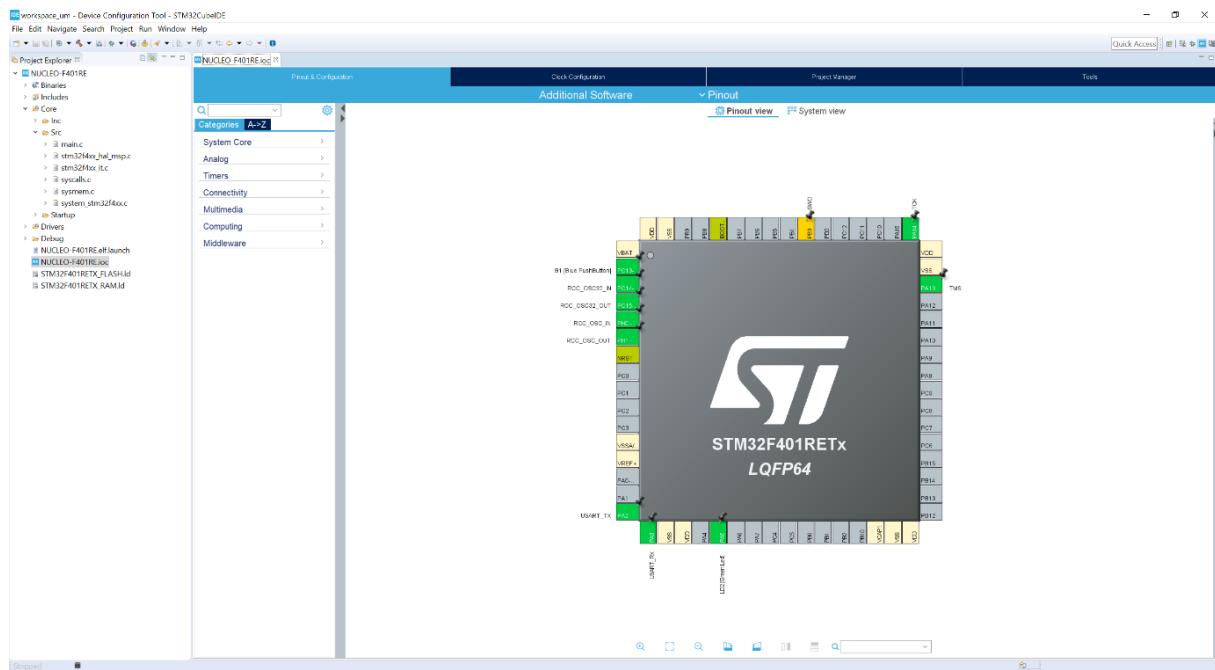

1.4.1.4 *Remote System Explorer perspective*


The *Remote System Explorer* perspective is basically used when developing STM32 Arm® Cortex® MPU-based systems. The *Remote Systems* view is used to view files and the *Remote Shell* view is used to run commands.

Figure 14. Remote System Explorer perspective

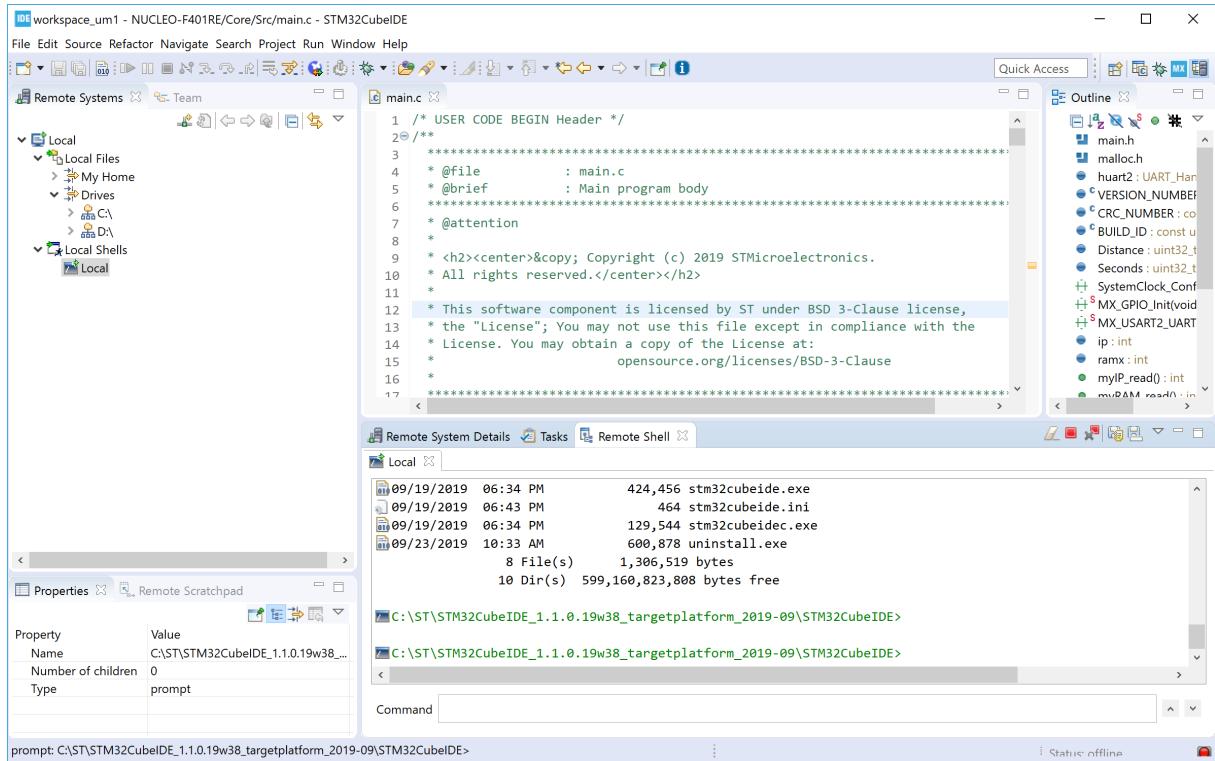

The *Remote Systems* view contains buttons to open a new connection via FTP, Linux®, Local, SSH, Telnet and others.

Figure 15. New connection

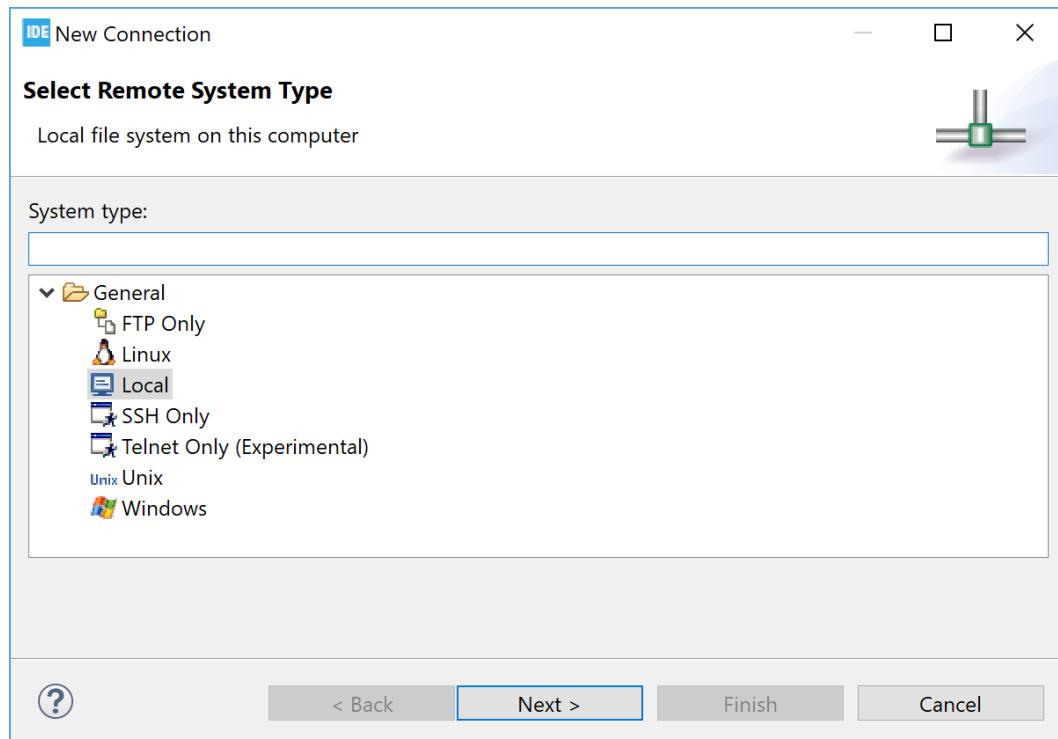

1.4.2 Editors

The editor area in a perspective is used by editors. Any number of editors can be opened simultaneously but only one can be active at a time. Different editors can be associated with different file extensions. Example of editors are; c-editor, linker script editor, ioc-file editor for STM32CubeMX device configuration.


To open a file in the editor, double-click on the file in the *Project Explorer* view or open the file via the [File] menu. When a file is modified in the editor, it is displayed with an asterisk (*) indicating that the file has unsaved changes.

1.4.3 Views

Only the most common views associated with the perspective are displayed by default. There are many more views in the product supporting different features. Some of these views only provide valid data when a debug session is ongoing, while others always display data.


Views can be opened from the [Window]>[Show View] menu by selecting one of the views in the list.

Figure 16. [Show View] menu

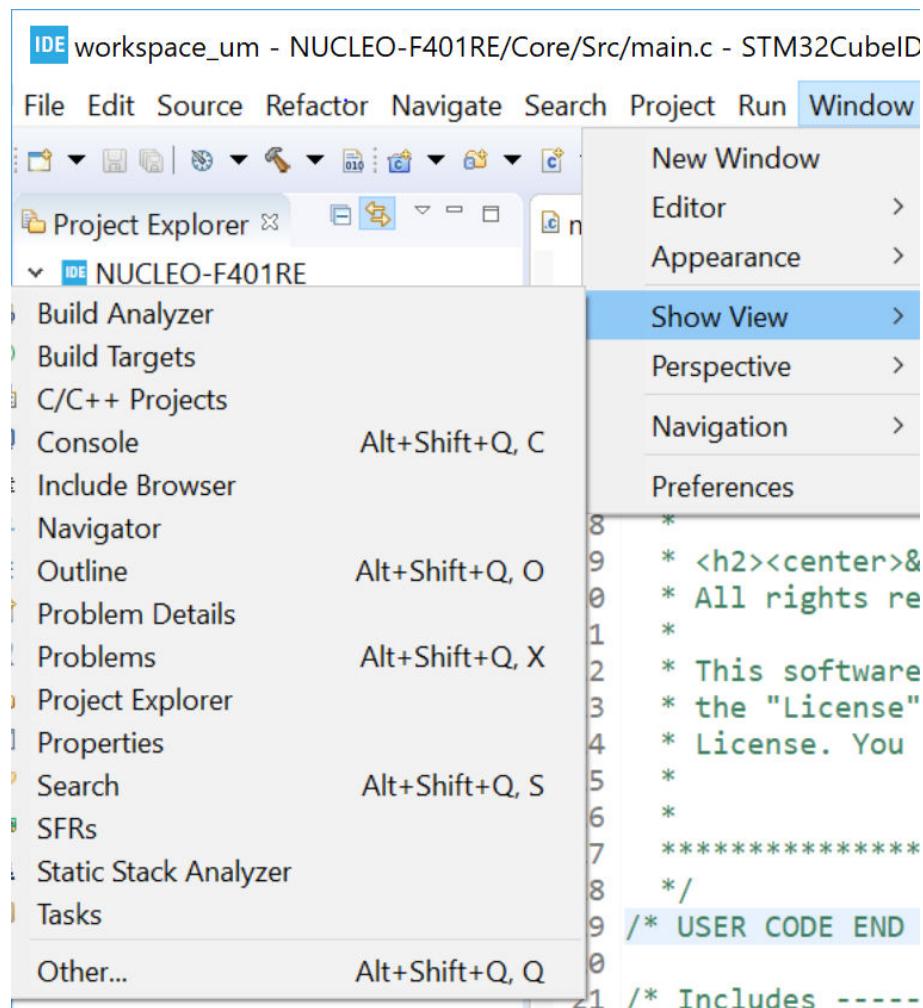

The above list of views in [Figure 16](#) is still not complete. It contains only the most common views for the work task related to the perspective currently selected. To access even more views, select [**Other...**] from the list. This opens the **Show View** dialog box. Double-click on any view to open it and access its additional features.

[Figure 17. Show View dialog](#)

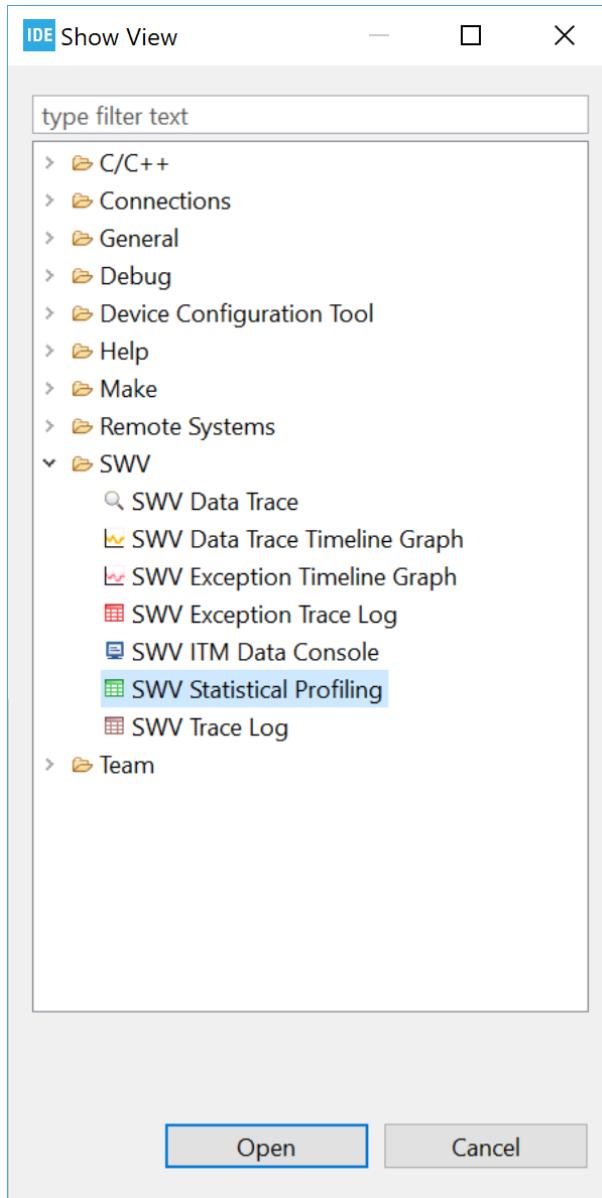

The views can be resized and their positions can be changed: Simply drag the view to a new place in STM32CubeIDE. The view can also be dragged outside the STM32CubeIDE window on the screen. Such detached views are shown in separate windows. Detached views works like the other views but are always shown in front of the workbench. Detached views can be attached again by dragging the tab in the detached view into the STM32CubeIDE window.

To restore the perspective to original state, right-click the perspective icon in the toolbar and select [**Reset**] from the list. Another way to reset the perspective is to use the menu [**Window**]>[**Perspective**]>[**Reset Perspective**].

1.4.4


Quick Access edit field

The magnifying glass in the toolbar opens the *Quick Access* text box, where any search phrase or keyword can be entered. GUI objects like menu commands, toolbar buttons, preference settings or views can be found using the text box. As any search string is typed, the *Quick Access* shows all the GUI objects that match the criteria, in real time. Type a couple of characters or more and see how the list of results is refined correspondingly on-the-fly.

The *Quick Access* is a time saver when looking for a specific GUI object that cannot be found quickly otherwise, such as a preference setting deeply buried in the configuration dialogs. It is also convenient to retrieve a menu command or toolbar button hidden in the currently active perspective.

For example, in [Figure 18](#), the search string “**SWV**” entered in the *Quick Access* provides immediately the list of matching views, GUI commands and preference settings. To open the view or preference setting, click on the GUI object in the search result list.

Figure 18. Quick access

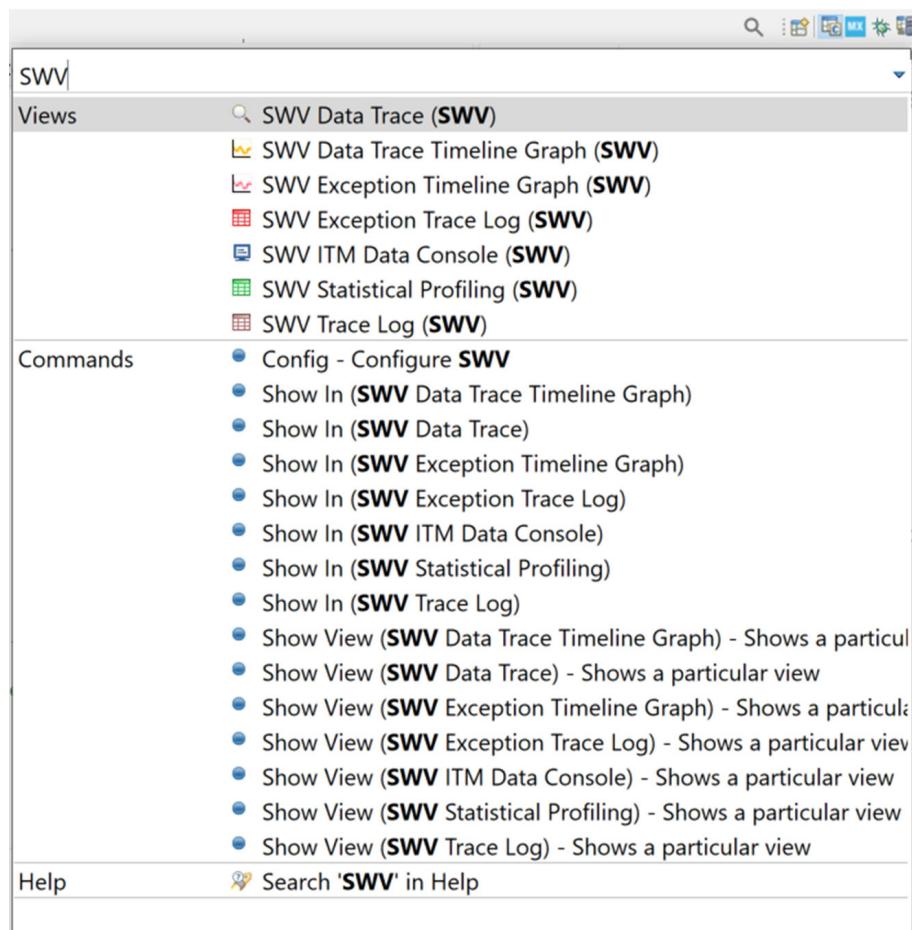


1.5

Configuration - Preferences

STM32CubeIDE can be customized in many ways. The menu [Window]>[Preferences] is used to open the **Preferences** dialog. In this dialog, the left pane is used to navigate to certain preference pages. There is also a filter field, which can be used to narrow down the content displayed. The arrow controls on the upper-right side of the dialog can be used to navigate back and forth across pages. The right pane contains the setting of the displayed preferences. Make any preferred change and press **[Apply]** to update the setting.

[**Restore Defaults**] resets all changes. The preference settings are stored in a metadata folder in the workspace of the application. [Section 1.7 Managing existing workspaces](#) in this user manual provides information on how to backup preferences and copy preferences across workspaces.

Figure 19. Preferences

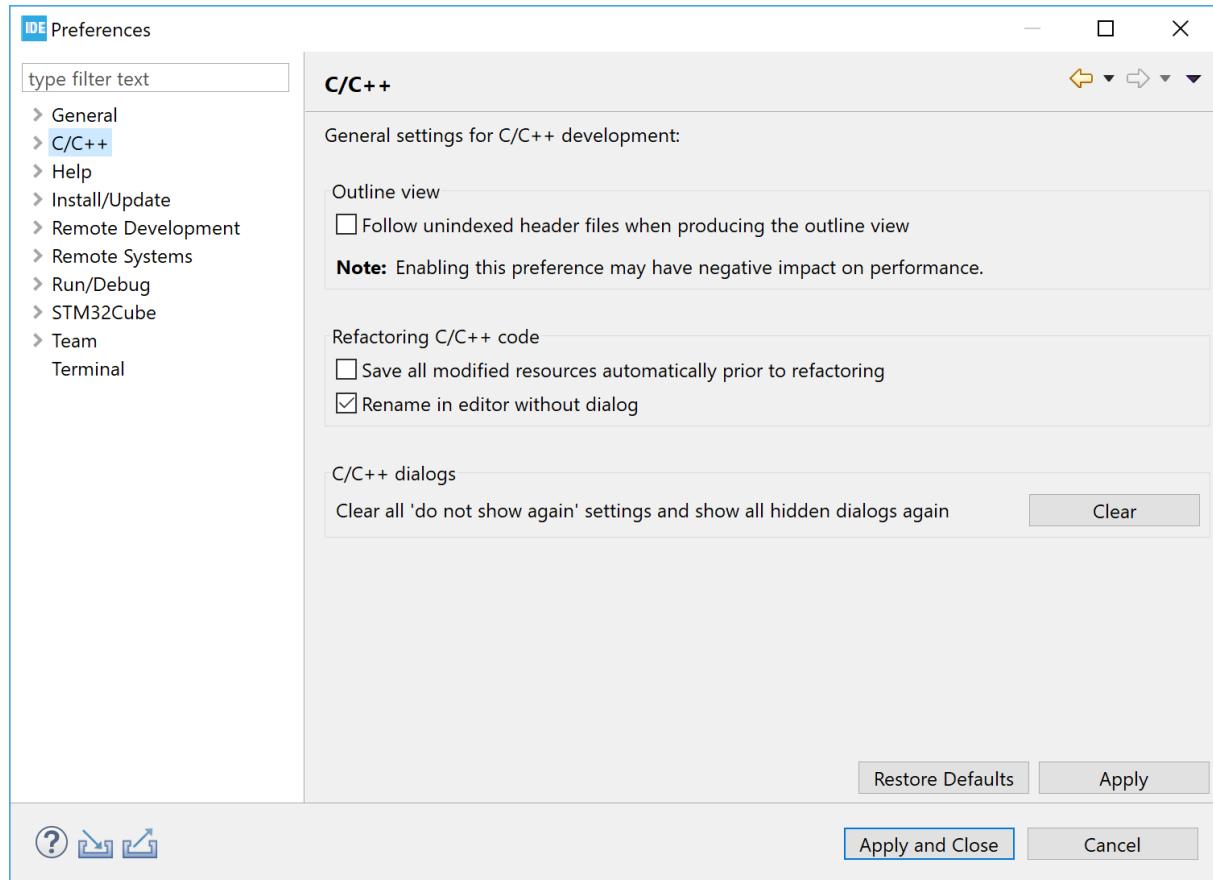


It is advised to walk through the preferences pages and get an understanding of the possible configuration options. The following sections present some of them.

1.5.1 Preferences - Editors

The editor can be configured in many ways. For instance, the menu selection [General]>[Editors]>[Text Editors] provides a *Preferences* pane containing general editor settings such as:

- Displayed tab width
- Insert spaces for tabs
- Highlight current tab
- Show line numbers
- Others

Figure 20. *Preferences - Text Editors*

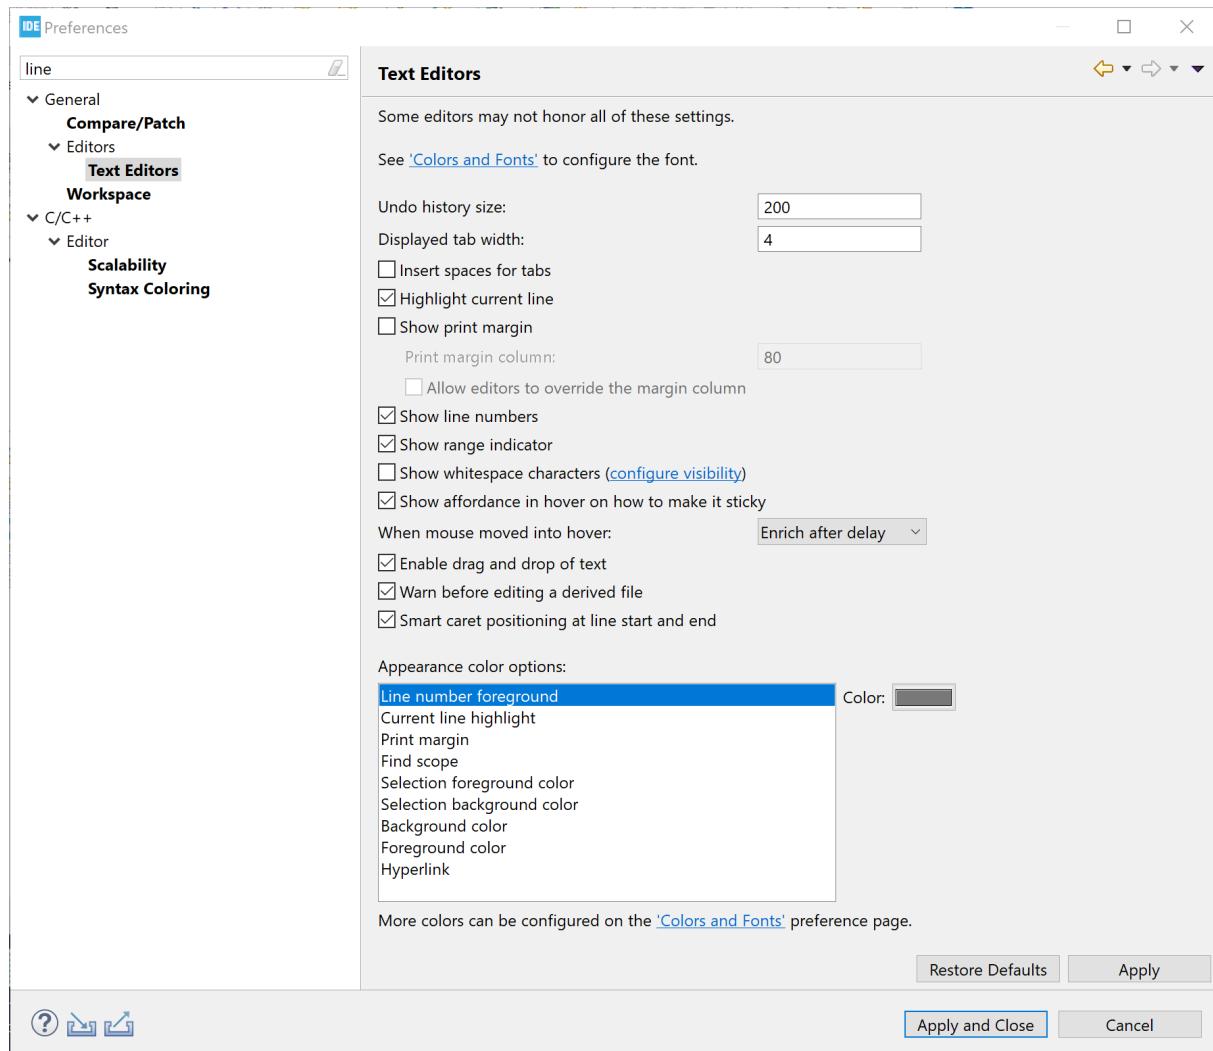


1.5.2 Preferences - Code style formatter

It is possible to configure the editor to use special formatting.


The menu selection [C/C++]>[Code Style]>[Formatter] provides a *Preferences* pane containing settings to set an active profile.

Figure 21. *Preferences - Formatter*

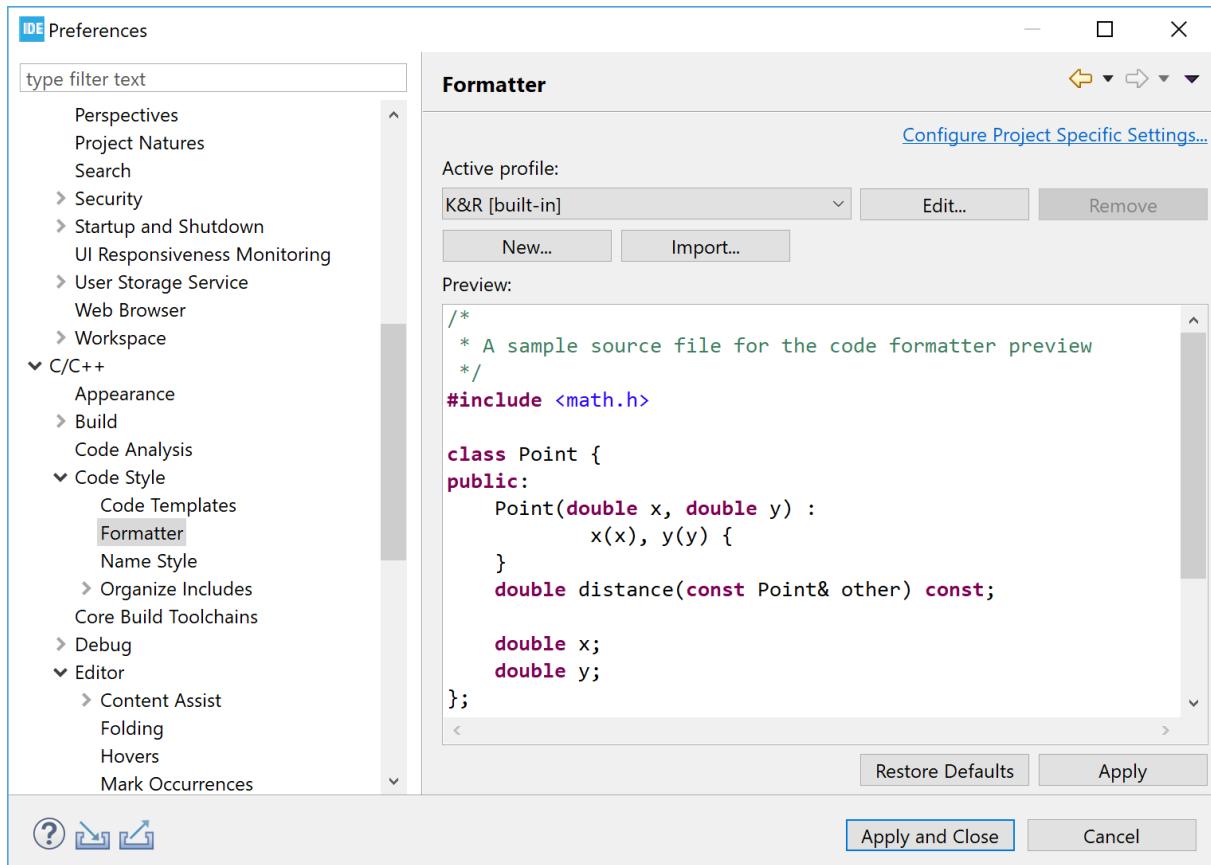

At this point, if [Edit...] is pressed, a new dialog is opened, where the selected profile can be updated according to specific coding rules. This is displayed in [Figure 22](#).


[Figure 22. Preferences - Code style edit](#)

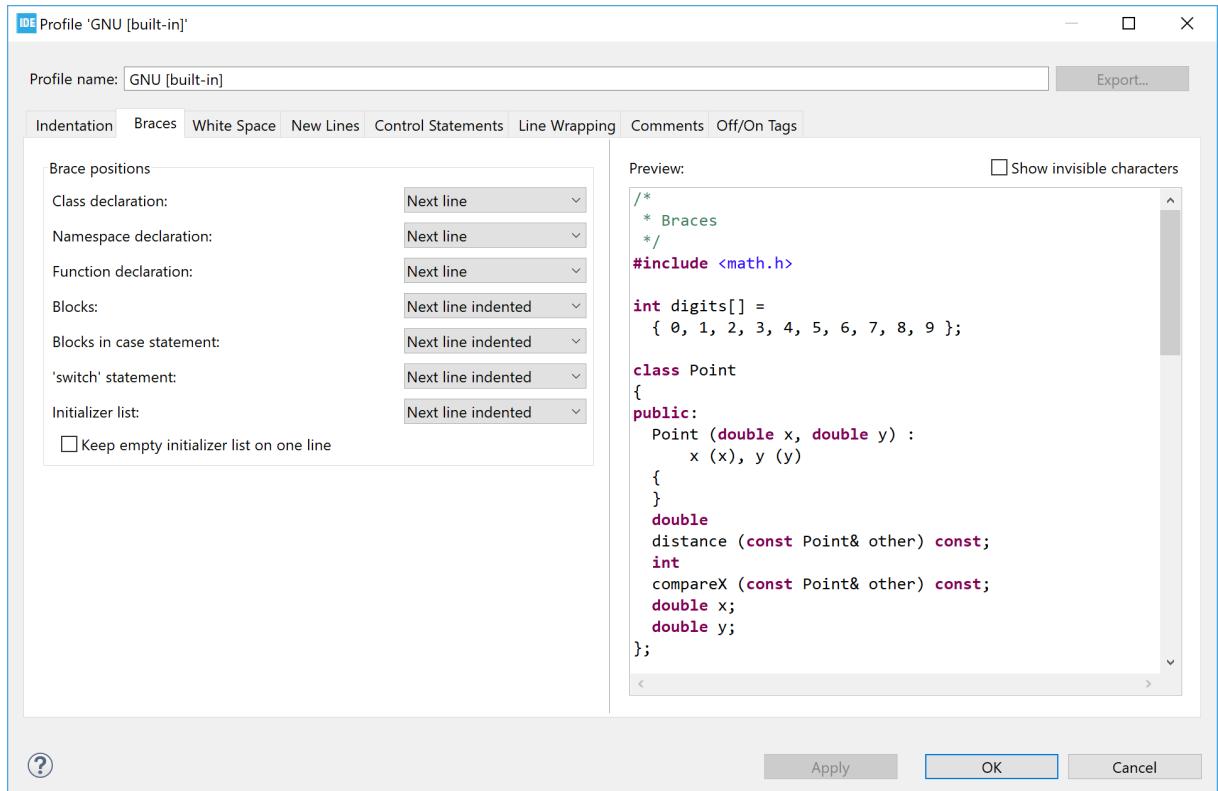

1.5.3 Preferences - Network proxy settings

STM32CubeIDE uses the Internet for instance to get access to STM32 devices information. If a proxy server is used for Internet access, some configuration settings are required in STM32CubeIDE. The proxy settings are set in the *Preferences* pane obtained through [General]>[Network Connections]. To change the settings, set [Active provider] to *Manual* and update the *Proxy entries* for HTTP and HTTPS with specific *Host*, *Port*, *User* and *Password* using the [Edit...] button.

Figure 23. Preferences - Network Connections

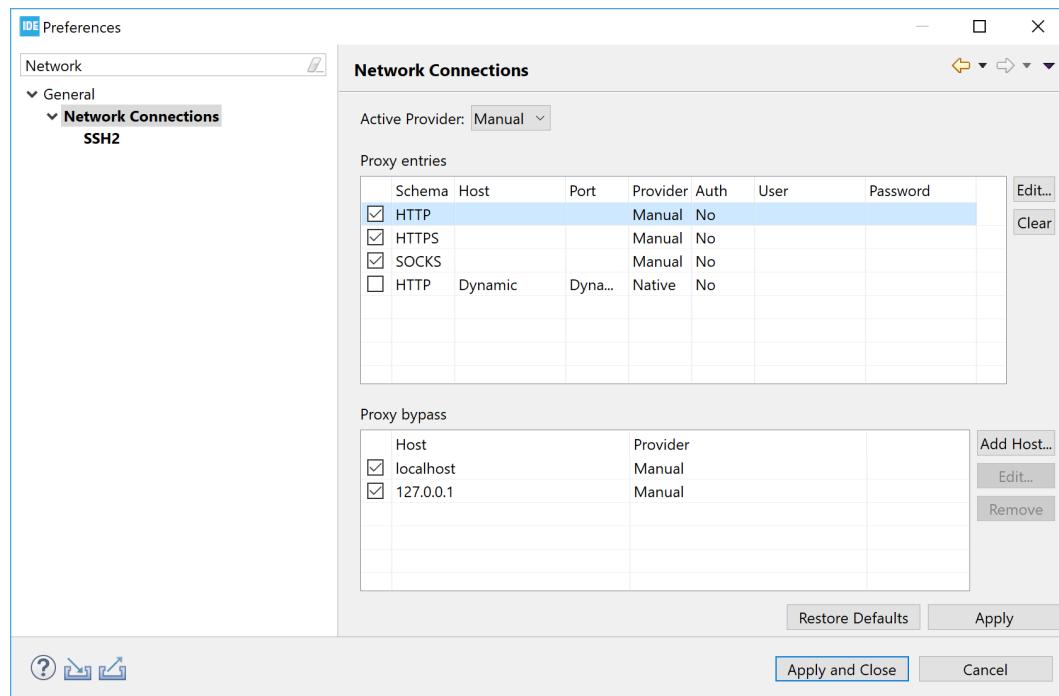

Note: If there is a problem to save the proxy settings, the reason can be a corrupt `secure_storage` file. Proceed as follows to solve the problem:

1. Close all running STM32CubeIDE applications
2. Rename file `C:\Users\user_name\.eclipse\org.eclipse.equinox.security\secure_storage` to a new name
3. Restart STM32CubeIDE
4. Update the proxy network settings, with user and password information, and save them to create a new `secure_storage` file

1.5.4 Preferences - Build variables

The STM32CubeIDE preferences feature build variables that are only visible in the IDE.

The menu selection [C/C++]>[Build]>[Build Variables] provides a *Preferences* pane with *Build Variables*, which can be used as \${VAR} in STM32CubeIDE. Enable [Show system variables] to display all available variables.

Figure 24. Preferences – Build variables


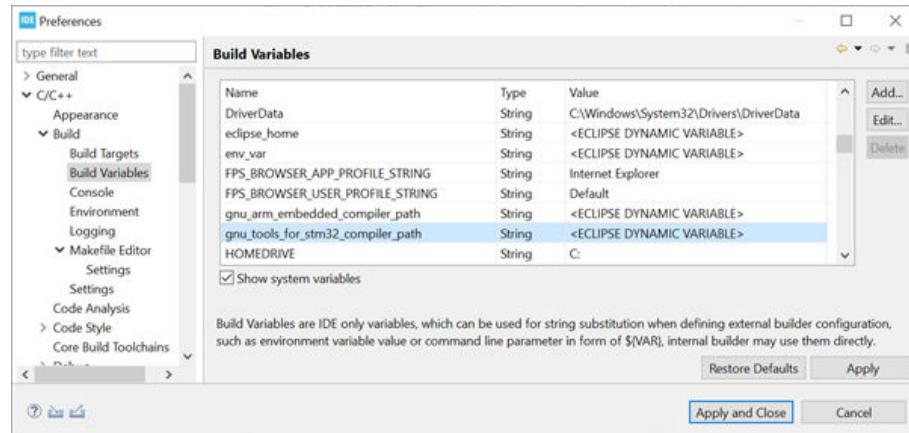


Table 1. Examples of toolchain build variables

Variable	Description
gnu_tools_for_stm32_compiler_path	Path to GNU Tools for STM32 toolchain.
gnu_arm_embedded_compiler_path	Path to GNU Arm Embedded toolchain.
stm32cubeide_make_path	Path to make and BusyBox.

A pre-build step example using build variables to display toolchain version is given in Figure 25.

Figure 25. Pre-build step using build variables

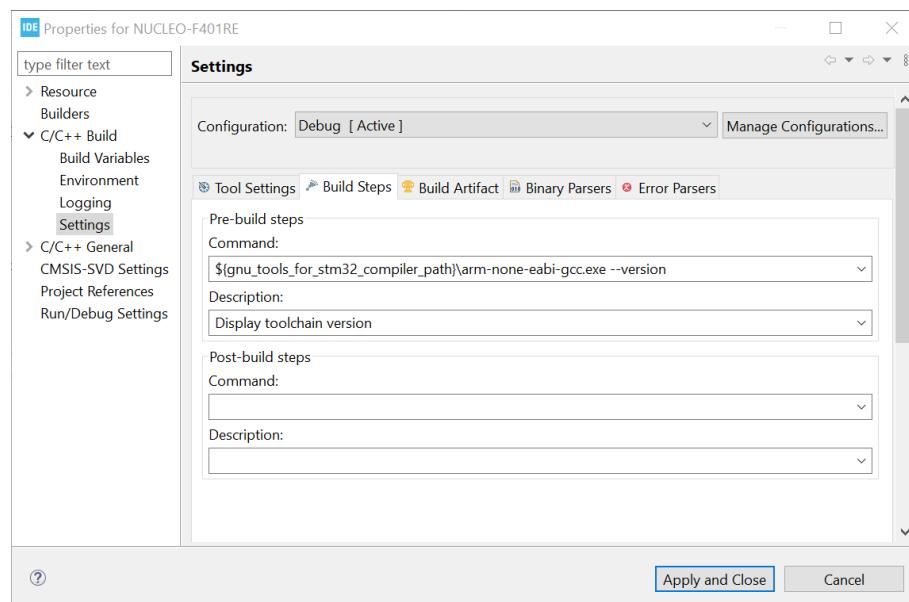

1.6

Workspaces and projects

The basic concepts of workspaces and projects compares as follows:

- A workspace contains projects. Technically, a workspace is a directory containing project directories or references to them.
- A project contains files. Technically, a project is a directory containing files that may be organized in sub-directories.
- A single computer may hold several workspaces at various locations in the file system. Each workspace may contain several projects.
- The user may switch between workspaces, but only one workspace can be active at one time.
- The user may access any project within the active workspace. Projects located in another workspace cannot be accessed, unless the user switches to that workspace.
- The files included in a project do not need to be physically located in a folder in the project but can be located somewhere else and linked into the project.
- Switching workspaces is a quick way of shifting from one set of projects to another. It triggers a quick restart of the product.

In practice, the project and workspace model facilitates a well-structured hierarchy of workspaces, containing projects, containing files.


1.7

Managing existing workspaces

The workspace can be selected when starting STM32CubeIDE. It is also possible to switch to another workspace during the use of STM32CubeIDE. In this case STM32CubeIDE restarts after the new workspace is selected. To restart STM32CubeIDE with a new workspace, select menu [File]>[Switch Workspace].

The workspaces known to STM32CubeIDE can be managed by selecting [Window]>[Preferences] then, in the Preferences dialog, selecting [General]>[Startup and Shutdown]>[Workspaces]. In the right pane, it is possible to enable [Prompt for workspace on startup] and set [Number of recent workspaces to remember] to the desired value.

Figure 26. Preferences - Workspaces

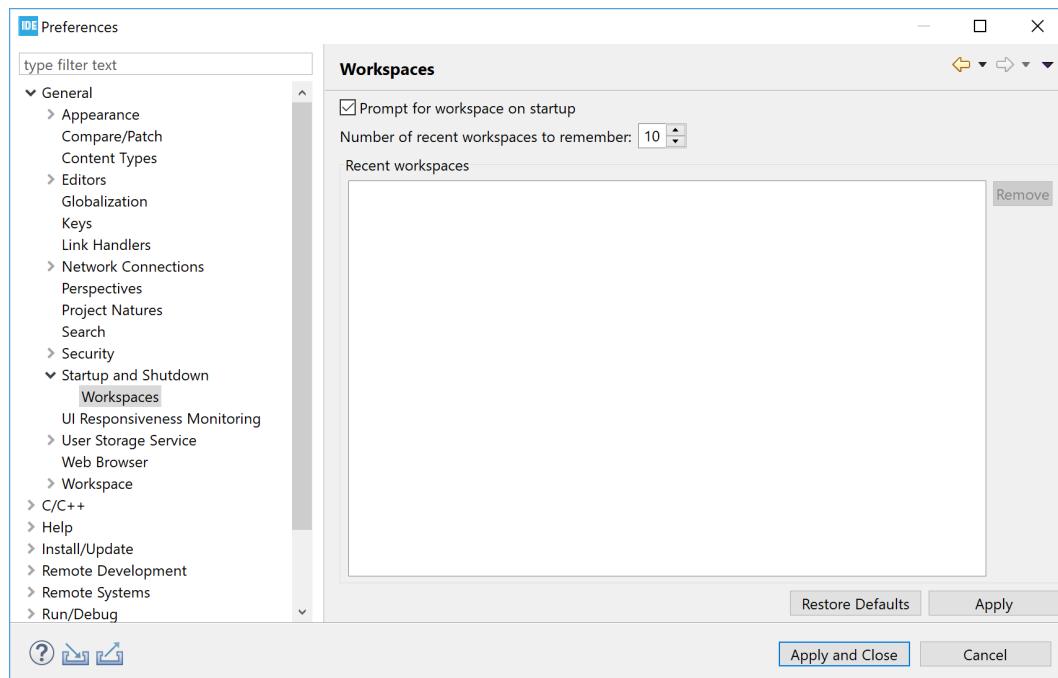

It is also possible to select and remove recent workspaces from the list of recent workspaces. However, removing a workspace from that list does not remove the files. Neither does it remove the files from the file system.

1.7.1 Backup of preferences for a workspace

It is generally a good practice to take a copy of the existing preferences for a workspace. It can be especially useful to recreate the workspace after a crash without the time-consuming process to redo the settings manually.

In the menu, select [File]>[Export]. Then, in the panel, select [General]>[Preferences]. Press the [Next] button and, in the next page, enable [Export All] along with a correct filename.

1.7.2 Copy preferences between workspaces

To copy workspace preferences from one workspace to another, an existing export of preferences must first be created as explained in [Backup of preferences for a workspace](#).


Then select [File]>[Switch Workspace] and the new workspace. STM32CubeIDE restarts and opens with the new workspace.

In the menu, select [File]>[Import] and in the panel select [General]>[Preferences]. Press the [Next] button and, on the next page, enable [Import All] and enter the file name. The preferences are now the same in both workspaces.

1.7.3 Keeping track of Java heap space


To keep track on how much Java heap space is used, select the [Window]>[Preferences] menu. In the **Preferences** page, select the [General] node and then enable [Show heap status]. The currently used and available Java heap space is then displayed in the STM32CubeIDE status bar. The garbage collector can also be triggered manually from the status bar.

Figure 27. Display of Java heap space status

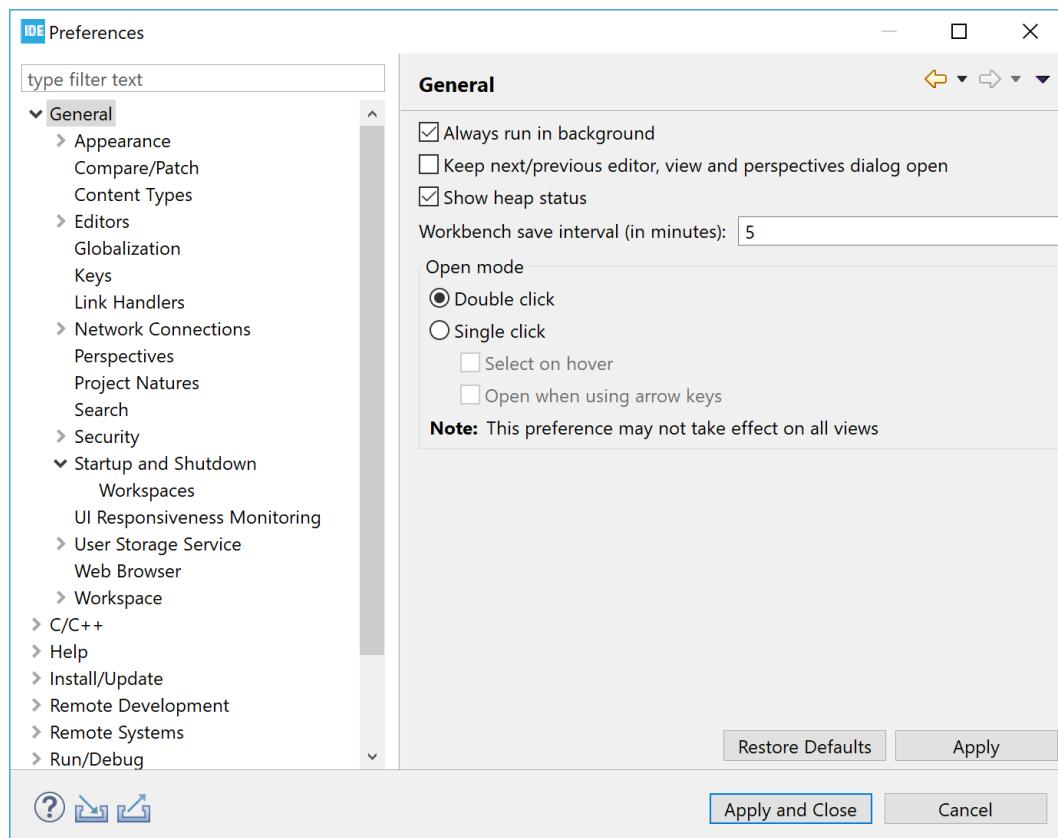

1.7.4 Unavailable workspace

Only one instance of STM32CubeIDE can access one workspace at a time. This is to prevent conflicting changes in the workspace. If STM32CubeIDE is started with a workspace that is already used by another instance of the program, the following error message is displayed.

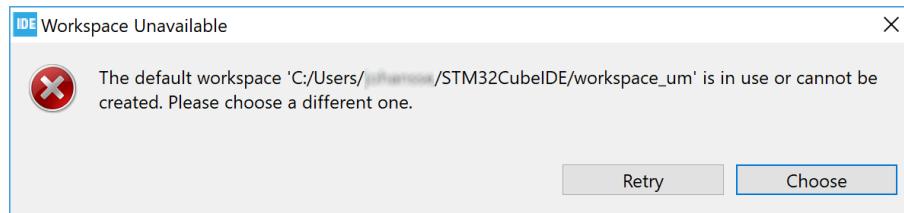Figure 28. Workspace unavailable

If this message is displayed, choose a different workspace, or return to the already running STM32CubeIDE.

1.8

STM32CubeIDE and Eclipse® basics

STM32CubeIDE contains so many features that it is easy to miss some really useful capabilities. Noteworthy features are spell checking of C/C++ comments, word- and code completion, content assist, parameter hints and code templates. The editor also includes an include-file dependency browser, code navigation using hypertext-links, bookmark and to-do lists, and powerful search mechanisms. The next sections remind some of the useful tools that can be easily missed.

1.8.1

Keyboard shortcuts

It is convenient to use keyboard shortcuts instead of the mouse. One important shortcut to know is the shortcut **Ctrl+Shift+L**. This shortcut opens a cheat sheet with all available shortcuts.


Figure 29. Shortcut keys

Activate Editor	F12
Backward History	Alt+Left
Build All	Ctrl+B
Build Target Build	Shift+F9
Close	Ctrl+F4
Close All	Ctrl+Shift+F4
Collapse All	Ctrl+Shift+Numpad_Divide
Content Assist	Ctrl+Space
Context Information	Ctrl+Shift+Space
Copy	Ctrl+Insert
Cut	Shift+Delete
Debug	F11
Delete	Delete
Expand All	Ctrl+Shift+Numpad_Multiply
Find Text in Workspace	Ctrl+Alt+G
Find and Replace	Ctrl+F
Forward History	Alt+Right
Last Edit Location	Ctrl+Q
Maximize Active View or Editor	Ctrl+M

Press 'Ctrl+Shift+L' to open the preference page

Pressing **Ctrl+Shift+L** in this sheet opens the *Keys* pane in the *Preferences* dialog.

Figure 30. Shortcut preferences

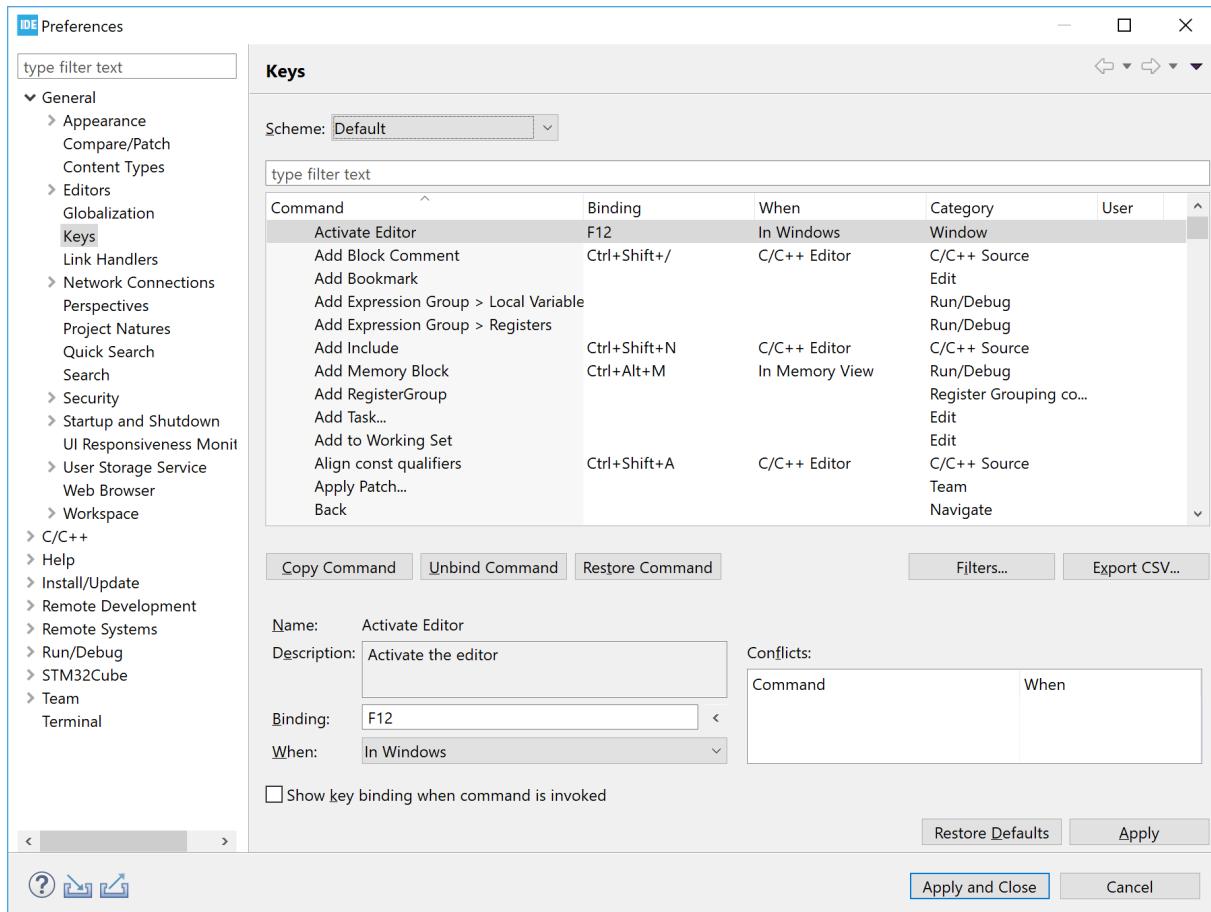

The Keys pane offers the possibility to examine the shortcuts in detail and change the scheme (default, GNU Emacs, or Microsoft® Visual Studio®), reconfigure shortcut keys, and others.

Table 2 presents the default bindings of some of the keys to mention.

Table 2. Key shortcut examples

Binding	Command	Detail
Keyboard shortcut overview		
Ctrl+Shift+L	List keyboard shortcuts	Lists all the defined keyboard shortcuts.
Navigation in files and C symbols		
Ctrl+Shift+R	Open resource	Finds files from any perspective.
Ctrl+H	Search for keyword	Searches for a keyword in a defined scope with the possibility to use reg. exp.
Alt+Enter	View properties	Views the properties for the selected resource.
Ctrl+Page up or Ctrl+Page down	Switch editor	Switches to an open editor to the left or to the right.
Alt+→ or Alt+←		
Ctrl+E	Select editor	Moves to an open editor by filtering text or selecting in the menu.
Ctrl+Shift+T	Search for elements	Searches for elements (such as functions, symbols, or others) in workspace resources.
Ctrl+Q	Go to the last edit	Goes to the editor, and to the position in this editor, where the last edit was done.

Binding	Command	Detail
Navigation through file information		
Ctrl+O	Quick outline	Navigates through large files from perspectives lacking an outline view.
Ctrl+L	Go to line	Goes to a line in the editor.
Ctrl+F	Search inside context	Searches within the file currently active in the editor.
Ctrl+Alt+I	Open include browser	Opens the include browser for the current resource.
Ctrl+Alt+H	Open call hierarchy	Shows how the function calls are made to and from a selected function.
Ctrl+Space	Code completion	Code completion using the parameter hints from the context <i>Parameter hints</i> .
Code formatting and refactoring		
Shift+Alt+A	Toggle block select	Edits one column across multiple rows.
Ctrl+I	Indent line	Indents a source code line according to defined format rules.
Ctrl+Shift+F	Format the selected code	Formats the source code according to defined format rules.
Shift+Alt+R	Quick renaming	Renames any C symbol across all the files in all open projects.
Version control		
Ctrl+Alt+C	Commit resources	Commits the modified files within the active context.
Debug		
F11	Debug project	Starts a debug session of the project currently active.
F8	Resume	Continues the debugging process until the next breakpoint.
F5	Step into	Steps into the next method call at the currently executing line of code.
F6	Step over	Steps over the next method call at the currently executing line of code.
F7	Step return	Returns from a method that has been stepped into.
Shift+F5	Reverse step into	Steps into the last method call at the currently executing line of code.
Shift+F6	Reverse step over	Steps over the last method call at the currently executing line of code.
Ctrl+R	Run to a line	Runs to the position of the cursor in the code.
Ctrl+F2	Terminate	Stops the debugging process.
Ctrl+Alt+B	Skip breakpoints	Skips all breakpoints.
Good to know		
[Window]>[Preferences]>[General]>[Keys]		Allows the users to define their own keyboard shortcuts. Also allows the choice of other keyboard shortcut schemes: GNU Emacs, or Microsoft® Visual Studio®, or others.

1.8.2 Editor zoom in and zoom out


It is possible to increase or decrease the default font size for text editors by pressing **Ctrl++** and **Ctrl+-**:

- **Ctrl++** : zoom in text
- **Ctrl+-** : zoom out text

Note:

If a keyboard with a numeric keypad is used and the + or – keys are pressed on the numeric keypad, use the **Shift** key in addition to make the zoom work (**Ctrl+Shift+** or **Ctrl+Shift-**).

Figure 31. Editor with text zoomed in

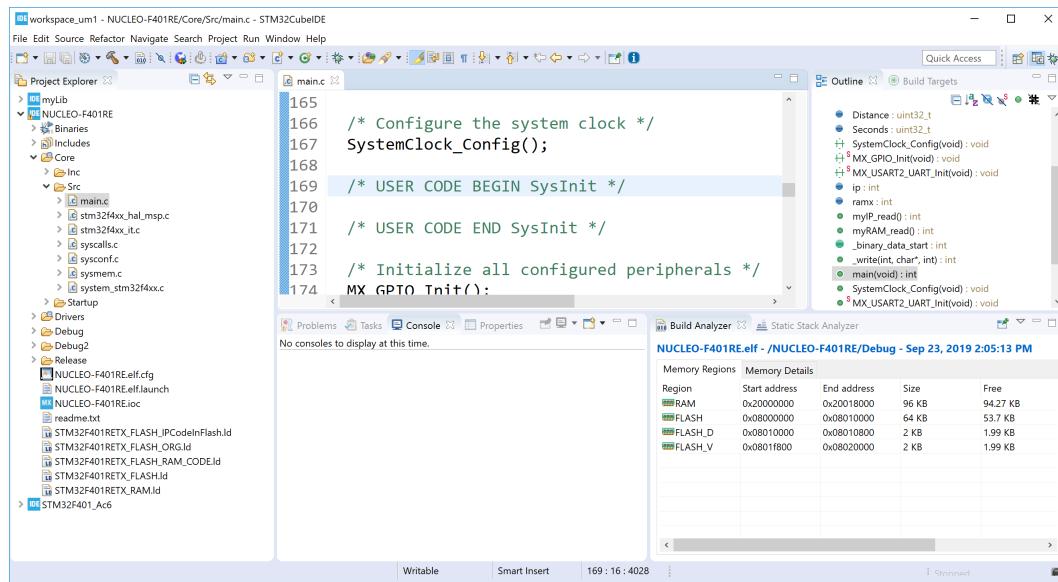

1.8.3 Quickly find and open a file

Pressing **Ctrl+Shift+R** to find and open a file quickly is one of the features easily missed. Type a couple of characters part of the name of the file to open. It is possible to add the * and ? search wildcards as appropriate. The editor then lists the matching filenames. Select the desired file in the search result list, and open the file using any of these three ways:


- **[Show In]**: sends the file to one of the views chosen in the drop-down list (such as the #include file dependency browser view)
- **[Open With]**: opens the file in the editor selected in the drop-down list
- **[Open]**: probably the most commonly used option, simply opens the file in the standard C/C++ editor

1.8.4

Branch folding

A block of code enclosed within `#if` and `#endif` can be folded. To activate the functionality, go to [Window]>[Preferences], then [C/C++]>[Editor]>[Folding] and check the [Enable folding of preprocessor branches (#if/#endif)] checkbox. Once the checkbox is checked, the editor must be restarted. Close the file, open it again, and the small icon in the left margin of the editor showing that the functionality is activated.

Figure 32. Editor folding

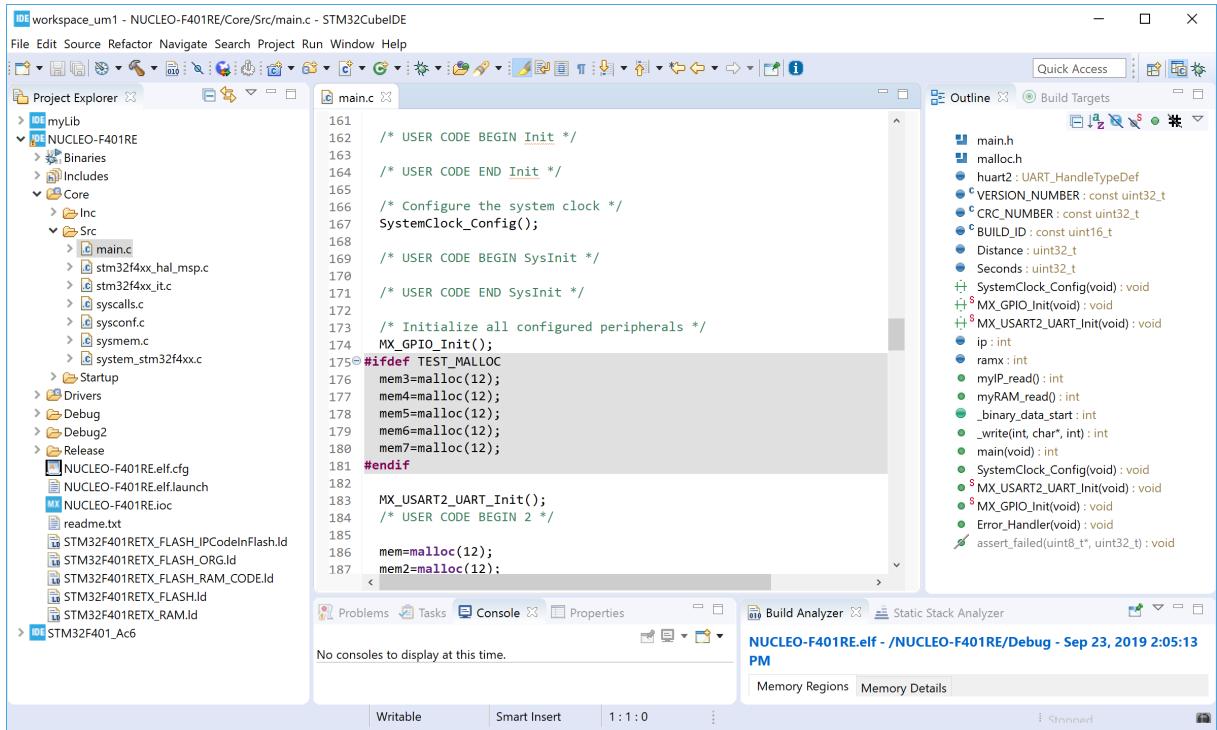

1.8.5


Block selection mode

Alt+Shift+A toggles the selection mode between normal and block. When the block mode is enabled, use either the mouse or the **Shift+Arrow** keys of the keyboard to select a block of text.

Use of the block selection mode


To start using the block selection mode, press **Alt+Shift+A**. Click somewhere in the text and drag down. A column is then marked as shown in Figure 33.

Figure 33. Editor block selection

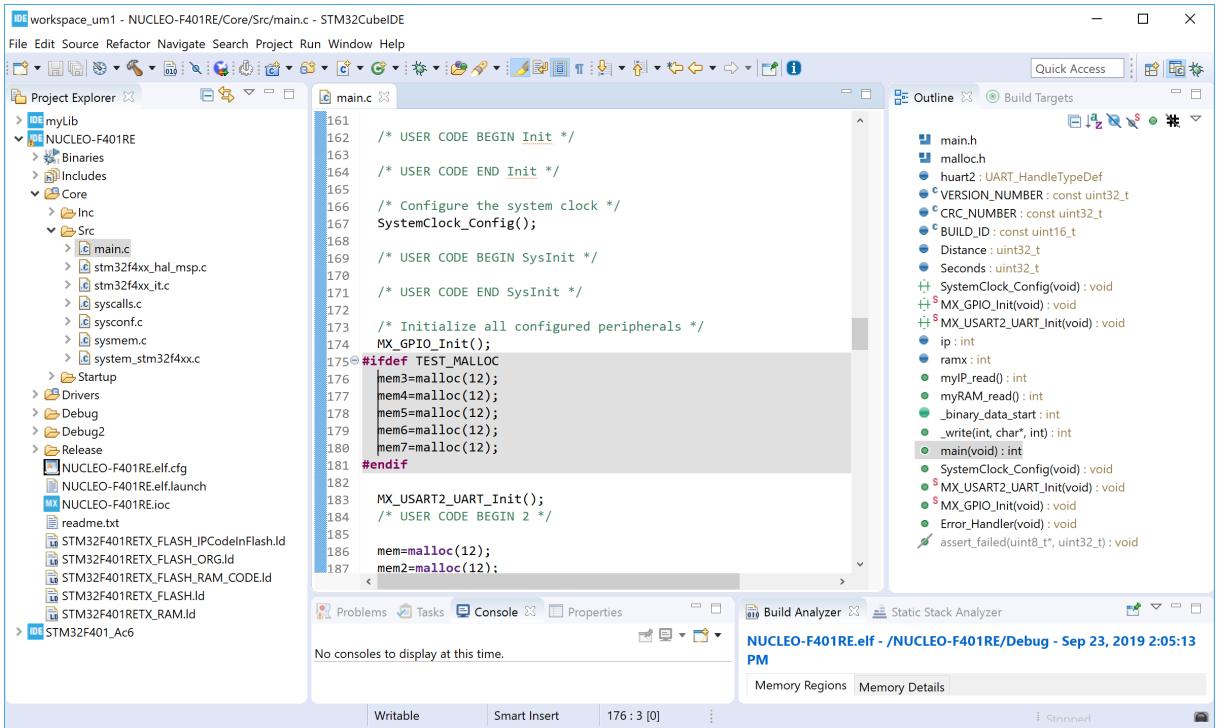

Add some text and see that this text is entered in all marked rows. As an example, the text “My_” is added and displayed in Figure 34.

Figure 34. Editor text block addition

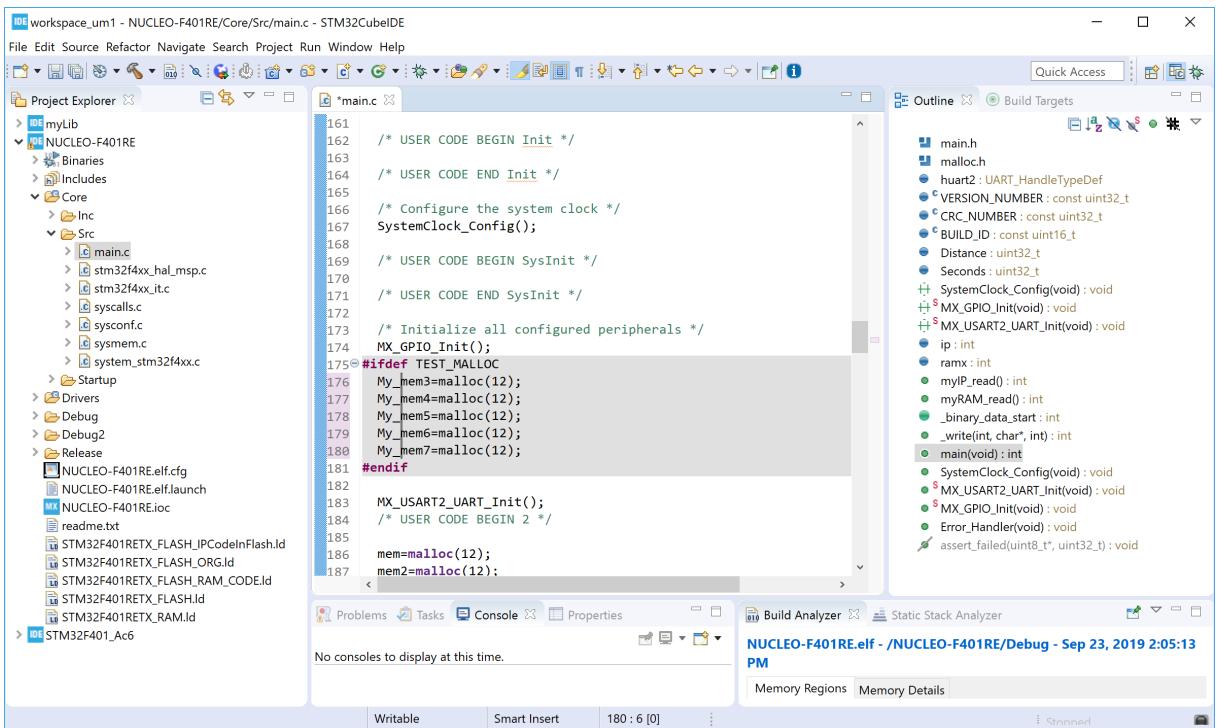

Selection and edition of areas

Select a block. In Figure 35, the block starting with “`mem3`” to “`mem7`” is selected.

Figure 35. Editor column block selection

The screenshot shows the STM32CubeIDE interface with the main.c file open in the editor. The code block from line 175 to 187 is highlighted with a light blue background, indicating it is selected. The code in this block is:


```

175 #ifdef TEST_MALLOC
176     My_mem3=malloc(12);
177     My_mem4=malloc(12);
178     My_mem5=malloc(12);
179     My_mem6=malloc(12);
180     My_mem7=malloc(12);
181 #endif
182
183     MX_USART2_UART_Init();
184     /* USER CODE BEGIN 2 */
185
186     mem=malloc(12);
187     mem2=malloc(12);

```

Copy the selected block by using **Ctrl+C**. This copied text can then be inserted elsewhere. To do so, type **Alt+Shift+A** to toggle the selection mode back to the normal mode, move the cursor to another line, and type **Ctrl+V** to paste the copied columns to the new lines.

Figure 36. Editor column block paste

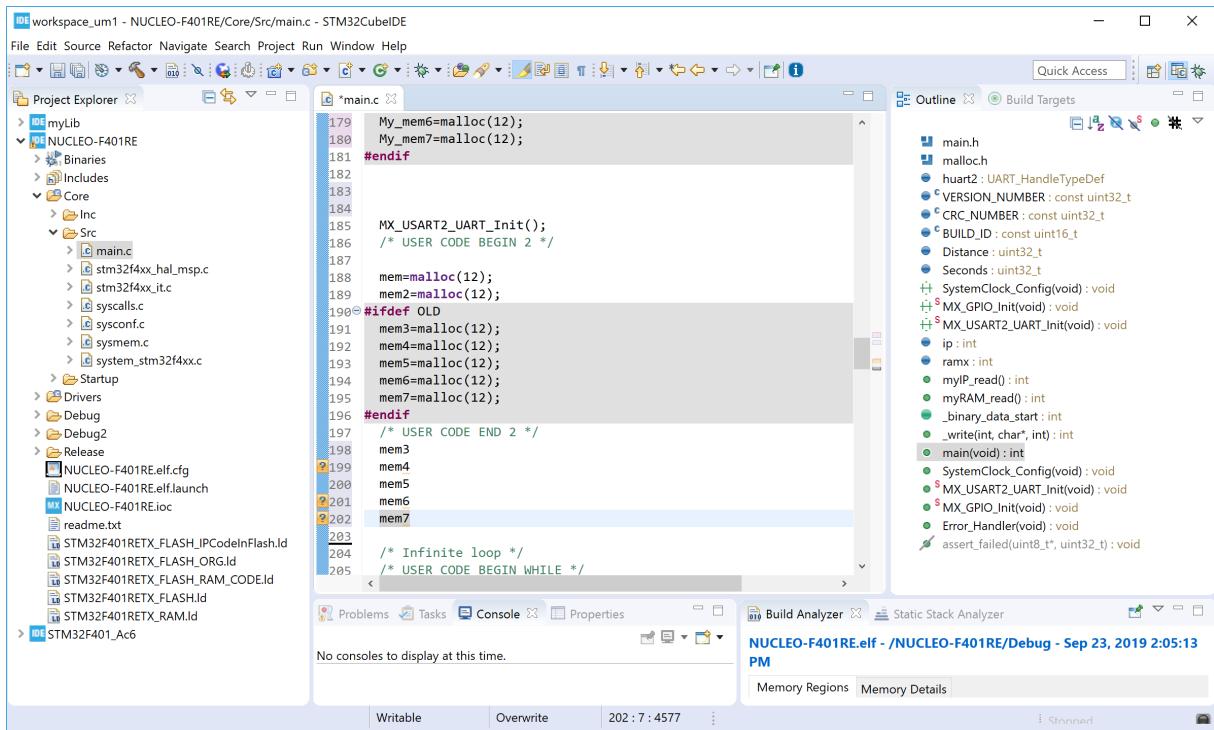

1.8.6 Compare files


To compare two files easily in STM32CubeIDE:

1. Select the two files in the *Project Explorer* view
2. Click on one file
3. Press **Ctrl**
4. Click on the other file
Both files are now marked in the *Project Explorer* view
5. Right-click and select [**Compare With**]>[**Each Other**]

Note:


It is possible to configure how the comparison of files is managed. For instance, ignoring white space can be enabled from the preferences. Open the Preferences page using [Window]>[Preferences], select [General]>[Compare/Patch], and enable [Ignore white space].

Figure 37. Editor - Compare files

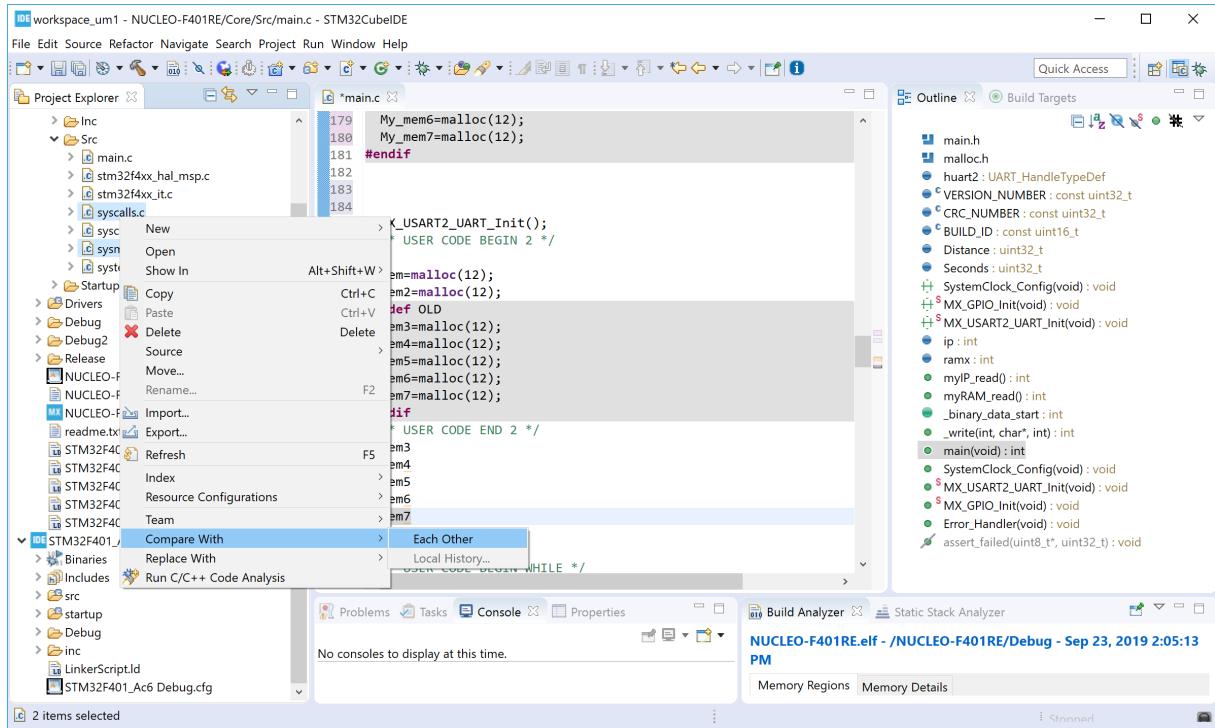

The *File Differences* editor opens and compares both files.

Figure 38. Editor - File differences

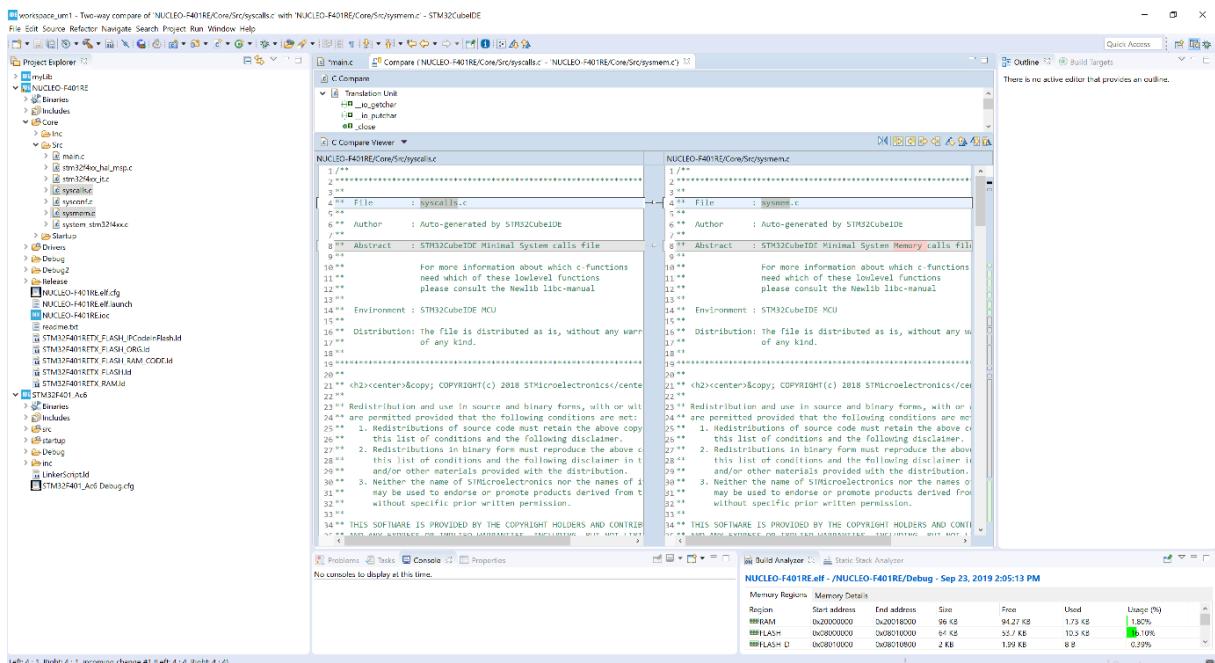


Use the navigation buttons to navigate between differences, or simply navigate in the view using the scroll bar to see the file differences.

1.8.7 Local file history

It is recommended to maintain projects with a version control system such as Apache® Subversion® (SVN) or Git™. Still, STM32CubeIDE contains a local file with the history of edited files, which can be useful if some investigation is needed after a file has become not functional. The workspace preferences contain a *Local History* page.


Figure 39. Local history

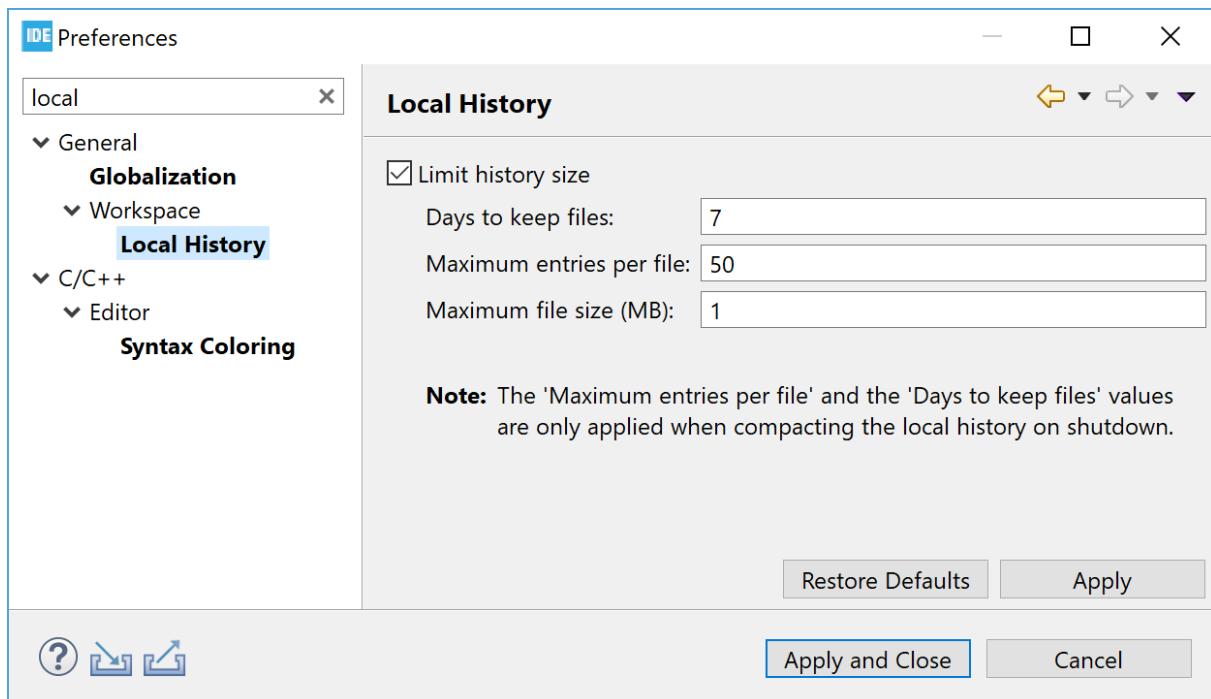

To show the local history of a file:


1. Select the file in the *Project Explorer* view
2. Right-click
3. Select [Team]>[Show local History]

Figure 40. Show local history

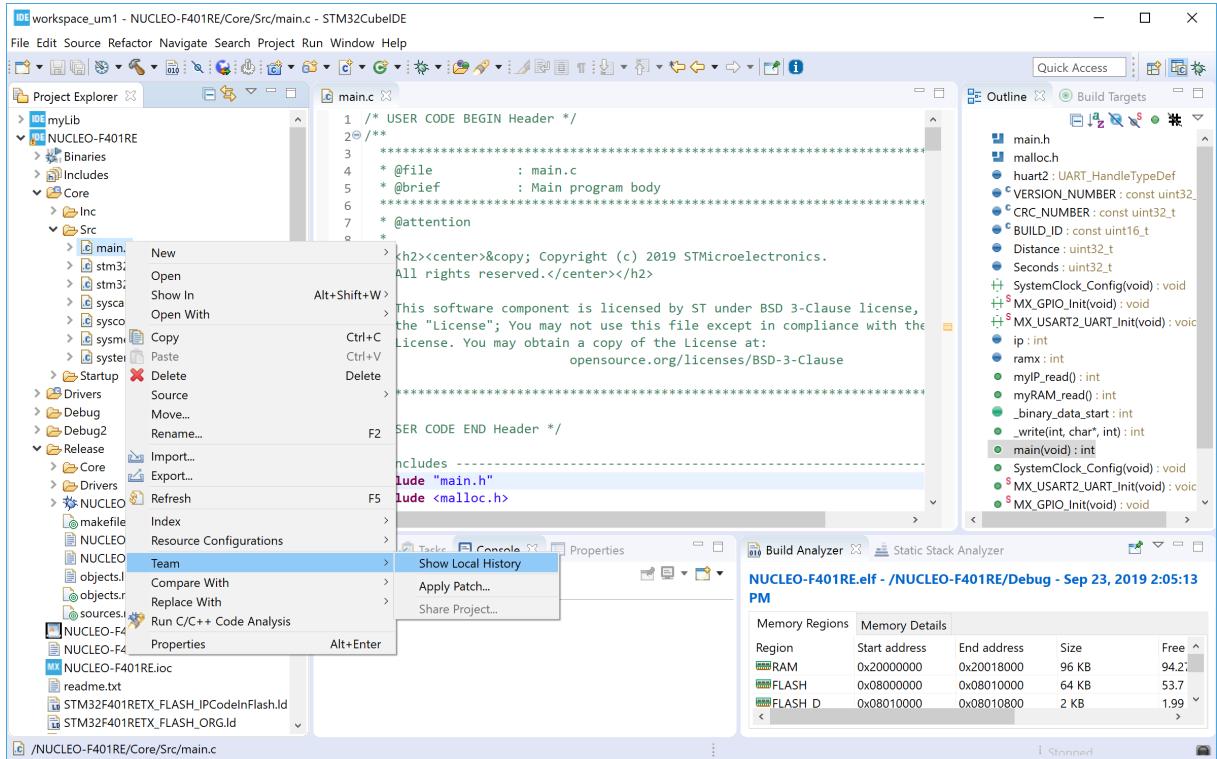

The *History* view opens and displays the file history.


Figure 41. File history

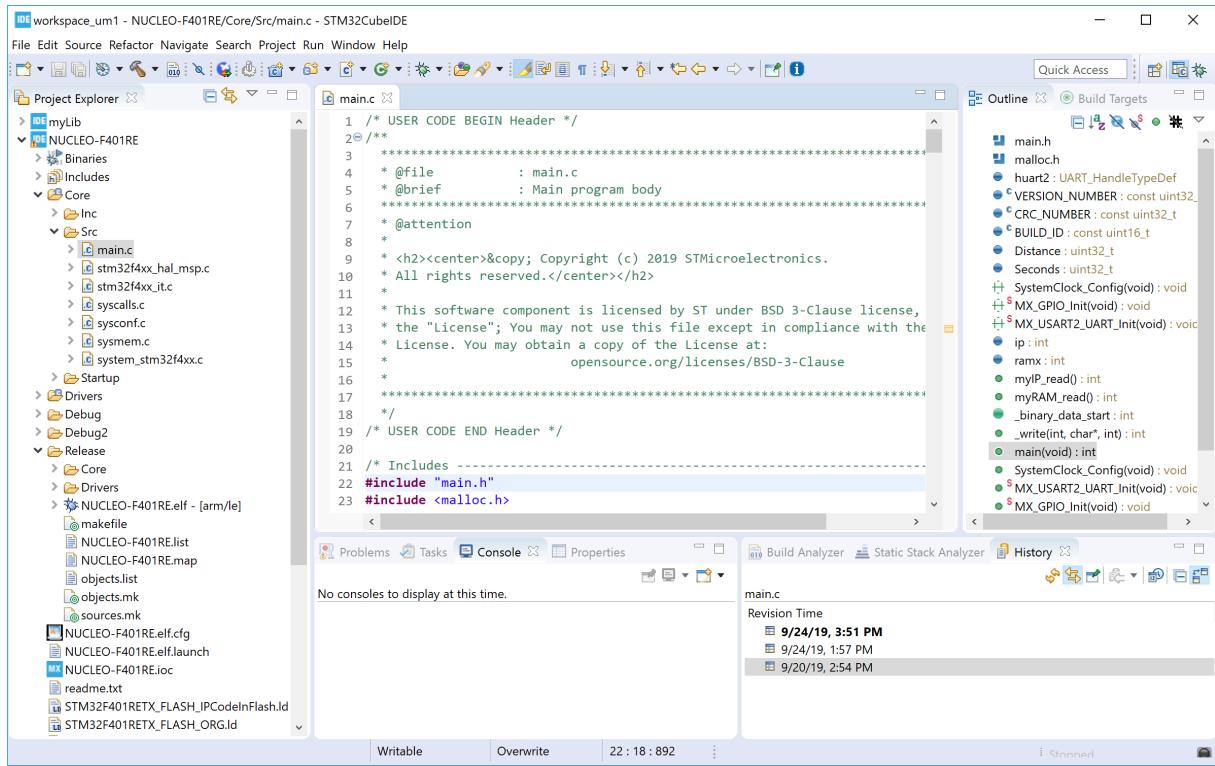

In the case presented in Figure 41, there are three revisions of `main.c`. Double-click on a file in the *History* view to open it in the editor.


Right-click on a file in the history and select **[Compare Current with Local]** to compare it with the current version of the file.

Figure 42. Compare current history with local history

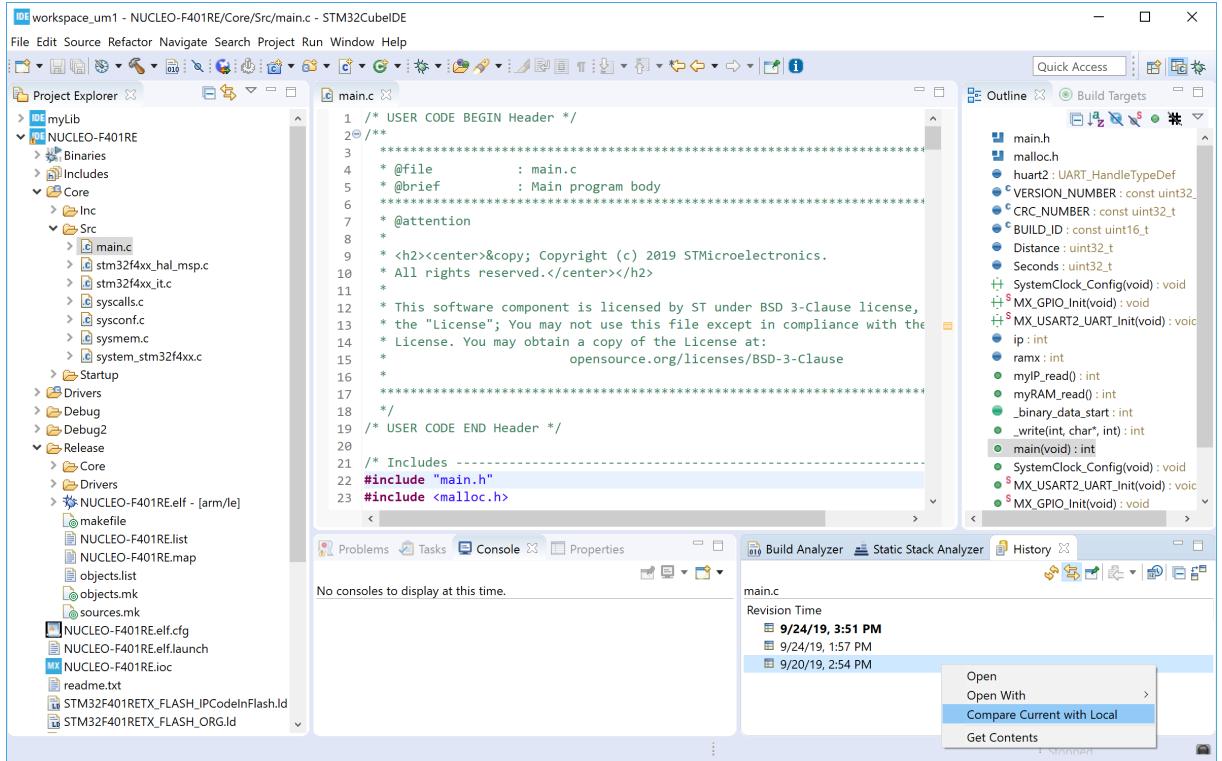

This opens the *File Differences* editor and displays the file changes.

Figure 43. Compare local file differences

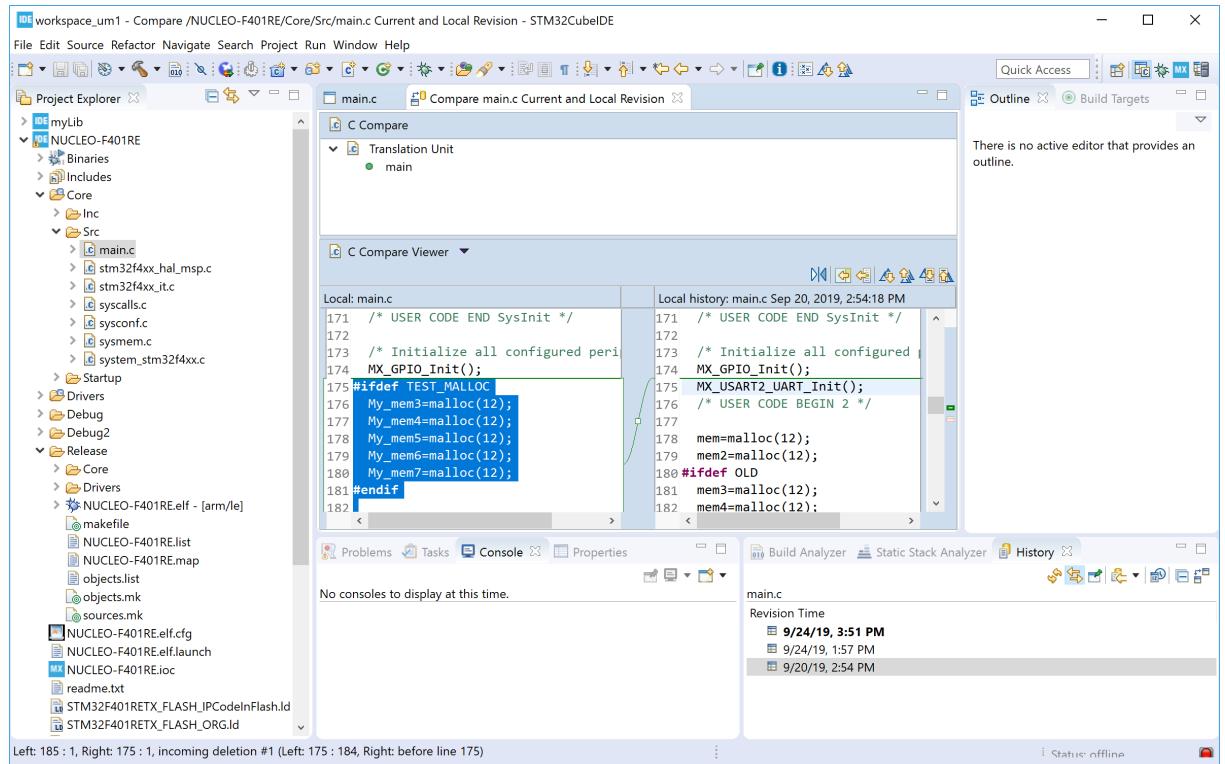

2 Creating and building C/C++ projects

As mentioned in [Section 1.6 Workspaces and projects](#), a workspace is a directory containing projects. The first time a workspace is created, it is empty without any projects. The projects need to be created or imported in the workspace. This section contains information on how to create projects in the workspace and build projects. It also covers how to import and export projects.

2.1 Introduction to projects

A project is a directory in the workspace containing files that may be organized in sub-directories. It is possible to access any project within the active workspace. The files included in a project do not need to be physically located in a folder in the project but can be located somewhere else and linked into the project. Projects located in another workspace cannot be accessed, unless the user switches to that workspace or import some of these projects into the workspace in use.

It is possible to rename and delete a project. If a workspace contains many projects, it is also possible to close some of them to make the work easier. Closed projects can be reopened again at any time.

This section focuses on the two types of STM32 projects supported by STM32CubeIDE:

- Executable programs
- Static library projects

However, the Eclipse® C/C++ Development Toolkit (CDT™), which STM32CubeIDE is based on, contains also basic project wizards, which can be used to create C managed build, C++ managed build, and makefile projects.

The STM32 projects can be:

- C or C++
- Generated executable or library file
- Based on [STM32Cube](#) (using STM32 firmware library package) or empty projects

STM32 projects also support an advanced umbrella project structure, where one project contains many projects, for instance one project per core for multi-core devices.

2.2 Creating a new STM32 project

2.2.1 Creating a new STM32 executable project


The easiest way to create a new STM32 C/C++ project is to use the STM32 project wizard. It is selected through the menu **[File]>[New STM32 Project]**.

Another way to create a new C/C++ project is to open the *Information Center* and press **[Start new STM32**

project]. As mentioned in [Section 1.3 Information Center](#), the *Information Center* can be opened using the  button on the toolbar or via the menu **[Help]>[Information Center]**.

Both ways initialize and launch the *STM32 Project Target Selection* tool.

Figure 44. STM32 target selection

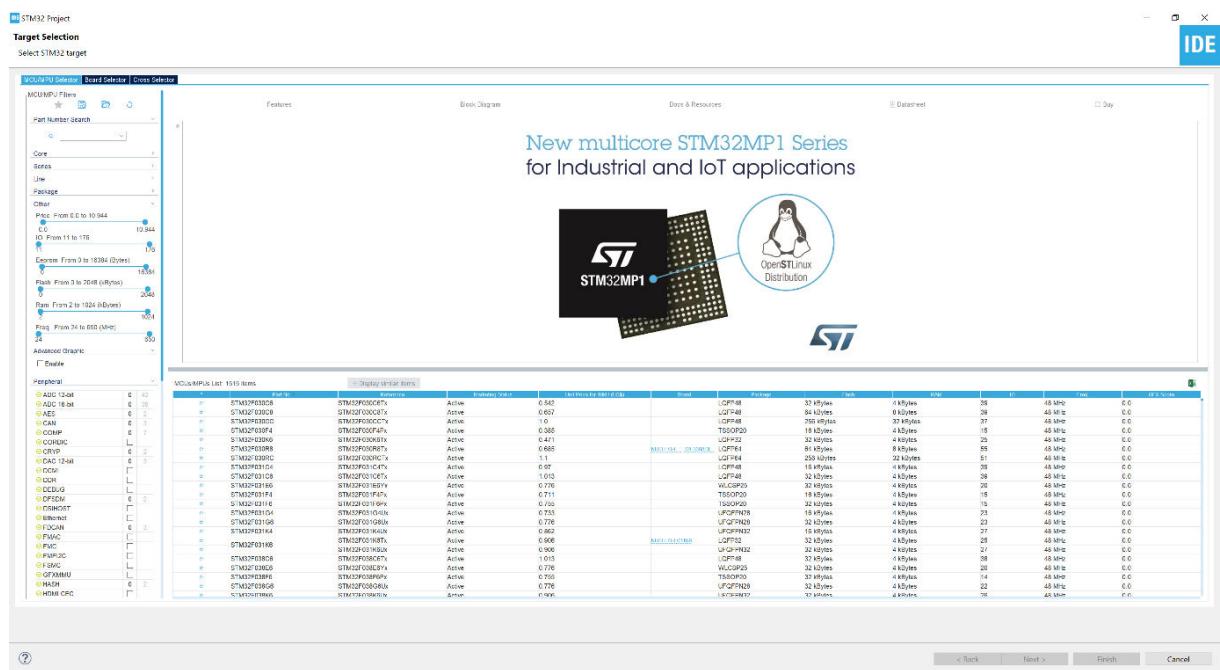


Five tabs, *Features*, *Large Pictures*, *Docs & Resources*, *Datasheet*, and *Buy*, offer the possibility to display detailed information about the selected board or device. For instance, documentation available for the board is displayed and can be opened when *Docs & Resources* is selected. When *Datasheet* is selected, the board datasheet is downloaded from STMicroelectronics web site.

Pressing [Next] when the NUCLEO-F401RE board is selected opens the *Project setup* page.

Enter a project name and select the desired setting for the project in the dialog boxes. The project named "NUCLEO-F401RE" is filled in as an example in Figure 46.

Figure 46. Project setup

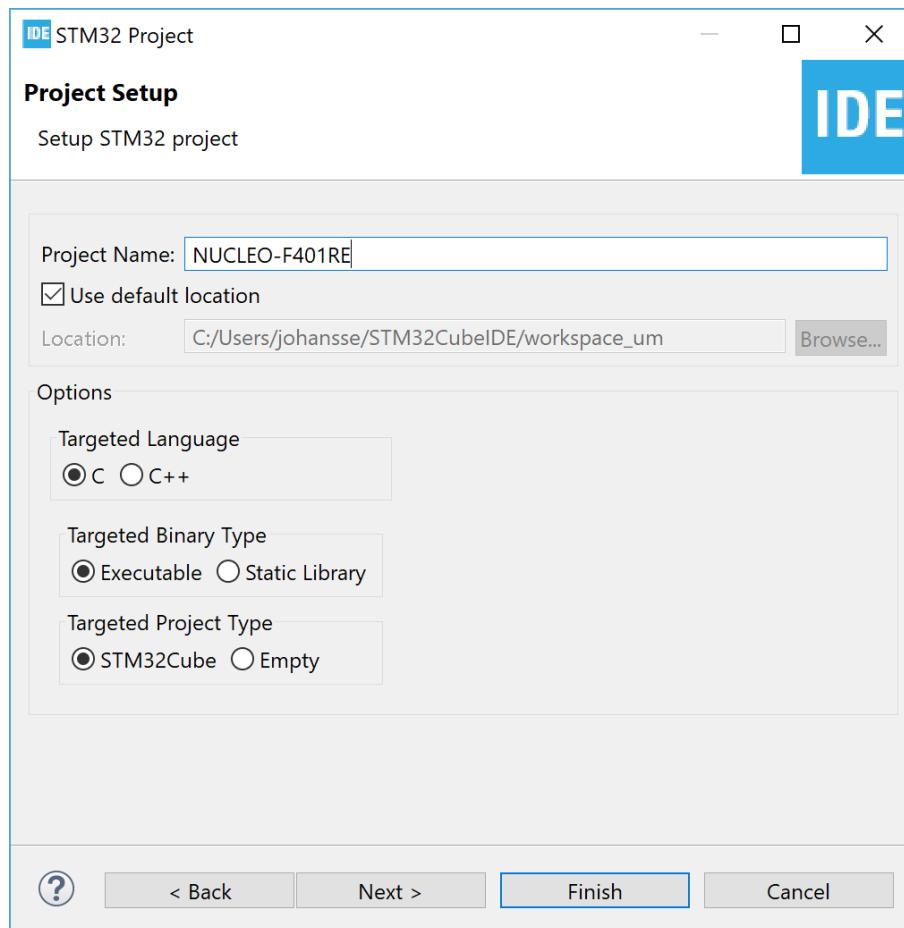


According to the settings in Figure 46, the project is meant to be stored in the default location with the following options set:

- C project
- Executable binary type
- STM32Cube targeted project type


Press [Next] to open the *Firmware Library Package Setup* page.

Figure 47. Firmware library package setup

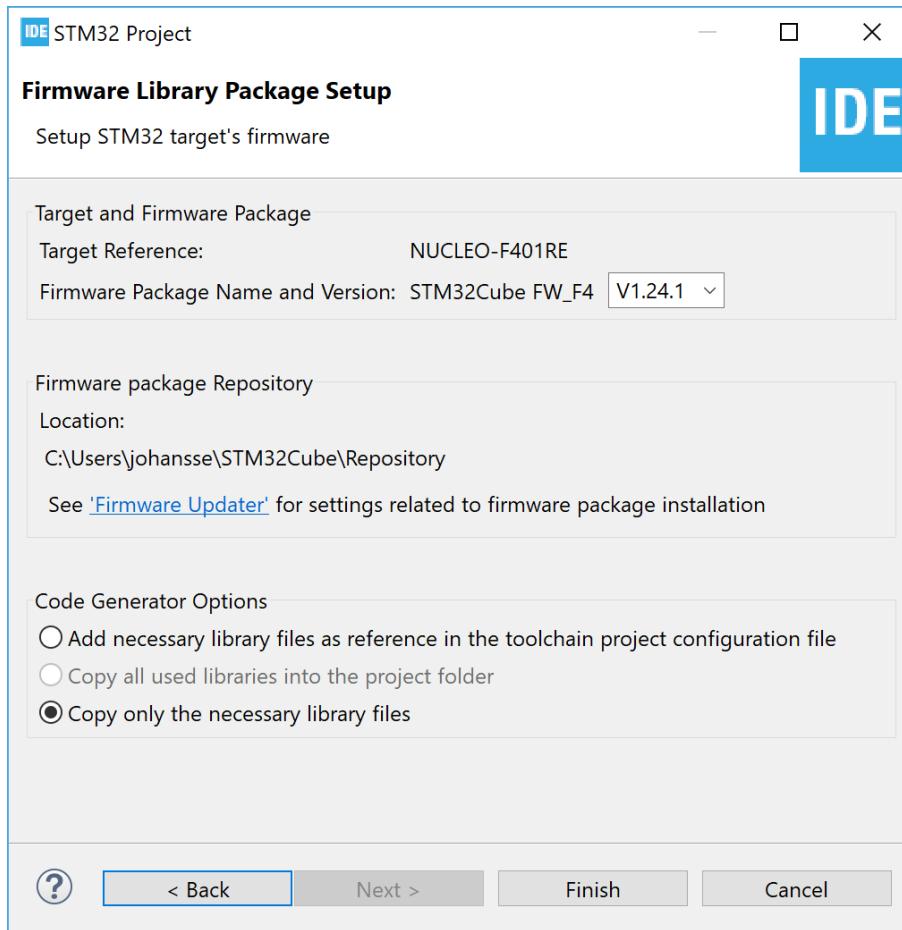


In this page, it is possible to select the STM32Cube firmware package to use when creating the project. In this case, the default settings are used. Press [**Finish**] to create the project.
As a result, the following dialog is displayed.

Figure 48. Initialization of all peripherals

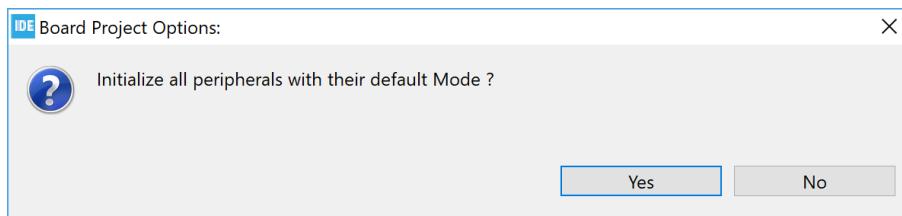

Press [**Yes**] since it is a good practice to get the software needed to initialize the peripherals.
This opens the new dialog shown in Figure 49.


Figure 49. STM32CubeMX perspective opening

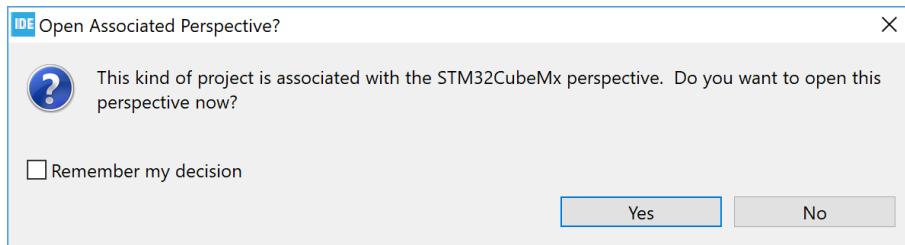

Opening the *STM32CubeMX* perspective is a good decision if there are any needs to configure the device. Enable **[Remember my decision]** if the question must not be asked the next time a new project is created. Press **[Yes]** to continue.


At this point, the project creation starts. The time it takes depends on the amount of files that need to be downloaded to create the project.

Figure 50. Project creation started

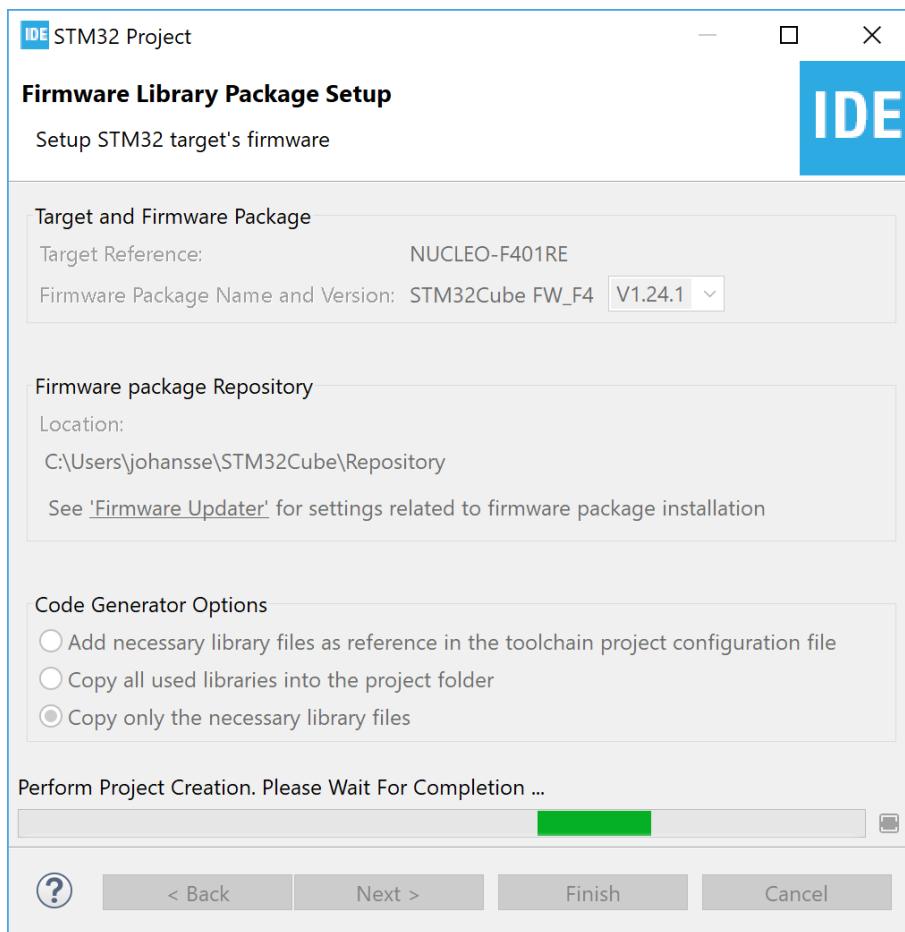

When the project is created, the *STM32CubeMX* perspective is opened with a window for configuring the peripherals, clock, middleware, and power consumption.

Figure 51. STM32CubeMX

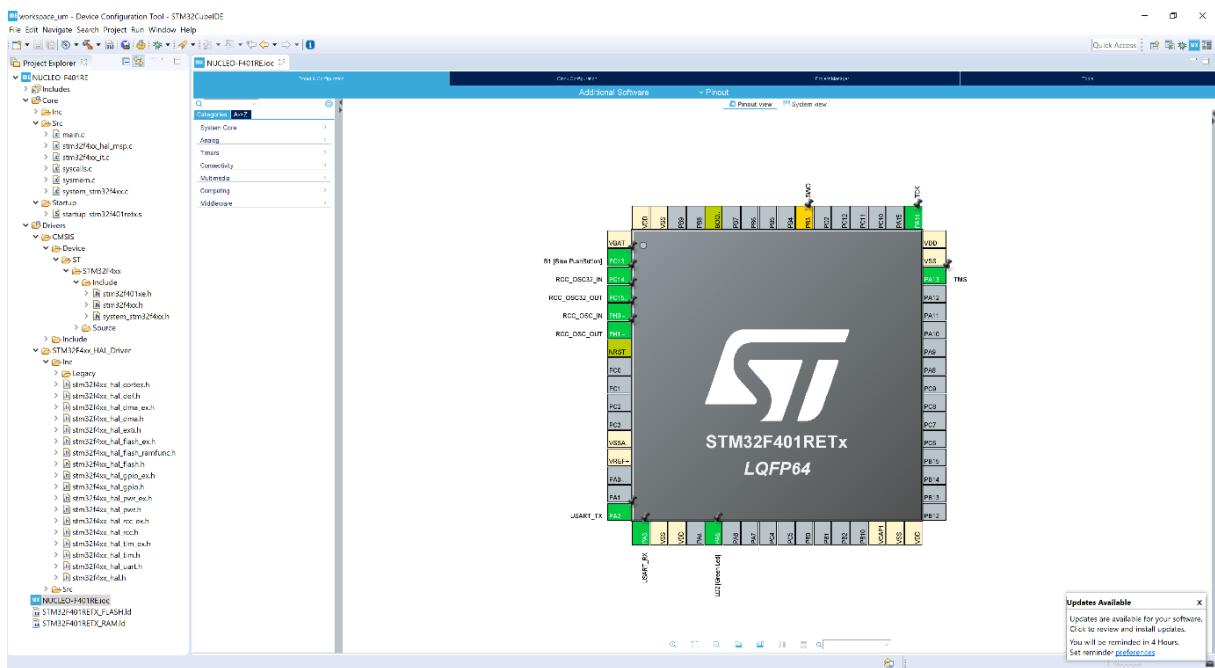

The new project is listed in the *Project Explorer* view with some of the folders and files it contains.

The NUCLEO-F401RE.ioc file contains the configuration settings and is opened in the STM32CubeMX editor. This editor contains tabs for *Pinout & configuration*, *Clock configuration*, *Project manager* and *Tools*. When changes are made in the STM32CubeMX editor, the .ioc file in the tab is marked as changed. If the file is saved, a dialog opens asking “*Do you want to generate Code?*”, making it easy to generate new code in the project that supports the new device configuration. For more information on how to use the STM32CubeMX editor, refer to [ST-14].

It is possible to create an STM32 project with less files and folders by selecting the targeted project type [**Empty**] instead of [**STM32Cube**] (refer to Figure 46. Project setup). When [**Empty**] is selected, the generated project only contains some folders, a device startup file with `Reset_Handler` code and vector table, the `main.c` file, and some other c files and linker script files. STM32 header files, system files and CMSIS files must be added manually. These files can for instance be copied from some other STM32Cube targeted project or from an STM32 example project.

Note:

For empty projects, make sure to configure the floating-point unit setting to use software FPU or hardware FPU according to application requirements. When using hardware FPU, initialize the FPU. For non-empty projects, the initialization of the FPU is normally done in the `SystemInit` function in file `system_stm32fxxxx.c`. To notify that the FPU configuration may be needed, the `main.c` file created in an empty project contains a compiler warning stating #warning "FPU is not initialized, but the project is compiling for an FPU. Please initialize the FPU before use."

2.2.2


Creating a new STM32 static library project

The method described in Section 2.2.1 Creating a new STM32 executable project can be used also to create a static library project. However, static libraries are often reused in multiple application projects, possibly targeting different STM32 products. The STM32 project wizard does not support changing the MCU device. The standard Eclipse®/CDT™ projects solution with some STM32 related extensions does support changing the MCU device per build configuration.

The recommended way to create static library projects is therefore to rely on Eclipse®/CDT™ projects as described below.

To create an Eclipse®/CDT™, go to [File]>[New]>[C/C++ Project]. This opens the window displayed in Figure 52.


Figure 52. New C/C++ project

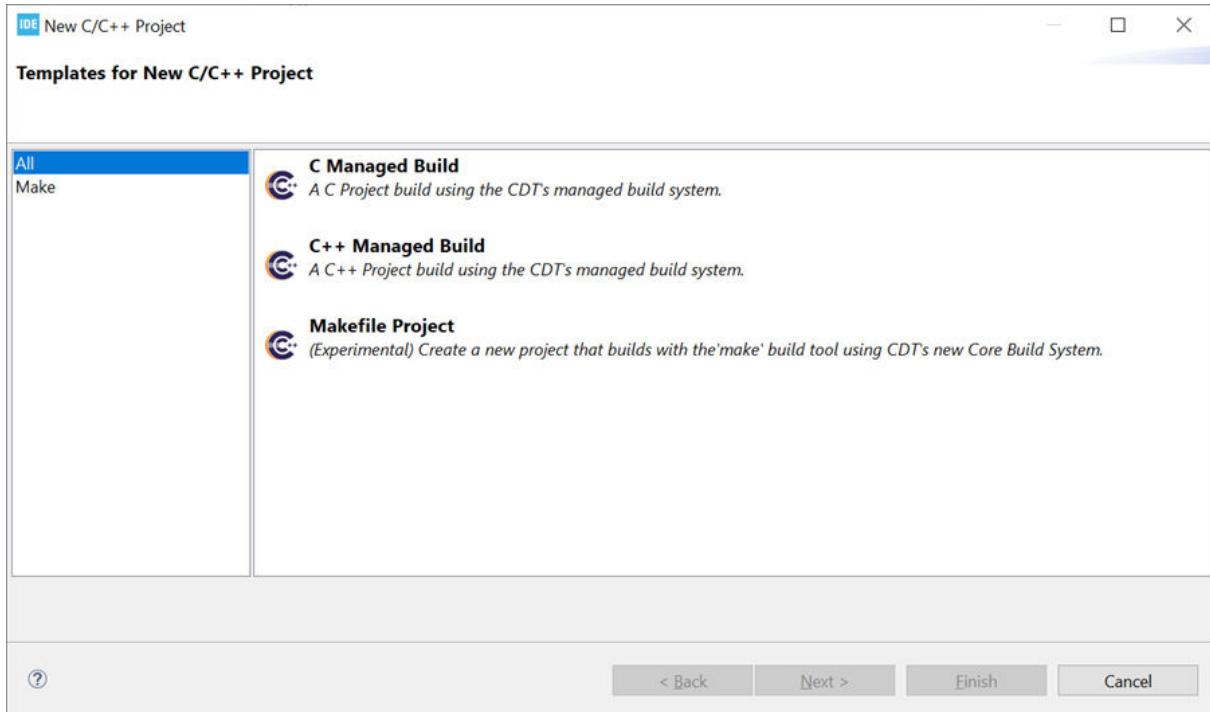

Select either *C Managed Build* or *C++ Managed Build* depending on what the project requires and click on [**Next**]. This brings up the project type selector. The *Empty Project* type is the only type supporting the *MCU ARM GCC* toolchain. Make sure to select *Empty Project* under the *Executable* folder and then select the *MCU ARM GCC* toolchain as seen in Figure 53.


Once the project naming and type selection are done, click on [Next].

Figure 53. Project type

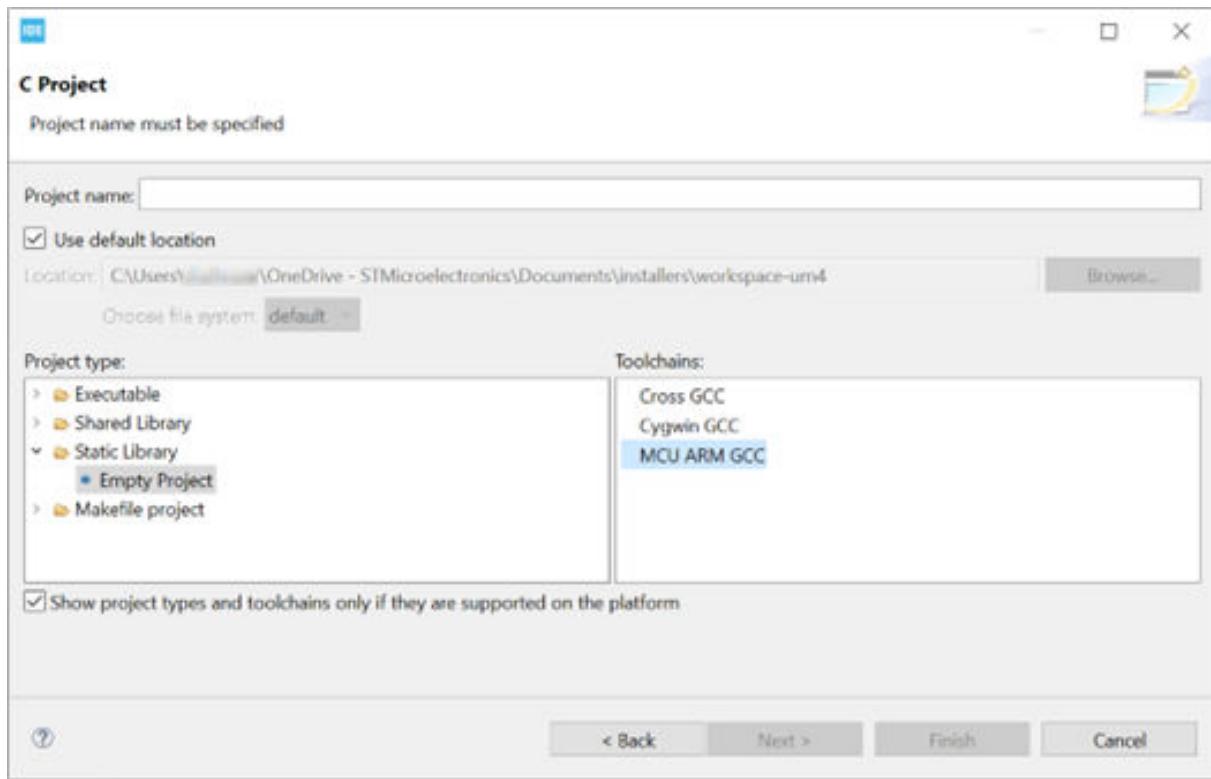


This launches a standard Eclipse® project configuration window as shown in Figure 54. Click on [Next].

Figure 54. Project configuration selection

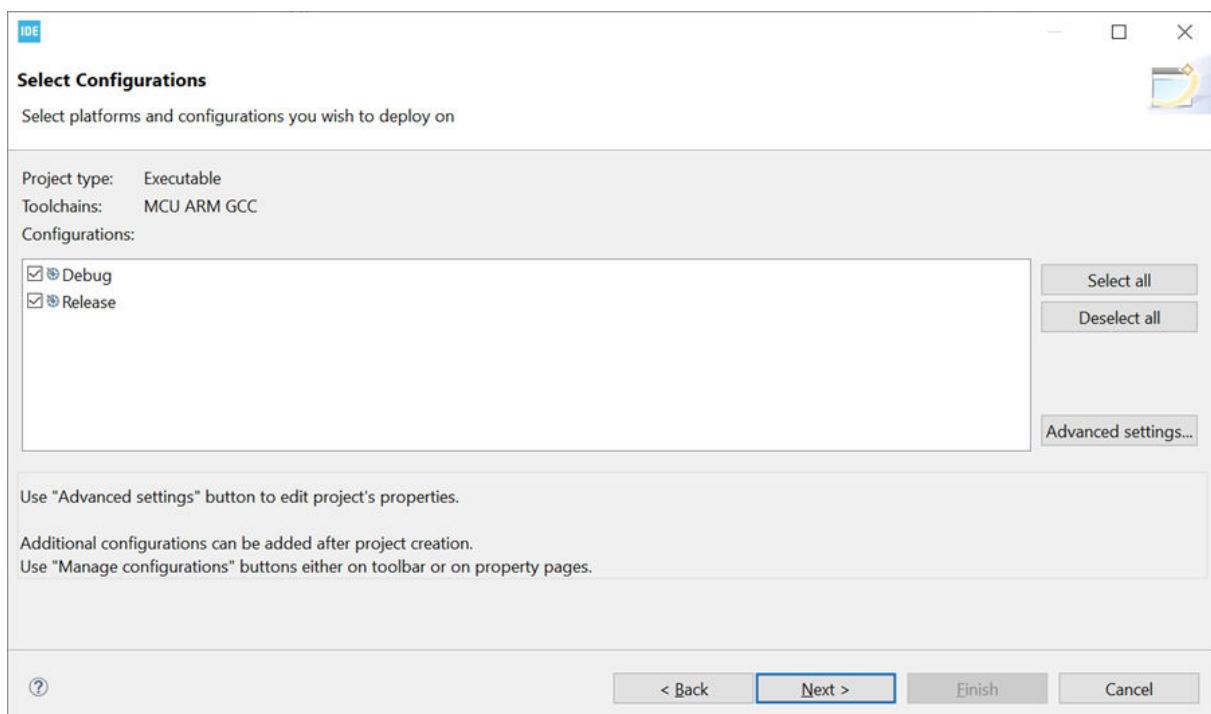


In the target selector screen shown in [Figure 55](#), make sure to select the appropriate target by clicking on the [Select...] button and filtering the correct target for the project. The target selector helps to set the `-mcpu=cortex-mX` toolchain flag correctly in the already defined build configurations seen in the previous step (see [Figure 54](#)).

[Figure 55. Project default target selector](#)

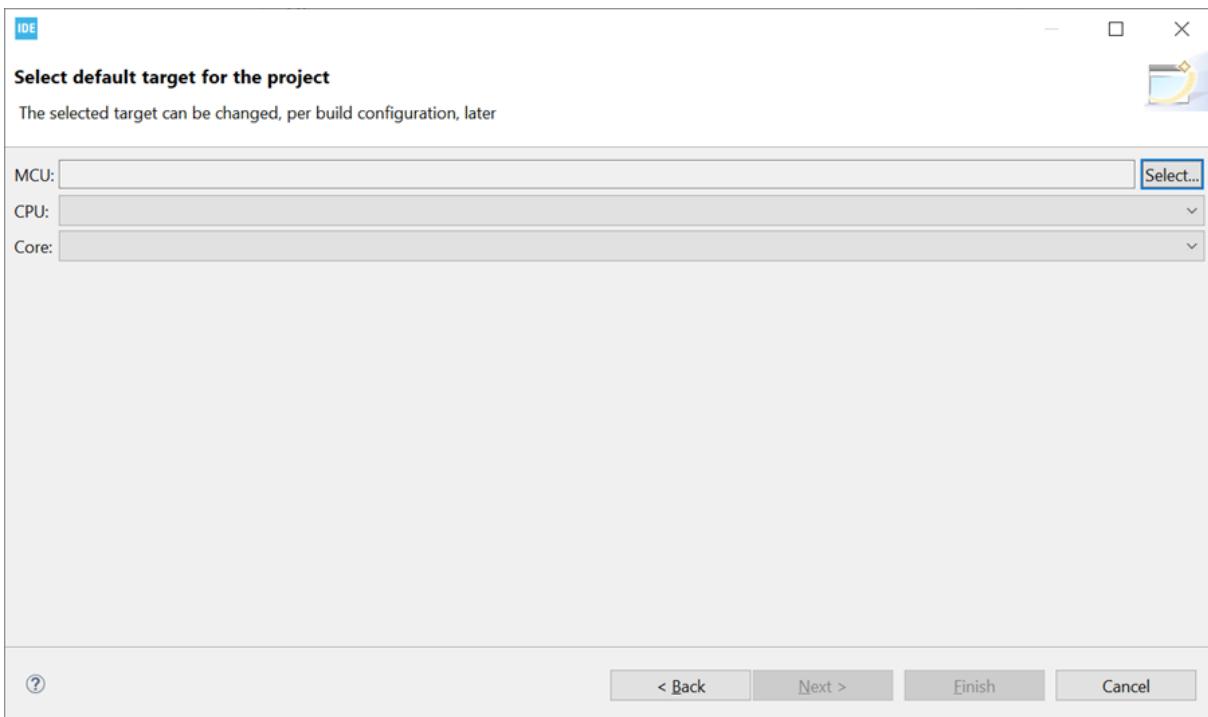


When clicking on [Select...], the filter dialog shown in Figure 56 shows up, allowing users to filter and select the correct device.

Figure 56. Project MCU/MPU selector

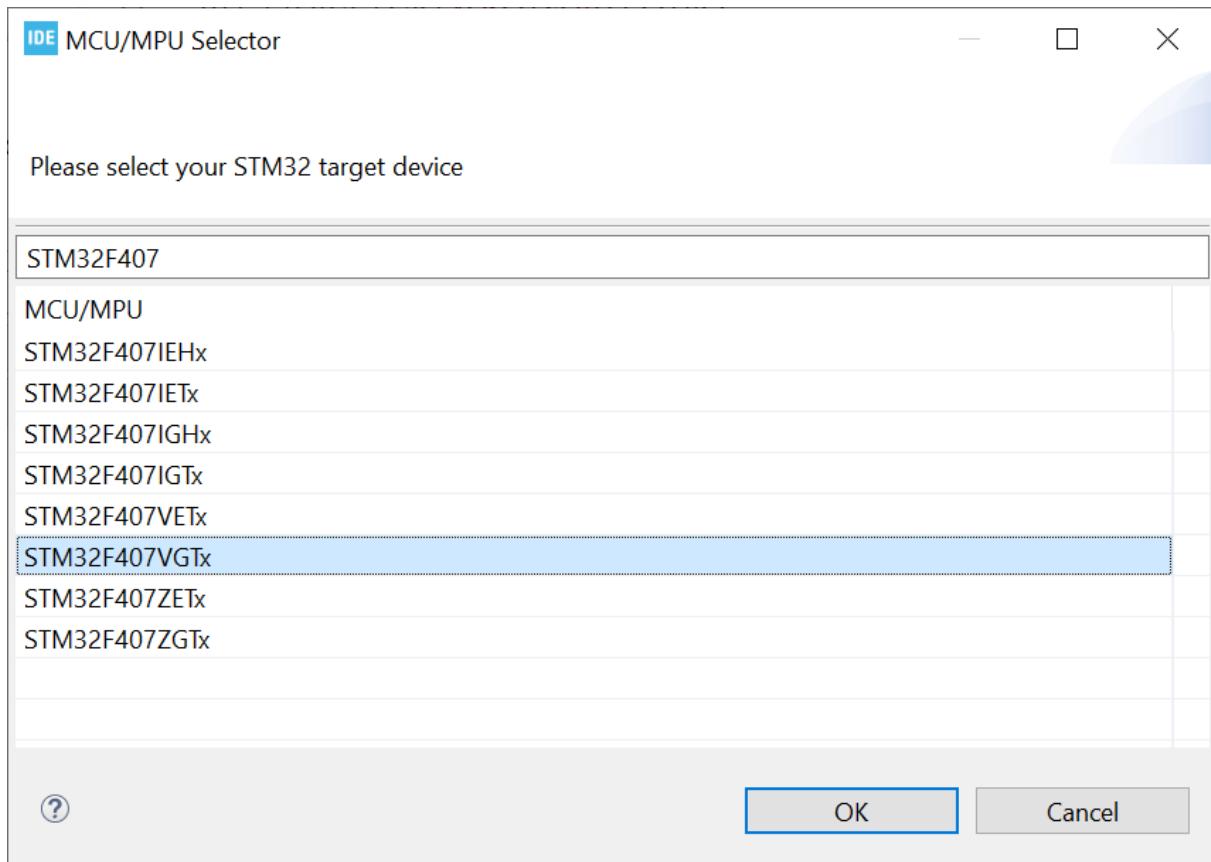


After the target selection (*MCU*), the *CPU* and *Core* fields are automatically populated in the simple single-core case as shown in Figure 57.

Figure 57. Project target selection

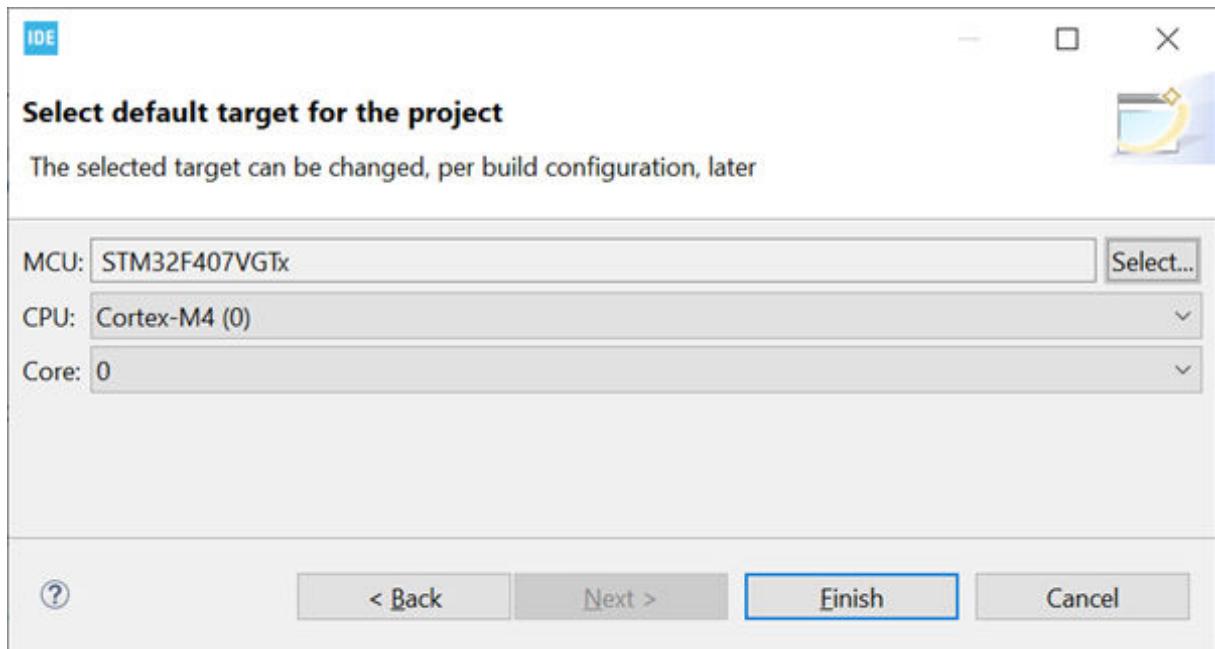


For more advanced devices such as multi-core STM32H7 microcontrollers, the user must select the *CPU* and *Core* that the project targets to make sure that the code is built correctly. These settings are also used later to set up the debug configurations properly. Make sure that the settings are as needed for the project and click on [Finish].

Figure 58. Project target selection (advanced)

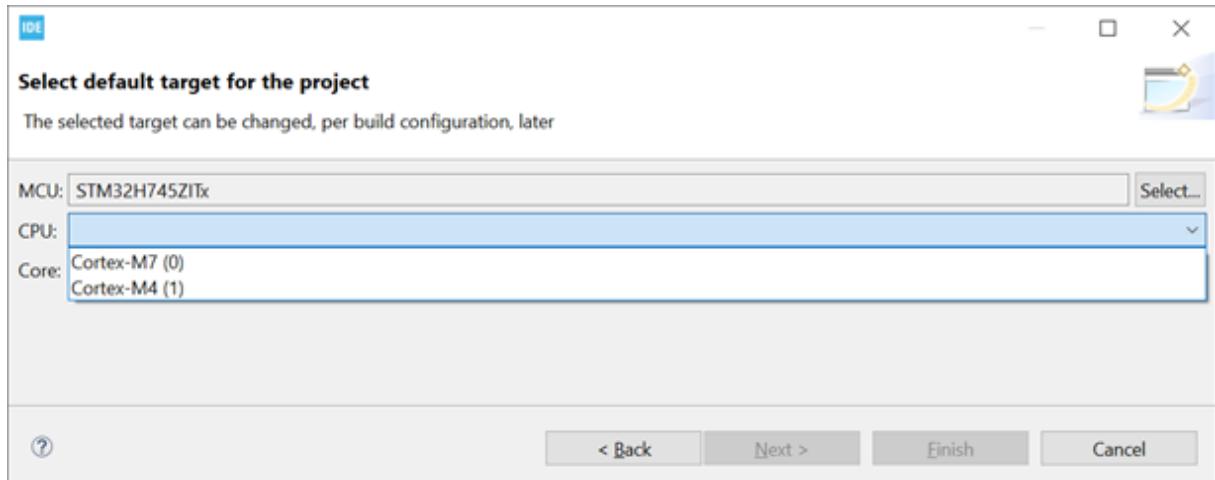

After the project creation, it is possible to create different build configurations for different targets as described in [Section 2.3.1.2](#). After a new build configuration is created, right-click the project in the *Project Explorer*, go to **[Properties]>[C/C++ Build]>[Settings]>[Tool Settings]**, and click on **[Select...]** to select a new target for the specific build configuration.

Figure 59. Project target change

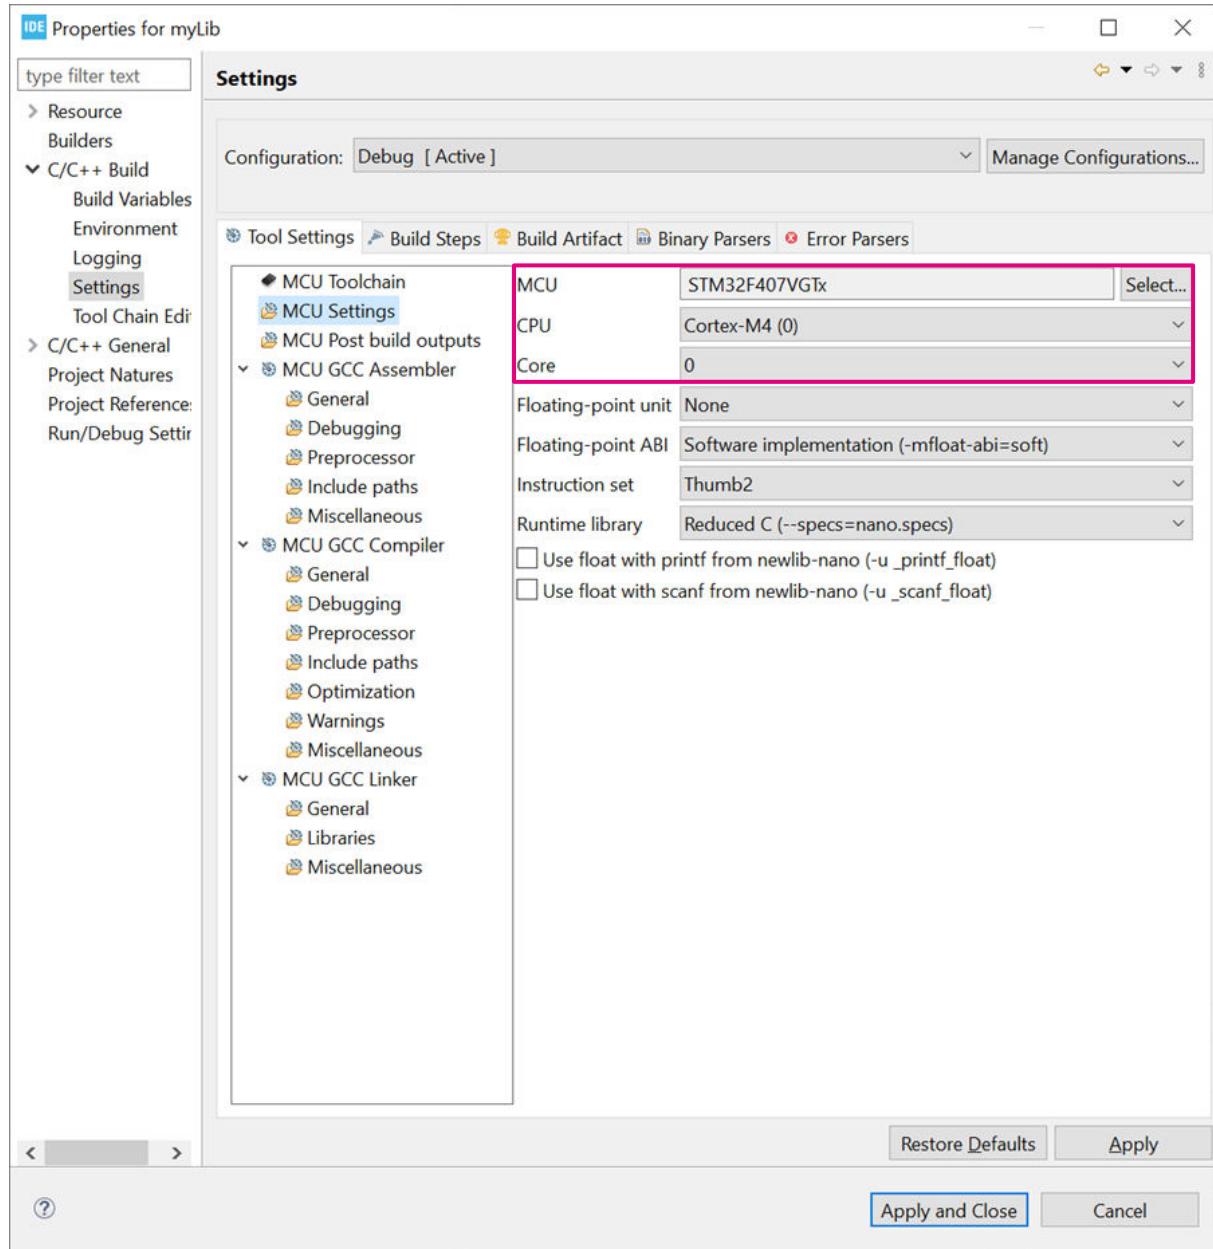

Tip:

CDT™ projects can also be used to produce target independent applications or executable projects.

2.3

Configure the project build setting

When an STM32 project is created, it contains default C/C++ build settings for the project. There are however a lot of different options that can be used by GCC, each embedded system having its own requirements. It is therefore possible to configure the project build settings further than the default build settings.

It is also common to have different requirements on build settings during different phases of the project development; for instance during the debugging and release phases. To handle this, different build configurations for each project are supported by STM32CubeIDE. This section presents the build configurations first, and then the project build settings.

2.3.1

Project build configuration

Each build configuration allows different variants of a project and contains a specific build setting. When an STM32 project is created in STM32CubeIDE, two build configurations, *Debug* and *Release*, are created by default. The *Debug* configuration makes the project built with debug information and without any optimization. The *Release* configuration makes the project optimized for smaller code size and with no debug information. By default, the *Debug* configuration is set as the active build configuration when the project is created.

It is possible to create new build configurations for a project at any time. Such new build configuration can be based on an earlier available build configuration.

When building the project, the active build configuration is used and during build the files generated are written into a folder with the same name as the active build configuration.

Note:

The build configuration only handles the build settings. How to configure debug settings is described later in this manual.

2.3.1.1

Change the active build configuration


To change the active build configuration:

1. Select the project name in the *Project Explorer*
2. Use the toolbar in the C/C++ perspective and click on the arrow to the right of the [Build] toolbar button


3. The build configurations are listed

Select the build configuration to use from the list.

Figure 60. Set the active build configuration using the toolbar

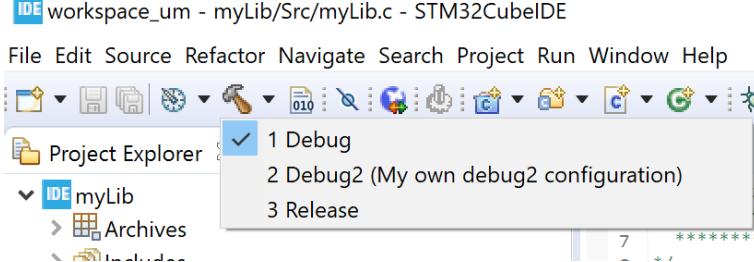


Another way to change the active build configuration is to right-click on the project name in the *Project Explorer* view, select [**Build Configurations**]>[**Set Active**], and select the preferred build configuration.

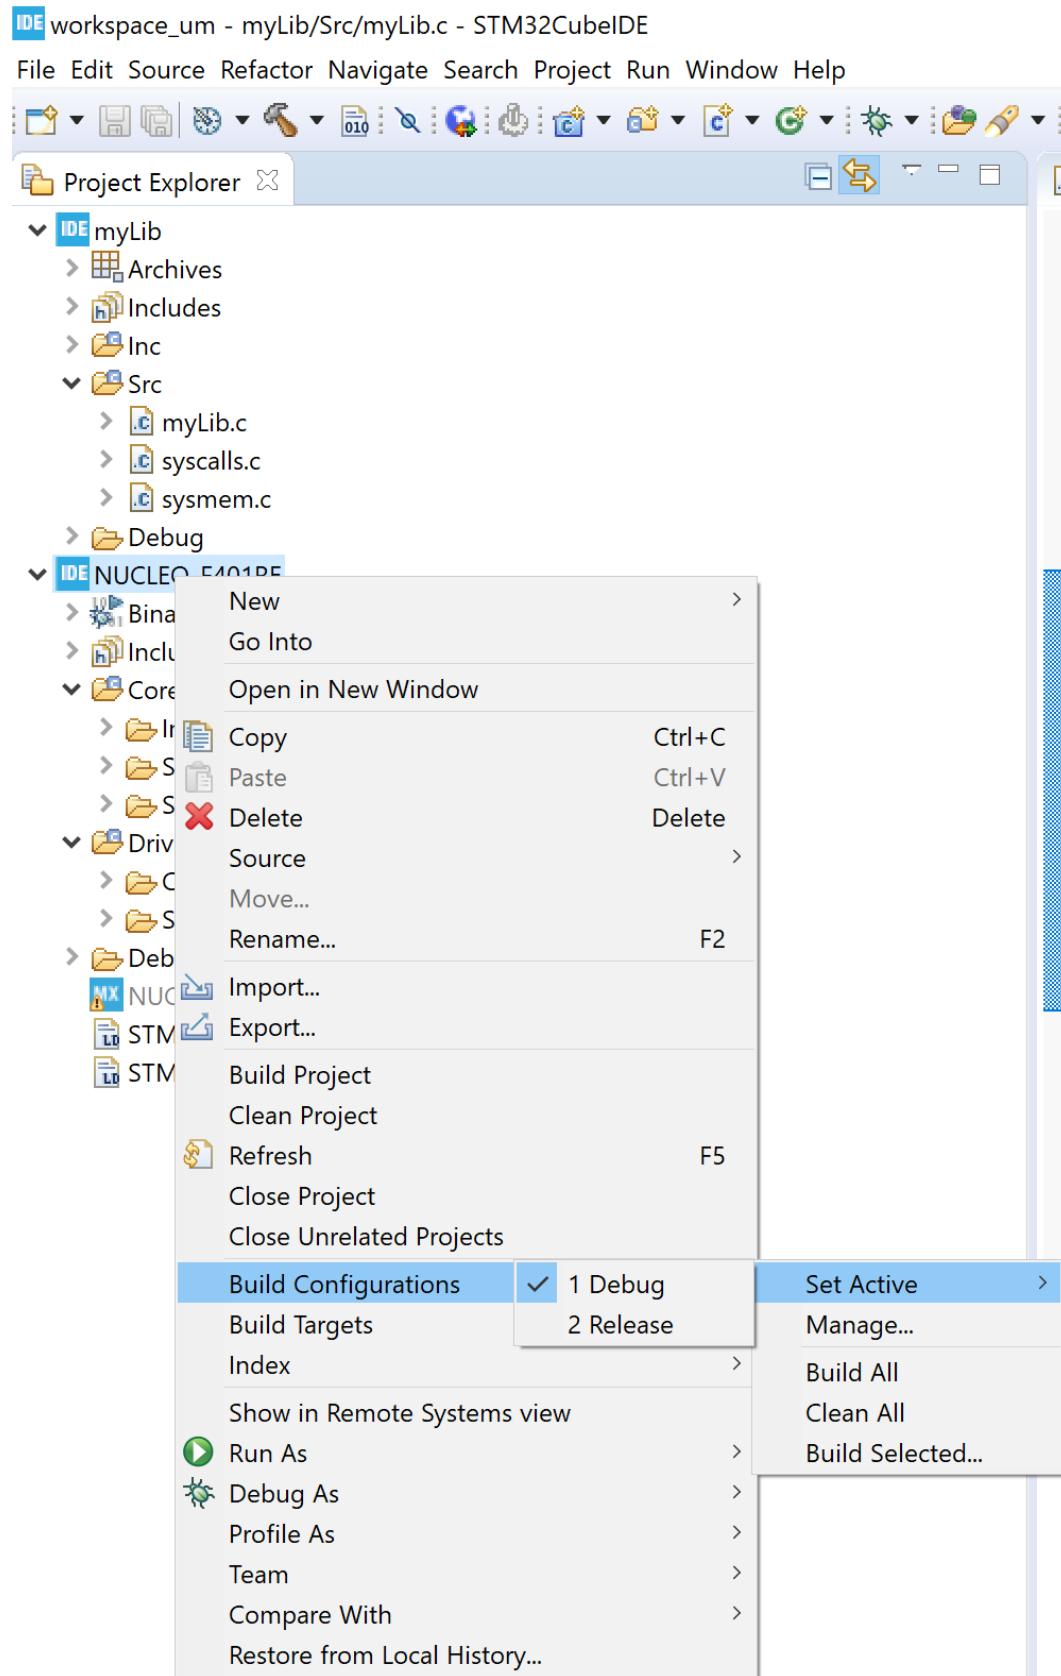Figure 61. Set active build configuration using right-click

It is also possible to select the active build configurations using the menu [Project]>[Build Configurations]>[Set Active] and select the chosen build configuration.

Figure 62. Set active build configuration using menu

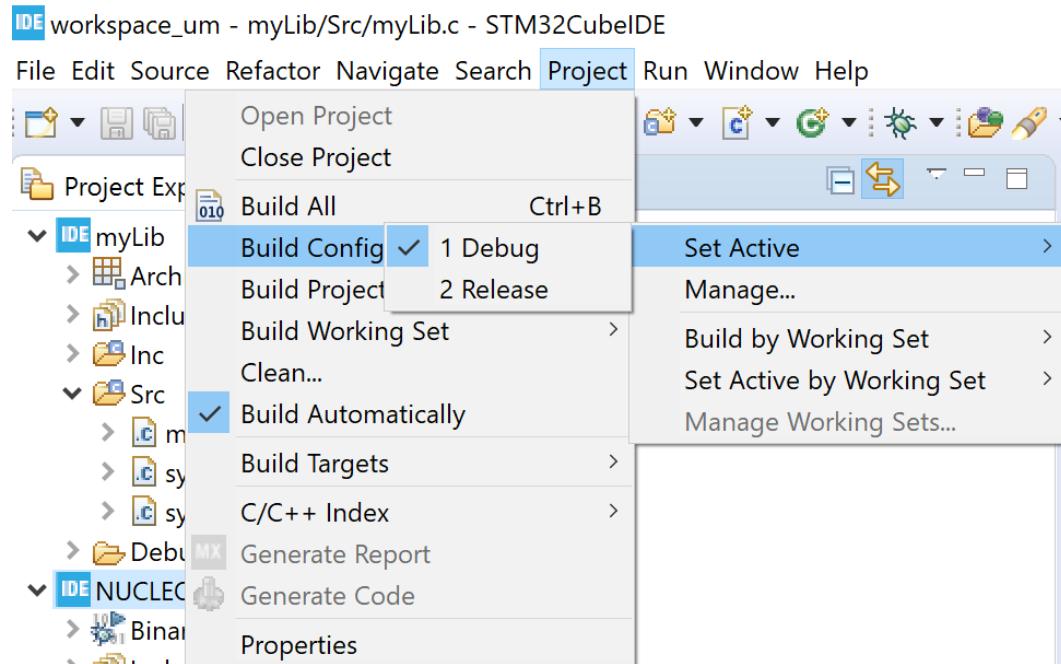


2.3.1.2 Create a new build configuration

To create a new build configuration:

1. Right-click on the project name in the *Project Explorer* view
 2. Either:
 - Select [Build Configurations]>[Manage...]
 - Use the menu [Project]>[Build Configurations]>[Manage...]
- Both methods open the *Manage Configurations* dialog.

Figure 63. Manage Configurations dialog

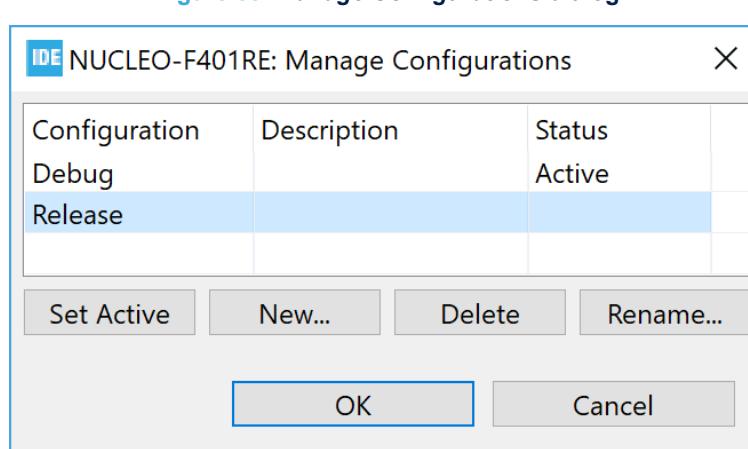


As shown in [Figure 63](#), some buttons in the dialog are used to manage the configurations:

- **[Set Active]** is used to change and select another configuration to be active
- **[New...]** is used to create a new build configuration
- **[Delete]** is used to delete an existing build configuration
- **[Rename...]** is used to rename the build configuration

To create a new build configuration, press the **[New...]** button. This opens the *Create New Configuration* dialog. In this dialog, a name and description is entered. The name must be a valid directory name since it is used as the directory name when building the project with the new configuration.


Figure 64. Create a new build configuration

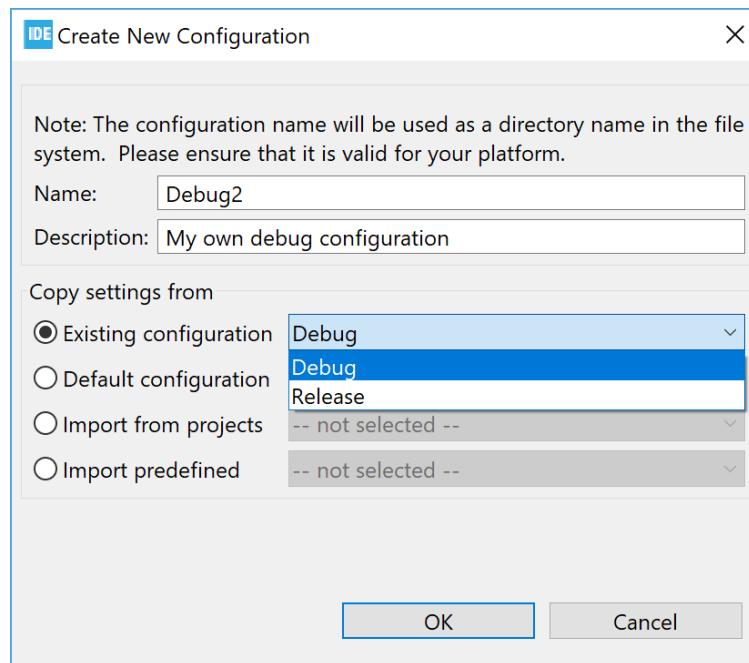

As seen in [Figure 64](#), the new build configuration is based on an existing build configuration. In the case illustrated, the new configuration is based on the existing *Debug* configuration. Press **[OK]** when finished with the settings.

The *Manage Configurations* dialog opens and the new debug configuration is displayed.

Figure 65. Updated Manage Configurations dialog

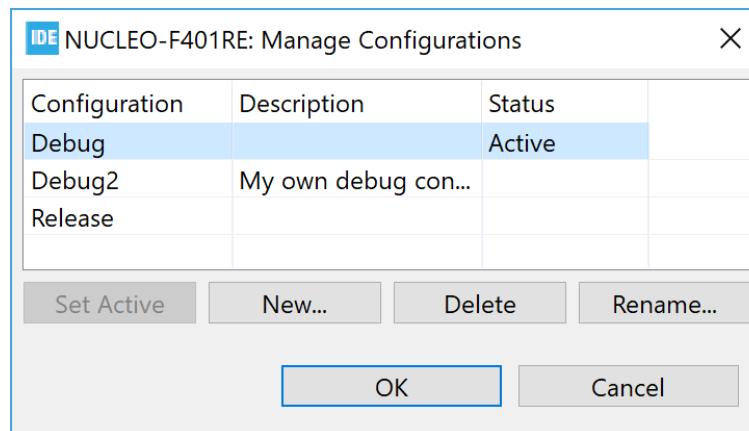

Change the active configuration to another configuration if needed and press [OK] to save and close the configurations dialog when finished managing configurations.

2.3.1.3


Delete a build configuration

To delete a build configuration:

1. Open the *Manage Configurations* dialog
2. Select the configuration to be deleted
3. Press the [**Delete**] button

For instance, if the *Debug2* configuration is selected and [**Delete**] button is pressed, the following confirmation dialog opens.

Figure 66. Configuration deletion dialog

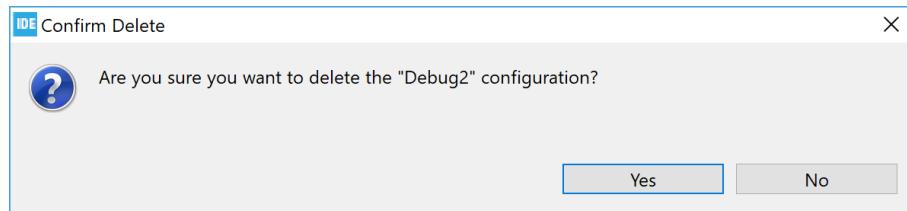

In this case, select [**No**] to keep the *Debug2* configuration.

2.3.1.4


Rename a build configuration

To rename a build configuration:

1. Open the *Manage Configurations* dialog
2. Select the configuration to be renamed
3. Press the [**Rename...**] button

For instance, if the *Debug2* configuration is selected and [**Rename...**] button is pressed, the following confirmation dialog opens.

Figure 67. Configuration renaming dialog

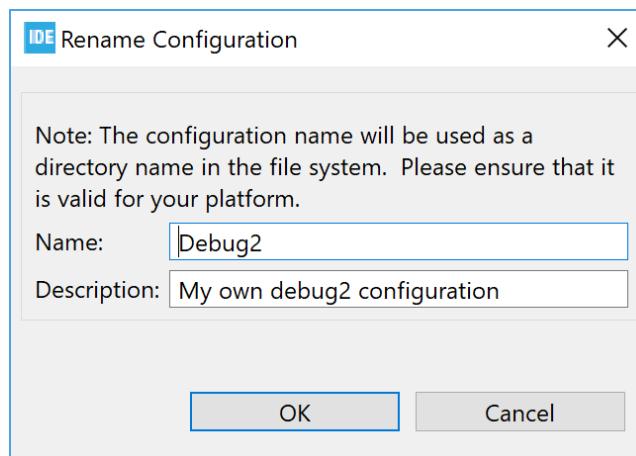

Update the name, description, or both and press [OK] to rename the *Debug2* configuration. In this case, press [**Cancel**] and keep the name.


2.3.2

Project C/C++ build settings

Each build configuration contains one project C/C++ build setting. The project C/C++ build setting is updated in project properties. To update the build setting, right-click on the project name in the *Project Explorer* view and select [**Properties**] or use the menu [**Project**]>[**Properties**]. Both these ways open the *Properties* window for the project.

Select [**C/C++ Build**]>[**Settings**] in the *Properties* left pane. The right part is then filled with tabs *Tool Settings*, *Build Steps*, *Build Artifact*, *Binary Parsers*, and *Error Parsers*. The first two tabs are the most useful ones.

Figure 68. Properties tabs

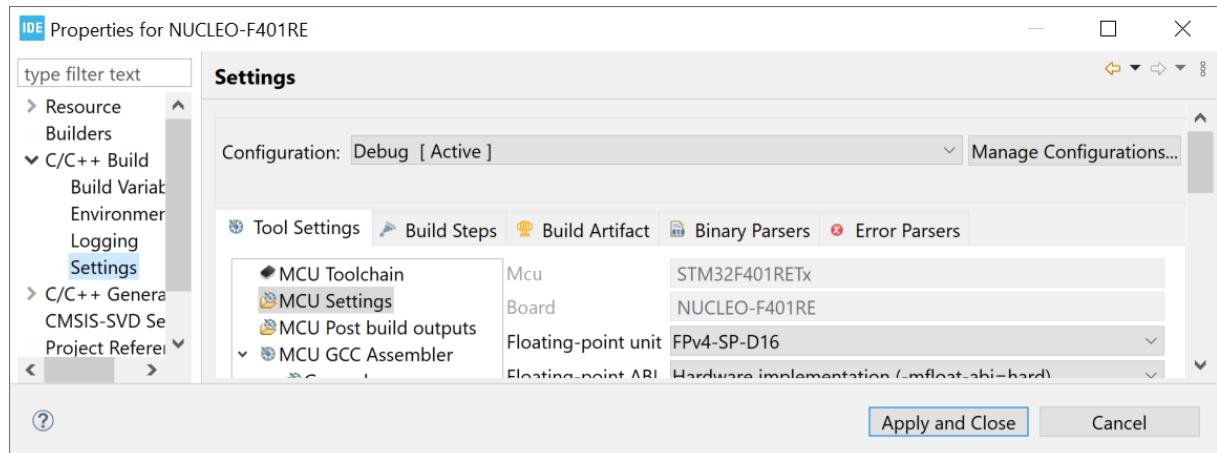


Note:

Resize the dialog window or use the top-right arrow buttons if all tabs are not visible.

The *Settings* pane contains a [**Configuration**] selection to decide if new selections are used in the active configuration only, in another configuration, in all configurations or in multiple configurations. Press [**Manage Configurations**] to open the *Manage Configurations* dialog.

Figure 69. Properties configurations

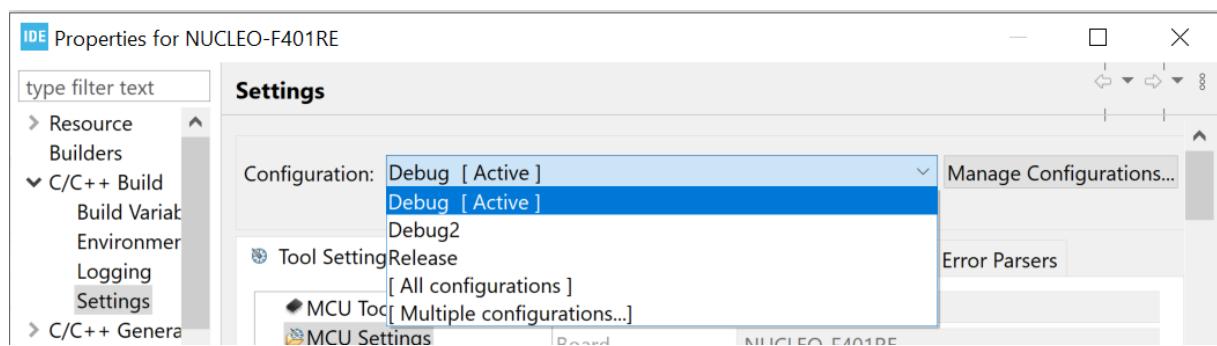


The *Tool Settings* tab is further split into *MCU Toolchain*, *MCU Settings*, *MCU Post build outputs*, *MCU GCC Assembler*, *MCU GCC Compiler* and *MCU GCC Linker*.

MCU Toolchain is used to change toolchains. STM32CubeIDE includes one version of the *GNU Tools for STM32* toolchain. The *Toolchain Manager* is used to download other *GNU ARM Embedded* toolchains and to configure to use local *GNU ARM Embedded* toolchains.


Information about patches made in *GNU Tools for STM32* can be read in [EXT-12]. The document can be opened from the *Technical Documentation* page in the *Information Center*.

Figure 70. Properties toolchain version

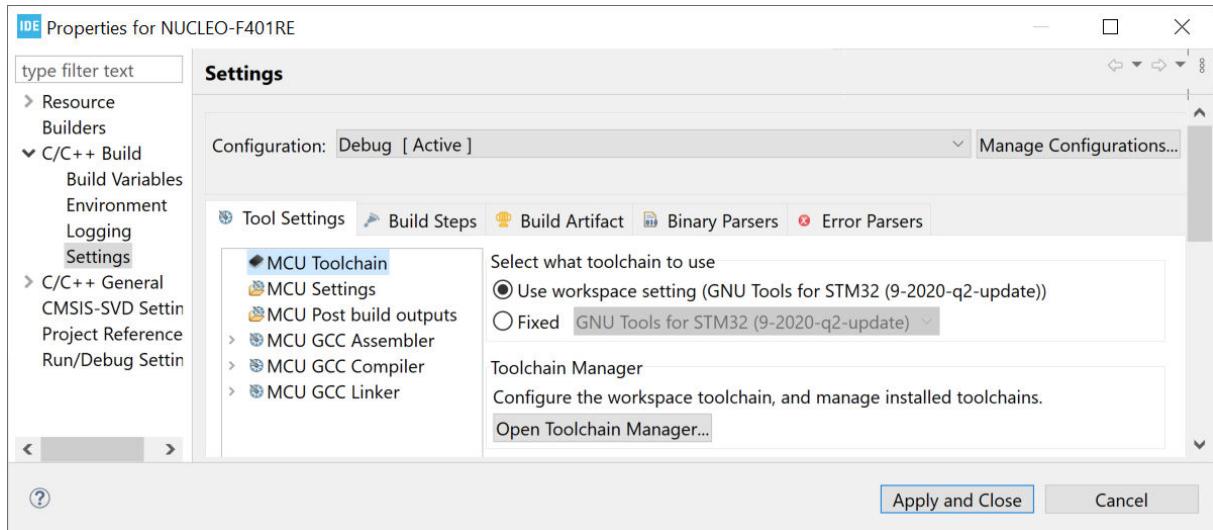

Select **[Fixed]** to enable the toolchain selection.


Figure 71. Properties toolchain selection

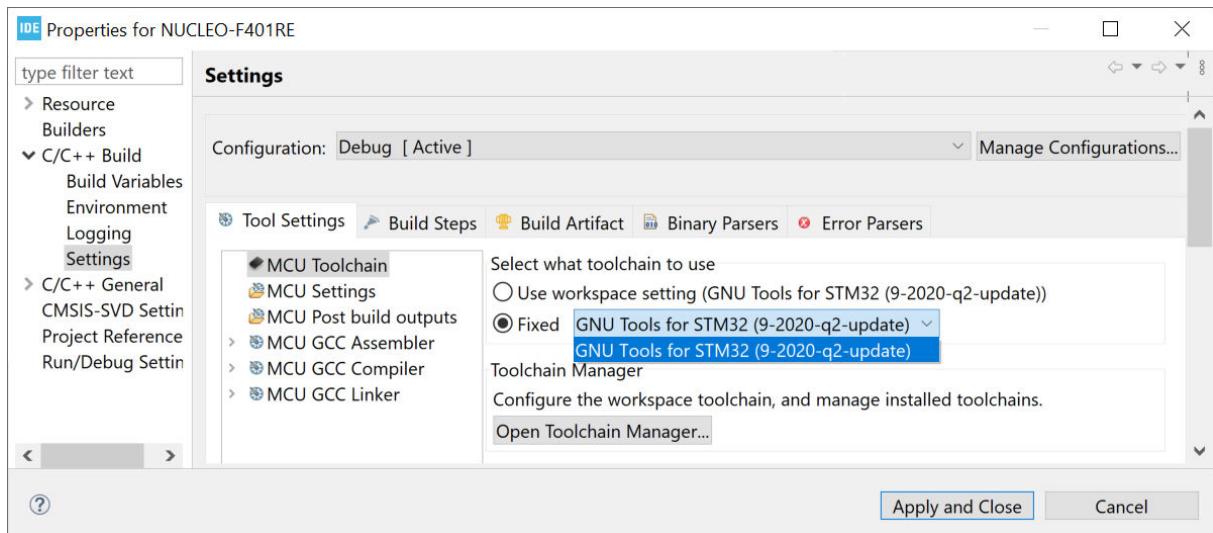

As shown in Figure 71, only the default toolchain *GNU Tools for STM32* is available by default. To install additional toolchains, click on the **[Open Toolchain Manager...]** button to open the *Toolchain Manager*. Section 2.11 *Toolchain Manager* contains detailed information on how to install, uninstall toolchains and select the default workspace toolchain.

MCU Settings displays the selected MCU and board for the project and proposes to select how to handle floating point, instruction set and runtime library.


Figure 72. Properties tool MCU settings

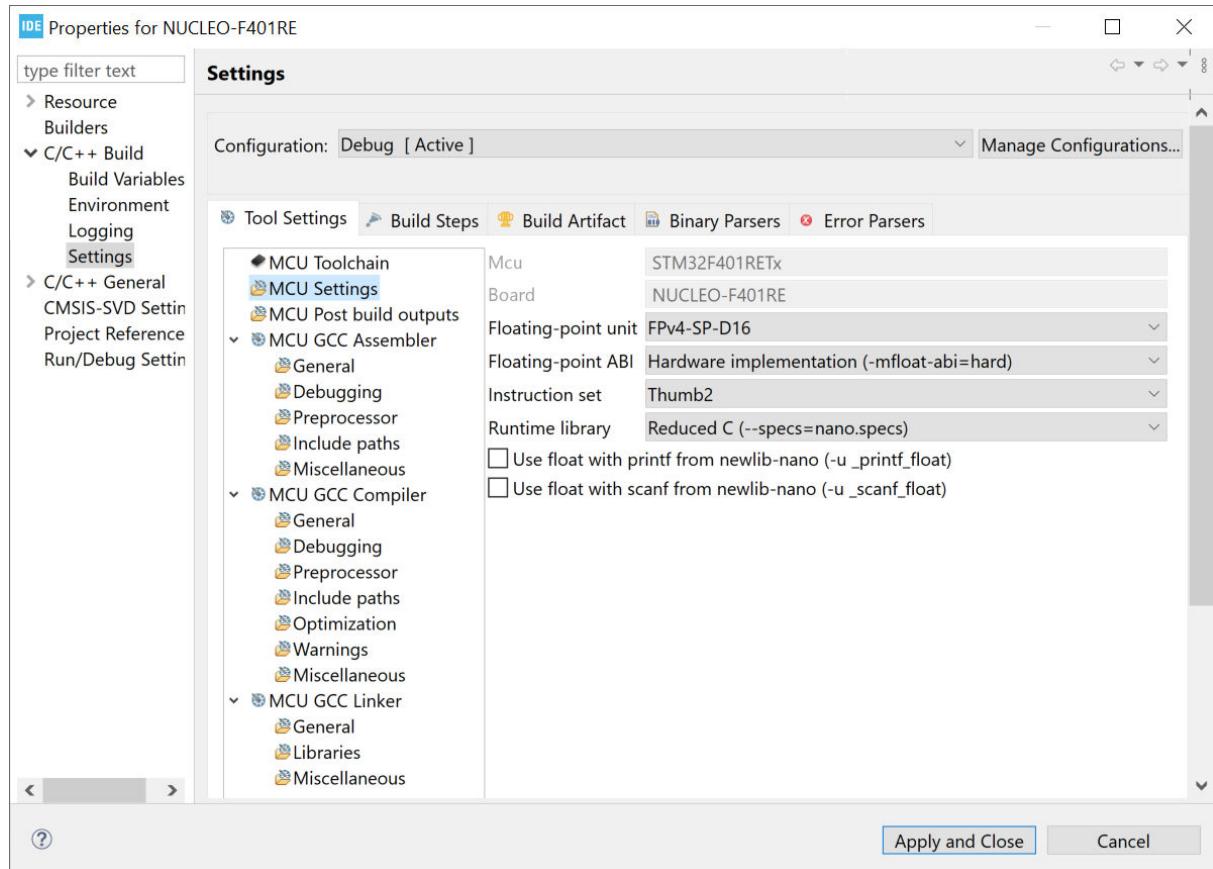

MCU Post build outputs proposes to convert the `elf` file to another file format, show build size information, and generate list file. The output file can be converted to:


- Binary file
- Intel Hex file
- Motorola S-record file
- Motorola S-record symbols file
- Verilog file

Figure 73. Properties tool MCU post-build settings

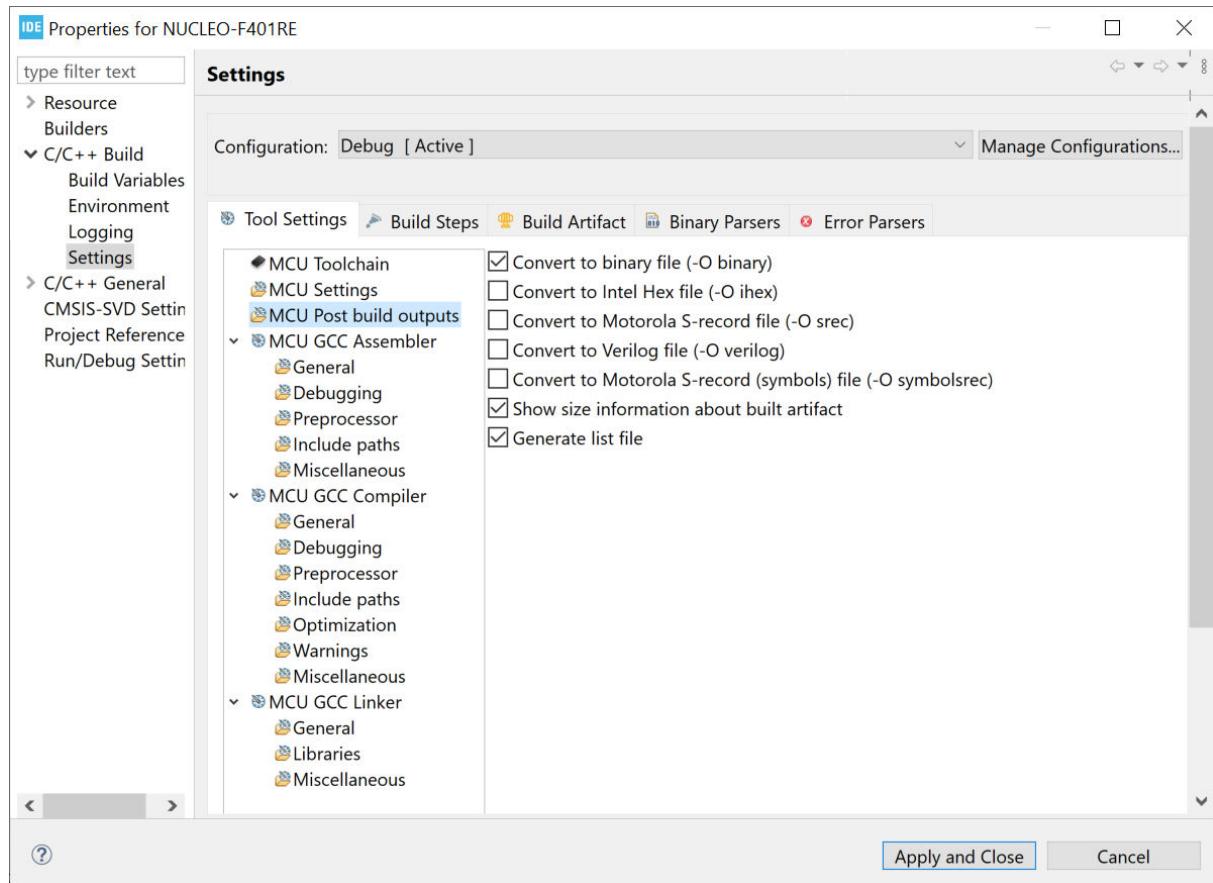


The *MCU GCC Assembler* settings contains selections for the assembler. The main node presents all the assembler command-line options that are currently enabled in the sub-node settings. The sub-nodes are used to view the current settings or change any settings for the assembler.

Figure 74. Properties tool GCC assembler settings

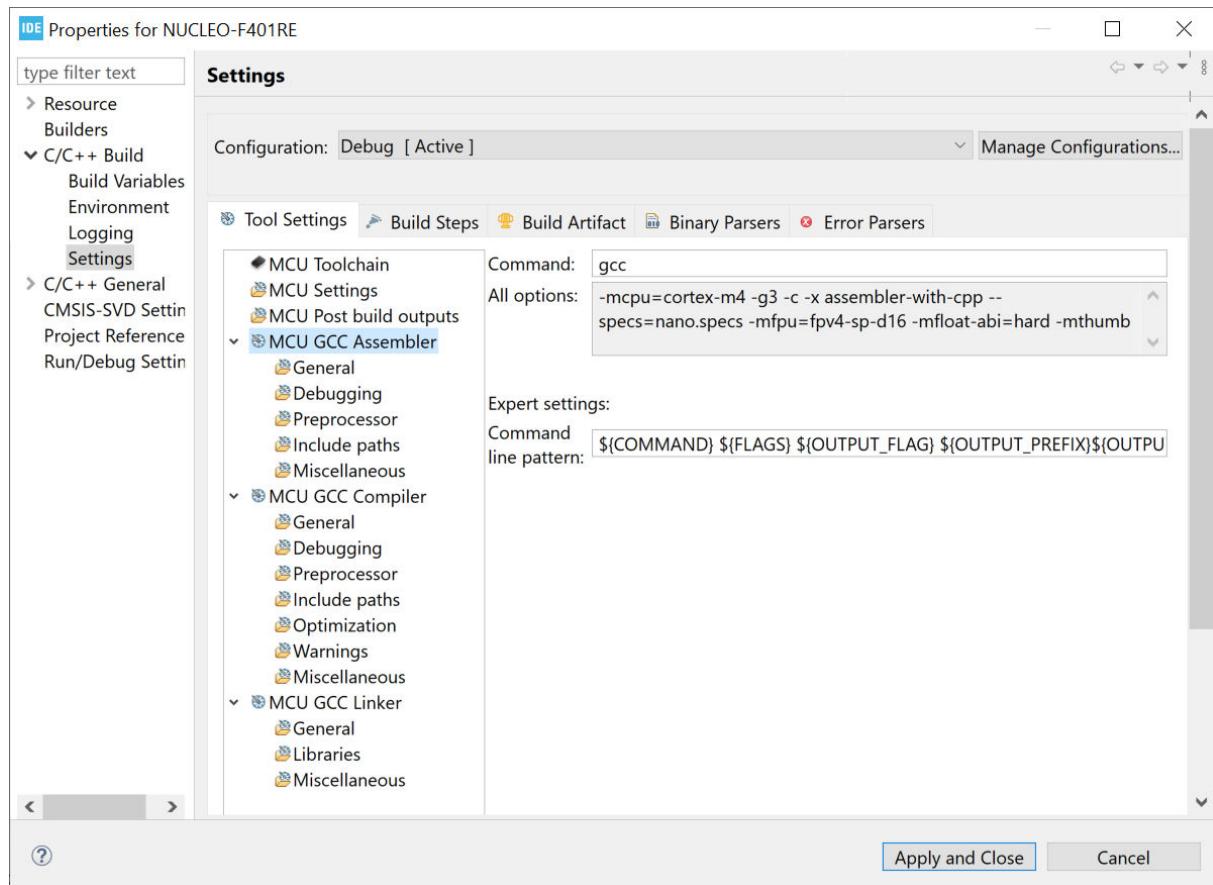


The *MCU GCC Compiler* settings contains selections for the compiler. The main node presents all the compiler command-line options that are currently enabled in the sub-node settings. The sub-nodes are used to view the current settings or change any settings for the compiler.

Figure 75. Properties tool GCC compiler settings

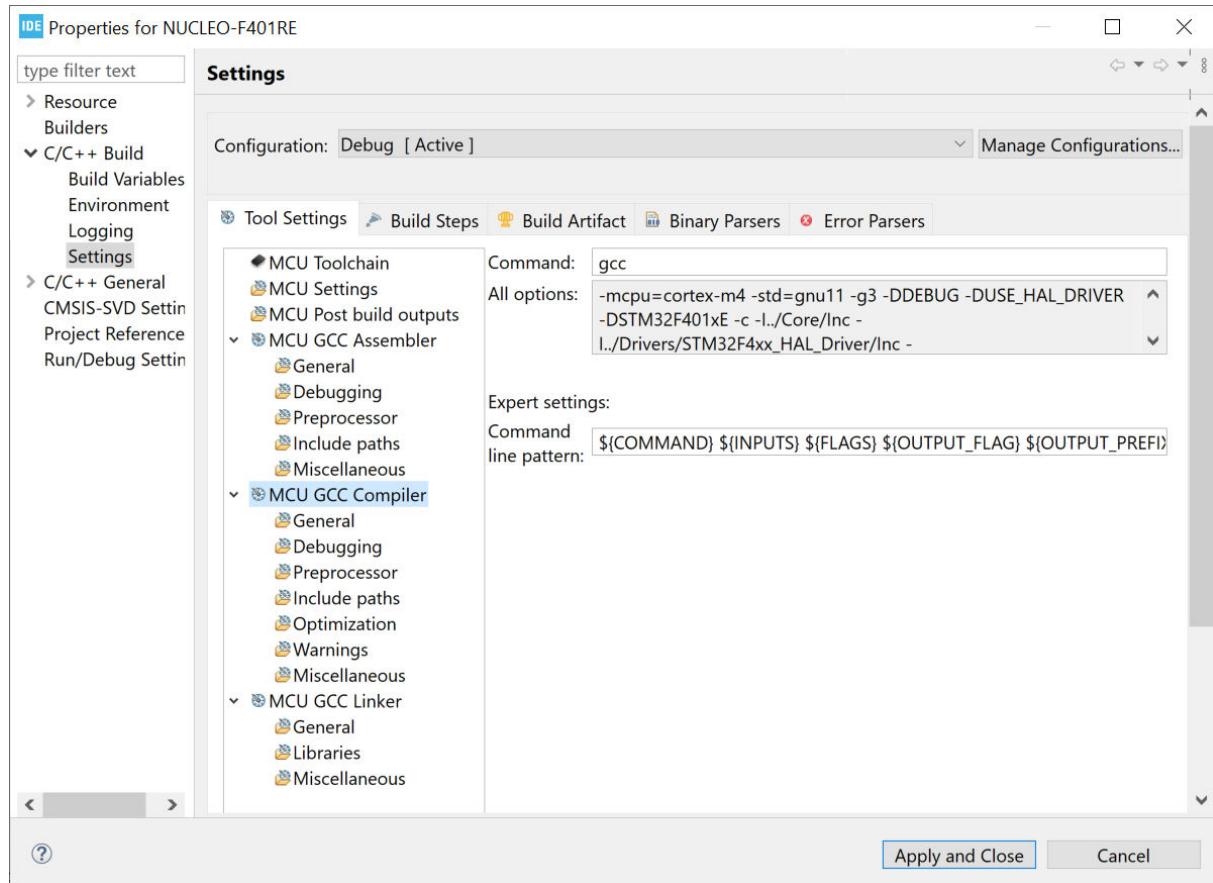


The *MCU GCC Linker* settings contains selections for the linker. The main node presents all the linker command-line options that are currently enabled in the sub-node settings. The sub-nodes are used to view the current settings or change any settings for the linker.

Figure 76. Properties tool GCC linker settings

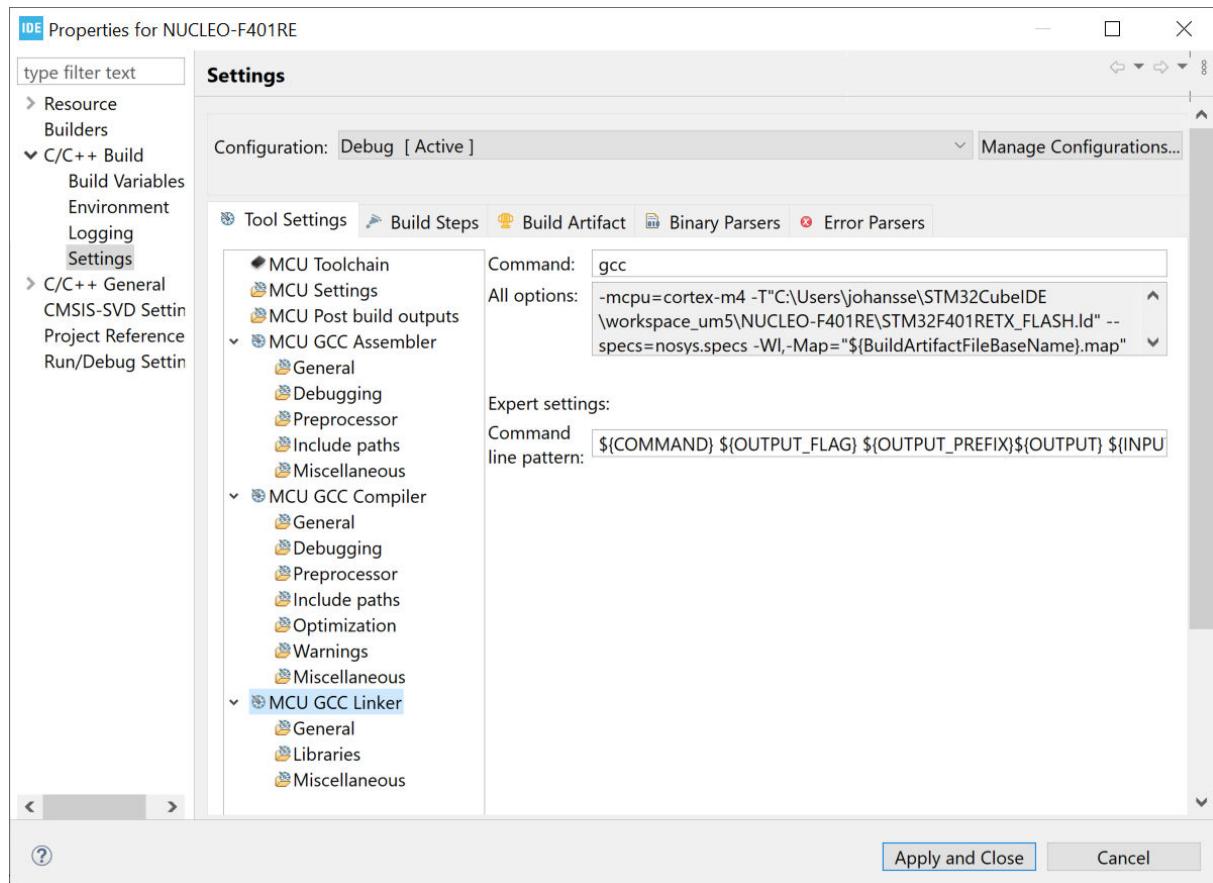

The *Build Steps* settings contains fields used to provide pre-build and post-build steps, which run before and after building the project. Edit the fields to run any pre-build or post-build step.

Figure 77. Properties build steps settings

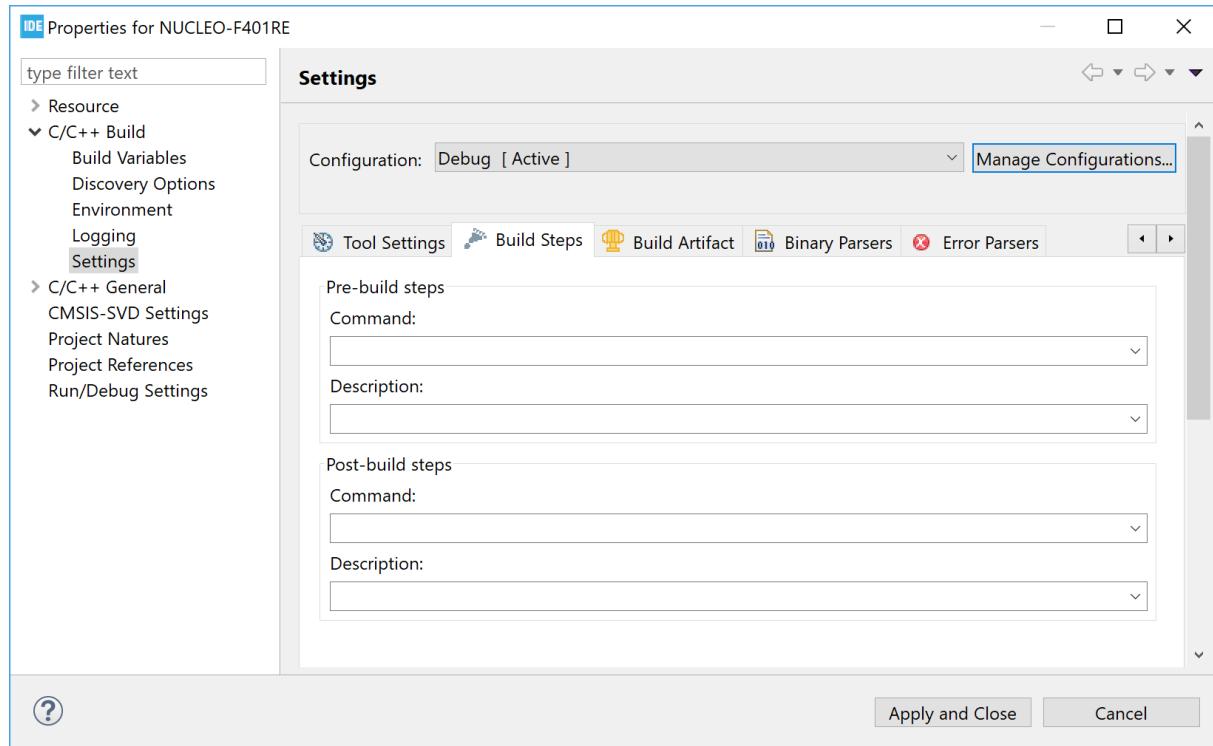


Note: It is possible to add more advanced post-build operations using makefile targets as described in Section 2.4.7.

2.4 Building the project

To start a build, select the corresponding project in the *Project Explorer* view and click on the **[Build]** toolbar button.

Figure 78. Project build toolbar

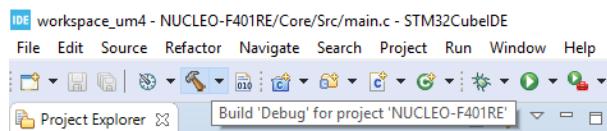

The build can also be started from menu **[Project]>[Build Project]**. The **[Project]** menu contains also some other usable build commands such as **[Build All]**, **[Build Project]** or **[Clean]**.

Another way to start a build is to right-click on the project in the *Project Explorer* view. This opens the context menu with the **[Build]** command and some other build options.

During the build, the *Console* view lists the build process. At the end, when the `elf` file is created normally, it lists size information.

Figure 79. Project build console

```

CDT Build Console [NUCLEO-F401RE]
arm-none-eabi-gcc ".../Core/Src/main.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -DDEBUG -c -I...
arm-none-eabi-gcc ".../Core/Src/stm32f4xx_hal_msp.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -I...
arm-none-eabi-gcc ".../Core/Src/stm32f4xx_it.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -DDEBUG
arm-none-eabi-gcc ".../Core/Src/syscalls.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -DDEBUG -c -I...
arm-none-eabi-gcc ".../Core/Src/sysmem.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -DDEBUG -c -I...
arm-none-eabi-gcc ".../Core/Src/system_stm32f4xx.c" -mcpu=cortex-m4 -std=gnu11 -g3 -DUSE_HAL_DRIVER -DSTM32F401xE -DDEBUG -c -I...
arm-none-eabi-gcc -o "NUCLEO-F401RE.elf" "@objects.list" -mcpu=cortex-m4 -T"C:\Users\johansse\STM32CubeIDE\worksp...
Finished building target: NUCLEO-F401RE.elf

arm-none-eabi-size NUCLEO-F401RE.elf
arm-none-eabi-objdump -h -S NUCLEO-F401RE.elf > "NUCLEO-F401RE.list"
    text      data      bss      dec      hex filename
    7308        20     1636    8964   2304 NUCLEO-F401RE.elf
Finished building: default.size.stdout

Finished building: NUCLEO-F401RE.list

12:42:04 Build Finished. 0 errors, 0 warnings. (took 5s.932ms)


```

2.4.1 Building all projects

The toolbar contains the **[Build all]** button, which is used to build the active build configuration for all open projects in workspace.

It is also possible to use the menu **[Project]>[Build All]** to start a build of all projects.


Figure 80. Project build all

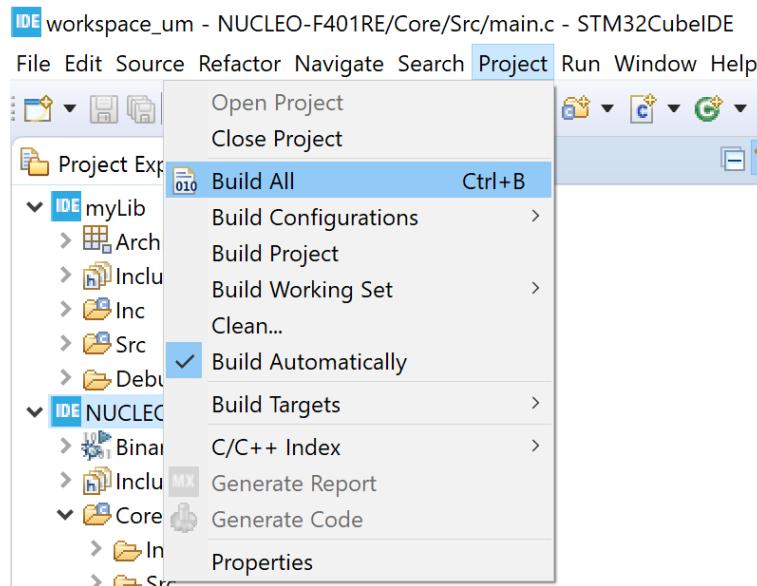

2.4.2 Build all build configurations

To build all build configurations for a project, right-click the project and select **[Build Configurations]>[Build All]** in the context menu.

Figure 81. Project build-all configurations

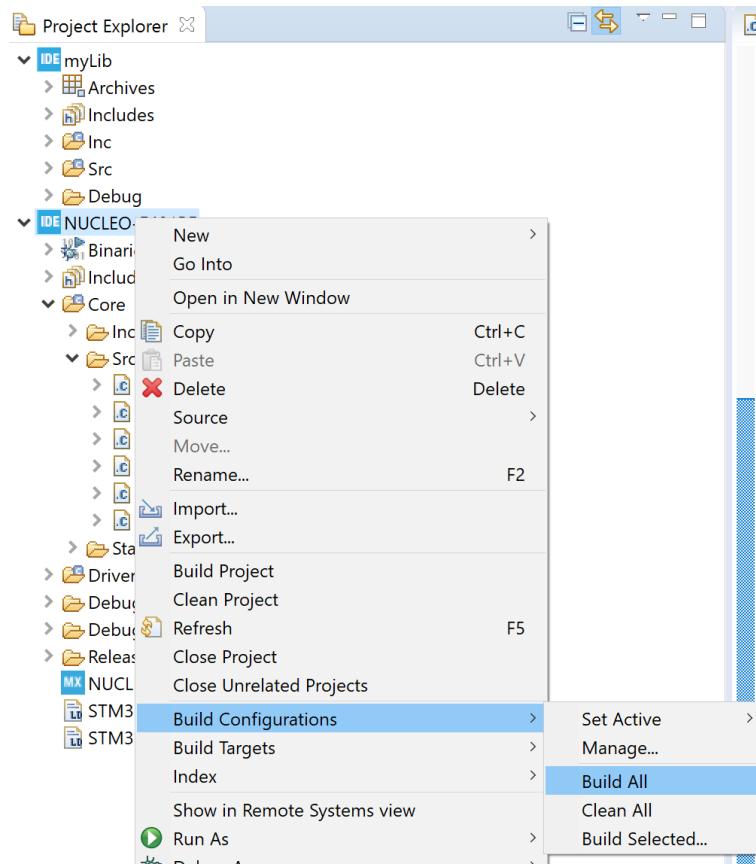

2.4.3 Headless build

Headless build is intended to be used to build projects that must be integrated into script-controlled builds, such as nightly builds on build servers for continuous integration process methods or others. The STM32CubeIDE GUI is never displayed in this case, and the user is not requested any manual interaction with STM32CubeIDE.

STM32CubeIDE includes a headless-build command file to run headless builds. For instance, when using Windows®, it is located in the C:\ST\STM32CubeIDE_1.7.0\STM32CubeIDE STM32CubeIDE installation folder. The `headless-build.bat` file is intended to be run from a command prompt.

Note:

Before running any headless build, make sure that the workspace is not opened by STM32CubeIDE. If there is an STM32CubeIDE running already using the workspace, it is not possible for the headless-build process to open and build the project.

To run headless build in Windows®, use the following procedure:

1. Open a command prompt.
2. Navigate to the STM32CubeIDE installation directory. Open the folder in which the IDE is stored.
For example: `cd C:\ST\STM32CubeIDE_1.7.0\STM32CubeIDE`
3. Enter the following command to build the NUCLEO-F401RE project in the workspace
`C:\Users\Name\STM32CubeIDE\workspace_1.7.0:
$ headless-build.bat -data C:\Users\Name\STM32CubeIDE\workspace_1.7.0
-cleanBuild NUCLEO-F401RE`

To get help on headless build parameters, use headless build with option `-help`. Figure 82 shows the result of command `$ headless-build.bat -help`.

Figure 82. Headless build

```
C:\ST>cd STM32CubeIDE_1.7.0.21alpha1
C:\ST\STM32CubeIDE_1.7.0.21alpha1>headless-build.bat -help
Usage: PROGRAM -data <workspace> -application org.eclipse.cdt.managedbuilder.core.headlessbuild [ OPTIONS ]
Options:
  -data      {/path/to/workspace}
  -import    {{uri:}/|/path/to/project}
  -importAll {{uri:}/|/path/to/projectTreeURI} Import all projects under URI
  -build     {project_name_reg_ex}/{config_reg_ex} | all]
  -cleanBuild {project_name_reg_ex}/{config_reg_ex} | all]
  -markerType Marker types to fail build on {all | cdt | marker_id}
  -no-indexer Disable indexer
  -printErrorMarkers Print all error markers
  -I         {include_path} additional include_path to add to tools
  -include   {include_file} additional include_file to pass to tools
  -D         {preproc_define} addition preprocessor defines to pass to the tools
  -E         {var=value} replace/add value to environment variable when running all tools
  -Ea        {var=value} append value to environment variable when running all tools
  -Ep        {var=value} prepend value to environment variable when running all tools
  -Er        {var} remove/unset the given environment variable
  -T         {toolid} {optionid=value} replace a tool option value in each configuration built
  -Ta        {toolid} {optionid=value} append to a tool option value in each configuration built
  -Tp        {toolid} {optionid=value} prepend to a tool option value in each configuration built
  -Tr        {toolid} {optionid=value} remove a tool option value in each configuration built
  Tool option values are parsed as a string, comma separated list of strings or a boolean based on the options type

C:\ST\STM32CubeIDE_1.7.0.21alpha1>
```

2.4.4

Temporary assembly file and preprocessed C code

Save the temporary assembly file by adding the `-save-temp`s flag to the compiler:

1. In the menu, select **[Project]>[Properties]**
2. Select **[C/C++ build]>[Settings]**
3. Open the *Tool Settings* tab
4. Add `-save-temp`s in the **[C Compiler]>[Miscellaneous]** settings
5. Rebuild the project

The assembler file is located in the build output directory with name `filename.s`.

The file `filename.i` containing the preprocessed C code is generated also. It shows the code after the preprocessor but before the compilation. It is advise to examine the content of this file in case of problems with defines.

2.4.5

Build logging

To enable or disable project build logging, right-click on the project in the *Project Explorer* view and select **[Properties]**. Then, select **[C/C++ Build]>[Logging]**. The log file location and name are also specified.

To enable a global build log for all projects in a workspace, select **[Window]**, **[Preferences]**, and open **[C/C++, Build, Logging]>[Enable global build logging]**.

2.4.6

Parallel build and build behaviour


Parallel build occurs when more than one thread is used at the same time to compile and build the code. Most often, it reduces build time significantly. The optimal number of threads to use is usually equal to the number of CPU cores of the computer. Parallel build can be enabled and disabled.

To configure parallel build:

1. Right-click on the project in the *Project Explorer* view
2. Select menu **[Project]>[Properties]**
3. Select **[C/C++ Build]** in the *Properties* panel
4. Open the *Behavior* tab and configure **[Enable parallel build]**

The *Behavior* tab also contains build settings on how to behave on errors, build on resource save, incremental build, and clean.

Figure 83. Parallel build

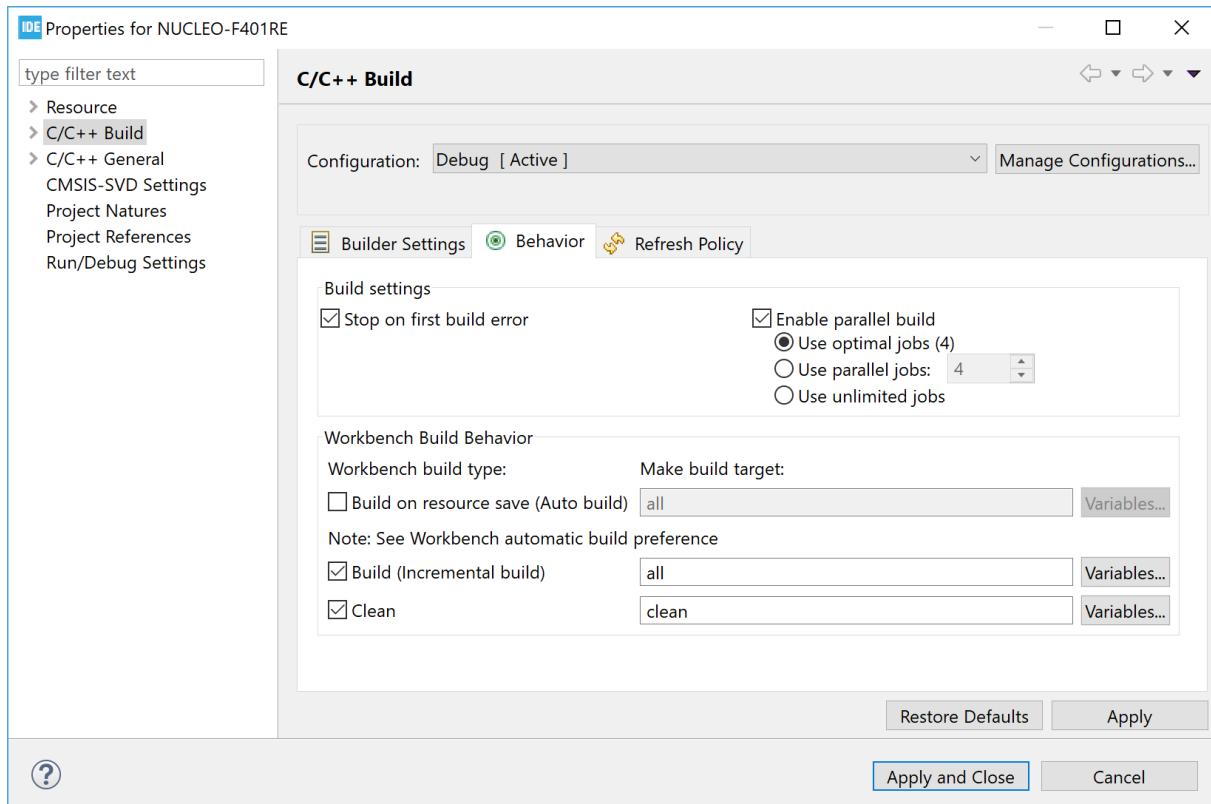

2.4.7 Post-build with makefile targets

It is possible to add advanced post-build scripts by using makefile targets. To do this:

1. Create a new file
2. Name it `makefile.targets`
3. Place it in the root directory of the project

The content of the file must be similar to the example presented below. The example just copies the `elf` generated file to a new file and uses macros `BUILD_ARTIFACT`, `BUILD_ARTIFACT_PREFIX`, `BUILD_ARTIFACT_NAME`, and `BUILD_ARTIFACT_EXTENSION`, which are generated into the makefile by STM32CubeIDE from v1.5.0.

```
secure_target := \
    $(BUILD_ARTIFACT_PREFIX)$(BUILD_ARTIFACT_NAME)-secure.$(BUILD_ARTIFACT_EXTENSION)
main-build: $(secure_target)

$(secure_target): $(BUILD_ARTIFACT)
    # Do what you want here... simple copy file for demo
    cp "$<" "$@"

```

Note:


make requires that tabs are used instead of spaces.

2.5 Linking the project

This section contains basic information about the linker and linker script files. Detailed information about the linker can be found in the *GNU Linker* manual ([EXT-05]), which is accessed from the *Information Center*. Click on the

[Information Center] toolbar button  and open the *Information Center* view. Open the linker documentation using the [C/C++ Linker The GNU Linker PDF] link.

Figure 84. Linker documentation

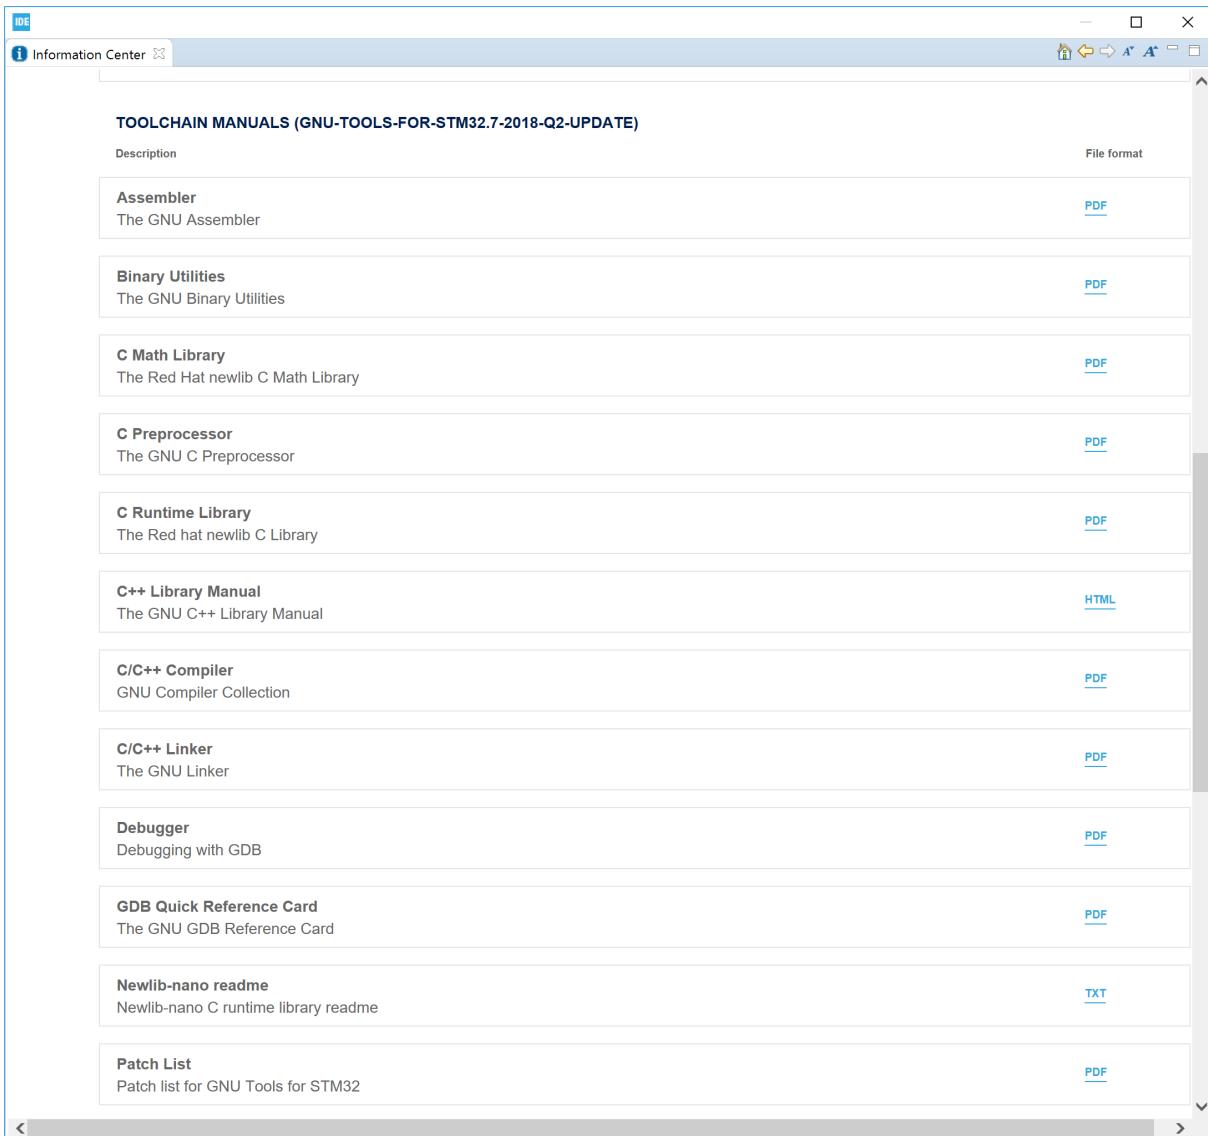

2.5.1


Run time library

The toolchains included in STM32CubeIDE contain two prebuilt run time C libraries based on `newlib`. One is the *standard C newlib library* and the other is the *reduced C newlib-nano*. Use `newlib-nano` to achieve smaller code size. For information about the differences between `newlib-nano` and the standard `newlib`, refer to the `newlib-nano` readme file ([ST-09]), accessible from the *Information Center*.

To select the desired run time library for use in the project.

1. Right-click on the project in the *Project Explorer* view
2. Select menu **[Project]>[Properties]**
3. Select **[C/C++ Build]>[Settings]** in the *Properties* panel
4. Open the *Tool Settings* tab, select **[MCU Settings]** and configure the **[Runtime library]** setting

Figure 85. Linker run time library

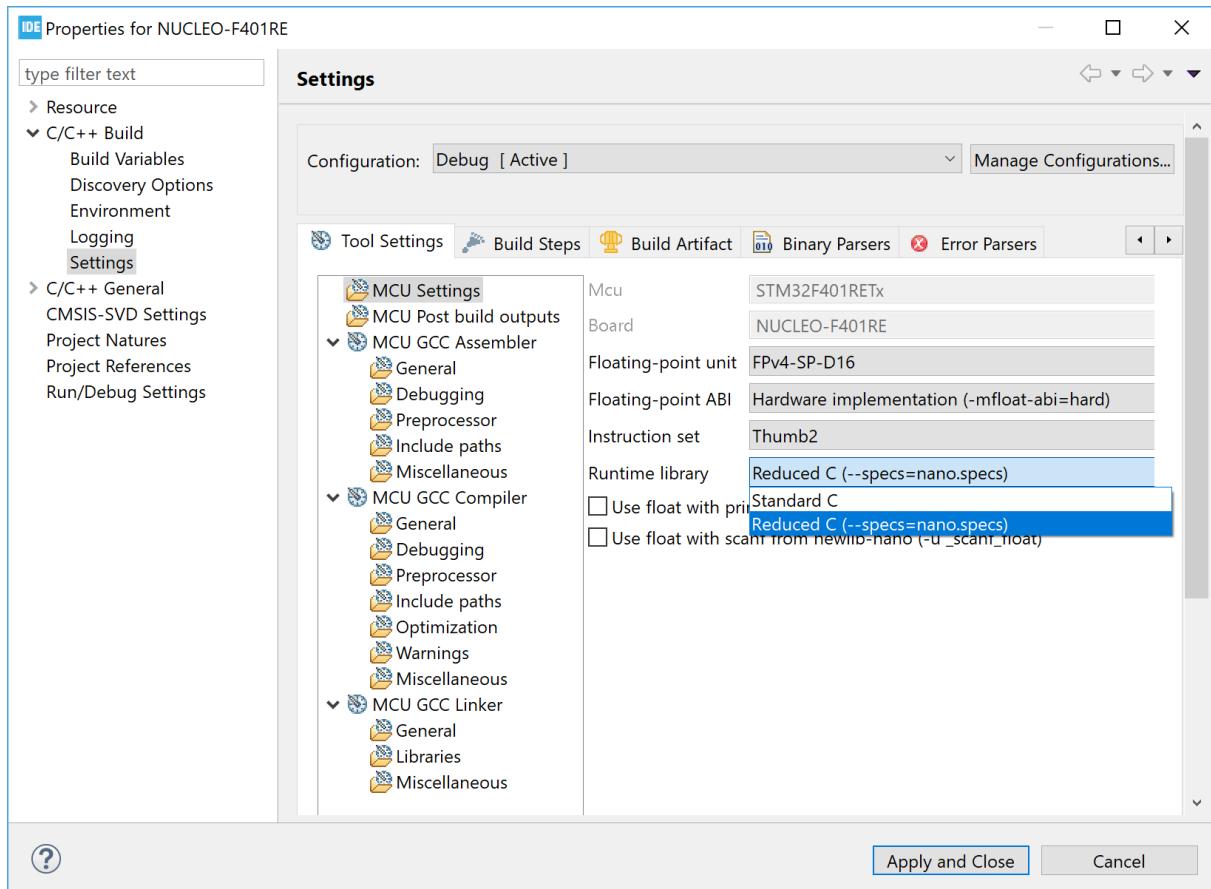

When `newlib-nano` is used while floating-point numbers must be handled by `scanf/printf`, additional options are required. The reason is that `newlib-nano` and `newlib` handle floating-point numbers differently. In `newlib-nano`, formatted floating-point number inputs and outputs are implemented as weak symbols. Therefore, the symbols must be pulled by specifying explicitly if `%f` is used with `scanf/printf` using the `-u` option:


- `-u _scanf_float`
- `-u _printf_float`

For example, to enable output float with `printf`, the command line is as follows:

```
$ arm-none-eabi-gcc --specs=nano.specs -u _printf_float $(OTHER_LINK_OPTIONS)
```

The options can be enabled using the **[Use float ...]** checkboxes in **[MCU Settings]** in the **Tool Settings** tab.

Figure 86. Linker newlib-nano library and floating-point numbers

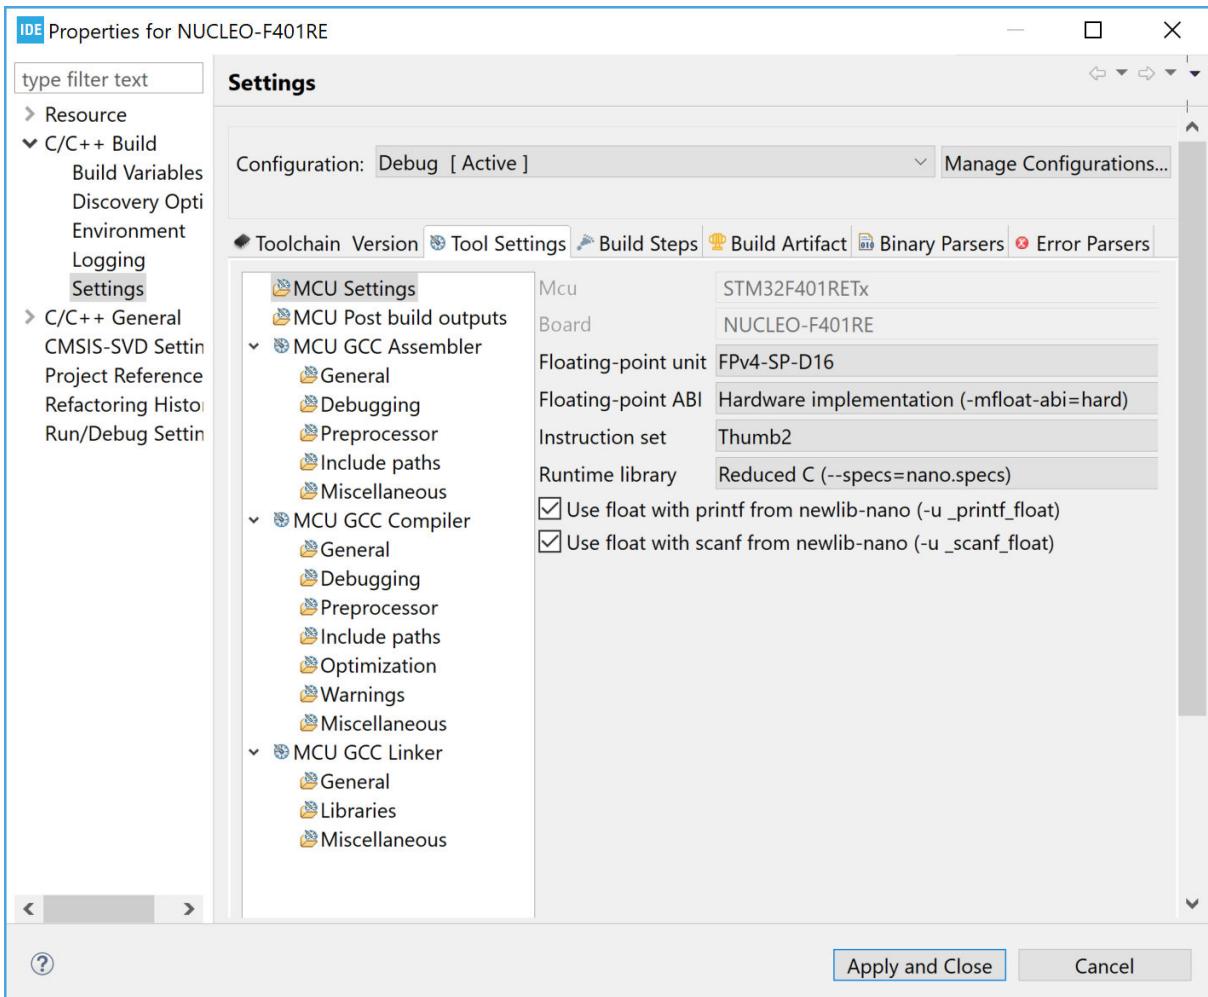


2.5.2 Discard unused sections

Linker optimization is the process where the linker removes unused code and data sections, dead code, from the output binary. Run time and middleware libraries typically include many functions that are not used by all applications, thus wasting valuable memory unless removed from the output binary.

When using the project wizard to create new projects, the default configuration is that the linker discards unused sections. To check or change the setting about unused sections, open at any time the build settings for the project:

1. Right-click the project in the *Project Explorer* view and select [**Properties**]
2. In the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the *Tool Settings* tab in the panel
4. Select [**MCU GCC Linker**]>[**General**]
5. Configure [**Discard unused sections (-Wl,--gc-sections)**] according to the project requirements
6. Rebuild the project

Figure 87. Linker discard unused sections

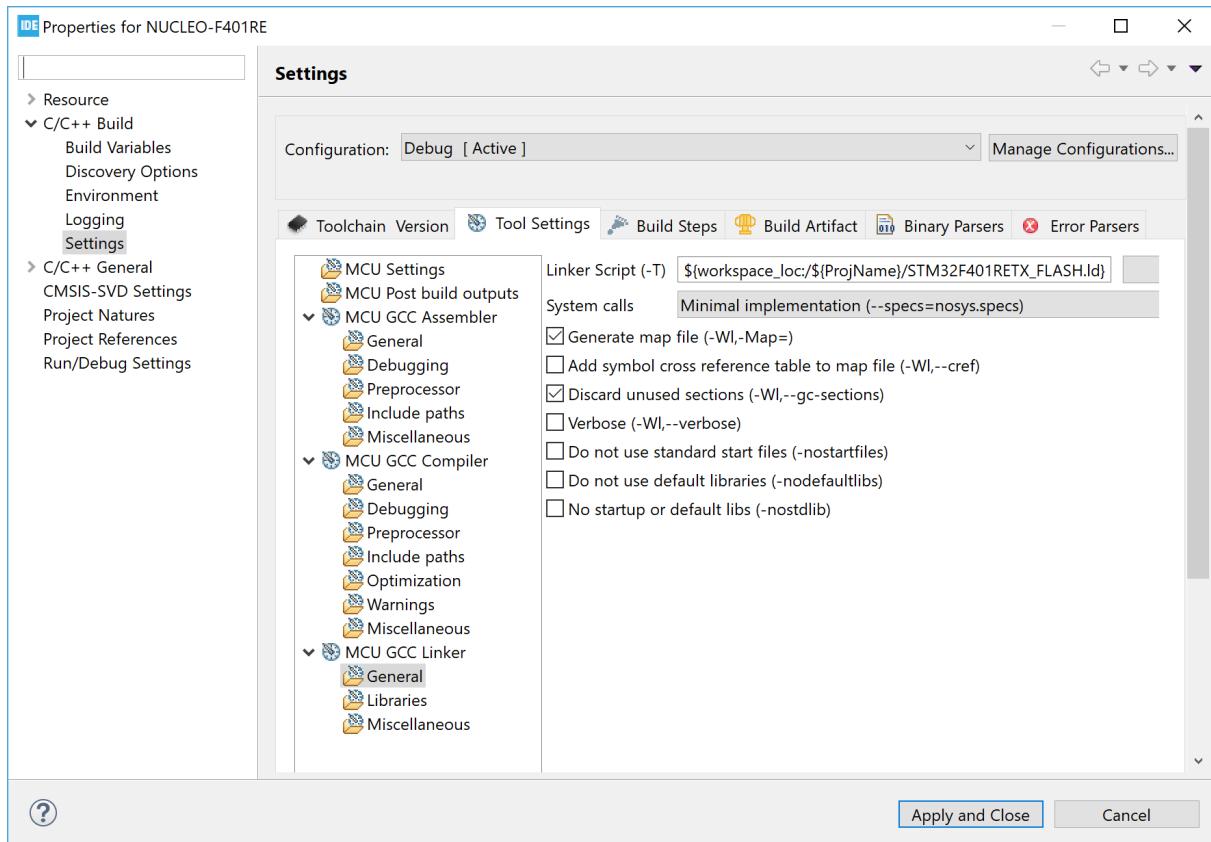

2.5.3

Page size allocation for malloc

When the *GNU Tools for STM32* toolchain is used with the standard C `newlib` library, the page size setting for `malloc` can be changed. The `newlib` default page size is 4096 bytes. If a `sysconf()` function is implemented in the user project, this user function is called by `_malloc_r()`.

The following example shows how to implement a `sysconf()` function with a 128-byte page size. Add a similar function if there is a need for the application to use a smaller page size than the default 4096 bytes.

```
/**  
*****  
** File : sysconf.c  
*****  
*/  
  
/* Includes */  
#include <errno.h>  
#include <unistd.h>  
  
long sysconf(int name)  
{  
    if (name==_SC_PAGESIZE)  
    {  
        return 128;  
    }  
    else  
    {  
        errno=EINVAL;  
        return -1;  
    }  
}
```

Note: If the “GNU ARM Embedded” toolchain is used, it does not call any `sysconf()` function implemented in the application but always uses the default `sysconf()` function in `newlib`. Also, no call to `sysconf()` is made if the “GNU Tools for STM32” toolchain is used with the reduced C `newlib-nano` library.


2.5.4

Include additional object files

STM32CubeIDE makes it easy to include additional object files that must be linked to a project. They can be files from other projects, precompiled libraries where no source code is available, or object files created with other compilers.

1. Right-click the project in the *Project Explorer* view and select [**Properties**]
2. In the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the *Tool Settings* tab in the panel
4. Select [**MCU GCC Linker**]>[**Miscellaneous**]
5. Use the [**Add...**] icon to add additional object files in several possible ways:
 - Enter the filenames in the *Add file path* dialog
 - Use the [**Workspace...**] or [**File system...**] buttons to locate the files

Figure 88. Linker include additional object files

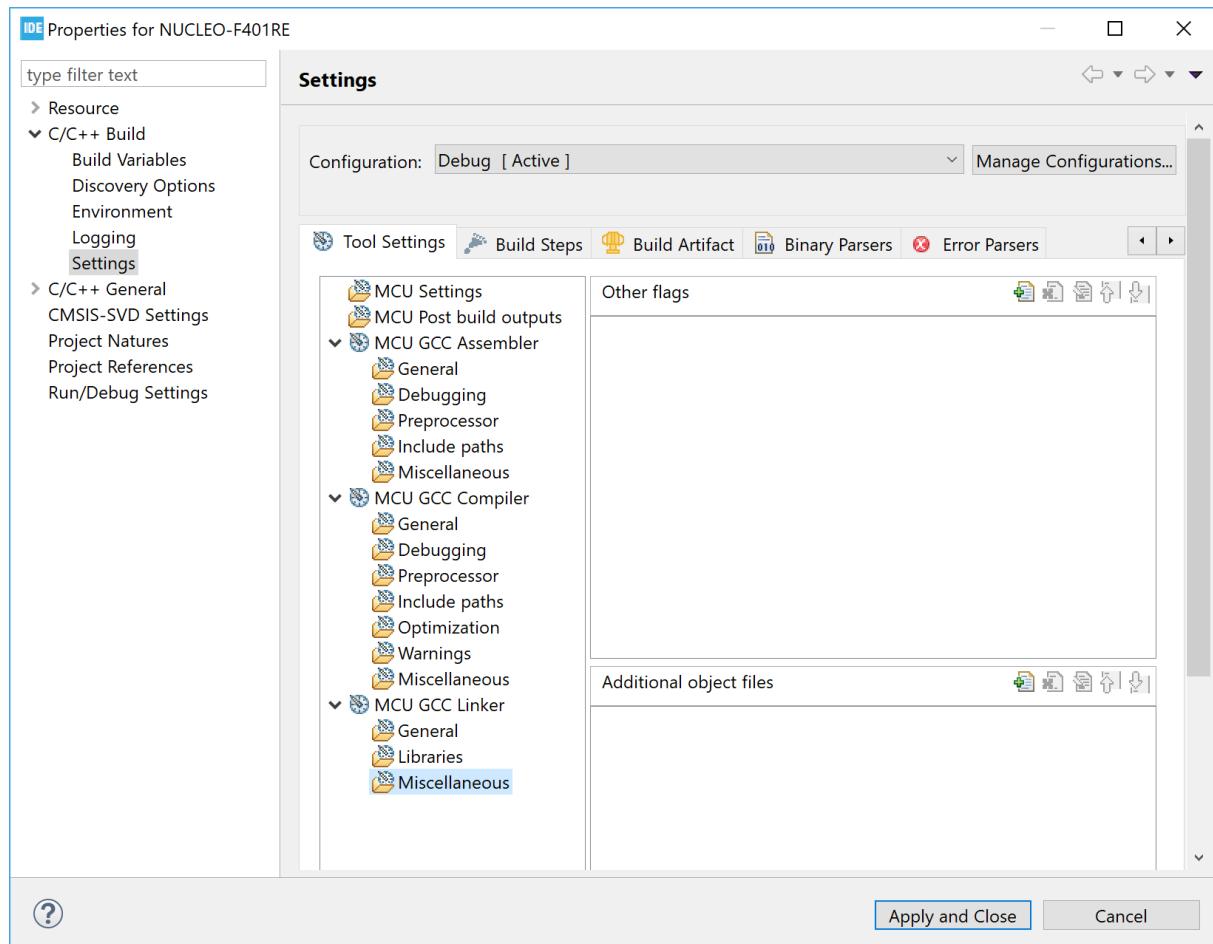

2.5.5

Treat linker warnings and errors

The GNU linker is normally silent for warnings. One example of such silent warning is seen if the startup code containing the normal `Reset_Handler` function is missing in the project. The GNU linker in normal silent mode creates an `elf` file and only report a warning output in the `Console` window about the missing `Reset_Handler`.

Example of warning message:

```
arm-none-eabi-gcc -o "NUCLEO-F401RE.elf" @"objects.list" -mcpu=cortex-m4
-T"C:\Users\username\STM32CubeIDE\workspace_um\NUCLEO-
F401RE\STM32F401RETX_FLASH.ld" --specs=nosys.specs -Wl,-Map="NUCLEO-F401RE.map"
-Wl,--gc-sections -static -mfpu=fpv4-sp-d16 -mfloat-abi=hard -mthumb -Wl,--start-
group -lc -lm -Wl,--end-group
c:\st\stm32cubeide_1.1.0.19w37\stm32cubeide\plugins\com.st.stm32cube.ide.mcu.extern
altools.gnu-tools-for-stm32.7-2018-q2-update.win32_1.0.0.201904181610\tools\arm-
none-eabi\bin\ld.exe: warning: cannot find entry symbol Reset_Handler; defaulting
to 0000000008000000
Finished building target: NUCLEO-F401RE.elf
```

In this case, a new `elf` file is created but, if the warning is not detected, it will not work to debug the project because the program does not contain the `Reset_Handler` function. It is possible to configure the linker to treat warnings as errors by adding the `--fatal-warnings` option.


When the `--fatal-warnings` option is used, the linker does not generate the `elf` file but displays an error in the console log:

```
c:\st\stm32cubeide_1.1.0.19w37\stm32cubeide\plugins\com.st.stm32cube.ide.mcu.extern
altools.gnu-tools-for-stm32.7-2018-q2-update.win32_1.0.0.201904181610\tools\arm-
none-eabi\bin\ld.exe: warning: cannot find entry symbol Reset_Handler; defaulting
to 0000000008000000
collect2.exe: error: ld returned 1 exit status
make: *** [makefile:40: NUCLEO-F401RE.elf] Error 1
"make -j4 all" terminated with exit code 2. Build might be incomplete.
11:26:30 Build Failed. 1 errors, 6 warnings. (took 7s.193ms)
```

To use the `-Wl,--fatal-warnings` option:

1. Right-click the project in the `Project Explorer` view and select [**Properties**]
2. In the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the `Tool Settings` tab in the panel
4. Select [**MCU GCC Linker**]>[**Miscellaneous**]
5. Add `-Wl,--fatal-warnings` to the [**Other flags**] field.

Figure 89. Linker fatal warnings

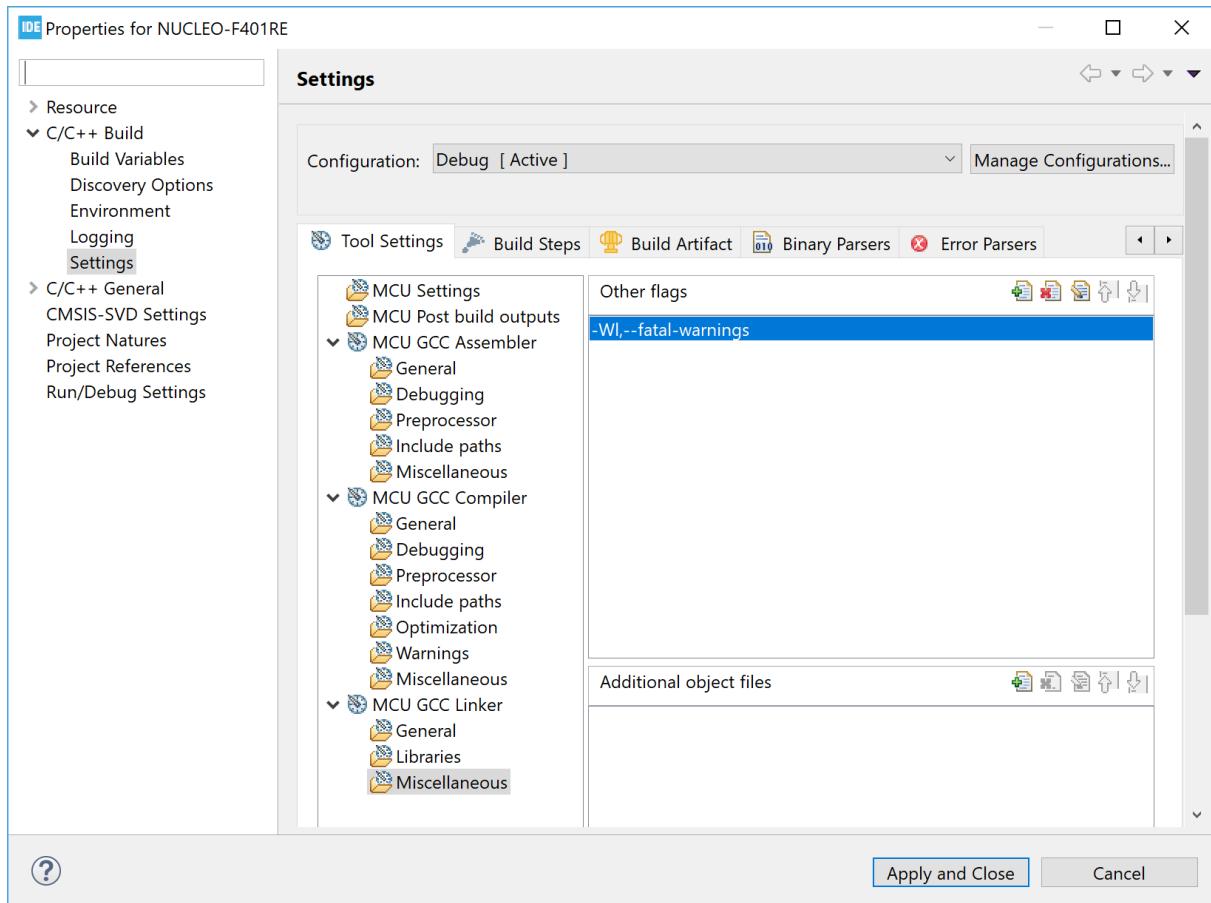

2.5.6 Linker script

The linker script file (.ld) defines the files to include and where things end up in memory. Some important parts of the linker script file are described in the next sections. For detailed information about the linker, read the C/C++ linker *GNU Linker manual ([ST-05])*. This manual is available in the documentation section of the *Information Center*. Consider sections 3.6 and 3.7 especially.

The linker script specifies the memory regions and the location of the stack, heap, bss, data, rodata, text, and program entry. The size of stack and heap are configurable by editing the `_Min_Stack_Size` and `_Min_Heap_Size` values in the linker script file. However, these values are only used by the linker to validate that stack and heap fit in memory. When running the program, the stack or heap may require more memory, which may lead to unexpected results if data is overwritten.

Table 3 presents as an example the typical program and memory layout of an STM32F4 device with 512-Kbyte flash memory and 96-Kbyte SRAM. The device is based on the Cortex®-M core with 32-bit address space (0x0000 0000 to 0xFFFF FFFF).

Table 3. Memory map layout

Example: STM32F4 96-Kbyte SRAM 512-Kbyte flash memory	Usage	Files Linker script .ld, or .h and .c files	Comment
0xFFFF FFFF 0xE000 0000	Cortex®-M4 internal peripherals.	.h and .c files.	SysTick, NVIC, ITM, debug, and others.
0xDFFF FFFF 0x6000 0000	External memory FMC (Flexible memory controller).	Must be added in linker script, and .h and .c files. ⁽¹⁾	NOR flash memory, NAND flash memory, SPI flash memory, PSRAM, SDRAM, and others.
0x5FFF FFFF 0x4000 0000	STM32 peripherals.	.h and .c files.	GPIO, ADC, timers, USB, USART, and others.
0x2001 8000	96-Kbyte SRAM Stack	Linker script _estack _Min_Stack_Size	The stack contains local data ⁽²⁾
	Heap	_Min_Heap_Size .user_heap_stack	⁽³⁾ Heap used by malloc ⁽⁴⁾ Data
		.bss	Static global data (.bss and .data) .bss == Uninitialized data Cleared to zero by the startup code.
0x2000 0000	Data	.data	.data == Initialized data Copied from flash memory to SRAM by the startup code.
0x0808 0000	512-Kbyte flash memory Data	Linker script .data .rodata	Initialized data to copy to SRAM.
	Program	ENTRY Reset_Handler ⁽⁵⁾ .text	Read-only data placed in flash memory.
0x0800 0000	Interrupt vector table	.isr_vector ⁽⁶⁾	.text == Program, such as main() in main.c, SystemInit() in system_stm32f4xx.c, Reset_Handler in startup_stm32*.s, g_pfnVectors in startup_stm32*.s, Vector table in startup_stm32*.s.
Color legend			
Cortex®-M internal peripherals and STM32 peripherals.			
External memory. Normally the linker script, header files, and C files must be updated to use external memories.			
Flash memory and SRAM where program, data, heap, and stack are located. Usually, when creating a project with STM32CubeIDE, these flash memory and RAM regions are accessible and usable without any updates of the linker script or other files. The linker script file defines how to place code, data, heap, and stack in memory.			

1. If external memory is used, the memory must be added into the linker script file. See in chapter [Section 2.5.7.1](#) how to add a new memory region.
2. The stack grows downwards and may go into the heap.
3. When running the program, the stack or heap may require more memory, which might lead to unexpected results if data is overwritten.
4. The heap grows upwards and may go into the stack.
5. The linker script file contains the entry point definition of the program. Normally, ENTRY(Reset_Handler).
6. The interrupt vector table contains the reset value of the stack pointer, the start addresses of the program (Reset_Handler), exception handlers, and interrupt handlers. Normally the Reset_Handler code and vector table (g_pfnVectors) are available in file <startup_stm32xxx.s>.

See below the default linker script generated by STM32CubeIDE for an STM32F4 device with 512-Kbyte flash memory and 96-Kbyte SRAM.

The beginning of the code excerpt shows the linker script header, entry, stack, heap and memory definitions.

```
/**  
 * @file      LinkerScript.ld  
 * @author    Auto-generated by STM32CubeIDE  
 * Abstract   : Linker script for NUCLEO-F401RE Board embedding STM32F401RETx Device from s  
tm32f4 series  
 *             512Kbytes FLASH  
 *             96Kbytes RAM  
  
 *             Set heap size, stack size and stack location according  
 *             to application requirements.  
  
 *             Set memory bank area and size if external memory is used  
*****  
* @attention  
*  
* <h2><center>&copy; Copyright (c) 2020 STMicroelectronics.  
* All rights reserved.</center></h2>  
*  
* This software component is licensed by ST under BSD 3-Clause license,  
* the "License"; You may not use this file except in compliance with the  
* License. You may obtain a copy of the License at:  
*             opensource.org/licenses/BSD-3-Clause  
*  
*****  
*/  
  
/* Entry Point */  
ENTRY(Reset_Handler)  
  
/* Highest address of the user mode stack */  
_estack = ORIGIN(RAM) + LENGTH(RAM);      /* end of "RAM" Ram type memory */  
  
_Min_Heap_Size = 0x200;      /* required amount of heap  */  
_Min_Stack_Size = 0x400;      /* required amount of stack */  
  
/* Memories definition */  
MEMORY  
{  
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K  
    FLASH     (rx)       : ORIGIN = 0x8000000,      LENGTH = 512K  
}
```

The continuation of the code excerpt shows the definition of sections.

```
/* Sections */  
SECTIONS  
{  
    /* The startup code into "FLASH" Rom type memory */  
    .isr_vector :  
    {  
        . = ALIGN(4);  
        KEEP(*(.isr_vector)) /* Startup code */  
        . = ALIGN(4);  
    } >FLASH  
  
    /* The program code and other data into "FLASH" Rom type memory */  
    .text :  
    {  
        . = ALIGN(4);  
        *(.text)           /* .text sections (code) */  
        *(.text*)          /* .text* sections (code) */  
        *(.glue_7)          /* glue arm to thumb code */  
        *(.glue_7t)         /* glue thumb to arm code */  
        *(.eh_frame)
```

```
KEEP (*(.init))
KEEP (*(.fini))

. = ALIGN(4);
_etext = .;           /* define a global symbols at end of code */
} >FLASH

/* Constant data into "FLASH" Rom type memory */
.rodata :
{
    . = ALIGN(4);
    *(.rodata)          /* .rodata sections (constants, strings, etc.) */
    *(.rodata*)         /* .rodata* sections (constants, strings, etc.) */
    . = ALIGN(4);
} >FLASH

.ARM.extab : {
    . = ALIGN(4);
    *(.ARM.extab)      .gnu.linkonce.armextab.*)
    . = ALIGN(4);
} >FLASH

.ARM : {
    . = ALIGN(4);
    __exidx_start = .;
    *(.ARM.exidx*)
    __exidx_end = .;
    . = ALIGN(4);
} >FLASH

.preinit_array :
{
    . = ALIGN(4);
    PROVIDE_HIDDEN (__preinit_array_start = .);
    KEEP (*(.preinit_array*))
    PROVIDE_HIDDEN (__preinit_array_end = .);
    . = ALIGN(4);
} >FLASH

.init_array :
{
    . = ALIGN(4);
    PROVIDE_HIDDEN (__init_array_start = .);
    KEEP (*(SORT(.init_array.*)))
    KEEP (*(.init_array*))
    PROVIDE_HIDDEN (__init_array_end = .);
    . = ALIGN(4);
} >FLASH

.fini_array :
{
    . = ALIGN(4);
    PROVIDE_HIDDEN (__fini_array_start = .);
    KEEP (*(SORT(.fini_array.*)))
    KEEP (*(.fini_array*))
    PROVIDE_HIDDEN (__fini_array_end = .);
    . = ALIGN(4);
} >FLASH

/* Used by the startup to initialize data */
_sidata = LOADADDR(.data);

/* Initialized data sections into "RAM" Ram type memory */
.data :
{
    . = ALIGN(4);
    _sdata = .;           /* create a global symbol at data start */
    *(.data)             /* .data sections */
    *(.data*)            /* .data* sections */
    *(.RamFunc)          /* .RamFunc sections */
```

```
*(.RamFunc*)          /* .RamFunc* sections */

. = ALIGN(4);
_edata = .;           /* define a global symbol at data end */

} >RAM AT> FLASH

/* Uninitialized data section into "RAM" Ram type memory */
. = ALIGN(4);
.bss :
{
    /* This is used by the startup in order to initialize the .bss section */
    _sbss = .;           /* define a global symbol at bss start */
    __bss_start__ = _sbss;
    *(.bss)
    *(.bss*)
    *(COMMON)

    . = ALIGN(4);
    _ebss = .;           /* define a global symbol at bss end */
    __bss_end__ = _ebss;
} >RAM

/* User_heap_stack section, used to check that there is enough "RAM" Ram type memory left
 */
._user_heap_stack :
{
    . = ALIGN(8);
    PROVIDE (end = .);
    PROVIDE ( __end = . );
    . = . + __Min_Heap_Size;
    . = . + __Min_Stack_Size;
    . = ALIGN(8);
} >RAM

/* Remove information from the compiler libraries */
/DISCARD/ :
{
    libc.a ( * )
    libm.a ( * )
    libgcc.a ( * )
}

.ARM.attributes 0 : { *(.ARM.attributes) }
```

2.5.6.1

The **ENTRY** command defines the start of the program

The first instruction to execute in a program is defined with the **ENTRY** command.

Example:

```
/* Entry Point */
ENTRY(Reset_Handler)
```

The **ENTRY** information is used by GDB so that the program counter (PC) is set to the value of the **ENTRY** address when a program is loaded. In the example, the program starts to execute from `Reset_Handler` when a step or continue command is given to GDB after a load.

Note:

The start of the program can be overridden if the GDB script contains a monitor reset command after the load command. Then the code starts to run from reset.

2.5.6.2

Stack location

The stack location is normally used by the startup file using the `_estack` symbol. The startup code normally initializes the stack pointer with the address given in the linker script. For Cortex®-M based devices, the stack address is also set at the first address in the interrupt vector table.

Example:

```
/* Highest address of the user mode stack */
_estack = ORIGIN(RAM) + LENGTH(RAM);      /* end of "RAM" Ram type memory */
```

2.5.6.3 Define heap and stack minimum sizes

It is common to define in the linker script the heap and stack minimum sizes to be used by the system.

Example:

```
_Min_Heap_Size = 0x200;      /* required amount of heap */
_Min_Stack_Size = 0x400;      /* required amount of stack */
```

The values defined here are normally used later in the linker script to make it possible for the linker to test if the heap and stack fit in the memory. The linker can then issue an error if there is not enough memory available.

2.5.6.4 Specify memory regions

The memory regions are specified with names `ORIGIN` and `LENGTH`. It is common also to have an attribute list specifying the usage of a particular memory region, such as `(rx)` with “`r`” standing for read-only section and “`x`” for executable section. It is not required to specify any attribute.

Example:

```
/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)       : ORIGIN = 0x8000000,      LENGTH = 512K
}
```

2.5.6.5 Specify output sections (.text and .rodata)

The output sections define where the sections such as ‘.text’, ‘.data’ or others are located in the memory. The example below tells the linker to put all sections such as `.text`, `.rodata` and others in the flash memory region. The glue sections mentioned in the example are used by GCC if there are some mixed code in the program. For instance, the glue code is used if some Arm® code makes a call to thumb code or vice versa.

Example:

```
/* Sections */
SECTIONS
{
    /* The startup code into "FLASH" Rom type memory */
    .isr_vector :
    {
        . = ALIGN(4);
        KEEP(*(.isr_vector)) /* Startup code */
        . = ALIGN(4);
    } >FLASH

    /* The program code and other data into "FLASH" Rom type memory */
    .text :
    {
        . = ALIGN(4);
        *(.text)           /* .text sections (code) */
        *(.text*)          /* *.text* sections (code) */
        *(.glue_7)         /* glue arm to thumb code */
        *(.glue_7t)        /* glue thumb to arm code */
        *(.eh_frame)

        KEEP (*(.init))
        KEEP (*(.fini))

        . = ALIGN(4);
        _etext = .;        /* define a global symbols at end of code */
    } >FLASH
```

2.5.6.6

Specify initialized data (.data)

Initialized data values require extra handling as the initialization values must be placed in the flash memory and the startup code must be able to initialize the RAM variables with correct values. The example below creates symbols `_sidata`, `_sdata` and `_edata`. The startup code can then use these symbols to copy the values from flash memory to RAM during program start.

Example:

```
/* Used by the startup to initialize data */
_sidata = LOADADDR(.data);

/* Initialized data sections into "RAM" Ram type memory */
.data :
{
    . = ALIGN(4);
    _sdata = .;           /* create a global symbol at data start */
    *(.data)             /* .data sections */
    *(.data*)            /* *.data* sections */
    *(.RamFunc)          /* .RamFunc sections */
    *(.RamFunc*)         /* *.RamFunc* sections */

    . = ALIGN(4);
    _edata = .;           /* define a global symbol at data end */
}

>RAM AT> FLASH
```

2.5.6.7

Specify uninitialized data (.bss)

Uninitialized data values must be reset to 0 by the startup code: the linker script file must identify the locations of these variables. The example below creates symbols `_sbss` and `_ebss`. The startup code can then use these symbols to set the values of the uninitialized variables to 0.

Example:

```
/* Uninitialized data section into "RAM" Ram type memory */
. = ALIGN(4);
.bss :
{
    /* This is used by the startup in order to initialize the .bss section */
    _sbss = .;           /* define a global symbol at bss start */
    __bss_start__ = _sbss;
    *(.bss)
    *(.bss*)
    *(COMMON)

    . = ALIGN(4);
    _ebss = .;           /* define a global symbol at bss end */
    __bss_end__ = _ebss;
} >RAM
```

2.5.6.8

Check if user heap and stack fit in the RAM

One section of the code is normally dedicated to linker checks about the fact that the needed heap and stack fit into the RAM together with all other data.

Example:

```
/* User_heap_stack section, used to check that there is enough "RAM" Ram type memory left */
._user_heap_stack :
{
    . = ALIGN(8);
    PROVIDE ( end = . );
    PROVIDE ( _end = . );
    . = . + _Min_Heap_Size;
    . = . + _Min_Stack_Size;
    . = ALIGN(8);
} >RAM
```

Note:

The stack is placed on top of RAM and heap after data with a gap in between. See Table 3. Memory map layout.

2.5.6.9

Linker map and list files

When building a project generated with STM32CubeIDE, a map and a list file are created in the debug or release build output folders. These files contain detailed information on the final locations of code and data in the program.

The Build Analyzer view can be used to analyse the size and location of a program in detail. Read more about this in Section 8 *Build Analyzer*.

2.5.7

Modify the linker script

This section presents common use cases requiring to edit the linker script. Editing and managing the script allows for more exact placements of the code and data.

2.5.7.1

Place code in a new memory region

Many devices have more than one memory region. It is possible to use the linker script to specifically place code in different areas. The example below shows how to update a linker script to support code to be placed in a new memory region named `IP_CODE`.

Example:

```
Original MEMORY AREA

/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 512K
}

Add IP_CODE into MEMORY AREA

/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 256K
    IP_CODE   (rx)      : ORIGIN = 0x8040000,      LENGTH = 256K
}
```

Place the following code a bit further down in the script, between the `.data { ... }` and the `.bss { ... }` section in the linker script file:

Example:

```
.ip_code :
{
    *(.IP_Code*);
} > IP_CODE
```

This tells the linker to place all sections named `.IP_Code*` into the `IP_CODE` memory region, which is specified to start at target memory address `0x804 0000`.

In the C code, tell the compiler which functions must go to this section by adding `__attribute__((section(".IP_Code")))` before the function declaration.

Example:

```
__attribute__((section(".IP_Code"))) int myIP_read()
{
    // Add code here...
    return 1;
}
```

The `myIP_read()` function is now placed in the `IP_CODE` memory region by the linker.

2.5.7.2

Place code in RAM

To place code in the RAM, some modifications of the linker script and startup code are needed. The example below describes the changes to be applied when the internal RAM is split into a few sections and the code is placed and executed in one of the internal RAM sections.

Define a new memory region in the `MEMORY {}` region in the linker script:

```
Original MEMORY AREA

/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 512K
}

Split RAM into memory areas RAM1, RAM_CODE, RAM

/* Memories definition */
MEMORY
{
    RAM1      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 16K
    RAM_CODE  (xrw)      : ORIGIN = 0x20004000,      LENGTH = 16K
    RAM       (xrw)      : ORIGIN = 0x20008000,      LENGTH = 64K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 512K
}
```

Define an output section for the code in the linker script. This must be placed with a Load Memory Address (LMA) belonging to the flash memory, and a Virtual Memory Address (VMA) in RAM:

```
/* load code used by the startup code to initialize the ram code */
_siram_code = LOADADDR(.RAM_CODE);
.RAM_CODE :
{
    . = ALIGN(4);
    _sram_code = .; /* create a global symbol at ram_code start */
    *(.RAM_Code)      /* .RAM_Code sections */
    *(.RAM_Code*)     /* .RAM_Code* sections */
    . = ALIGN(4);
    _eram_code = .; /* define a global symbol at ram_code end */
} >RAM_CODE AT> FLASH
```

The RAM code area must be initialized and code copied from the flash memory to the RAM code area. The startup code can access the location information symbols `_siram_code`, `_sram_code` and `_eram_code`.

Add load address symbols for `RAM_CODE` into the startup file:

```
/* Load address for RAM_CODE */
.word _siram_code;
.word _sram_code;
.word _eram_code;
```

Add a piece of code into the startup code to copy the RAM code from the flash memory (LMA) to the RAM (VMA):

```
Reset_Handler:
    ldr    sp, =_estack           /* set stack pointer */

/* Copy the ram code from flash to RAM */
    movs   r1, #0
    b     LoopRamCodeInit

RamCodeInit:
    ldr    r3, =_siram_code
    ldr    r3, [r3, r1]
    str    r3, [r0, r1]
    adds   r1, r1, #4

LoopRamCodeInit:
    ldr    r0, =_sram_code
    ldr    r3, =_eram_code
    adds   r2, r0, r1
    cmp    r2, r3
    bcc   RamCodeInit

/* Copy the data segment initializers from flash to SRAM */
    movs   r1, #0
    b     LoopCopyDataInit

CopyDataInit:
```

In the C code, instruct the compiler about which functions must go to this section by adding `__attribute__((section(".RAM_Code")))` before the functions declarations:

```
__attribute__((section(".RAM_Code")))
int myRAM_read()
{
    // Add code here...
    return 2;
}
```

Refer to [\[ST-12\]](#) for information on how to execute application code from CCM RAM using STM32CubeIDE. It contains examples on how to setup the linker script and startup code to execute a function or an interrupt handler from RAM. The example in the chapter 4 of [\[ST-12\]](#) can be used as an inspiration on how to add other RAM regions and setup code sections to be located in RAM.

2.5.7.3 Place variables at specific addresses

It is possible to place variables at specific addresses in the memory. To achieve this, the linker script must be modified. The example presented in this section places constant variables handling a product `VERSION_NUMBER`, `CRC_NUMBER`, and `BUILD_ID` in memory.

The first step is to create a new memory region in the linker script:

```
Original MEMORY AREA

/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 512K
}

Add a new 2K FLASH_V memory region at end of flash
/* Memories definition */
MEMORY
{
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K
    FLASH     (rx)      : ORIGIN = 0x8000000,      LENGTH = 512K-2K
    FLASH_V  (rx)      : ORIGIN = 0x807F800,      LENGTH = 2K
}
```

At this point, the memory section must be added:

```
Place the following a bit further down in the script, between the .data { ... } and the .bss
{ ... } section

.flash_v :
{
*(.flash_v*)
} > FLASH_V
```

This instructs the linker to place all sections named `flash_v*` into the `flash_v` output section in the `FLASH_V` memory region, which is specified to start at target memory address `0x807 F800`.

A section can be called almost anything except some predefined names such as “`data`”.

Now, the variables that must be located into the `FLASH_V` memory must be defined with attributes in the C files:


```
__attribute__((section(".flash_v.VERSION"))) const uint32_t VERSION_NUMBER=0x00010003;
__attribute__((section(".flash_v.CRC"))) const uint32_t CRC_NUMBER=0x55667788;
__attribute__((section(".flash_v.BUILD_ID"))) const uint16_t BUILD_ID=0x1234;
```

Important: Unless the variable is referenced in the code, the linker is allowed to garbage collect it.

When debugging this example and examining the memory, it can be observed that:

- Address 0x807 f800 contains VERSION_NUMBER
- Address 0x807 f804 contains CRC_NUMBER
- Address 0x807 f808 contains BUILD_ID

Figure 90. Linker memory output

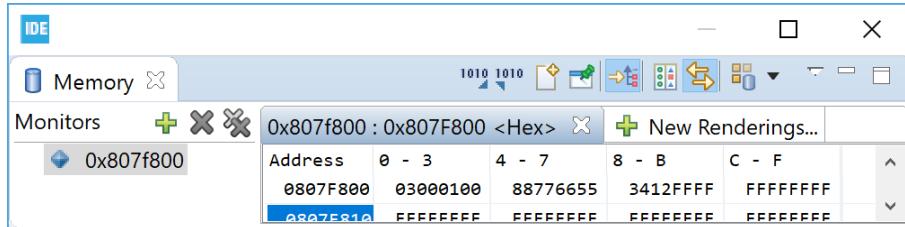

If the inserted data order in the flash memory is important, map the order of the variables in the linker script. This makes it possible to define the variables in any file. The linker outputs the variables in the defined order independently on how the files are linked. As a result, if the CRC_NUMBER is calculated in some way after the linker has built the file, the CRC_NUMBER can be inserted into the flash memory file by another tool:


```
Decide the order in the linker script by adding the specially named sections in order BUILD_ID, VERSION_NUMBER, CRC_NUMBER, and others(*).

.flash_v :
{
    *(.flash_v.BUILD_ID*);
    *(.flash_v.VERSION*);
    *(.flash_v.CRC*);
    *(.flash_v*);
} > FLASH_V
```

When debugging this example and examining the memory, it can be observed that:

- Address 0x807 f800 contains BUILD_ID
- Address 0x807 f804 contains VERSION_NUMBER
- Address 0x807 f808 contains CRC_NUMBER

Figure 91. Linker memory output specified order

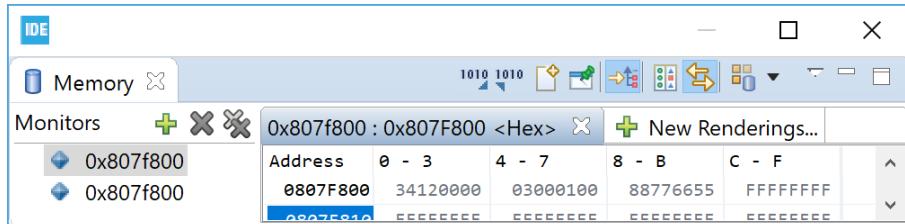

2.5.7.4

Linking in a block of binary data

It is possible to link in a block of binary data into the linked file. The example below describes how to include a ... /readme.txt file.

Example:

```
File: readme.txt
Revision: Version 2
Product news: This release ...
```

One way to include this in the project is to make a reference in a C file to include it using the `incbin` directive and the allocatable ("a") option on the section:

```
asm(".section .binary_data,\"a\";"  
".incbin \"../readme.txt\";"  
)
```

The new section `binary_data` is then added into the linker script with instructions that the section must be put in the flash memory. The `KEEP()` keyword can be used to surround an input section so that the linker garbage collector does not eliminate the section even if not called:


```
.binary_data :  
{  
    _binary_data_start = .;  
    KEEP(*(.binary_data));  
    _binary_data_end = .;  
} > FLASH
```

This block can then be accessed from the C code:

```
extern int _binary_data_start;  
int main(void)  
{  
    /* USER CODE BEGIN 1 */  
    int *bin_area = &_binary_data_start;
```

The binary data, in this case the `readme` file, can be observed in the *Memory* view when the project is debugged.

Figure 92. Linker memory displaying file readme

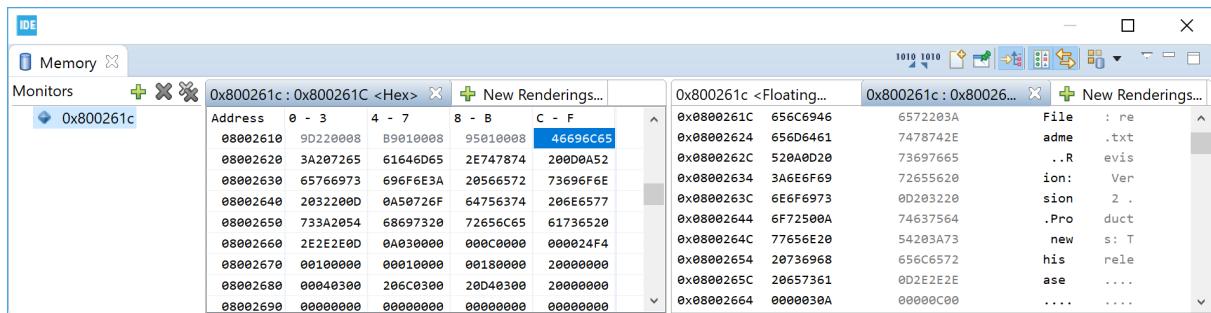

2.5.7.5

Locate uninitialized data in memory (NOLOAD)

There is sometimes a need to have variables located into the flash memory, or some other non-volatile memory, which must not be initialized at startup. In such cases, it is possible to create a specific `MEMORY AREA` in the linker script (`FLASH_D`) and use the `NOLOAD` directive in the section using the area.

Example:

```
The MEMORY AREA can be defined like this
```

```
/* Memories definition */  
MEMORY  
{  
    RAM      (xrw)      : ORIGIN = 0x20000000,      LENGTH = 96K  
    FLASH    (rx)       : ORIGIN = 0x80000000,      LENGTH = 512K-4K  
    FLASH_D (rx)       : ORIGIN = 0x807F000,        LENGTH = 2K  
    FLASH_V (rx)       : ORIGIN = 0x807F800,        LENGTH = 2K  
}
```

Add a section for `FLASH_D` using the `NOLOAD` directive. This can be done using the following code a bit further down in the linker script:

```
Place the following a bit further down in the script
```

```
.flash_d (NOLOAD) :  
{  
    * (.flash_d*) ;  
} > FLASH_D
```

Finally, data can be used somewhere in the program by adding a section attribute when declaring the variables that must be located in the `FLASH_D` memory.

```
__attribute__((section(".flash_d"))) uint32_t Distance;  
__attribute__((section(".flash_d"))) uint32_t Seconds;
```

2.5.8 Include libraries

To include a library into a project:

1. Right-click the project where the library must be included in the *Project Explorer* view and select **[Properties]**
2. In the dialog, select **[C/C++ Build]>[Settings]**
3. Select the *Tool Settings* tab in the panel
4. Select **[C Linker]>[Libraries]**
5. Add the library name to the **[Libraries]** field.

Make sure the library name is added and not the path. According to the GCC convention, the library name is its filename without the “lib” prefix and “.a” extension.


Example: for a library file named `libmyLib.a`, add the library name `myLib`.

If by any chance the library name do not comply with the GCC convention, the full library name can be entered, preceded by a colon “:”.

Example: for a library file named `STemWin524b_CM4_GCC.a`, add the library name `:STemWin524b_CM4_GCC.a`.

6. In the **[Library Paths]** list, set the library location path. Do not include the name of the library in the path. Example: `${workspace_loc:/myLib/Debug}` is the path to the archive file of the library project `myLib` residing in the same workspace as the application project.
7. Enable **[Place libraries in a linker group (-WL,--start-group \$(LIBS) -WL,--end-group)]** if libraries need to be linked several times to resolve circular dependencies.


Figure 93. Include a library

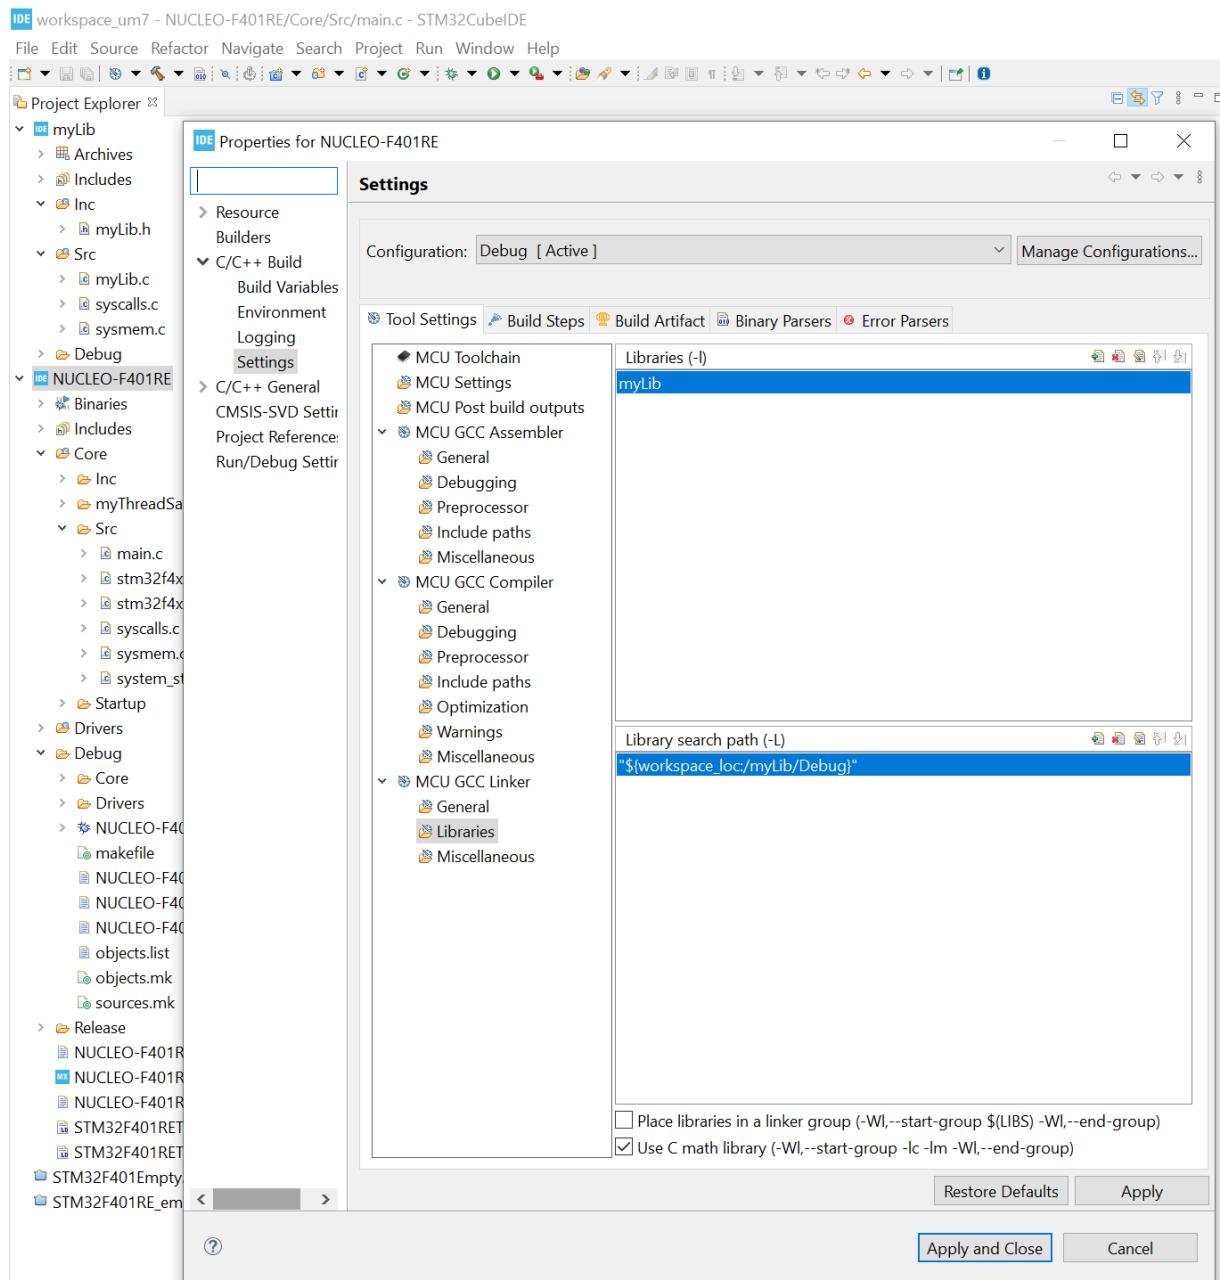

The source folders for the header files must also be added to the **[Include paths]** field:

1. Select **[MCU GCC Compiler]>[Include paths]**
2. press the **[Add...]** button and add the paths to the source folders for the header files in the library

Figure 94. Add library header files to the include paths

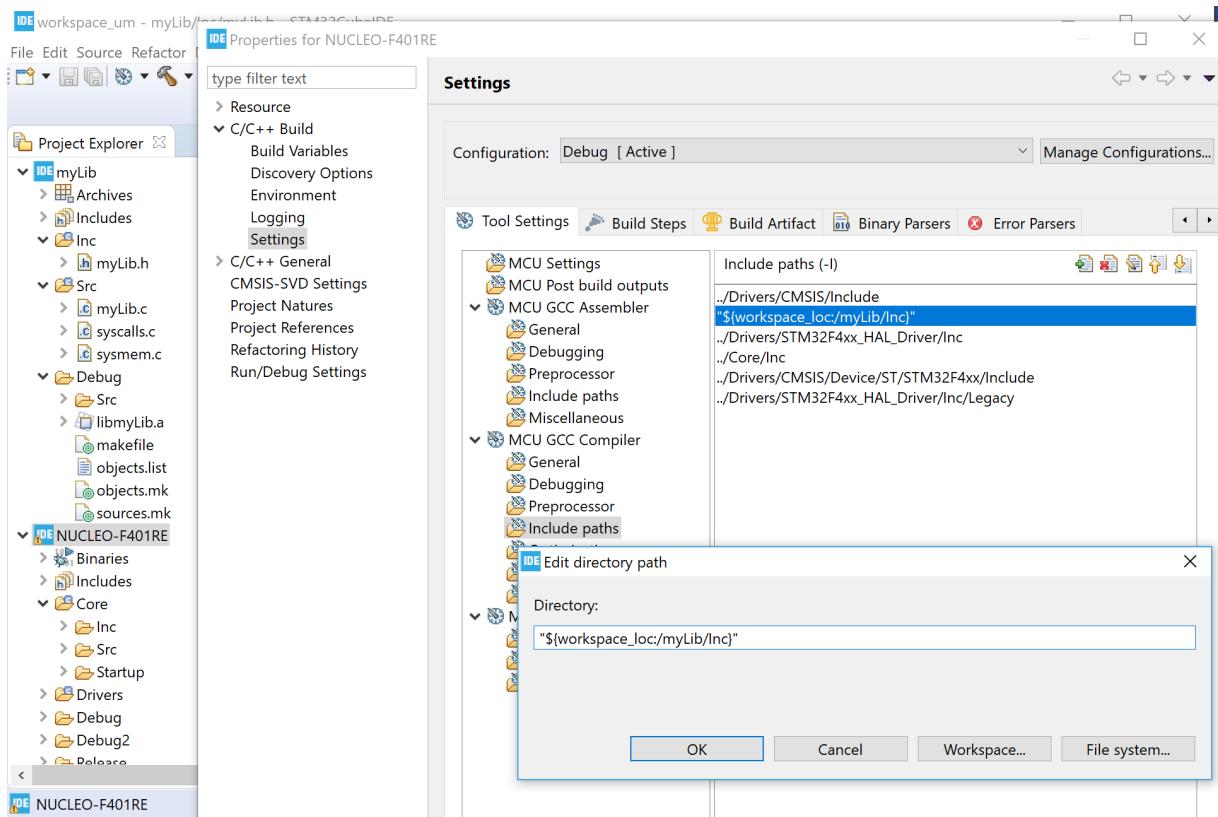

Note:

Libraries added by include paths are considered as static libraries because they are provided by external parties. The header files are not rescanned as the content must not have changed for external header files. If external libraries must be treated as normal source folders, the folders must also be added as source folders to the project.

Refer to [Section 2.5.9 Referring to projects](#) for more information if a project is referring to another project, a library or a normal project.

2.5.9


Referring to projects

Whenever a project is using code from another project, both projects must be referring to each other.

For a project to refer to a specific build of another project:

1. Select instead **[Project]>[Properties]**
2. Select **[C/C++ General]>[Paths and Symbols]**
3. Open the *References* tab
4. select the **[Configuration]** that the current project is referring to

Figure 95. Set project references

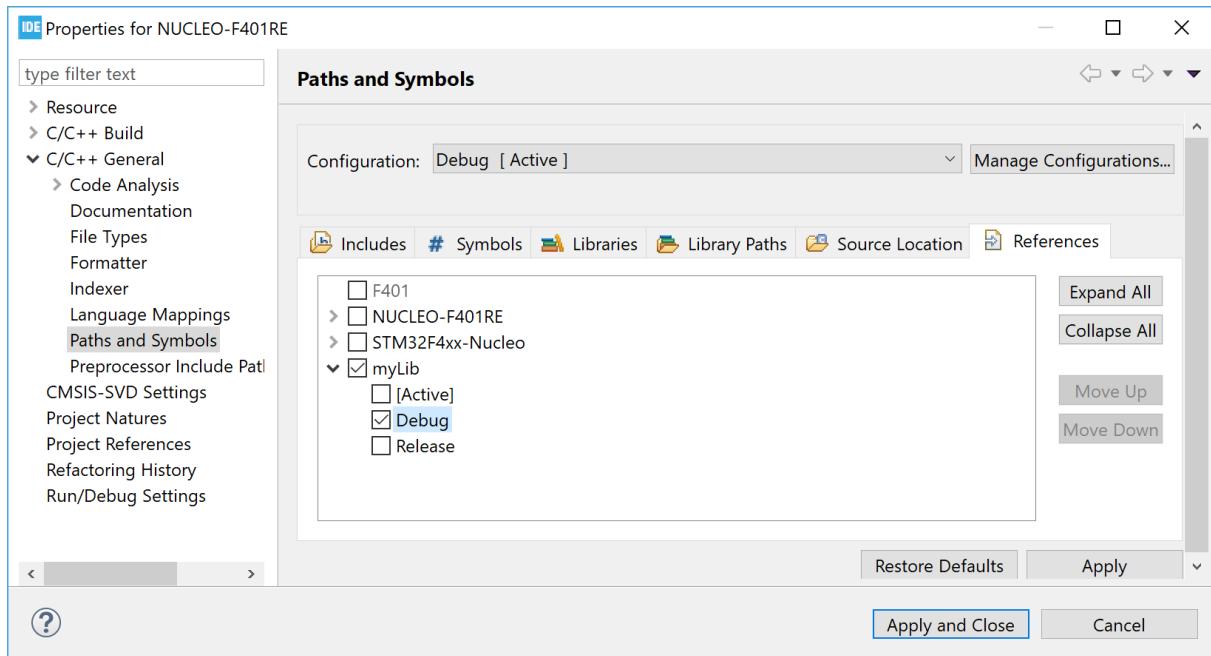

Note: When multiple projects are used as references, use the [**Move Up**] and [**Move Down**] buttons to setup the priorities.

There are many advantages to set project references correctly:

- The projects involved are not rebuilt more than necessary.
- The indexer is able to find functions from the library and open them. To use this possibility, press the **Ctrl** key and, in the editor, click the library function where it is used to open the library source file in the editor.
- It is possible to create the call hierarchy for the functions in the library. To find the call hierarchy, mark the function name and press **Ctrl+Alt+H** to display the call hierarchy in the *Call Hierarchyview*.

If a library project is added as a reference, all the correct settings in the *Paths and Symbols* property page for the library is set. The tool settings that depend on this property page are adjusted also.

This is the recommended method of adding libraries developed locally. For more information about adding libraries, refer to [Section 2.5.8 Include libraries](#).

Another way to have projects referring to each other is as follows:

1. Select [**Project**]>[**Properties**]
2. Select [**Project References**]
3. Select and mark the project for reference

With this method, however, it is not possible to refer to different build configurations and libraries are not set up automatically.

2.6 I/O redirection

The C run time library contains many functions, including some to handle I/Os. The I/O-related run time functions include `printf()`, `fopen()`, `fclose()`, and many others. It is common practice to redirect the I/O from these functions to the actual embedded platform. For instance, the `printf()` output can be redirected to an LCD display or serial cable while file operations like `fopen()` and `fclose()` can be redirected to a flash memory file system middleware.

2.6.1 printf() redirection

There are several ways to perform `printf()` redirection, such as using UART or SWV/ITM. Another solution is the Real-Time Transfer technology (RTT) provided by SEGGER.

The three techniques compare as follows:

- The UART output is maybe the most commonly used method, where the output from the embedded system is sent for instance to a terminal using RS-232. It requires some CPU overhead and medium bandwidth.
- The Instrumentation Trace Macrocell (ITM) output is efficient but requires that the Arm® CoreSight™ debugger technology with Serial Wire Viewer (SWV) is supported by the device. This is normally the case for Cortex®-M3, Cortex®-M4, Cortex®-M7, and Cortex®-M33 based devices. However, the SWV signals must be available and connected to the board also. It requires low CPU overhead but limited bandwidth. ITM output is explained in [Section 4 Debug with Serial Wire Viewer tracing \(SWV\)](#).
- The RTT solution is described by SEGGER on their website. RTT is a fast solution but requires SEGGER J-LINK debug probe.

To enable I/O redirection with UART or ITM output, the file `syscalls.c` must be included and built into the project. When `printf()` is used, it calls the `_write()` function, which is implemented in `syscalls.c`.

The `syscalls.c` file is normally created and included in the project when creating a new STM32CubeIDE project. The `_write()` function in this file must be modified to enable `printf()` redirection by modifying the call to `__io_putchar()`. The way to modify `_write()` depends on the hardware and library implementation.

The example below shows how to update `syscalls.c` so that `printf` ouput is redirected to ITM with an STM32F4 Series device. This is done by adding some header files to access `ITM_SendChar()` and make a call to `ITM_SendChar()`.

```
Original _write() function

__attribute__((weak)) int _write(int file, char *ptr, int len)
{
    int DataIdx;

    for (DataIdx = 0; DataIdx < len; DataIdx++)
    {
        __io_putchar(*ptr++);
    }
    return len;
}

Modified with added header files calling ITM_SendChar(*ptr++);

#include "stm32f4xx.h"
#include "core_cm4.h"

__attribute__((weak)) int _write(int file, char *ptr, int len)
{
    int DataIdx;

    for (DataIdx = 0; DataIdx < len; DataIdx++)
    {
        //__io_putchar(*ptr++);
        ITM_SendChar(*ptr++);
    }
    return len;
}
```

It can be noticed that the `_write` function in `syscalls.c` contains a weak attribute. This means that the `_write` function can be implemented in any C file used by the project.

For instance, the new `_write()` function can be added directly into `main.c`. Omit the weak attribute in that case, as shown in the example below.

```
int _write(int file, char *ptr, int len)
{
    int DataIdx;

    for (DataIdx = 0; DataIdx < len; DataIdx++)
    {
        //__io_putchar(*ptr++);
        ITM_SendChar(*ptr++);
    }
    return len;
}
```

2.7

Thread-safe wizard for empty projects and CDT™ projects

STM32CubeIDE includes a thread-safe wizard to generate files to support the use of resources that can be updated by application code and interrupts or when using a real-time operating system.

Note:

The thread-safe wizard may only be used for STM32CubeIDE empty projects. For projects managed by STM32CubeMX, the thread-safe implementation configuration must be made using STM32CubeMX dialogs.

The thread-safe wizard creates three files and adds the `STM32_THREAD_SAFE_STRATEGY` define to the project.


The files are:

- `newlib_lock_glue.c`
- `stm32_lock_user.h`
- `stm32_lock.h`

First, in the example below, a `myThreadSafe` folder is created in the empty project. This folder is selected in the *Thread-Safe Solution* wizard so that files are generated in this folder.


Open the menu [File]>[New]>[Other...] to obtain the wizard selection window shown in Figure 96.

Figure 96. Select a wizard

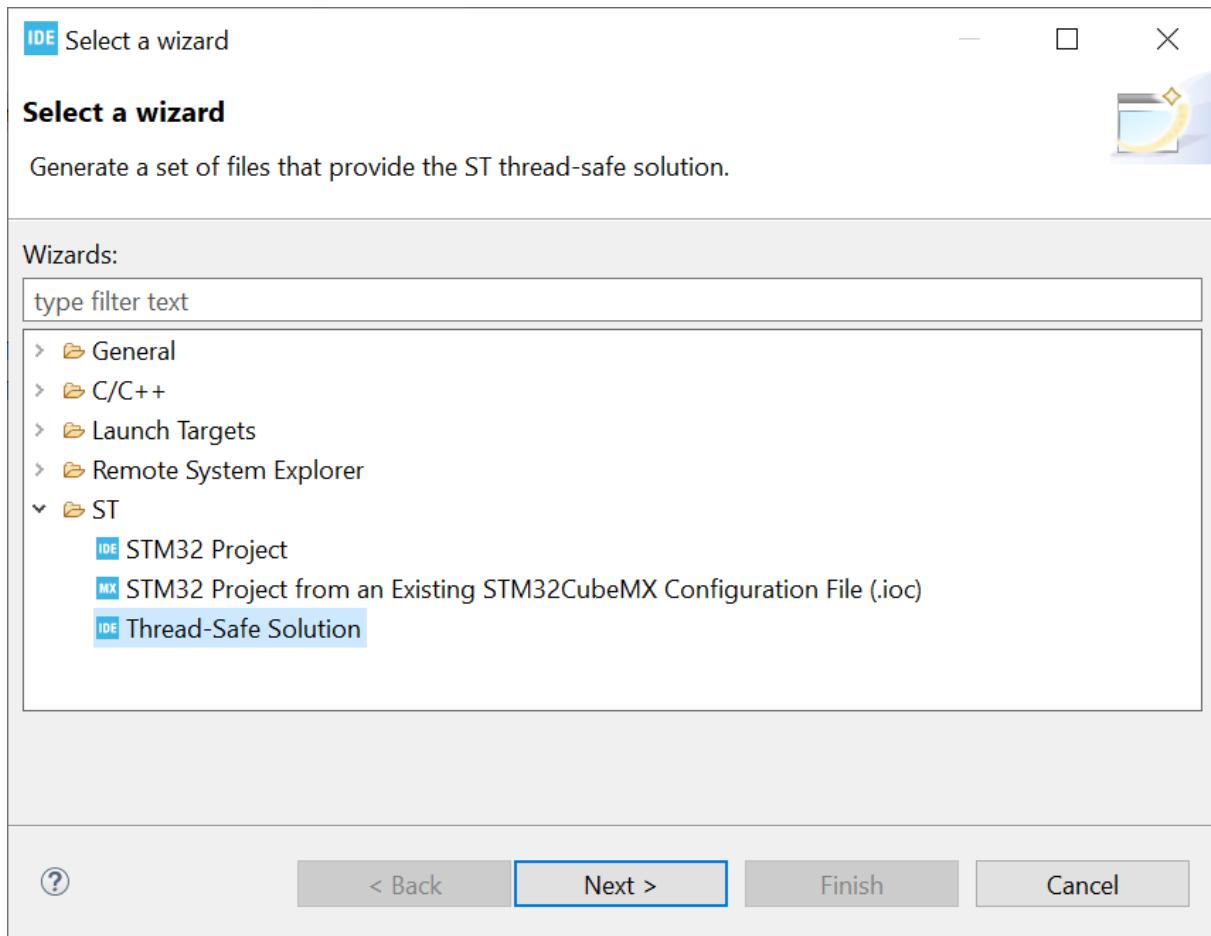


In the [ST] node select [Thread-Safe Solution] and press [Next >] to open the *Thread-Safe Solution* wizard.

Figure 97. *Thread-Safe Solution* wizard

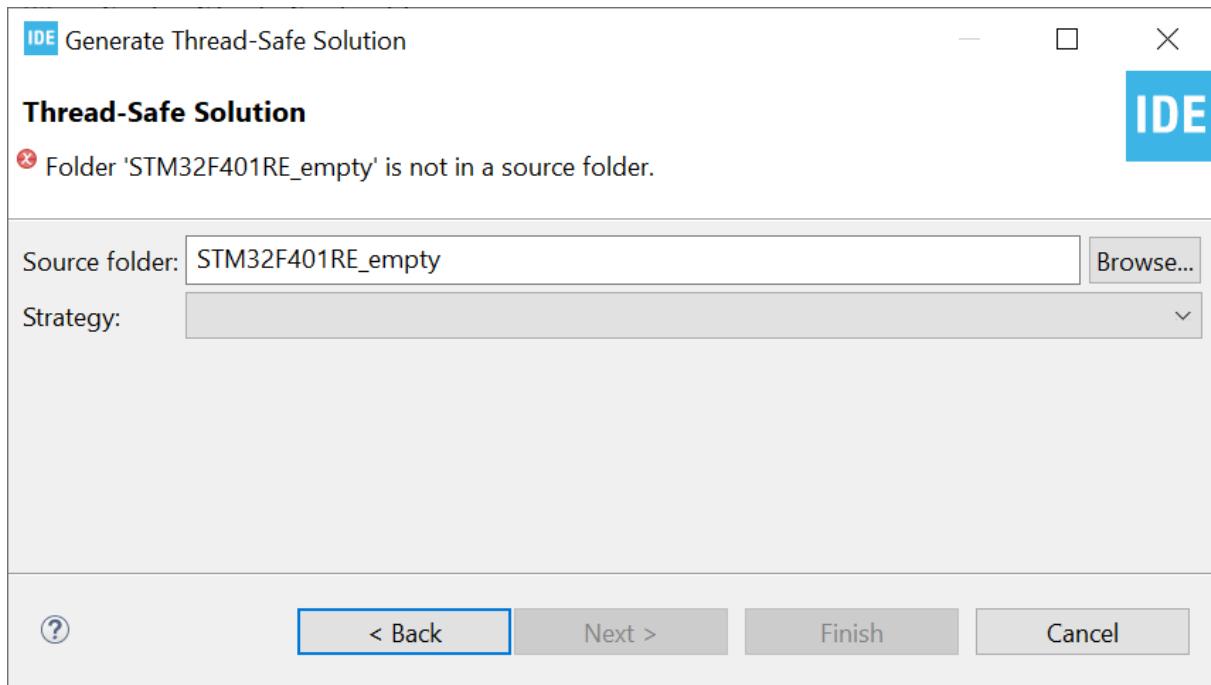

Press [Browse] to open the *Generate Into Source Folder* dialog.

Figure 98. Thread-safe source folder location

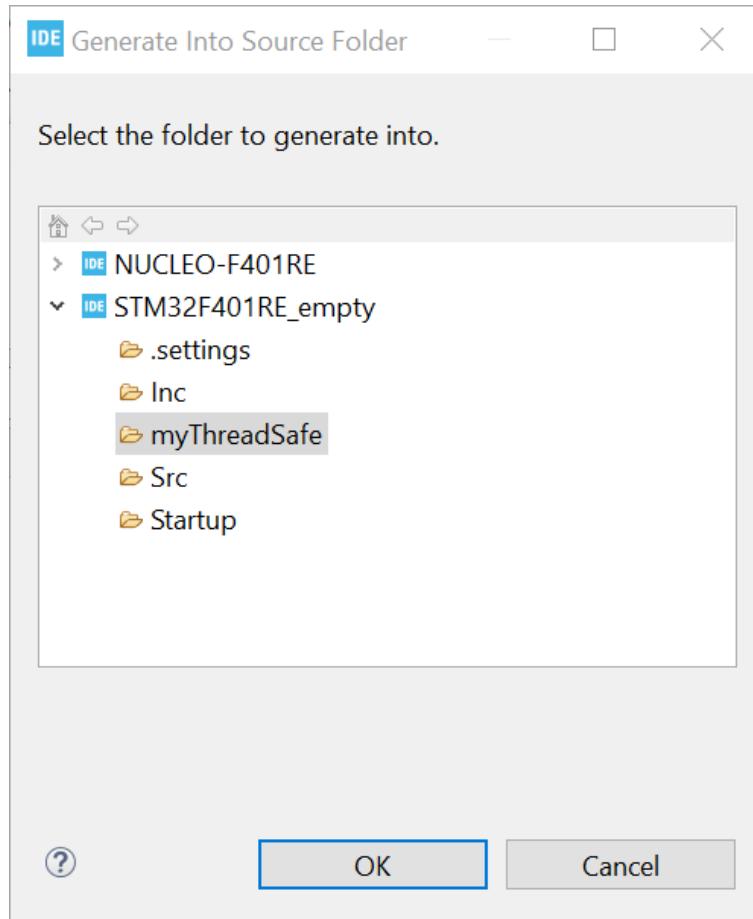

Select the source folder to generate the files into and press [OK].

The wizard proposes to select among five different thread-safe strategies:


1. User-defined thread-safe implementation.
2. Allow lock usage from interrupts.
3. Deny lock usage from interrupts.
4. Allow lock usage from interrupts. Implemented using FreeRTOS™ locks.
5. Deny lock usage from interrupts. Implemented using FreeRTOS™ locks.

The different strategies are explained in file `stm32_lock.h`.

```
* 1. User defined thread-safe implementation.  
*   User defined solution for handling thread-safety.  
*   NOTE: The stubs in stm32_lock_user.h needs to be implemented to gain  
*   thread-safety.  
*  
* 2. Allow lock usage from interrupts.  
*   This implementation will ensure thread-safety by disabling all interrupts  
*   during e.g. calls to malloc.  
*   NOTE: Disabling all interrupts creates interrupt latency which  
*   might not be desired for this application!  
*  
* 3. Deny lock usage from interrupts.  
*   This implementation assumes single thread of execution.  
*   Thread-safety dependent functions will enter an infinity loop  
*   if used in interrupt context.  
*  
* 4. Allow lock usage from interrupts. Implemented using FreeRTOS locks.  
*   This implementation will ensure thread-safety by entering RTOS ISR capable  
*   critical sections during e.g. calls to malloc.  
*   By default this implementation supports 2 levels of recursive locking.  
*   Adding additional levels requires 4 bytes per lock per level of RAM.  
*   NOTE: Interrupts with high priority are not disabled. This implies  
*   that the lock is not thread-safe from high priority interrupts!  
*  
* 5. Deny lock usage from interrupts. Implemented using FreeRTOS locks.  
*   This implementation will ensure thread-safety by suspending all tasks  
*   during e.g. calls to malloc.  
*   NOTE: Thread-safety dependent functions will enter an infinity loop  
*   if used in interrupt context.
```

Select a strategy as shown in Figure 99.

Figure 99. Thread-safe strategy selection

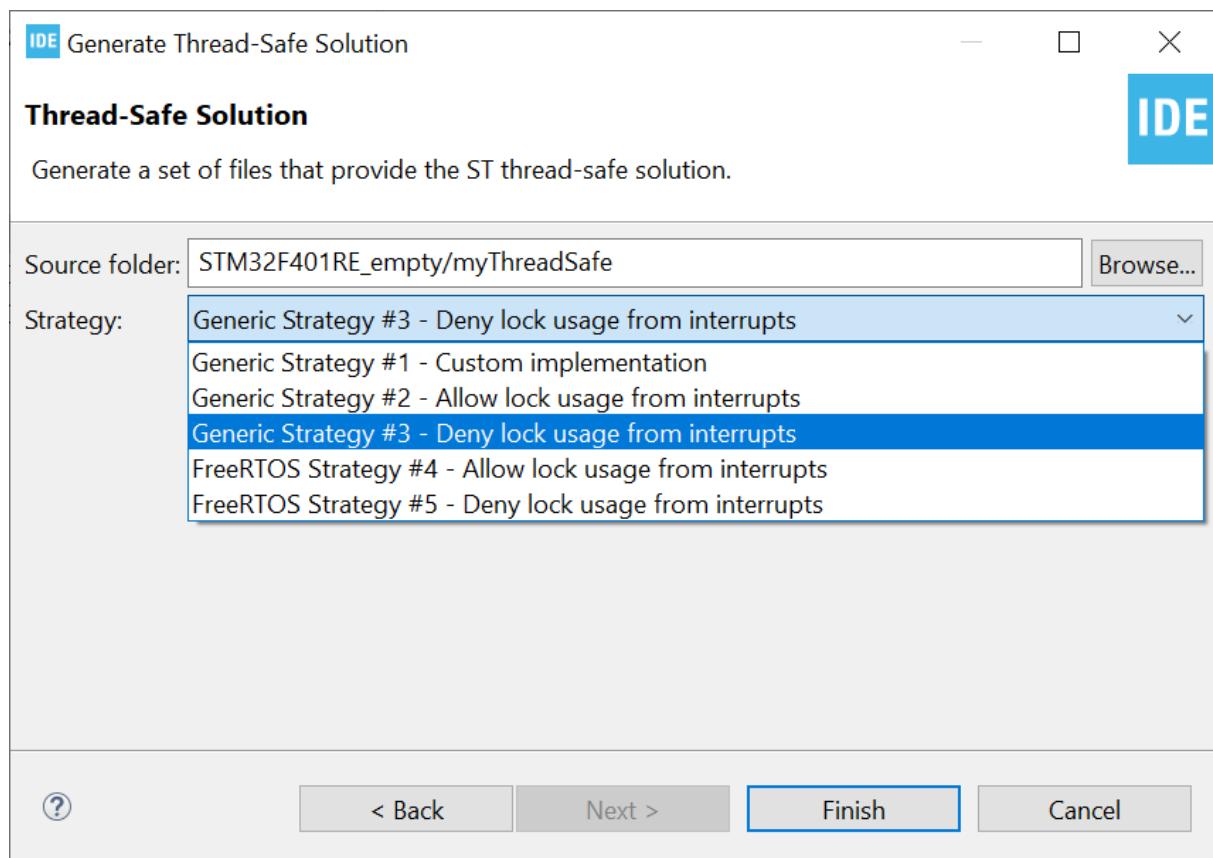


Select a strategy and press [Finish] to generate the files into the selected source folder.

Note:

The files generated are the same and contain the same information independently of the selected strategy.

A new define, STM32_THREAD_SAFE_STRATEGY=3, is added by the wizard to the project for use by the preprocessor when building the project. The define value is set according to the strategy selected in the wizard. The define can be observed by opening the project properties and looking into the *Tool Settings* tab.

Figure 100. Thread-safe properties

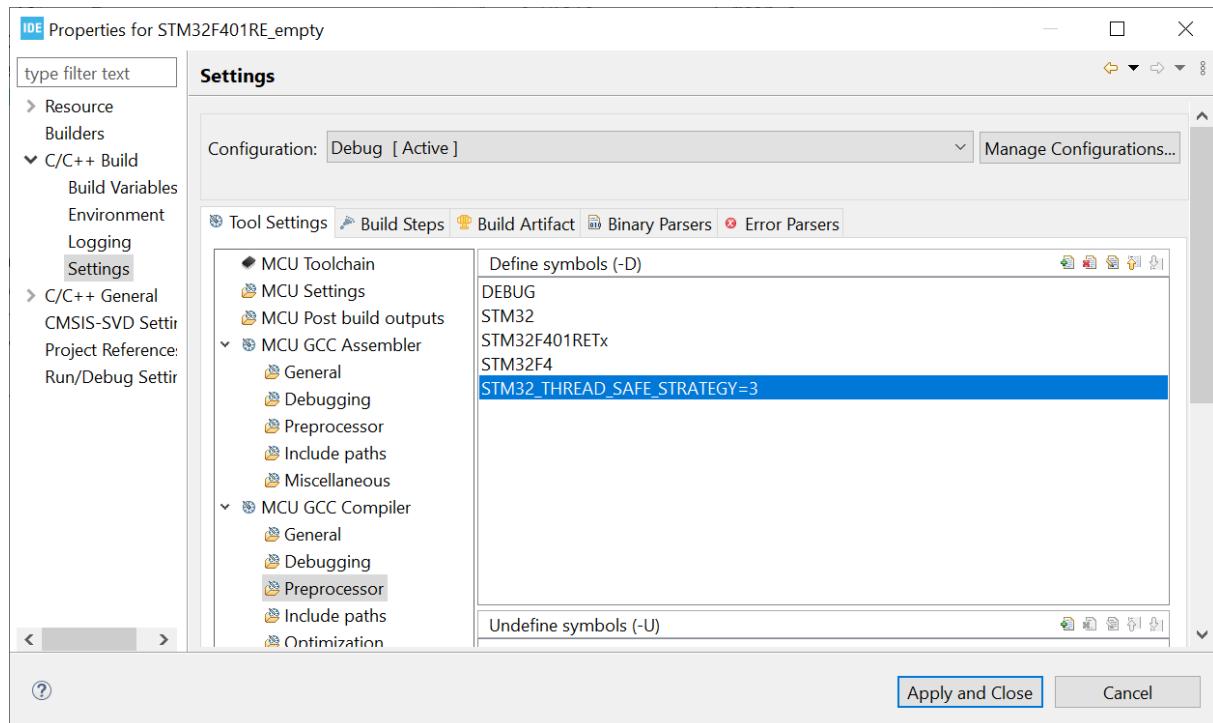


The generated files are shown in the *Project Explorer*.

Note:


The generated files require that some CMSIS header files are included in the project. The files must be copied and added manually into the project if they are missing.

Figure 101. Thread-safe files

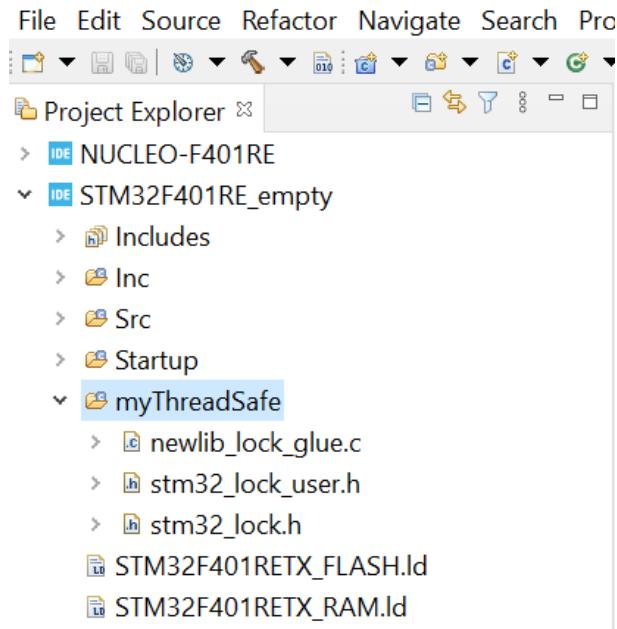

If the wizard is started while the project is managed by STM32CubeMX, an error is displayed stating that STM32CubeMX must be used to manage the thread-safe strategy.

Figure 102. Thread-safe error dialog

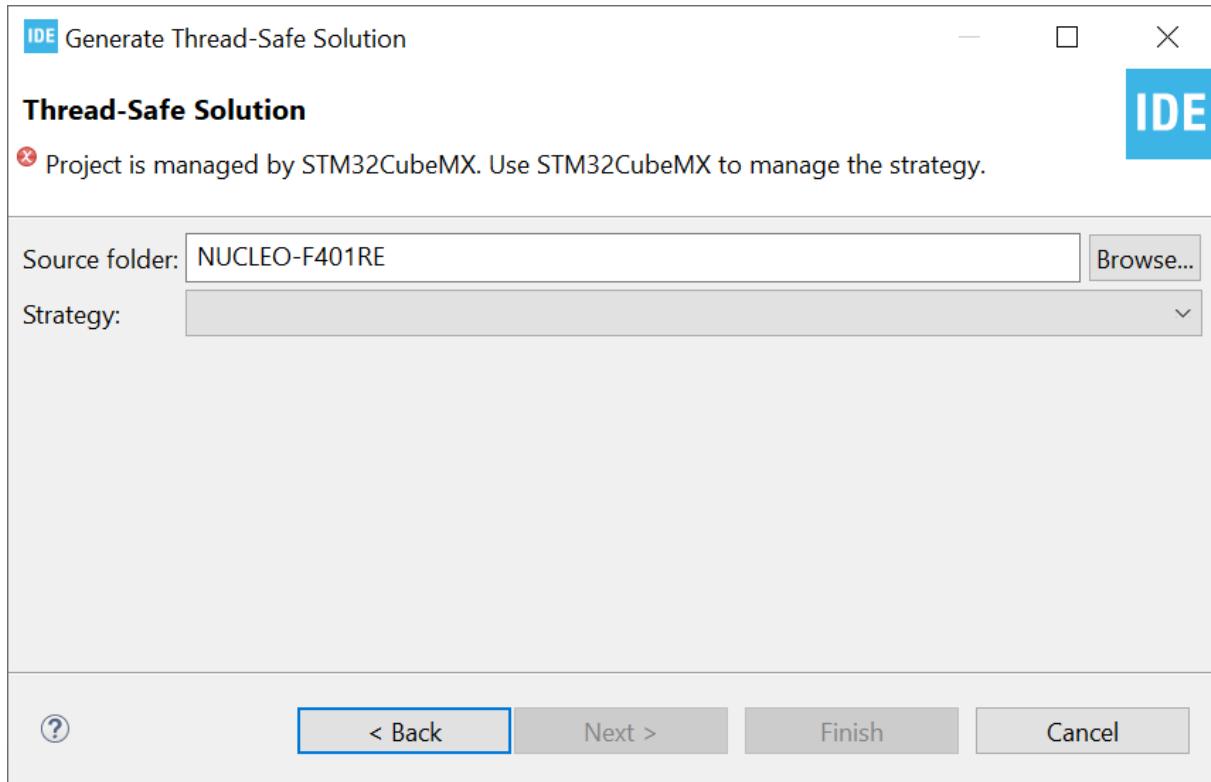

2.8

Position-independent code

This section is of interest to users working on applications where the final address location is not defined in the system. This occurs for instance when using a bootloader: the system designer must be able to define the final location of the application. In such case, position-independent code (PIC) can be used. The `-fPIE` compiler option enables the compiler/linker to generate position-independent executable.

Compiling with option `-fPIE` generates position-independent executable so that if the application is linked for address `0x800 0000` but placed at `0x800 1000`, it still runs.

However, the information in this section is not complete. The solution it describes works when using global data initialized to zero (`.bss`) but it does not work when using initialized data and has several other limitations. One such limitation is that run time libraries included in the STM32 toolchain cannot be used as these libraries are built without the `-fPIE` option for optimization. Instead of using position-independent code in a system, it is worth considering other solutions.

Alternate solution example:


If a system is designed to have a bootloader and multiple versions of an application in flash memory at different slots, it may be easier to setup multiple build configurations for the application. Each build configuration is based on its own linker script file. In this case, there is no need to use position-independent code since run time libraries can be used. Each build configuration links the application to a unique slot in flash memory, generating one single `elf` file per slot. When downloading a new version of the application into a slot, the correct `elf` file must be used. The bootloader can be designed to validate the addresses in the `elf` file and generate an error if it contains addresses that are out of the slot. The application can copy the interrupt vector table to RAM and update vector copies depending on the slot where the application is stored.

2.8.1 Adding the `-fPIE` option

To add the `-fPIE` option into the tool settings:

1. Right-click the project in the *Project Explorer* view and select [**Properties**]
2. In the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the *Tool Settings* tab in the panel
4. Select [**MCU GCC Compiler**]>[**Miscellaneous**]
5. Add `-fPIE` to the [**Other flags**] field.

Figure 103. Position independent code, `-fPIE`

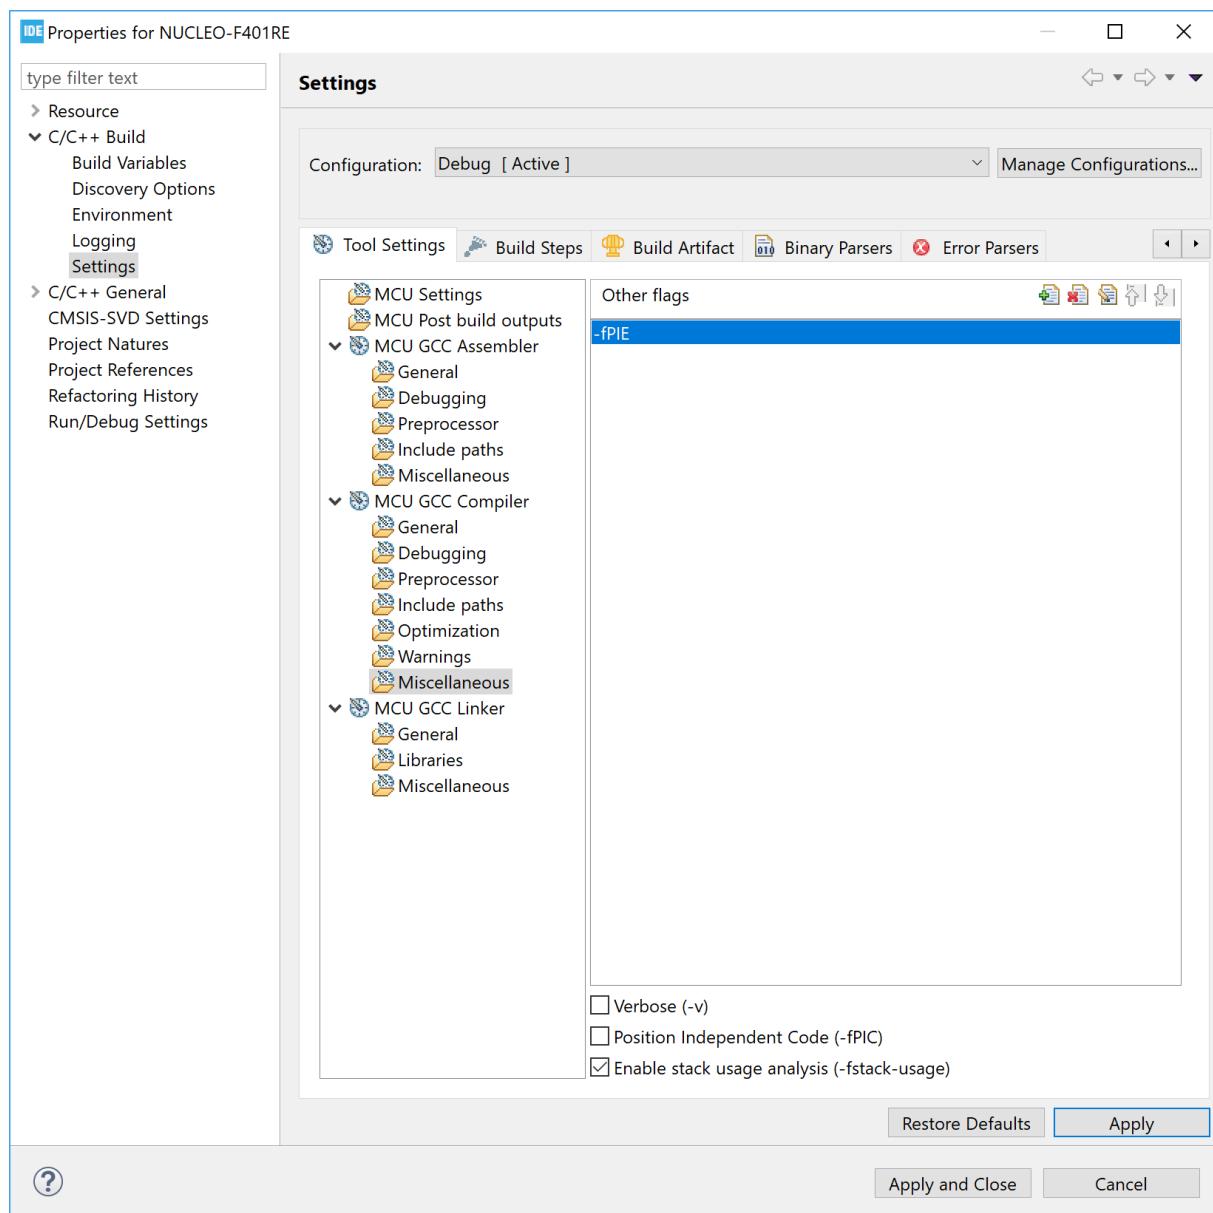

2.8.2 Run time library

The C run time library is compiled without using the `-fPIE` option. So any call to the library must be avoided when generating position-independent executable. The startup code normally has a call to `__libc_init_array`. This call must be removed as in the example below:

```
/* Call static constructors */
/*     bl __libc_init_array */
```

2.8.3 Stack pointer configuration

Make sure that the stack pointer is set up correctly. The stack pointer must be set in the `Reset_Handler` in the startup file as shown in the example below. It must not be assumed that the stack pointer is set by a reset reading it from the vector table.

```
Reset_Handler:  
    ldr    sp, _estack           /* set stack pointer */
```

2.8.4 Interrupt vector table

The vectors in the vector table must be updated if the program is loaded to an offset address. If a program needs to add the offset to each vector in the table, it can copy the interrupt vector table to the RAM and add the offset to this vector table.

The vector base register must also be changed so that it points to the new located vector table as shown in the example below:

```
/* Set Vector Base Address */  
SCB->VTOR=RAM_VectorTable;
```

2.8.5 Global offset table

The global offset table (GOT) is a table of addresses normally stored in the data section when building and using the `-fPIE` option. It is used by the executed program to find, during run time, addresses of global variables, unknown at compile time. If no global variable location change is needed, the variables can be located at same place as located when linking the program. Then the GOT table can be placed in the `.text` section in the flash memory area instead.

The example below shows how to update the linker script with the `.got*` section. In this case the `GOT_START` and `GOT_END` symbols are added also so that the tools are able to know the GOT location and size.

```
/* The program code and other data into "ROM" Rom type memory */  
.text :  
{  
    . = ALIGN(4);  
    *(.text)          /* .text sections (code) */  
    *(.text*)         /* .text* sections (code) */  
    GOT_START = .;  

```

2.8.6 Interrupt vector table and symbols

When debugging the code with an offset, both the load offset and the new symbol address must be specified. The symbol address to provide is the `.text` section address. The linker script can be updated by defining `.isr_vector` to be located into `.text`. This avoids the issue of finding the location of `.text`.

```
Remove the following

.isr_vector :
{
    . = ALIGN(4);
    KEEP(*(.isr_vector)) /* Startup code */
    . = ALIGN(4);
} >FLASH

Add KEEP(*(.isr_vector)) instead to first location of .text
/* The program code and other data into "FLASH" Rom type memory */
.text :
{
    . = ALIGN(4);
    KEEP(*(.isr_vector)) /* Startup code */
    *(.text)           /* .text sections (code) */
    *(.text*)          /* .text* sections (code) */
    GOT_START = .;
    *(.got*)
    GOT_END = .;
    *(.glue_7)         /* glue arm to thumb code */
    *(.glue_7t)        /* glue thumb to arm code */
    *(.eh_frame)

    KEEP (*(.init))
    KEEP (*(.fini))

    . = ALIGN(4);
    _etext = .;        /* define a global symbols at end of code */
} >FLASH
```

2.8.7 Debugging position-independent code

When debugging position-independent code located at an offset, the download offset and new symbol address must be set.

Figure 104. Debugging position independent code

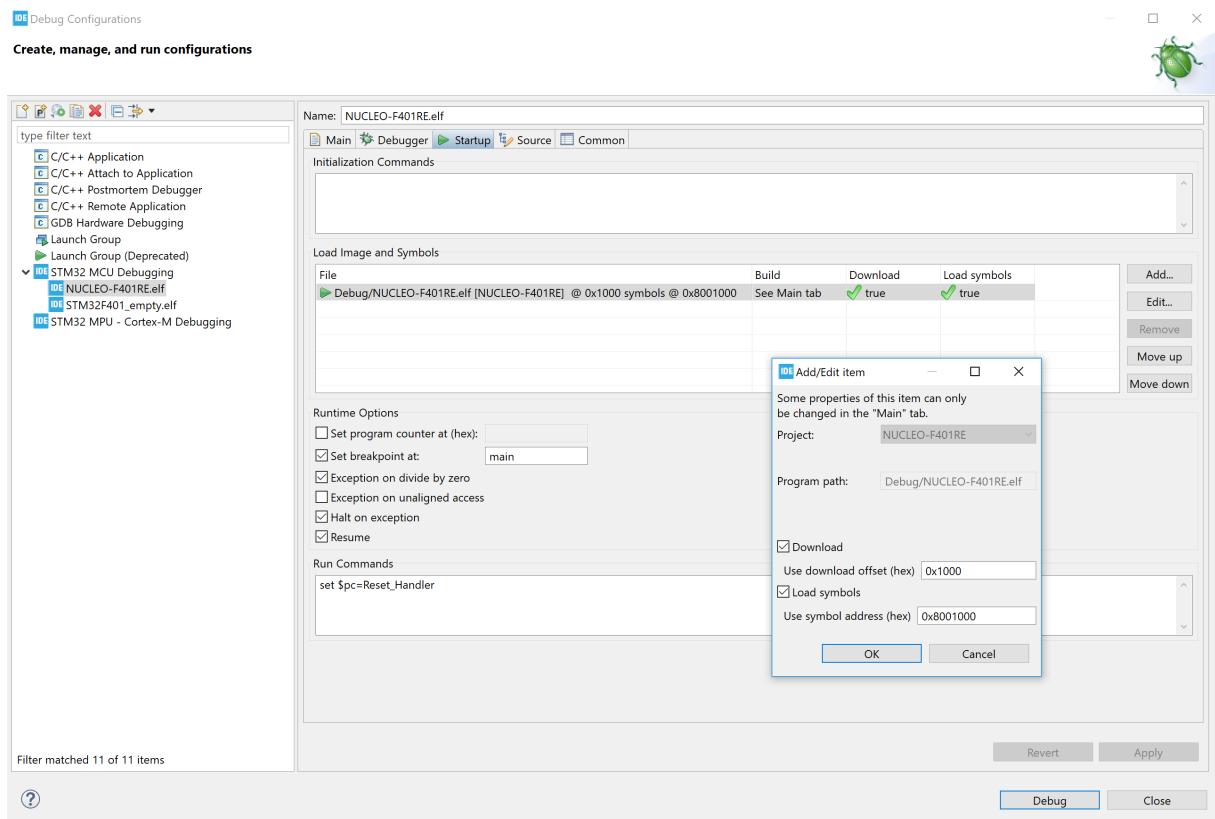


Figure 104 illustrates an example where the download offset is 0x1000 and the symbol address is 0x800 1000. It is possible to set the symbol address to 0x800 1000 in this case because the `.isr_vector` is added into the `.text` section as described in [Section 2.8.6 Interrupt vector table and symbols](#).

If instead the `.isr_vector` is located in another section outside `.text`, the start address of the `.text` section must be used with the offset added. For instance, if the map file states that `.text` starts at 0x0000 0000 0800 0194, the symbol address in this case must be set to 0x800 1194.


Figure 104 shows that the breakpoint is set at `main` and that the program counter (`$pc`) is set to the `Reset_Handler` symbol into [Run Commands]. This symbol contains the correct address to the `Reset_Handler` because gdb uses the base symbol address 0x800 1000. If `$pc` is not setup during this debug configuration, the [Resume] checkbox must be disabled to make the program stop after load. In this case, the program counter must be set manually in the *Registers* view before starting the program.

2.9 Exporting projects

A project can be exported in many different ways. This section shows how to export a project as a compressed zip file.


Right-click the project in the *Project Explorer* view and select [**Export...**].

Figure 105. Export project

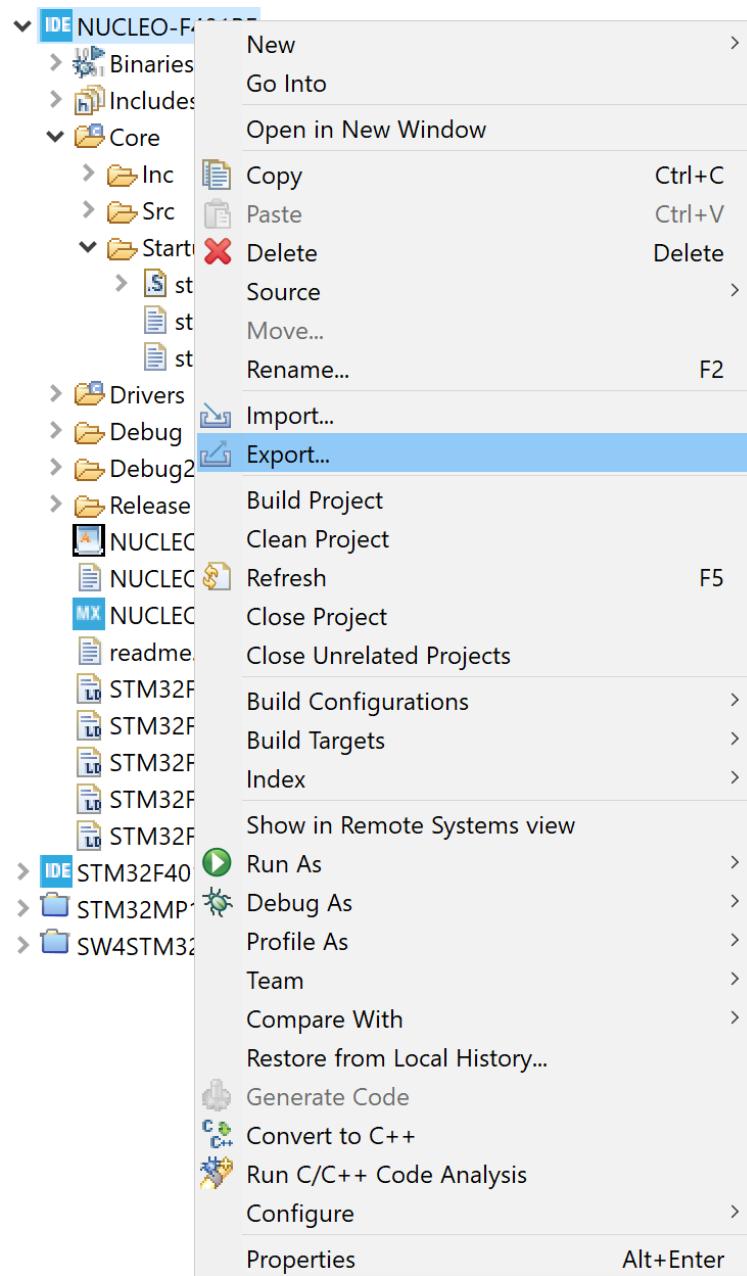


The *Export* dialog opens. Select [**General**]>[**Archive File**] and press [**Next >**].

Figure 106. Export dialog

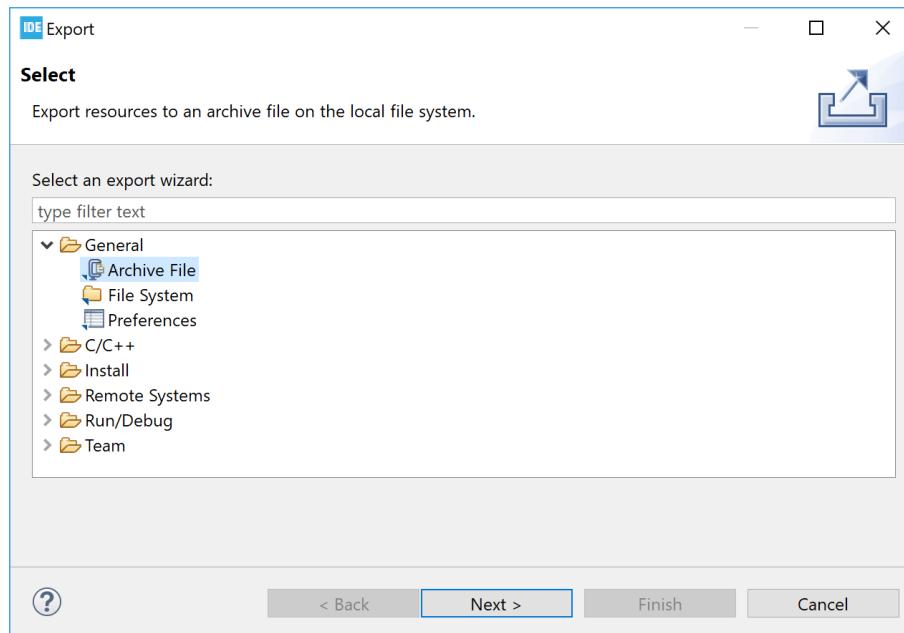

The *Export* dialog is updated. Select the project to be exported. It is possible to exclude some project files from the export. In the example in Figure 107, all project and library files are included. A file name must be entered into the [**To archive file**] field, possibly browsing to a folder location for the file with the [**Browse...**] button. In the example, the default options values are kept unchanged. Press [**Finish**] to export the project and create the zip file.

Figure 107. Export archive

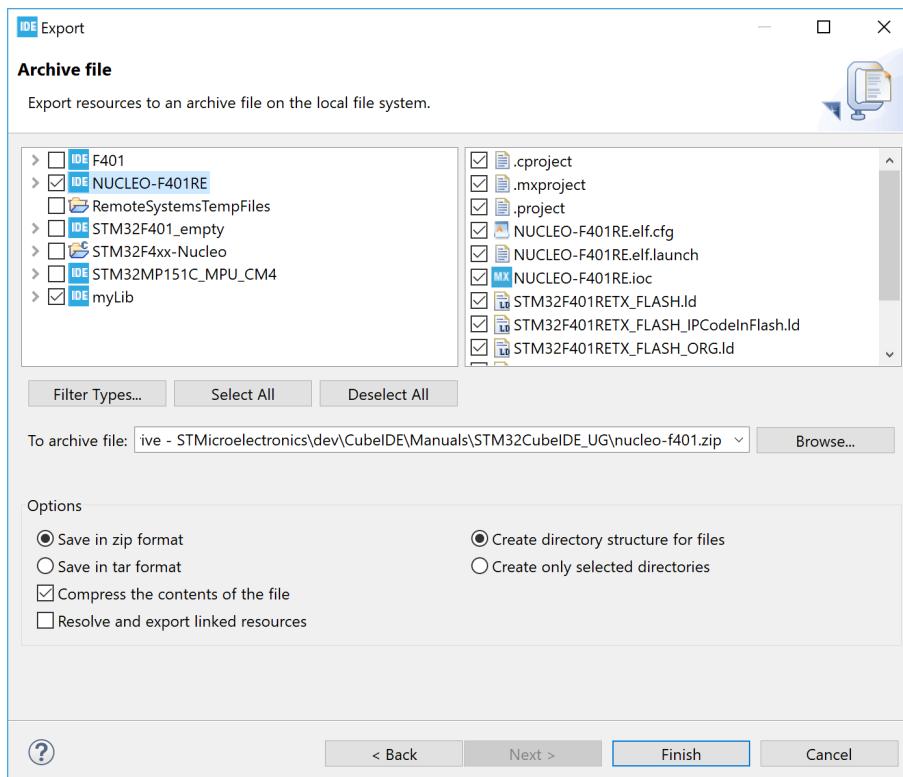

2.10

Importing existing projects

This section describes different ways to import existing projects into an STM32CubeIDE workspace. The standard Eclipse® importer is capable of importing Eclipse® projects. This is used to import projects created with STM32CubeIDE. The project importer is also extended to support the import of ac6 System Workbench for STM32 projects and Atollic® projects. Such projects are converted during the import phase to STM32CubeIDE projects.

It is possible to import and debug an existing `elf` file developed by another IDE or toolchain. More information on how this is done is available in Section 3.8.

2.10.1

Importing an STM32CubeIDE project

A project can be imported in many different ways. This section shows how to import a project that was exported as a compressed zip file.

- One way to open the *Import* dialog is to use the menu [**File**]>[**Import...**]
- Another way is to right-click the *Project Explorer* view and select [**Import...**]

Figure 108. Import project

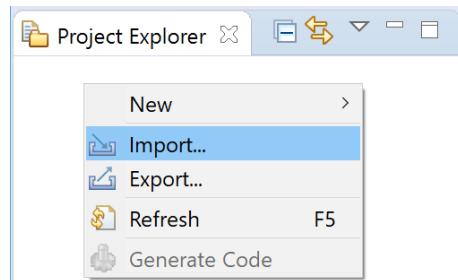


Figure 109. Import dialog


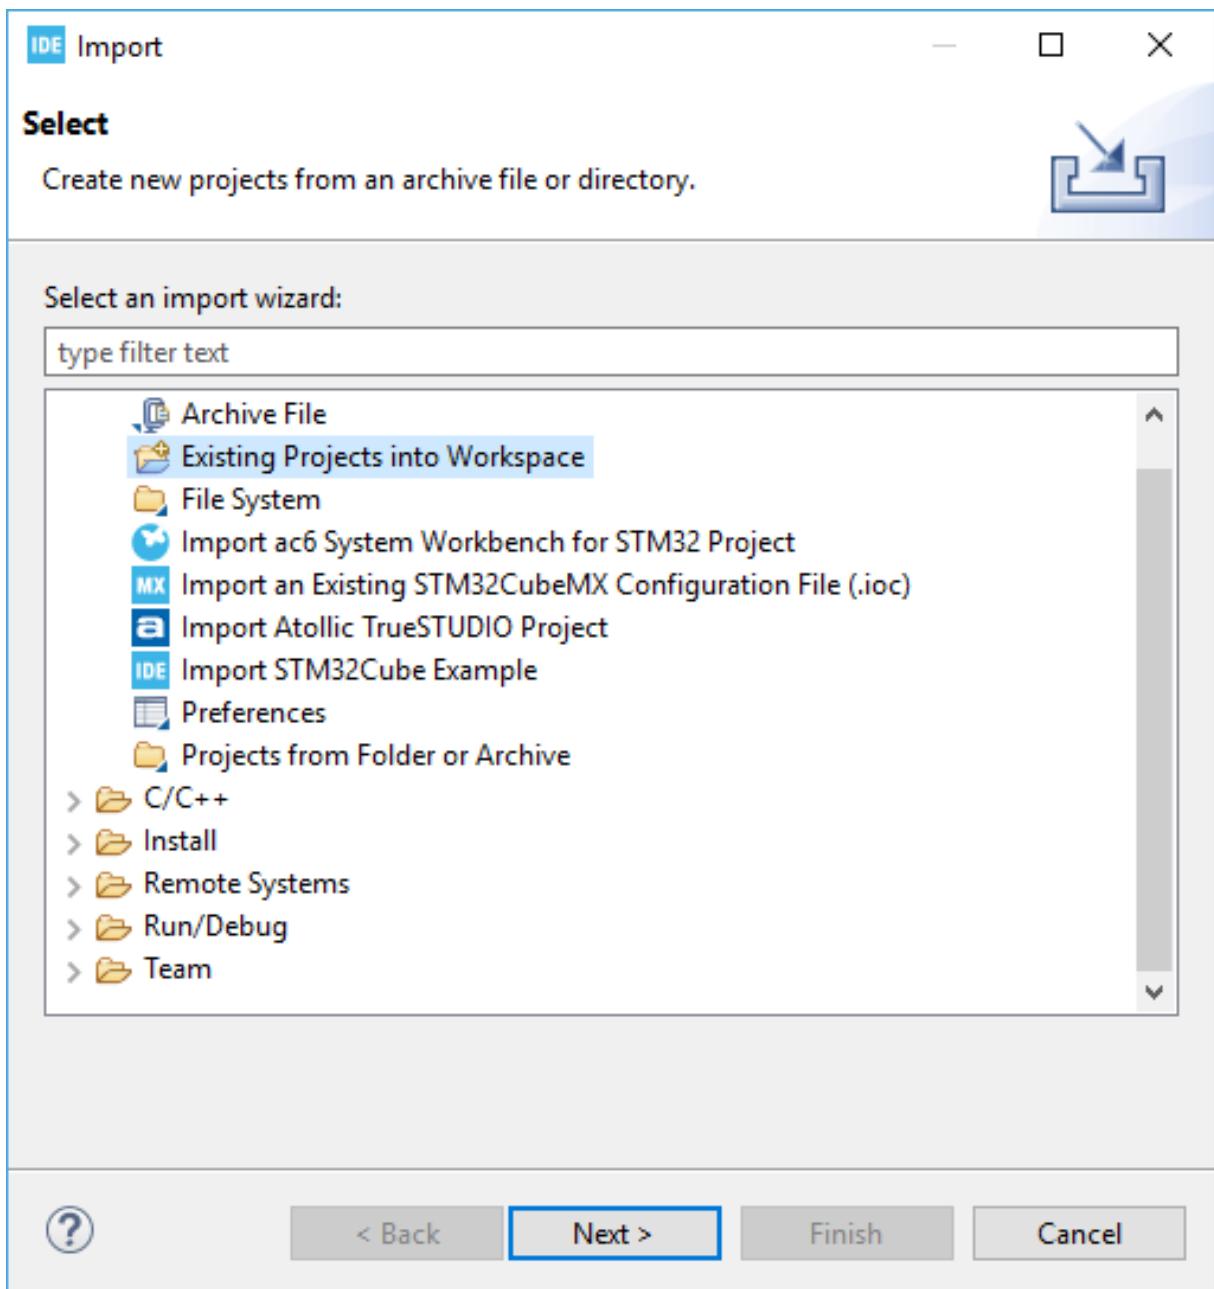


Figure 110. Import projects

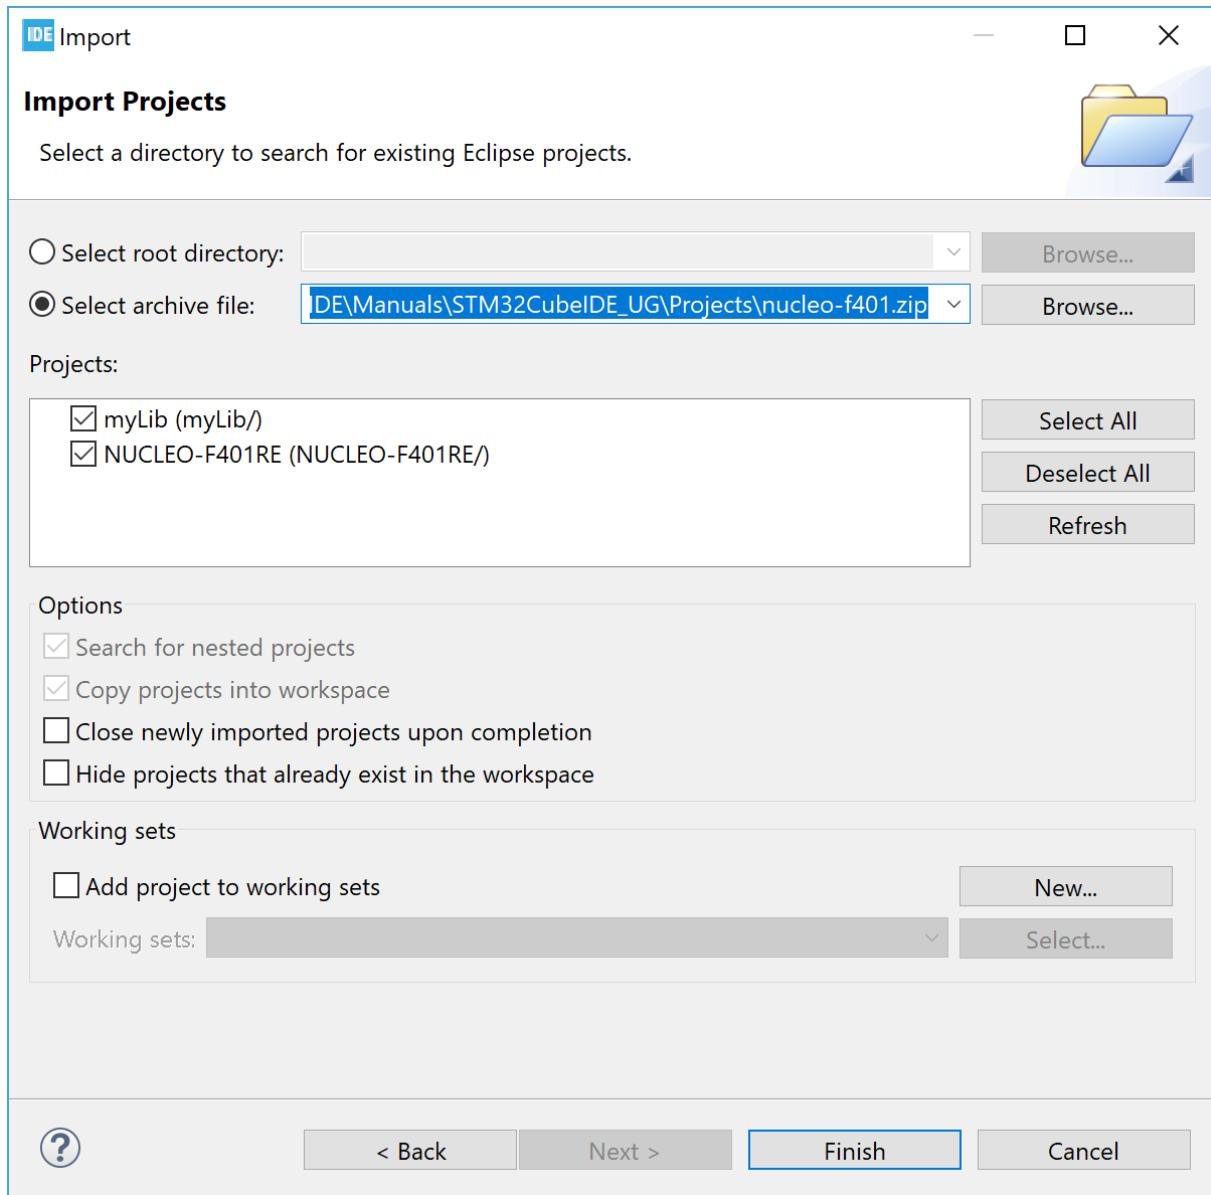

2.10.2

Importing System Workbench and projects


To import an ac6 System Workbench for STM32 project or an Atollic® project into STM32CubeIDE, it is advised to work on a project copy:

1. Create a copy of the project, either as a copy of the project folder or an export of the project in a zip file
2. Use the copied project for the import into STM32CubeIDE

The way to import the copied project is to open the *Import* dialog by means of the menu [File]>[Import...] or by right-clicking the *Project Explorer* view.


Select [Import ac6 System Workbench for STM32 project] or [Import Atollic TrueSTUDIO project] depending on the original tool used to create the project and press [Next >].

Figure 111. Import System Workbench projects (1 of 3)

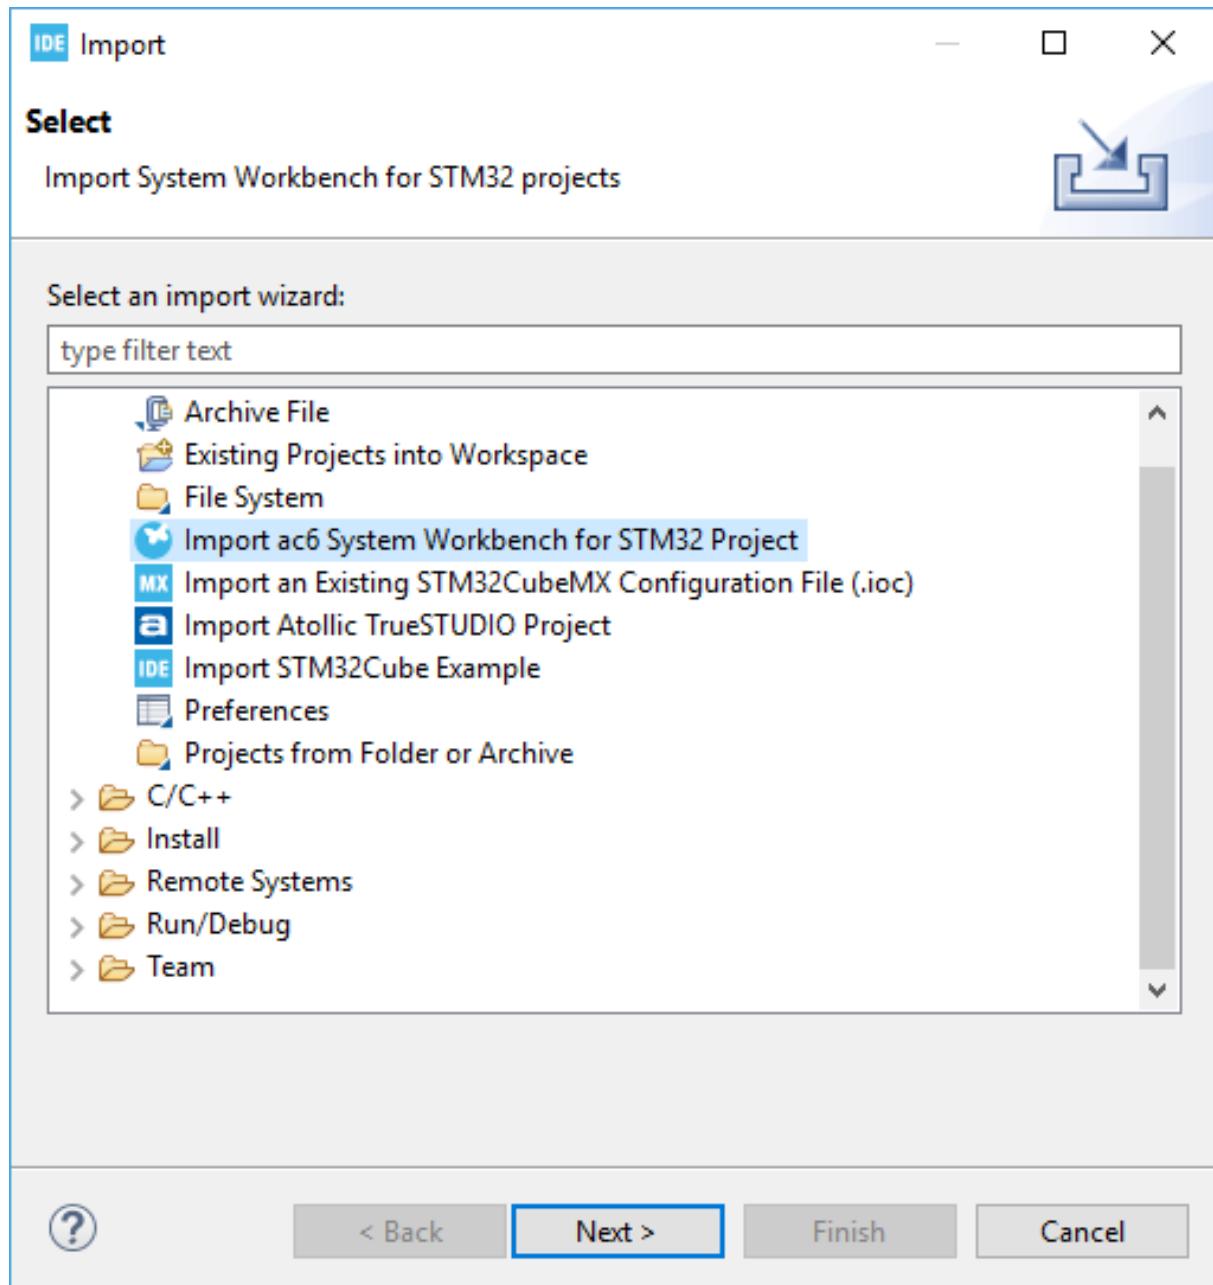


In this example, the ac6 project is copied into the STM32CubeIDE workspace, hence the [Directory...] button is used and project STM3F401_Ac6 is selected. The import wizard detects that this is a System Workbench project.

Figure 112. Import System Workbench projects (2 of 3)

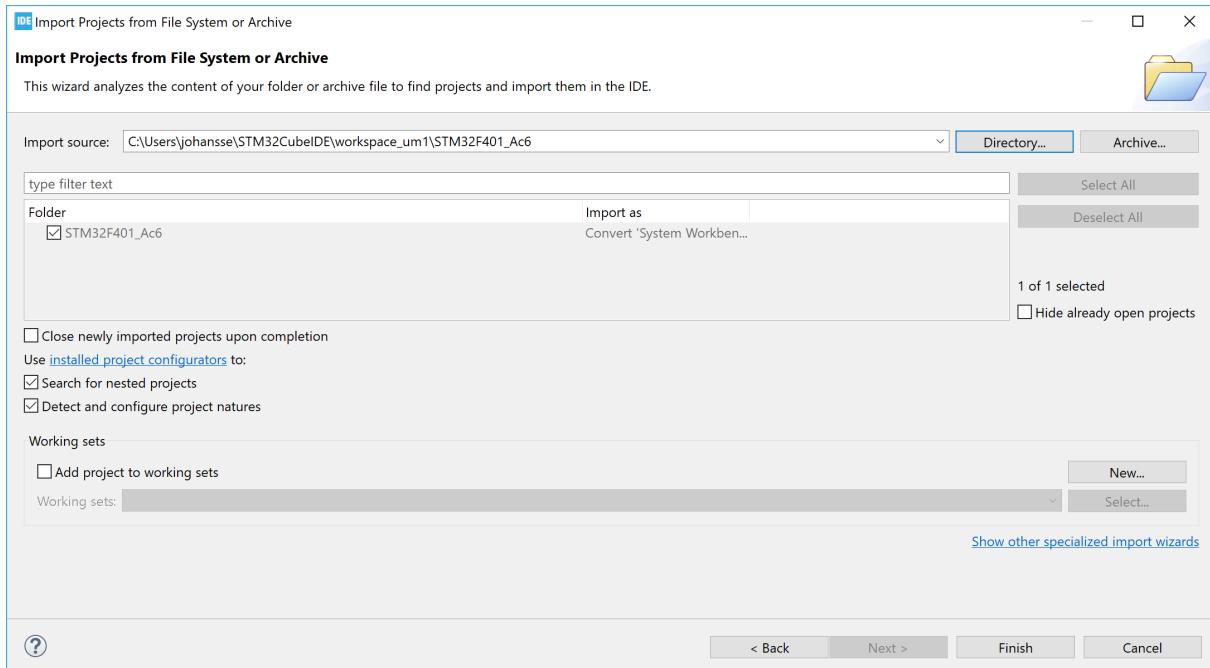

Press [Finish] to open the *Project converter* dialog.

Figure 113. Import System Workbench projects (3 of 3)

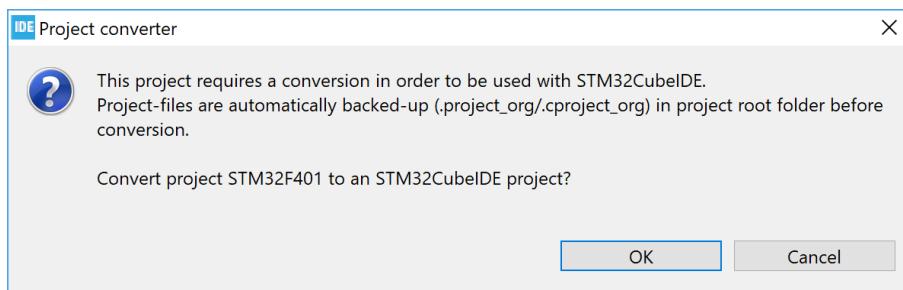

Press [OK] to convert the project to an STM32CubeIDE project.


There are two migration guides explaining how to migrate from ac6 System Workbench for STM32 ([ST-06]) and Atollic® to STM32CubeIDE ([ST-05]). These guides can be opened from the *Technical Documentation* page in the *Information Center*.

2.10.3

Importing using project files association

When STM32CubelDE is started, a pop-up window asks if .cproject and .project files must be associated to the program.

Figure 114. Import using project files association

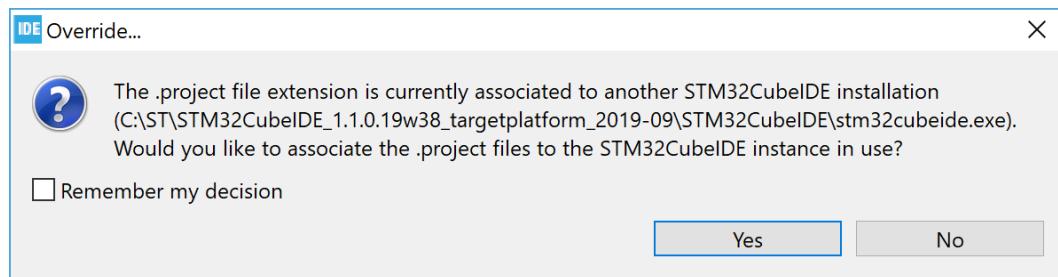

If the association is selected, double-clicking on a .project file in the personal computer file browser triggers the project import by STM32CubelDE into the current workspace. The project converter investigates the project, which is imported directly if made for STM32CubelDE. If the project comes from another tool, the project converter tries to identify if it is a known project format and, in such case, converts the project to an STM32CubelDE project as described in Section 2.10.2 Importing System Workbench and projects.

2.10.4

Prevent “GCC not found in path” error

When importing old projects, an error in the *Problems* view can state “Program “gcc” not found in PATH”. The error is caused by the project use of a deprecated discovery method setting. The error can be removed by updating the *Window Preferences* and *Project Properties* settings.

1. Open [Window]>[Preferences]. In the *Preferences* dialog, select [C/C++]>[Property Pages Settings] and enable checkbox [Display “Discovery Options” page].
2. Open [Project Properties]>[C/C++ Build]>[Discovery Options] and disable checkbox [Automate discovery of paths and symbols].

2.11


Toolchain Manager

The *Toolchain Manager* is used to install toolchains, uninstall toolchains and select the default workspace toolchain when building a project.

To open the *Toolchain Manager* from the *Tool Settings* tab in project properties:

1. Select the [MCU Toolchain] node

Figure 115. Open *Toolchain Manager*

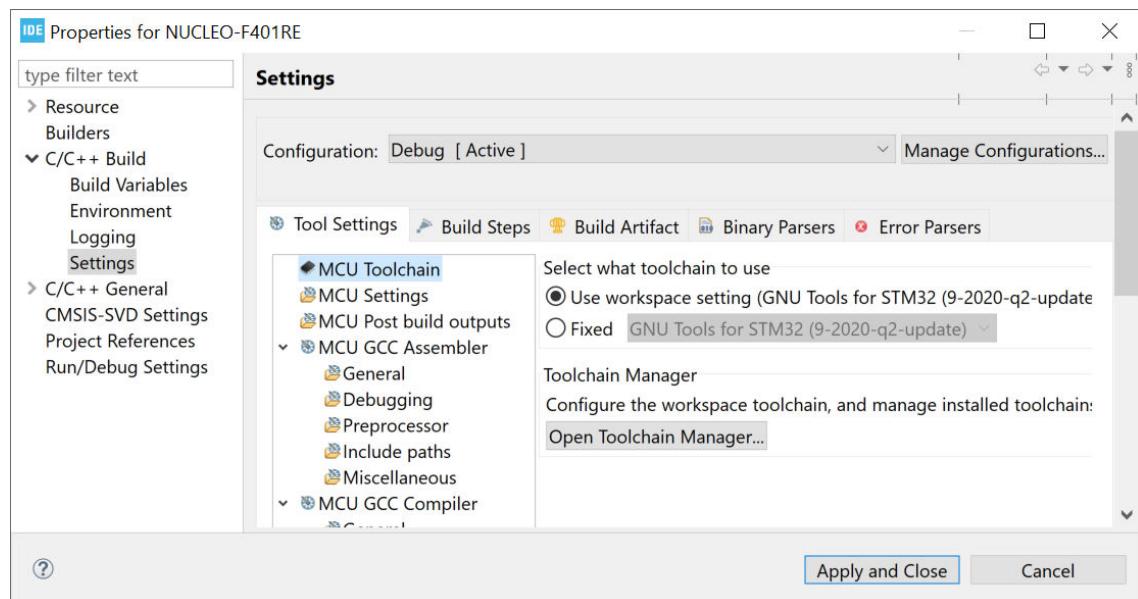


2. Click on [Open Toolchain Manager...]

The *Toolchain Manager* can also be opened from the [Window]>[Preferences] menu:

1. Select [STM32Cube]>[Toolchain Manager]

Figure 116. *Toolchain Manager*

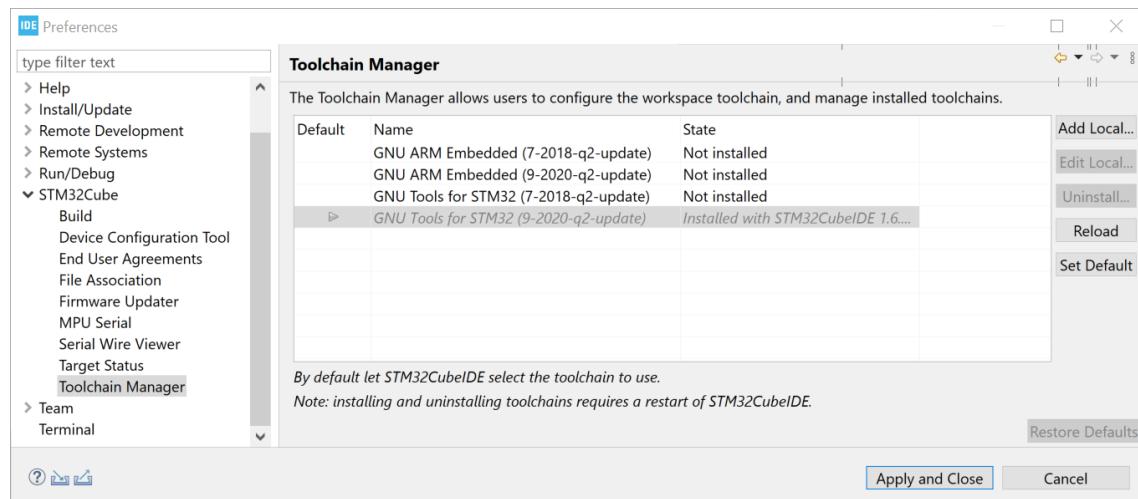

The columns in the *Toolchain Manager* are described in [Table 4](#).

Table 4. Toolchain Manager column details

Name	Description
Default	A green/grey arrow symbol indicates the default workspace toolchain. The arrow color is: <ul style="list-style-type: none">• green when the toolchain is manually set as default by the user• grey when the toolchain is selected as default by STM32CubeIDE logic
Name	The name of the toolchain.
State	The state of the toolchain. Toolchains available for download from STMicroelectronics online repository are listed as “ <i>installed</i> ” or “ <i>not installed</i> ”. Local toolchains added by the user are listed as “ <i>local</i> ”.

The buttons in the *Toolchain Manager* are described in [Table 5](#).


Table 5. Toolchain Manager button information

Name	Description
Add Local...	Add reference to local toolchain.
Edit Local...	Edit reference to local toolchain.
Install... Uninstall... Remove...	The button text depends on the type of the selected toolchain. It is used to: <ul style="list-style-type: none">• Install / Uninstall the selected toolchain provided by the repository• Remove the selected local toolchain
Reload	Reload the toolchain list from the repository.
Set Default	Set selected toolchain to be used by default.
Restore Defaults	Restore and use the default toolchain.
Apply and Close	Apply selection and close dialog.
Cancel	Cancel dialog.

2.11.1 Install new toolchain


Open the *Toolchain Manager* to install a new toolchain.

Figure 117. Install toolchain

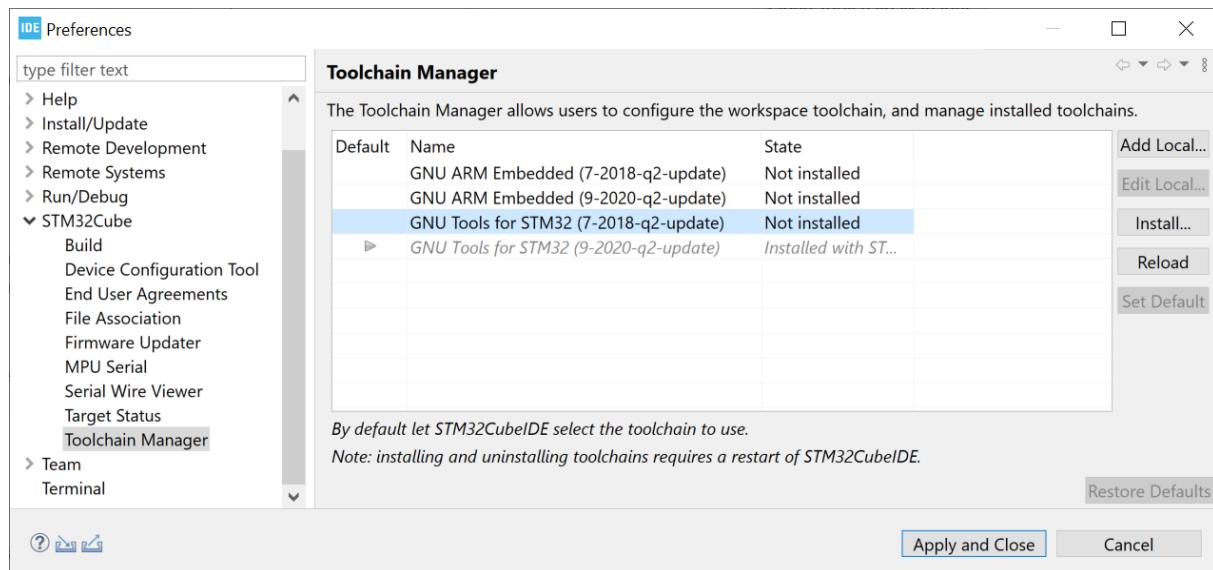


Select the toolchain to install and click on [**Install...**]. The *Install* dialog opens and displays the items to be installed.

Figure 118. Check items to install

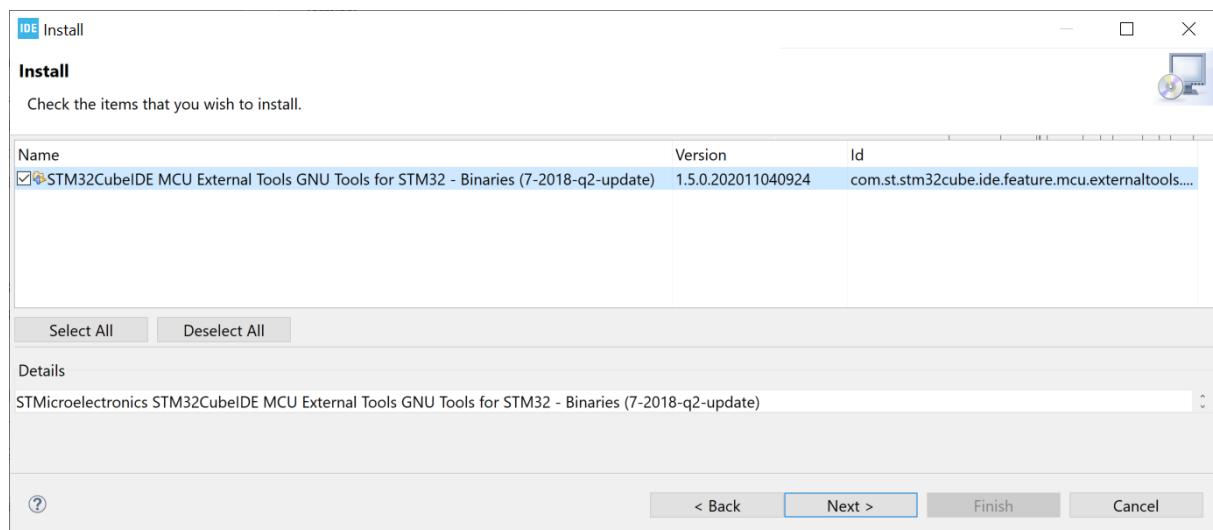


Check the items to install and click on [**Next**].

Figure 119. Review items to install

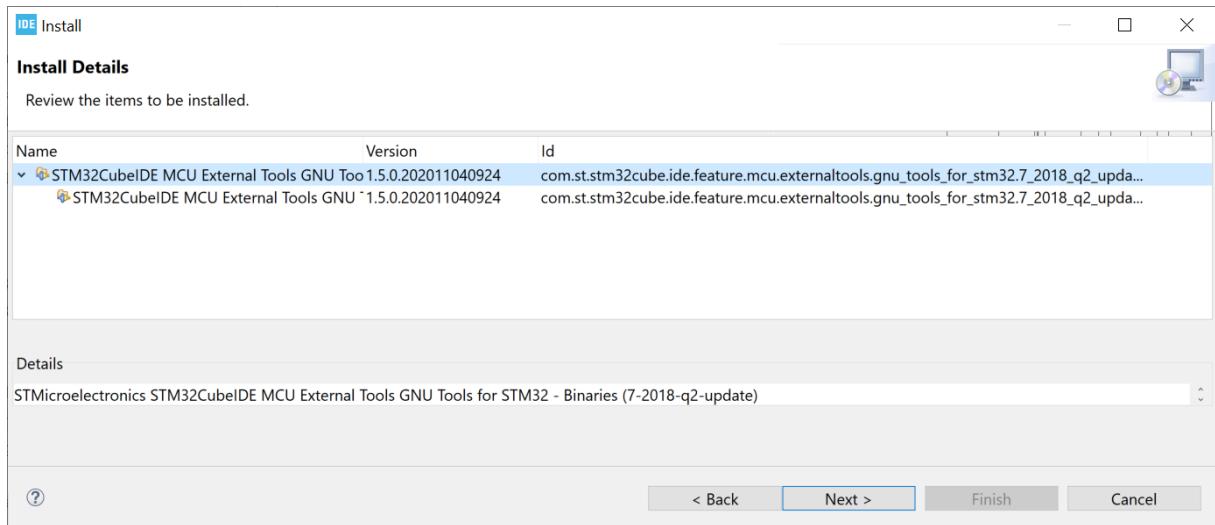

Review the items and click on [Next].

Figure 120. Review and accept licenses

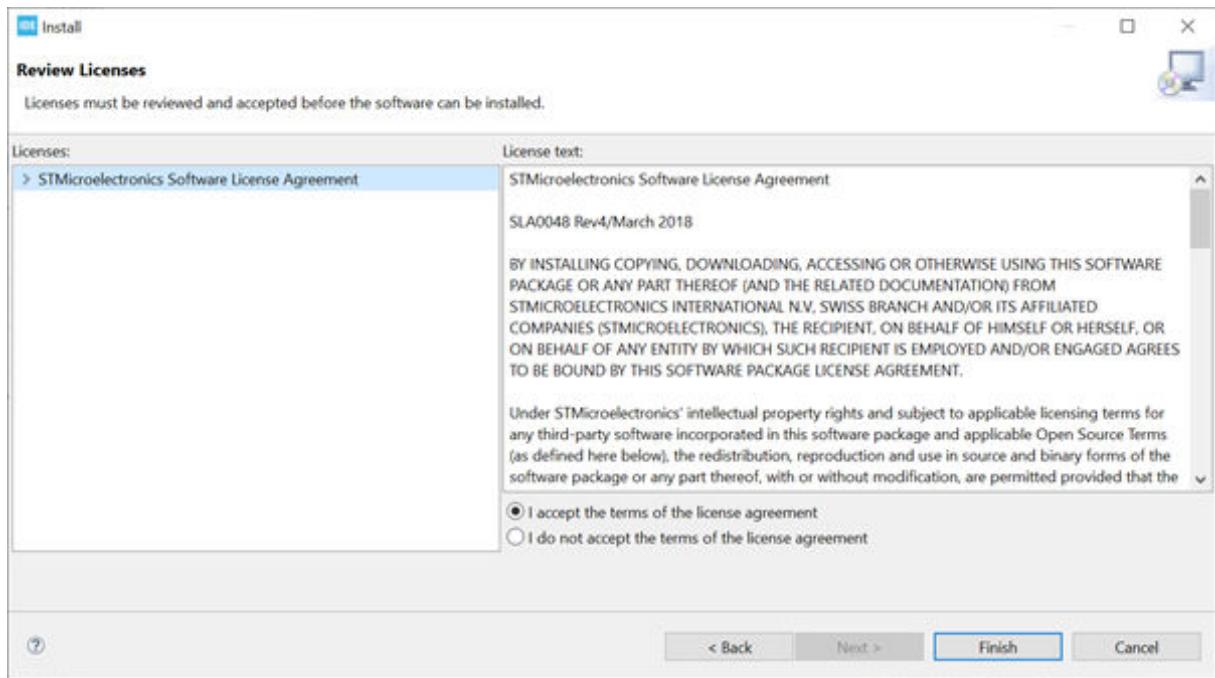

Review the licenses, select [**I accept the terms of the license agreements**] and click on [**Finish**].

At this point, the software installation starts. The progress bar displayed at the bottom of the STM32CubeIDE window shows the installation completion rate. Wait until the installation is completed.


The following warning may appear before the installation is finished.

Figure 121. Security warning



In this case, to finalize the installation, click on [**Install anyway**]. After some time, the following dialog is displayed.


Figure 122. Restart to apply software update

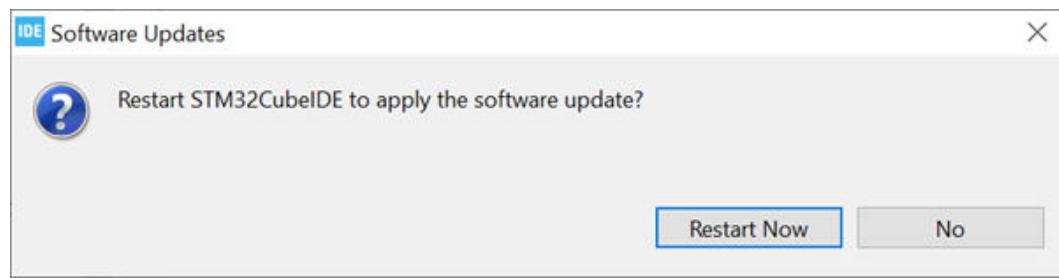

Click on [**Restart Now**] to be able to use the installed toolchain in STM32CubeIDE. STM32CubeIDE is restarted and the new toolchain can be used.

Open the *Toolchain Manager* to verify the installation.

Figure 123. Toolchain installed

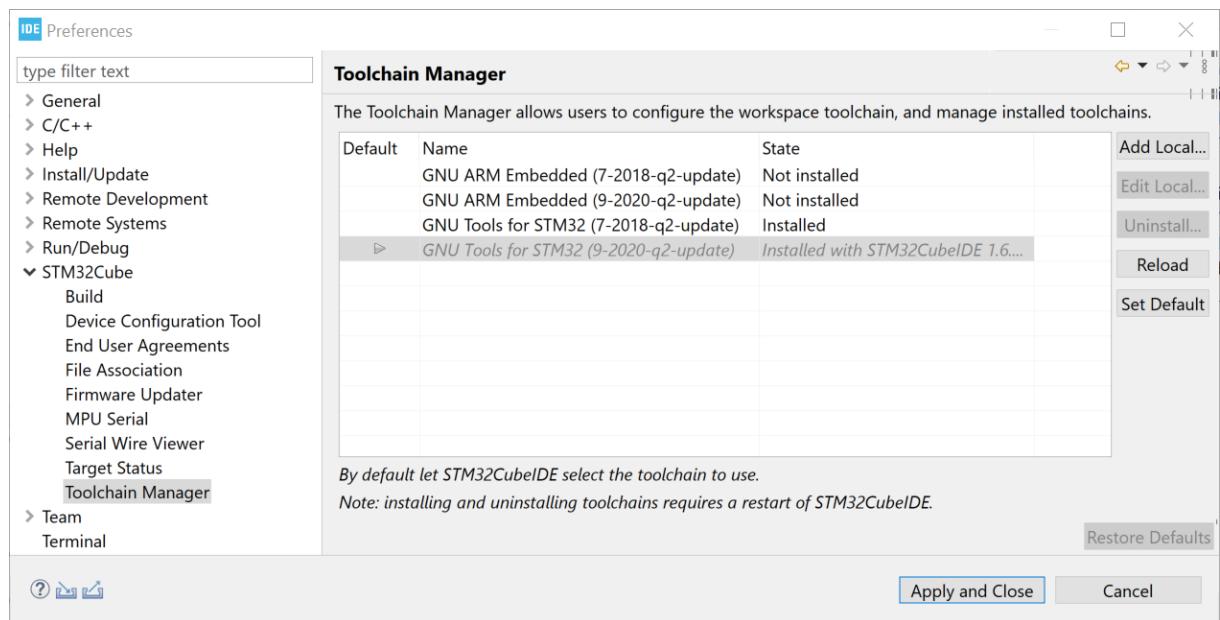

In this case, Figure 123 shows that two versions of *GNU Tools for STM32* are installed.

2.11.2 Manage default toolchain

The *Toolchain Manager* highlights the default workspace toolchain with an arrow in the *Default* column.

Figure 124. Default toolchain


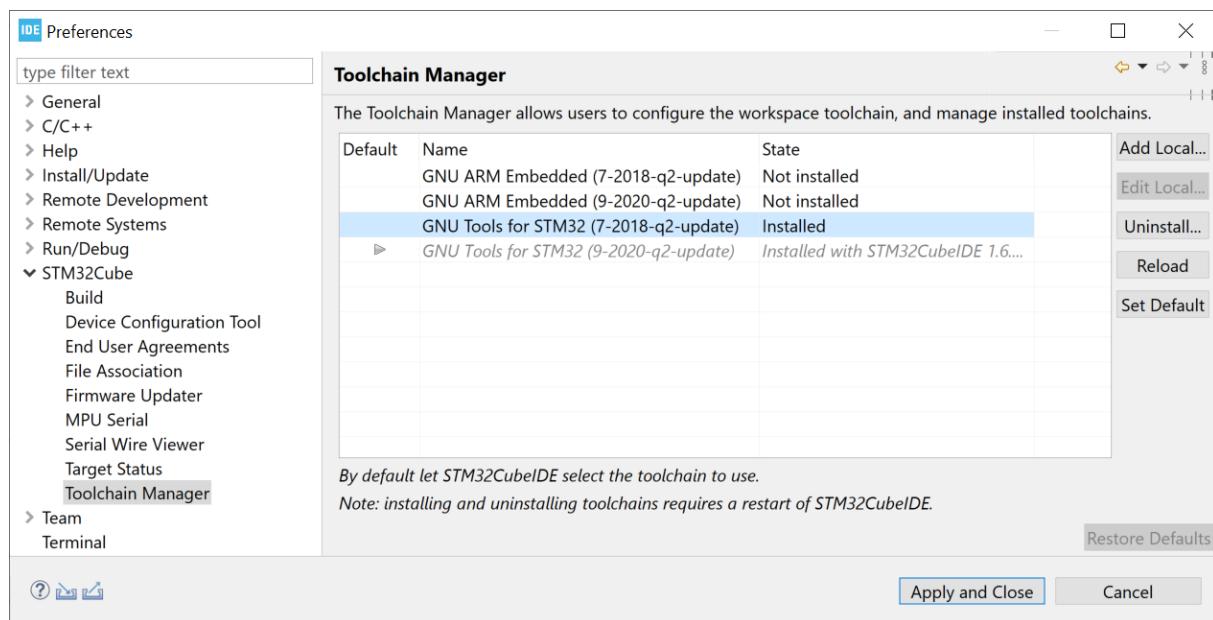


Figure 124 shows that *GNU Tools for STM32 version 9-2020-q2-update* is the default workspace toolchain. The *GNU Tools for STM32 version 7-2018-q2-update* line is marked in blue, which indicates that this toolchain selected. Any line in the table can be selected with the mouse.

Click on [**Set default**]: the selected toolchain to be used as the default workspace toolchain is highlighted with an arrow symbol in the *Default* column of the *Toolchain Manager*.

Figure 125. Default toolchain updated

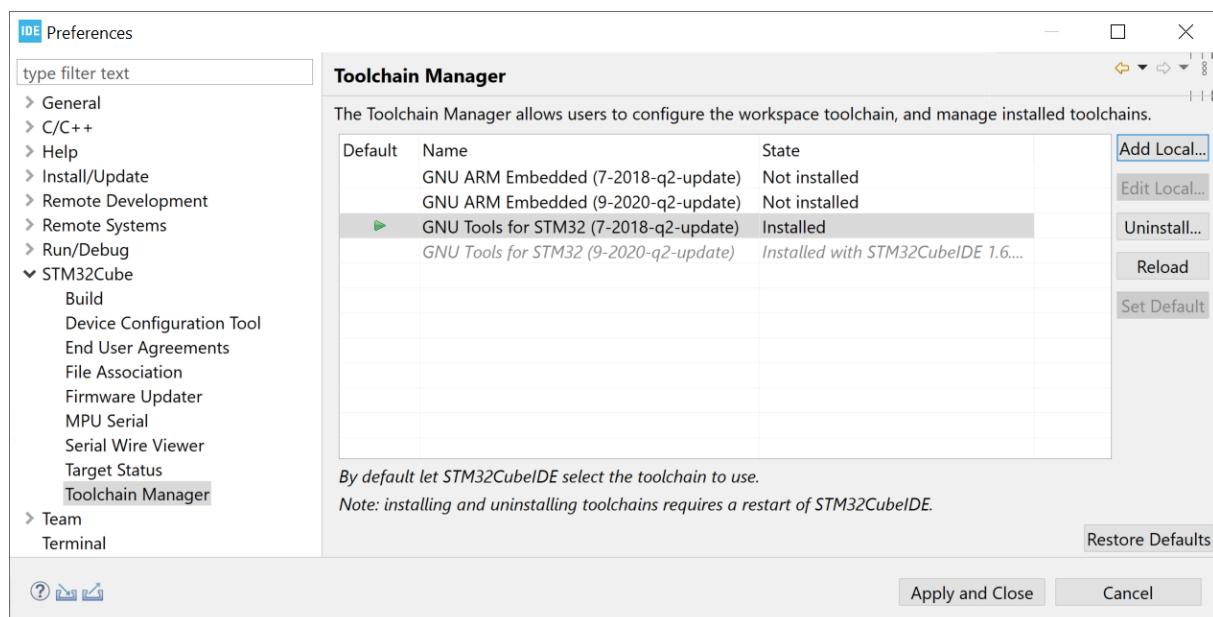


Click on [**Apply and Close**] to apply the setting and update which toolchain is set to be the default workspace toolchain.

2.11.3 Uninstall toolchain


It is not possible to uninstall the *GNU Tools for STM32* toolchain, which is installed by default with STM32CubelDE. Any other installed toolchain can be uninstalled.

Figure 126. Uninstall toolchain

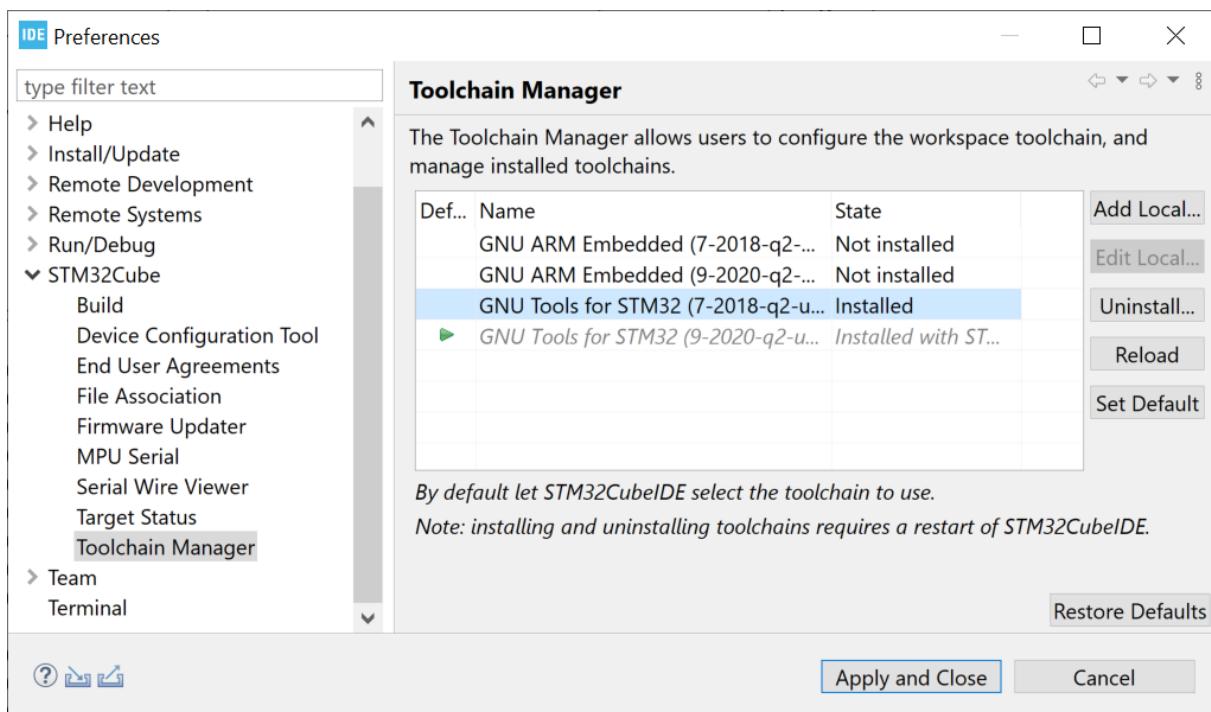


To uninstall a toolchain, select it in the *Toolchain Manager* and click on [**Uninstall...**]. This opens the *Uninstall* dialog.

Figure 127. Uninstall details

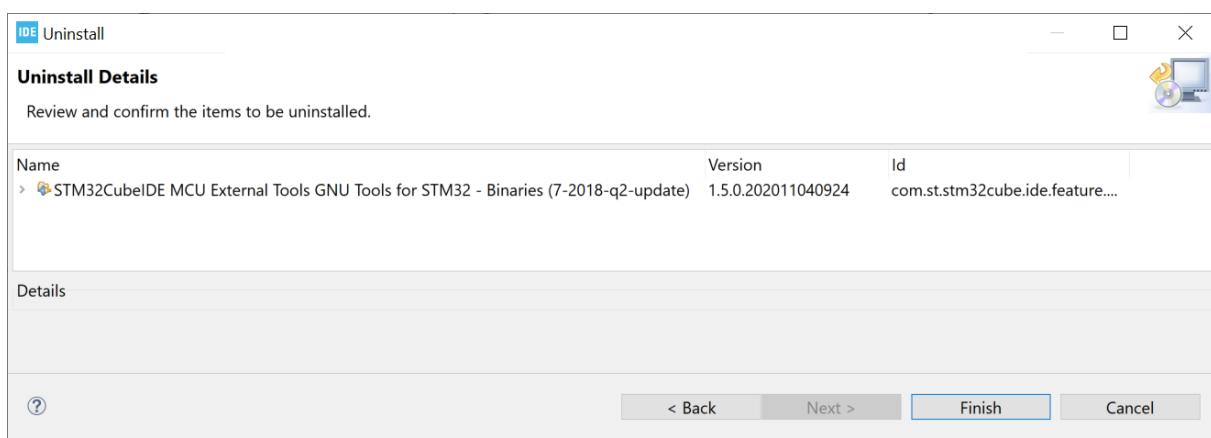

Click on [Finish] to start the software uninstallation. The *Software Updates* dialog is displayed.

Figure 128. Software updates

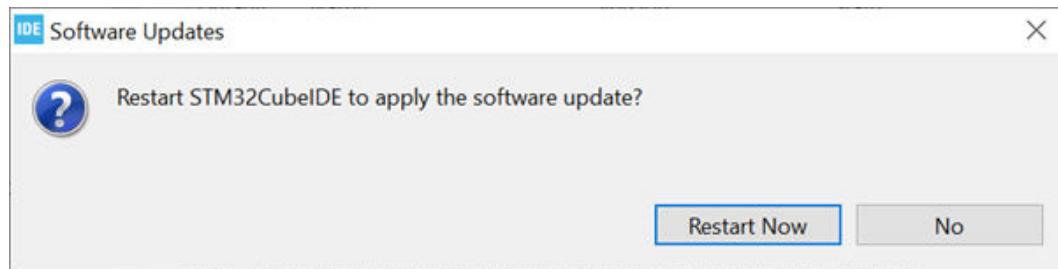


Click on [Restart Now] to apply the software update.

The product is restarted.

Open the *Toolchain Manager* to verify the installation.

Figure 129. Toolchain uninstalled

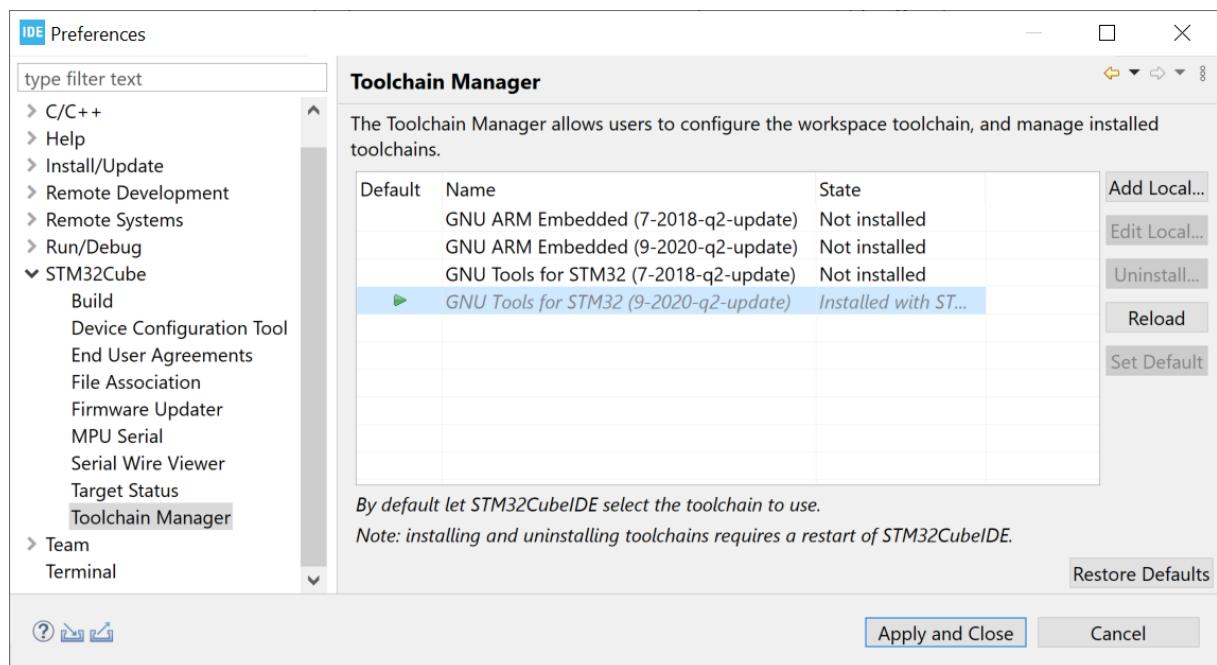


In this case, Figure 129 shows that only one version of *GNU Tools for STM32* is installed.

2.11.4 Using local toolchain

It is possible to add and use an already installed local GNU ARM toolchain. To add a local toolchain, follow the steps below:


1. Open *Toolchain Manager* and press the [Add Local...] button.

Figure 130. Add local toolchain

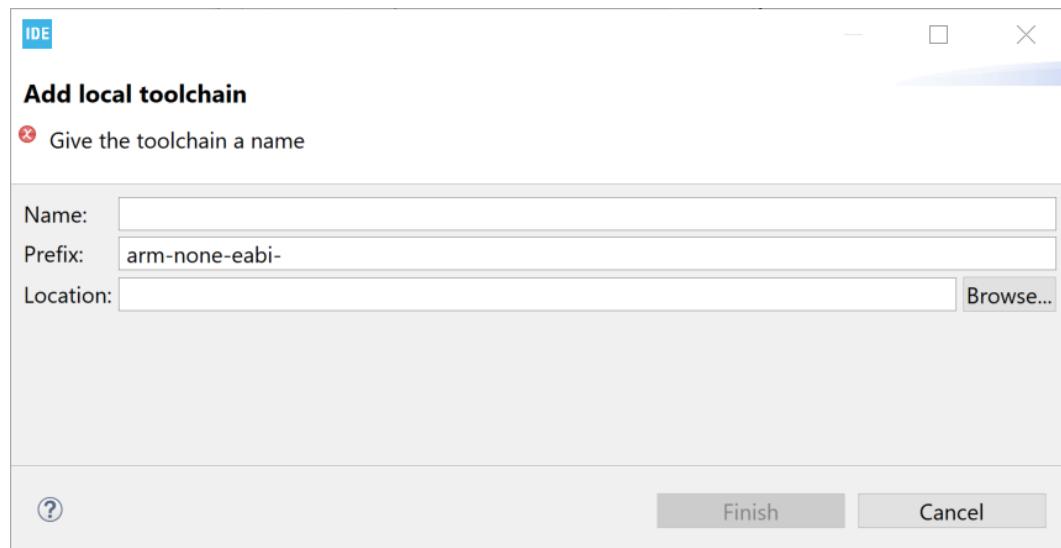

2. Add a name and specify location.


Figure 131. Specify local toolchain location

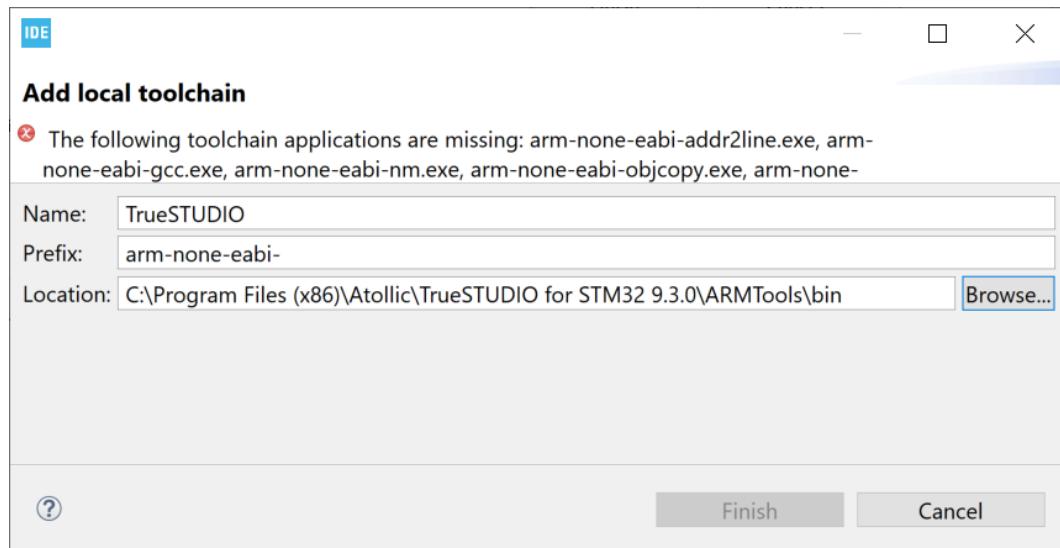

As seen in Figure 131, some naming problems can occur. In this case, the problem results from a wrong prefix that prevents the toolchain application validation.


Update the toolchain prefix. The prefix must end with a dash (-).

Figure 132. Specify local toolchain prefix

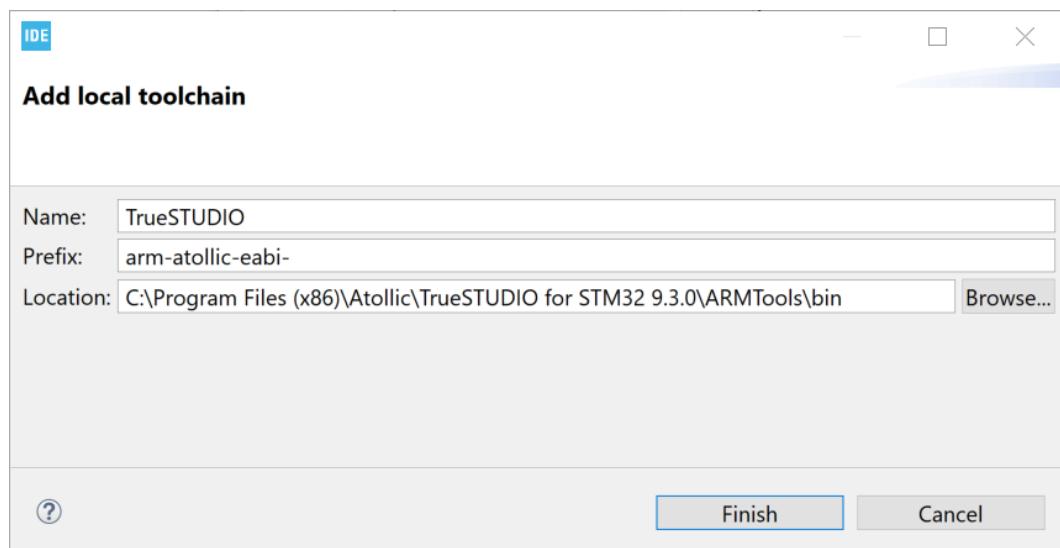


3. Press [Finish].

Figure 133. Local toolchain added

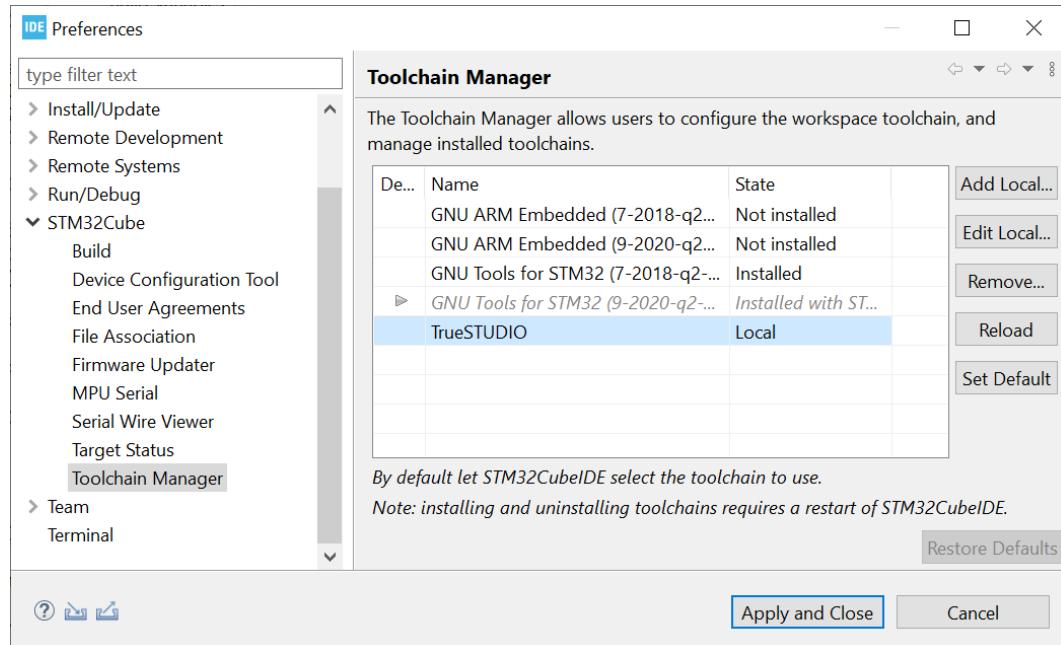

4. Use the [Edit Local...] button to edit local toolchain. The *Edit local toolchain* dialog opens, and it is possible to update *Prefix* and *Location*.

Figure 134. Edit local toolchain

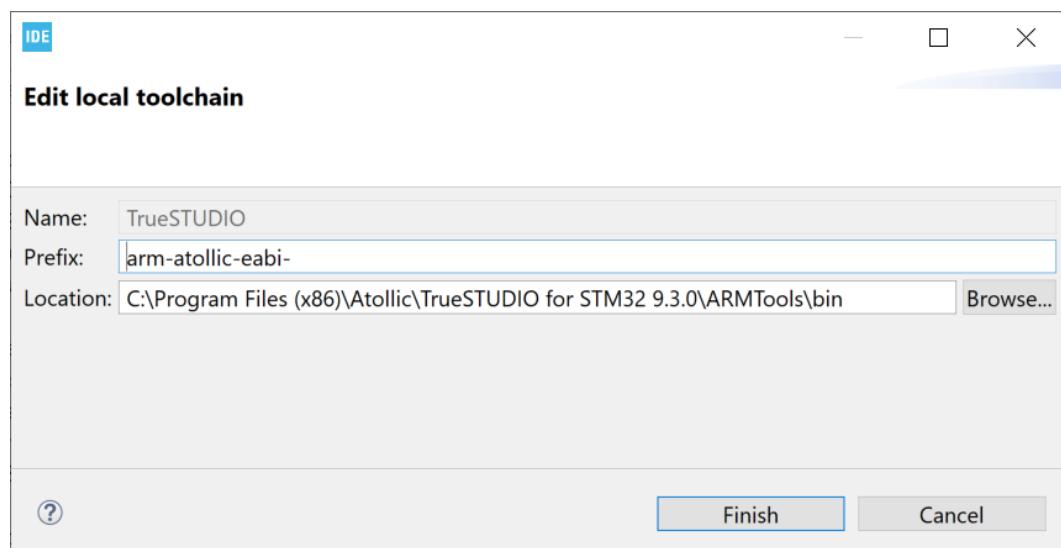

5. Update *Prefix* or *Location* and press [Finish] to update local toolchain settings.

2.11.5 Network error

In case of problem to access the update site, the *Network error...* dialog is displayed.

Figure 135. Toolchain network error



Check the network settings. Information on how to configure network proxy settings are described in [Section 1.5.3 Preferences - Network proxy settings](#).

3 Debugging

3.1 Introduction to debugging

STM32CubeIDE includes a powerful graphical debugger based on the GDB command-line debugger. It also bundles GDB servers for the ST-LINK and SEGGER J-Link JTAG probes.

The GDB server is a program that connects GDB on the PC to a target system. The STM32CubeIDE debug session can autostart a local GDB server or connect to a remote GDB server.

The remote GDB server can be running on the same PC, or on a PC that is accessible via the network and specified with *Host name* or *IP address* and a *Port number*. When connecting to a remote GDB server, this GDB server must be started first before a debug session is started in STM32CubeIDE.

When autostart local debugging is selected, STM32CubeIDE automatically starts and stops the GDB server as required during debugging, thus integrating the GDB server seamlessly.

Note: *It is recommended to use compiler optimization level `-O0` when building a project that must be debugged. Debugging with optimization level `-Og` may work but higher optimization level is hard to debug because of compiler code optimization.*


It is also possible to use the GDB server only to download the application into the target system and run it without starting a debug session. This is performed by creating run configurations, which is described later in this chapter (refer to [Section 3.7 Run configurations](#)).

STM32CubeIDE can be used to debug an existing `elf` file developed with another IDE or toolchain by importing the `elf` file using the import of STM32 Cortex®-M executable. This is described in [Section 3.8 Import STM32 Cortex®-M executable](#).

3.1.1

General debug and run launch flow

Debug configurations are used to debug an STM32 program. Run configurations are used to flash a new program into the STM32 and start it. The flowchart in Figure 136 presents the order of starting the GDB server, reset the device, load the program, set run time options, exceptions, program counter, breakpoints, Standby/Stop/Sleep, watchdog, and external loader initialization when starting a debug session. It also displays the differences between debug and run sessions.

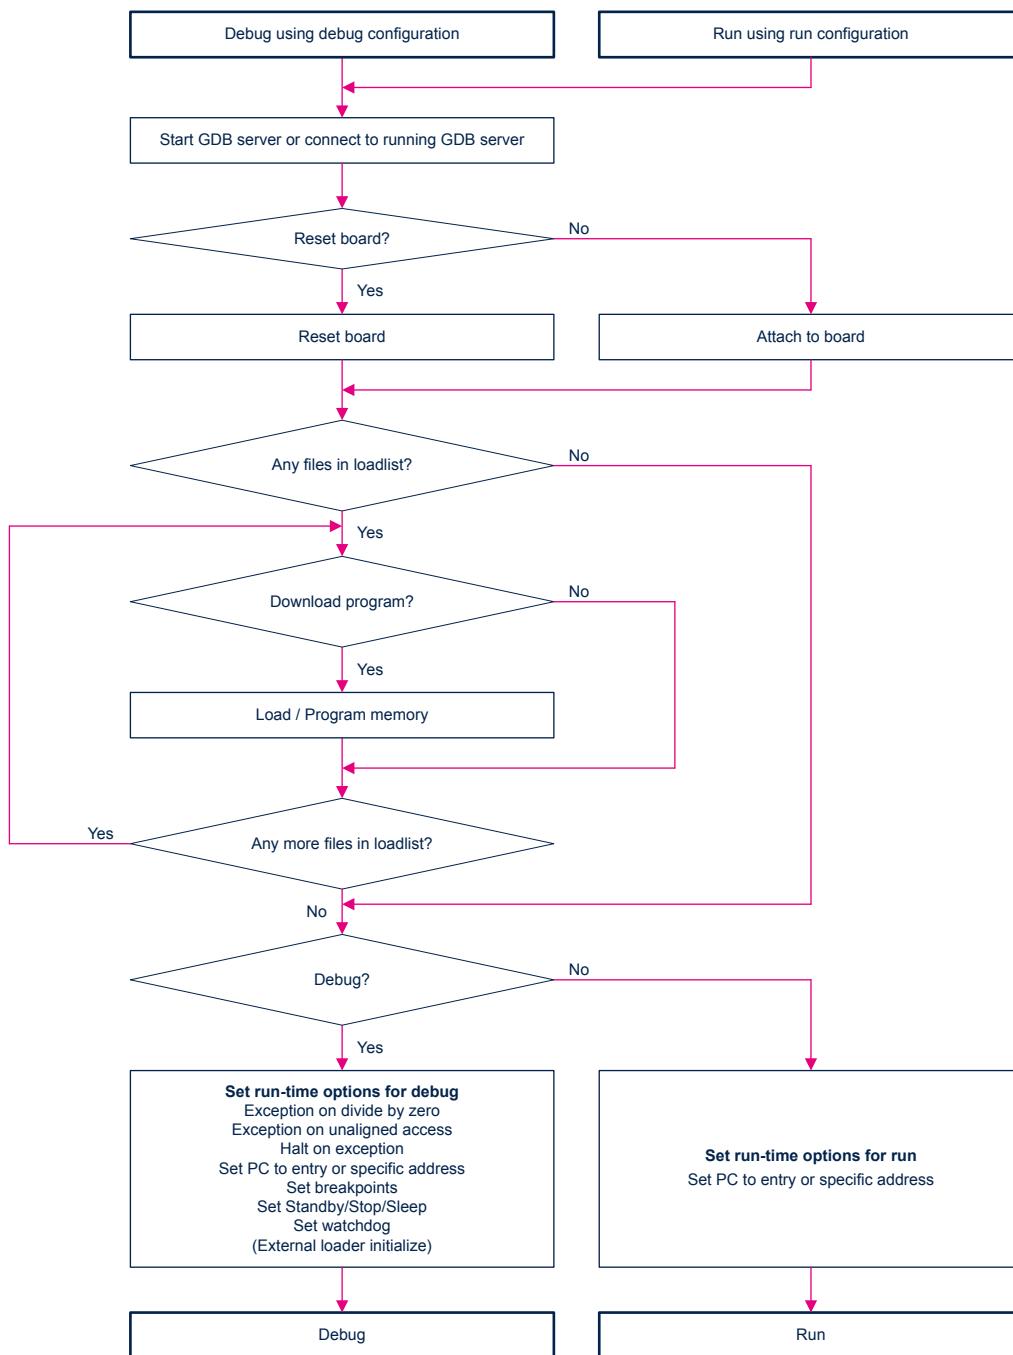
Figure 136. General debug and run launch flowchart

3.2

Debug configurations


A debug configuration for the project is needed before a debug session can be started. To create the first debug configuration for the project, right click on the project name in the *Project Explorer* view and select [Debug As]>[STM32 C/C++ Application].

Figure 137. Debug as STM32 MCU

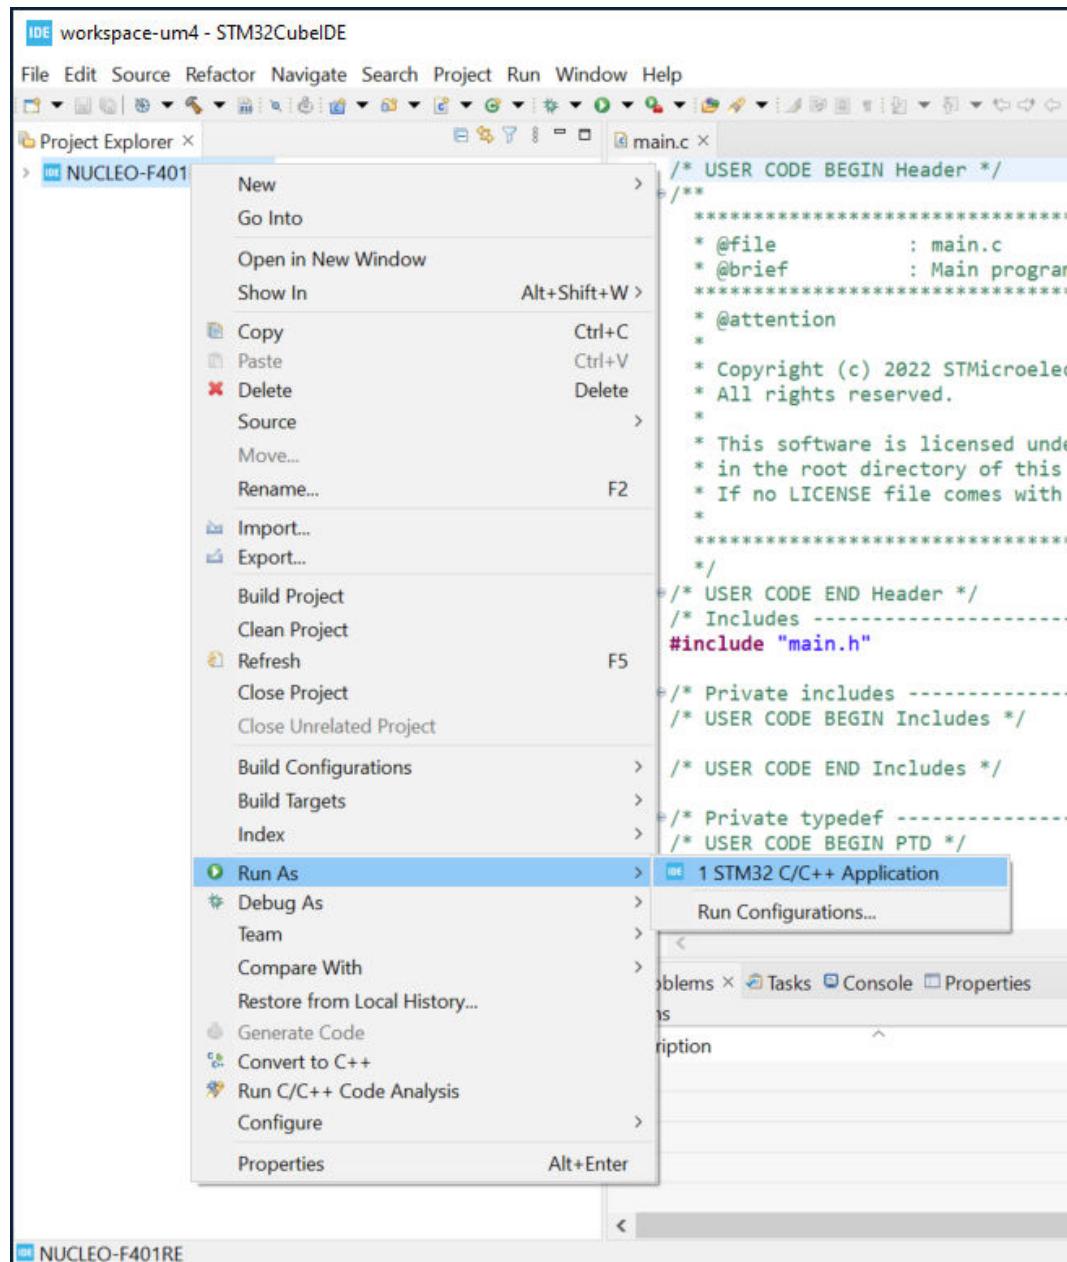

Another way to create a new debug configuration is to select the project name in the *Project Explorer* view and use the menu [Run]>[Debug As]>[STM32 C/C++ Application].

Figure 138. Debug as STM32 MCU menu

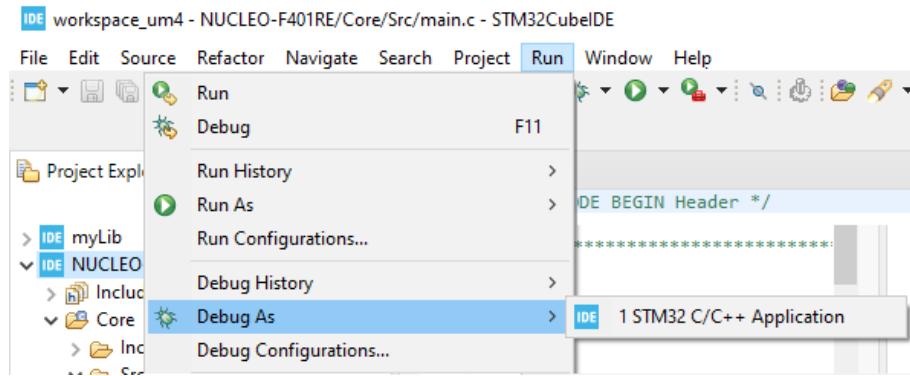

A third way to create a new debug configuration is to select a project name in the *Project Explorer* view and press [F11].

All three different ways open the *Debug Configuration* dialog.

3.2.1

Debug configuration

The *Debug Configuration* dialog contains the following tabs:

- *Main*
- *Debugger*
- *Startup*
- *Source*
- *Common*


The *Debugger* and *Startup* tabs must be updated when creating a new debug configuration while the others do not require update.

3.2.2

Main tab

The *Main* tab contains the configuration of the C/C++ application to debug. Usually, when creating a debug configuration using the sequence described earlier in this chapter, there is no need to make any change in the *Main* tab. Make sure the correct `elf` file and project are selected.

Figure 139. Debug configuration main tab

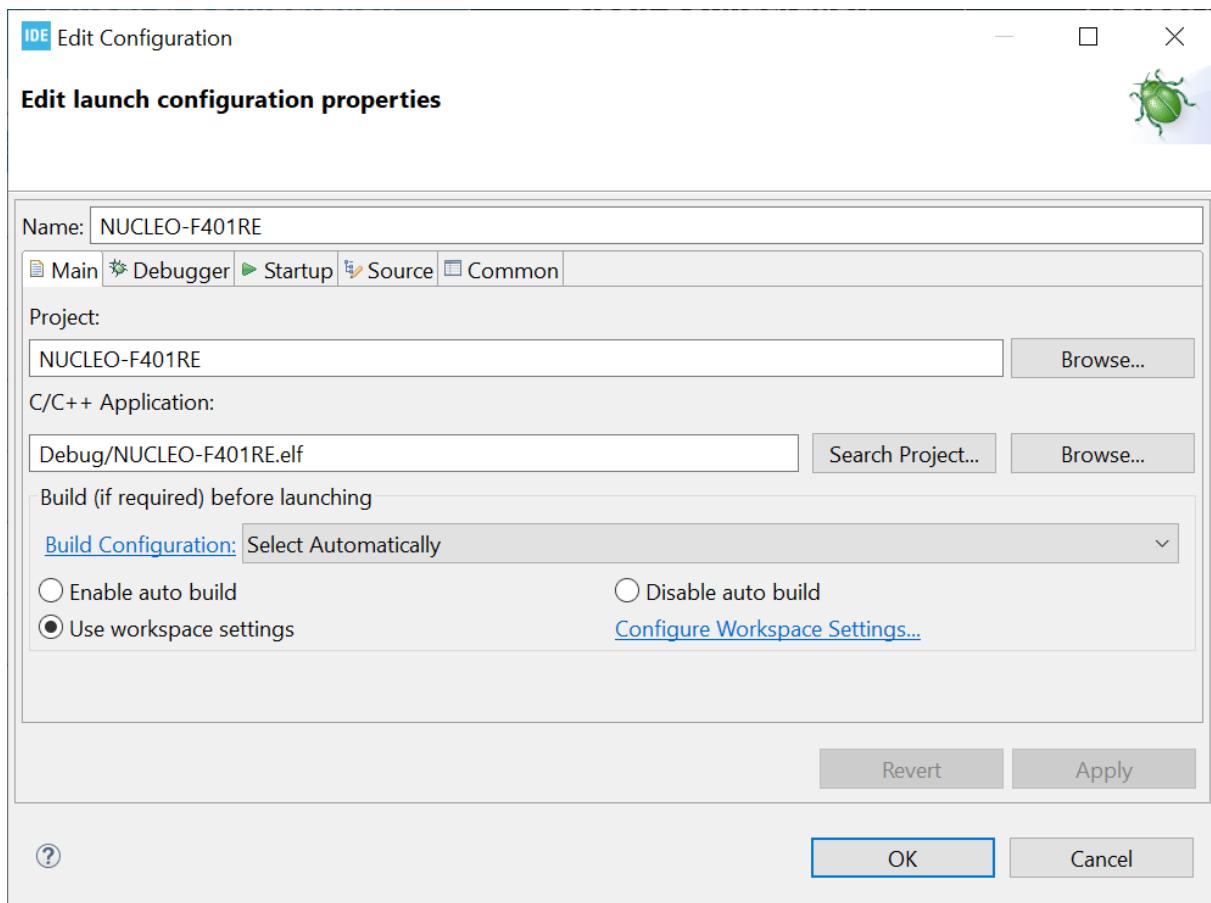


Note: *It is possible in the Main tab to define if a build must be made before the debug session is started.*

3.2.3 Debugger tab

The *Debugger* tab configures how to start the GDB server and connect to it. It also defines which GDB server must be used if **[Autostart local GDB server]** is selected.

Figure 140. Debug configuration debugger tab

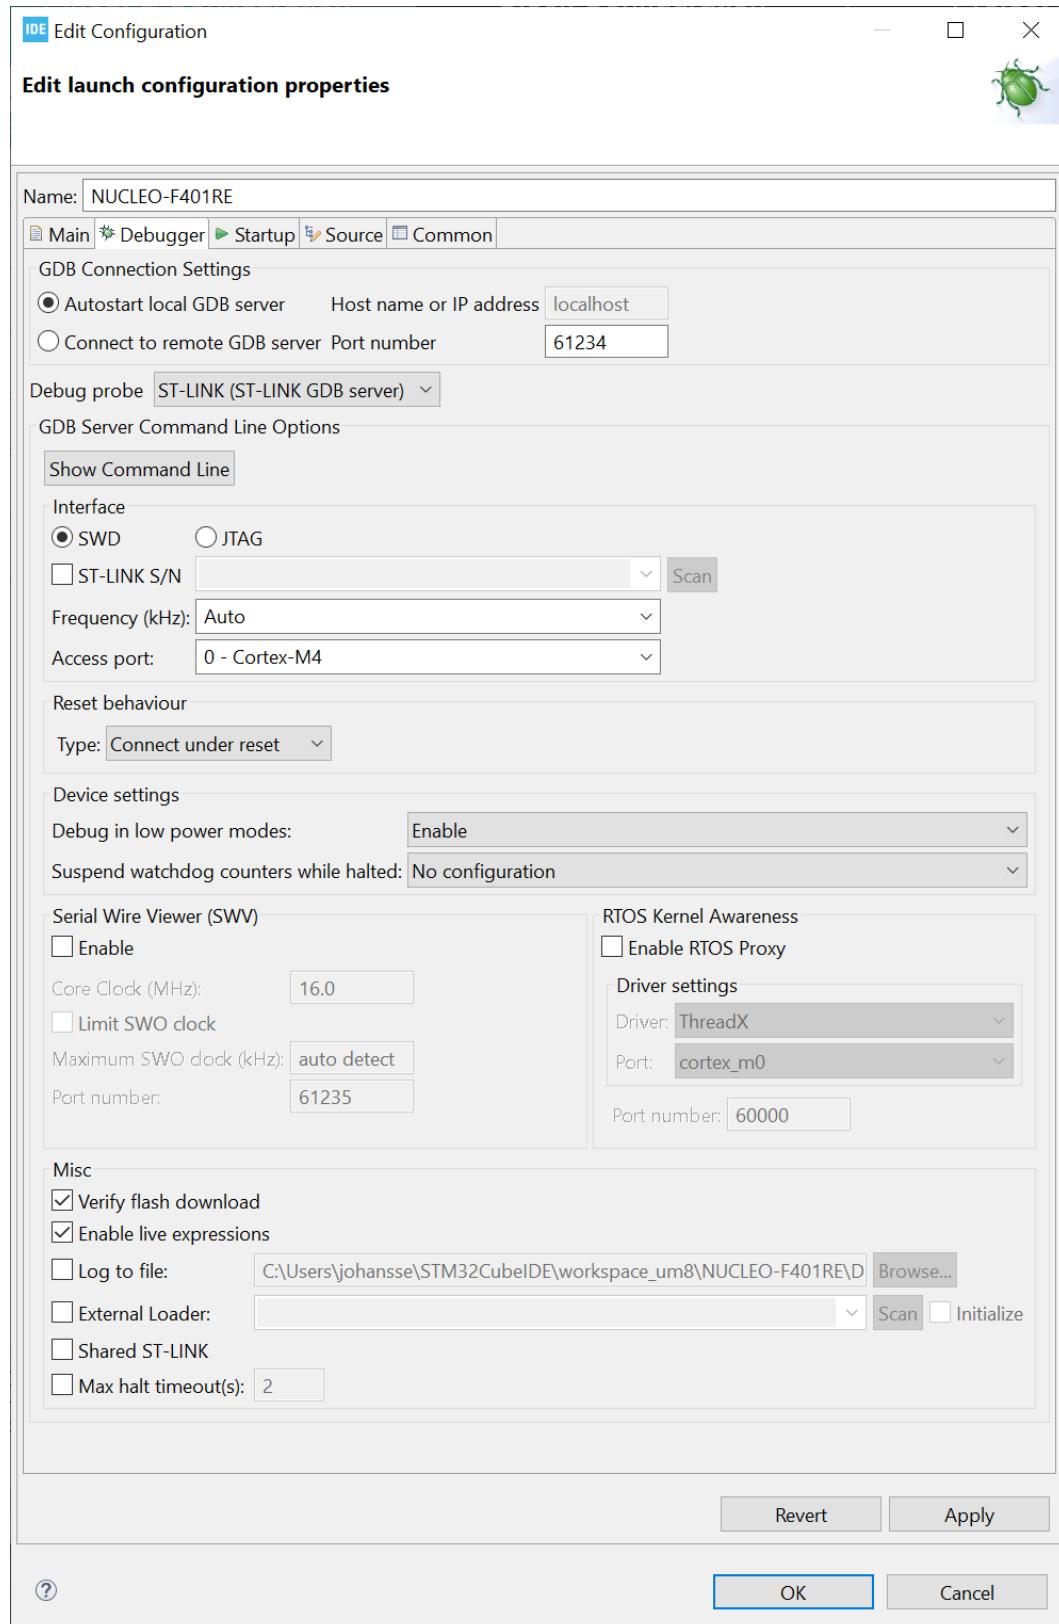


The [**Port number**] edit field contains the default value used by the GDB server selected in field [**Debug probe**]. Field [**Host name or IP address**] must be set when [**Connect to remote GDB server**] is selected.

Field [Debug probe] selects the probe and GDB server to be used for debugging. When using an ST-LINK debug probe, *ST-LINK GDB server* or *OpenOCD* can be used. When using a SEGGER J-LINK probe, use the *SEGGER J-LINK GDB server*.

Pressing the [Show Command Line] button opens the *GDB Server command line* dialog. The dialog displays how the GDB server is started according to the current [GDB Server Command Line options] settings.

Figure 141. GDB server command line dialog

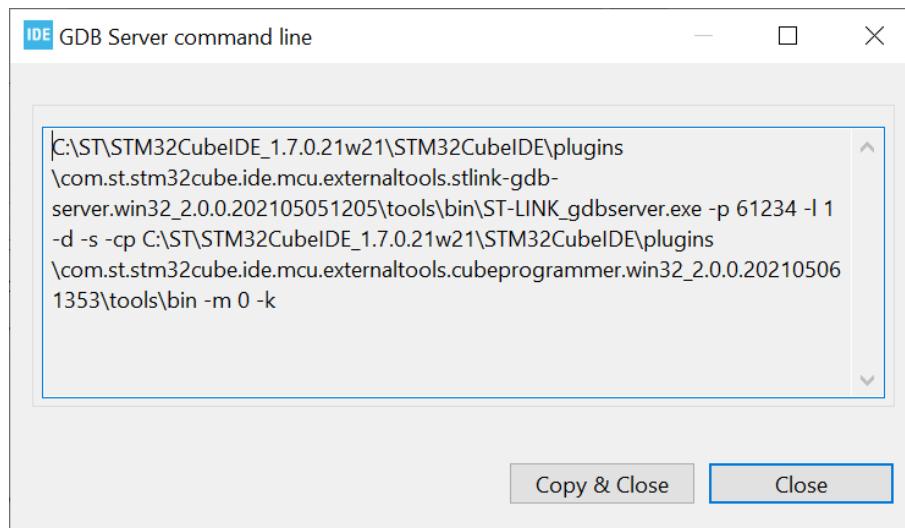


Use the [Copy & Close] button to copy the current command line settings to the clipboard, for instance to start the GDB server manually in a command line window by pasting the command.

The [GDB Server Command Line options] selections are updated as a function of the [Debug probe] selected. Detailed information about these settings are available in [Section 3.4 Debug using different GDB servers](#) and sub-sections.

3.2.4 Startup tab

The *Startup* tab configures how to start a debug session.

Figure 142. Debug configuration startup tab

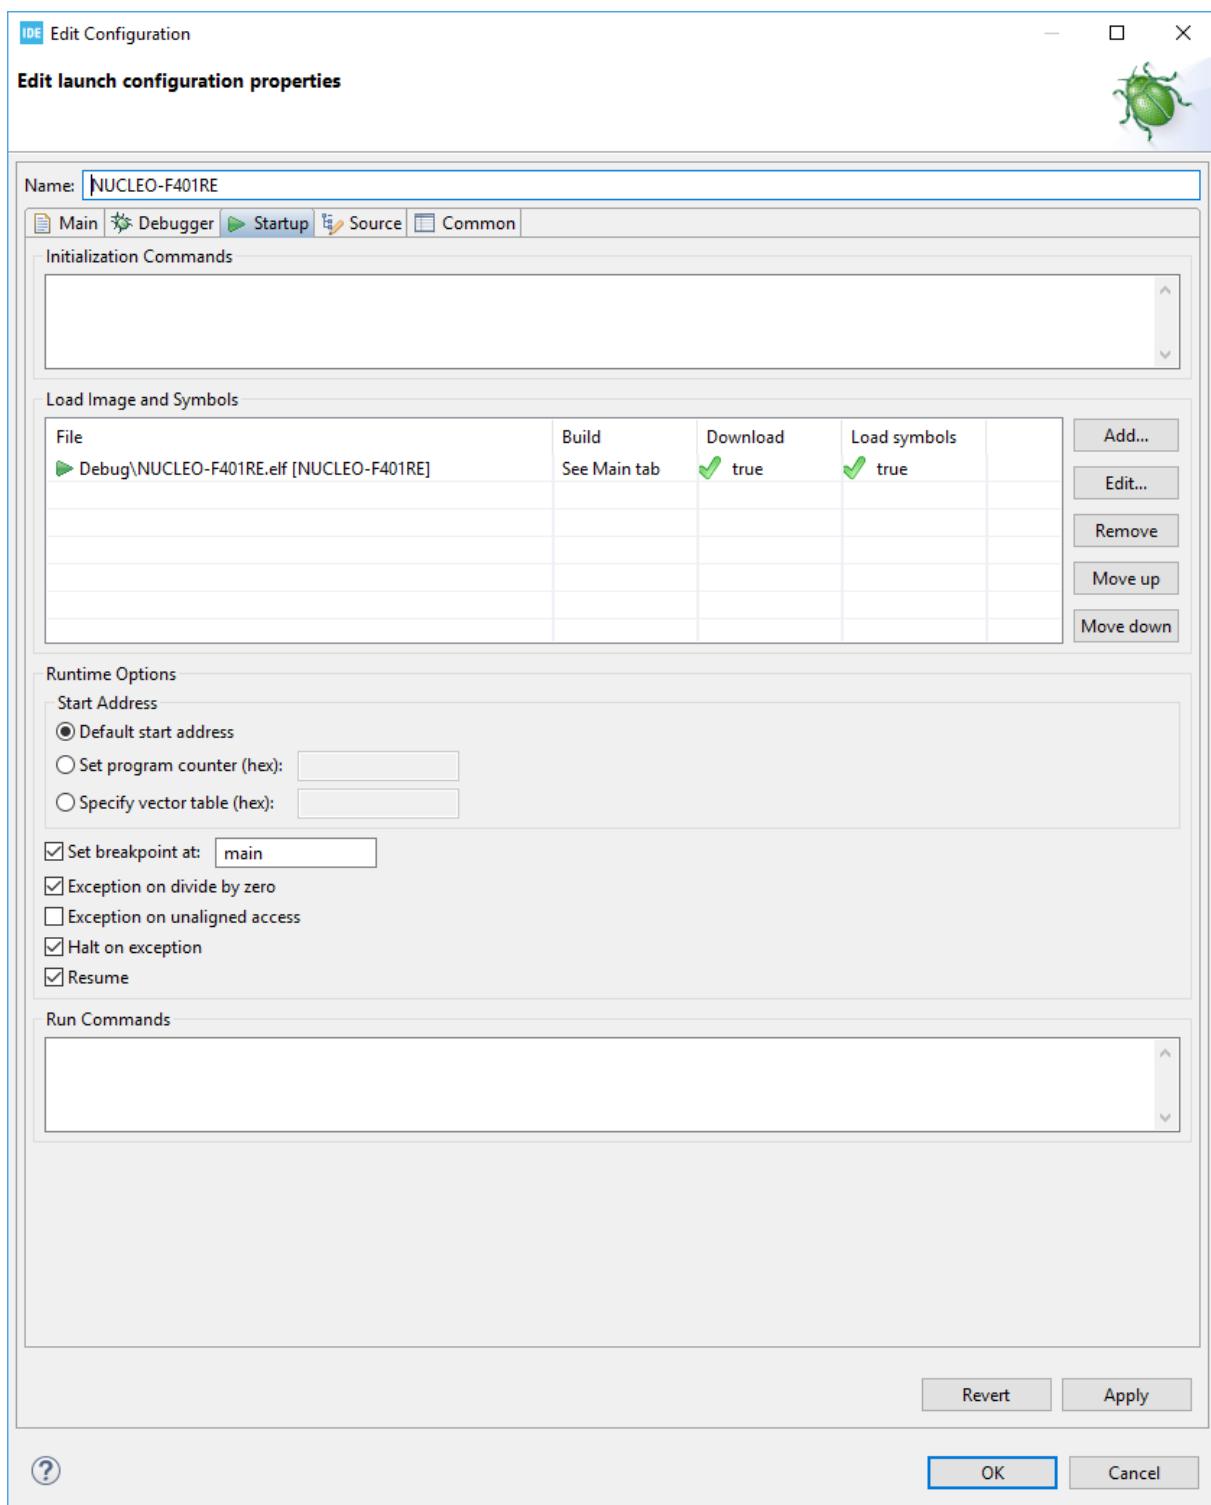

The [Initialization Commands] edit field can be updated with any kind of GDB or GDB server monitor commands if there is any special need to send some commands to the GDB server before load commands are sent. For instance, when using ST-LINK GDB server a `monitor flash mass_erase` command can be entered here if a flash memory erase is needed before load.

The [Load Image and Symbols] list box must contain the file(s) to debug. This list is associated with the following command buttons:

- [Add...]: Add new lines for files for download and/or load symbols
- [Edit...]: Edit the selected line
- [Remove]: Remove the selected line from the list
- [Move up]: Move the selected line upwards
- [Move down]: Move selected line downwards

The [Runtime Options] section contains checkboxes to set the start address and breakpoint, and enable exception handling and resume.

The start address can be selected as:

- [Default start address]: \$pc is set to the start address found in the last loaded elf file
- [Set program counter (hex)]: \$pc is set to the hex value specified in the edit field
- [Specify vector table (hex)]: \$pc is updated with the value found in memory using specified address + offset of 4. This is similar to how \$pc is set by a reset using vector table in a Cortex®-M device

The [Set breakpoint at:] checkbox is enabled by default and the edit field displays `main`. It means that, by default, a breakpoint is set at `main` when the program is debugged.

Three exception checkboxes, [Exception on divide by zero], [Exception on unaligned access] and [Halt on exception], are used to make it easier to find problems when debugging an application.

- [Exception on divide by zero] is enabled by default to make it easier to trap a divide-by-zero error when debugging
- [Exception on unaligned access] can be enabled to get exceptions if there are any unaligned accesses
- [Halt on exception] is enabled by default so that program execution halts when an exception error occurs during debugging. If an exception occurs, the *Fault Analyzer* view can be used to find the location of the problem


Note:

*The application software needs to enable **Exception on divide by zero** and **Exception on unaligned access** if they must be issued also when running the application and not only during debugging. The CMSIS Cortex®-M header files contain defines to update the SCB Configuration Control Register. For instance, core_cm4.h contains the SCB->CCR register, and SCB_CCR_DIV_0_TRP and SCB_CCR_UNALIGN_TRP defines.*

When the [Resume] selection is enabled, a `continue` command is issued to GDB after load to start the program. Usually, in this case, the program breaks at `main` if a breakpoint at `main` is set. Otherwise, when the [Resume] selection is disabled, the program stays at the `ENTRY` location specified in the linker script, normally the `Reset_Handler` function. A step may be needed in this case to display the `Reset_Handler` function in the editor.

When a line in the listbox is selected and [Edit...] is pressed, the following dialog appears for selecting if the file must be downloaded and if symbols must be loaded.

Figure 143. Add/Edit item

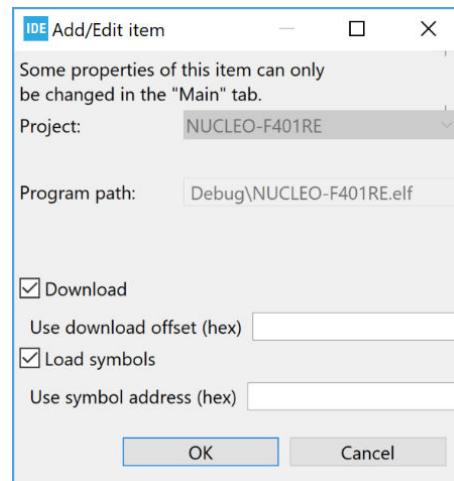


3.3

Manage debug configurations

Each project can have several debug configurations. It is easy to create a copy of an existing debug configuration and update it with some changes. For instance, one configuration may contain flash memory loading of new programs while another does not load any program.

When opening debug configurations from the menu [Run]>[Debug Configurations...], the *Debug Configurations* dialog opens. This dialog contains a navigation window on the left side with a toolbar, and the debug configuration on the right side with the tabs and fields described in [Section 3.2 Debug configurations](#).

Figure 144. Manage debug configurations

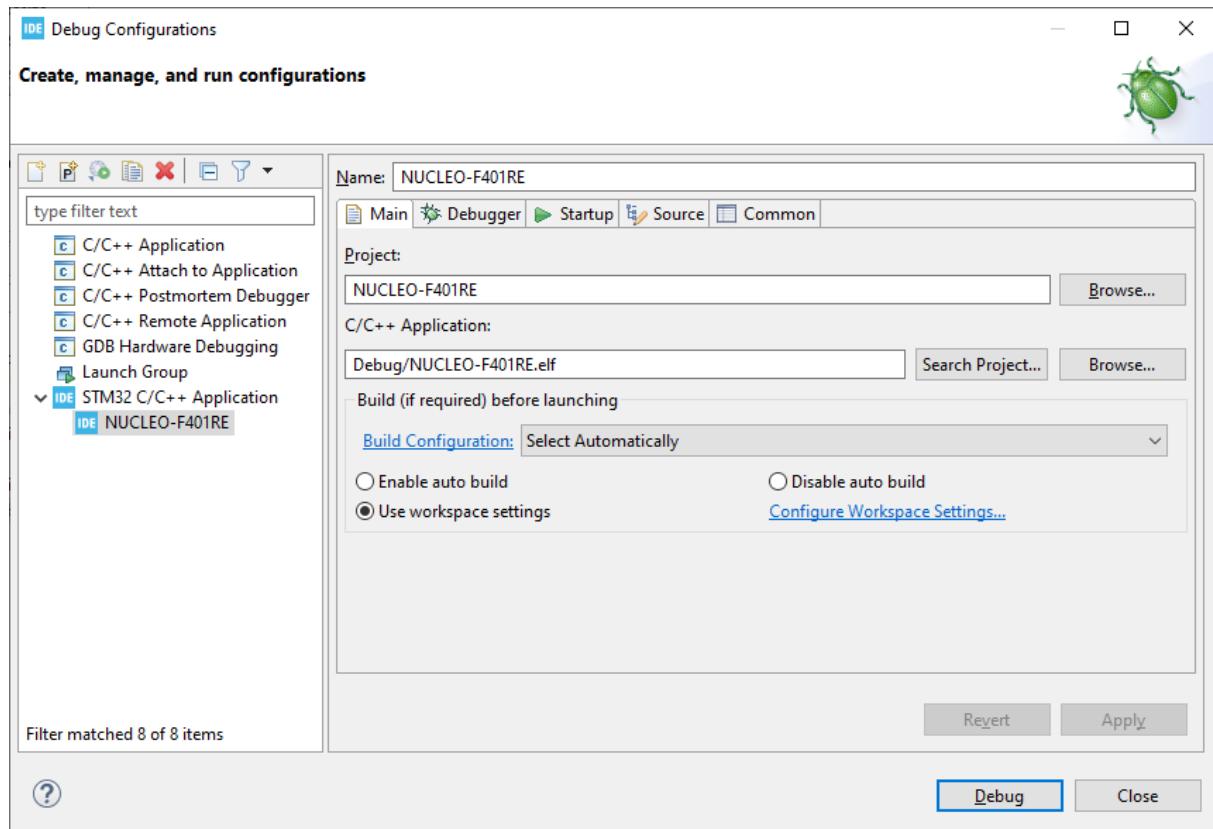

The [Name] field on top of the right pane can be edited using a name for the debug configuration, which reflects the configuration. This name then appears in the navigation window under the [STM32 C/C++ Application] node to the left when pressing [Apply].

The toolbar left of the navigation window contains icons to manage configurations, for instance to duplicate or delete a selected configuration.

Figure 145. Manage debug configurations toolbar



These icons are used for the following purpose, from left to right:

- Create new launch configuration
- New launch of configuration prototype
- Export launch configuration
- Duplicate currently selected launch configuration
- Delete selected launch configuration(s)
- Collapse all expanded launch configurations
- Filter launch configurations

3.4

Debug using different GDB servers

STM32CubeIDE includes the following GDB servers:

- ST-LINK GDB server
- OpenOCD GDB server
- SEGGER J-Link GDB server

All three GDB servers support normal debug, live expressions and SWV.

All GDB servers also support RTOS Kernel Awareness debugging for Microsoft® Azure® RTOS ThreadX and FreeRTOS™ operating systems using an RTOS proxy. The RTOS proxy is included in STM32CubeIDE.


Different command-line options are used when starting these GDB servers. Therefore the *Debugger* tab in the *Debug Configurations* dialog displays different settings depending on the GDB server selected. This section describes the individual settings for each server.

3.4.1

Debug using the ST-LINK GDB server

Usually, when the ST-LINK GDB server is used for debugging, there is no need to update the [**GDB Server Command Line Options**] in the Debugger tab. In some cases, the default configuration must be updated, for instance if SWV is intended to be used or if several STM32 boards are connected to the PC.

Figure 146. ST-LINK GDB server debugger tab

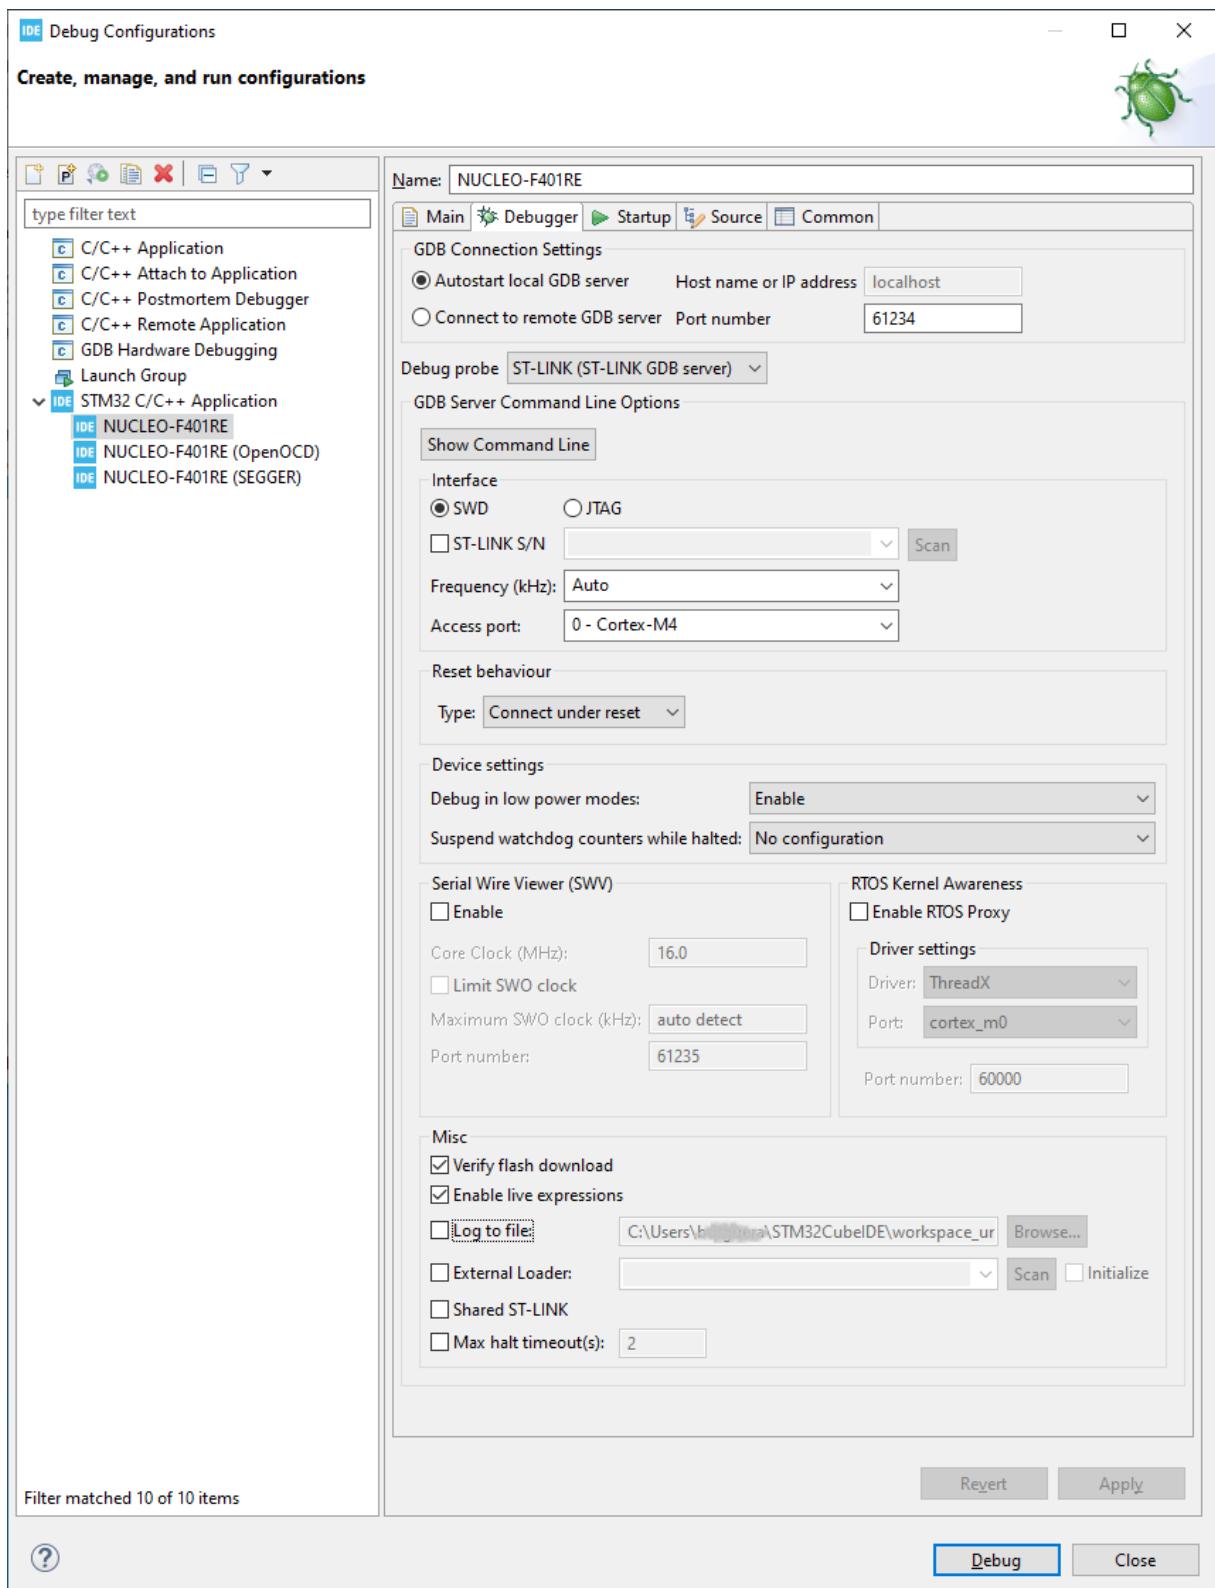

Select [SWD] or [JTAG] in [Interface] to define how the ST-LINK probe must connect with the microcontroller. The SWD interface is usually the preferred choice. It must be selected if SWV is to be used.

When [**ST-LINK S/N**] is enabled, the serial number of the ST-LINK probe to be used must be entered in the edit/list field. The [**Scan**] button can be used to scan and list all detected ST-LINK devices connected to the PC. After a scan, the S/N of these ST-LINK devices are listed in the list box from which the desired ST-LINK can be selected. When [**Use specific ST-LINK S/N**] is enabled, the ST-LINK GDB server is started and connects only to the ST-LINK with the selected S/N.

The [**Frequency (kHz)**] selection defines the communication speed between the ST-LINK and STM32 device. When [**Auto**] is selected, the maximum speed provided by ST-LINK is used. Reduce the frequency in case of hardware limitations.

The [**Access port**] selection is used only when debugging a multi-core STM32 device. In such case, the ST-LINK is connected to the device and the ST-LINK GDB server must be informed of the core to debug.

The [**Reset behaviour**] contains selections for [**Type**] and [**Halt all cores**]. The [**Halt all cores**] selection is only visible for multi-core devices.

The [**Type**] can be set as follows:

- [**Connect under reset**] (default): ST-LINK reset line is activated and ST-LINK connects in the SWD or JTAG mode while reset is active. Then the reset line is deactivated.
- [**Software system reset**]: System reset is activated by software writing in a register. This resets the core and peripherals, and can reset the whole system as the reset pin of the target is asserted by itself.
- [**Hardware reset**]: ST-LINK reset line is activated and deactivated (pulse on reset line), then ST-LINK connects in the SWD or JTAG mode.
- [**Core reset**]: Core reset is activated by software writing in a register (not possible on Cortex®-M0, Cortex®-M0+ and Cortex®-M33 cores). This only resets the core, not the peripherals nor the reset pin.
- [**None**]: For attachment to a running target where the program is downloaded into the device already. There must not be any file program command in the *Startup* tab.

Note:

*The selected reset behaviour is overridden if the debug configuration includes flash memory programming, in which case the ST-LINK GDB server uses the STM32CubeProgrammer ([STM32CubeProg](#)) command-line program `STM32_Programmer_CLI` to program the flash memory. This program is always started by the ST-LINK GDB server with `mode=UR reset=hwRst` so that a device reset is done when loading a new program, disregarding the selection of the [**None**] option. This ensures that device programming is made correctly.*

[**Halt all cores**] can be used only when debugging multi-core devices. The [**Halt all cores**] selection is not visible for single core devices.

[**Device settings**] contains selections for [**Debug in low power modes**] and [**Suspend watchdog counters while halted**]. These can be defined as:

- [**No configuration**]
- [**Enable**]
- [**Disable**]

The [**Serial Wire Viewer (SWV)**] selections can be used only when the [**SWD**] interface is selected. When [**SWV**] is enabled, it is required to configure the [**Clock Settings**]. The [**Core Clock**] must be set to the device speed. More information about SWV configuration is available in [Section 4.2.1 SWV debug configuration](#).

The [**RTOS Kernel Awareness**] selections are used to enable RTOS-kernel-aware debugging with the ThreadX and FreeRTOS™ operating systems. When RTOS-kernel-aware debugging is enabled and a debug session is started, all threads are listed in the *Debug* view. By selecting a thread in the *Debug* view the current line executed by the thread is displayed in the editor. More information about RTOS-kernel-aware debugging is available in [Section 6.3](#).

The [Misc] selections contains:

- **[Verify flash download]**
- **[Enable live expressions]** (To be able to use the *Live Expressions* view during debugging, the live expression mechanism must be enabled during startup. It is enabled by default.)
- **[Log to file]** (Enable in case of debugging problems. It starts the ST-LINK GDB server with a higher log level and saves the log into a file.)
- **[External Loader]** (Enable if loading must be made to non-internal STM32 flash memory). A **[Scan]** button is available to access STM32CubeProgrammer external flash loader files.
When **[External Loader]** is enabled, there is also an **[Initialize]** selection. When it is enabled, the `Init()` function in STM32CubeProgrammer is called after reset. It can be used to configure the device for external memory access. Usually, initialization must be done by the debugged application.
- **[Shared ST-LINK]** (Shared ST-LINK must be enabled if other programs must be able to connect to the same ST-LINK during a debug session.). Refer to [Section 3.6.2 Shared ST-LINK](#) for details.
A detailed description of the ST-LINK GDB server is available in the ST-LINK GDB server manual ([\[ST-07\]](#)), which is available from the *Information Center*.

Note:


STM32_Programmer_CLI is used by the ST-LINK GDB server to program the STM32 or external flash memory. In this case, such external flash memory programming is automatically done using the external loader.

3.4.2

Debug using OpenOCD and ST-LINK

When OpenOCD is used, the [GDB Server Command Line Options] in the *Debugger* tab contains a generator options toggle field, which alternates between [Show generator options...] and [Hide generator options...]. When the field is set to [Hide generator options...], the dialog displays additional [GDB Server Command Line Options] as shown in Figure 147.

Figure 147. OpenOCD debugger tab

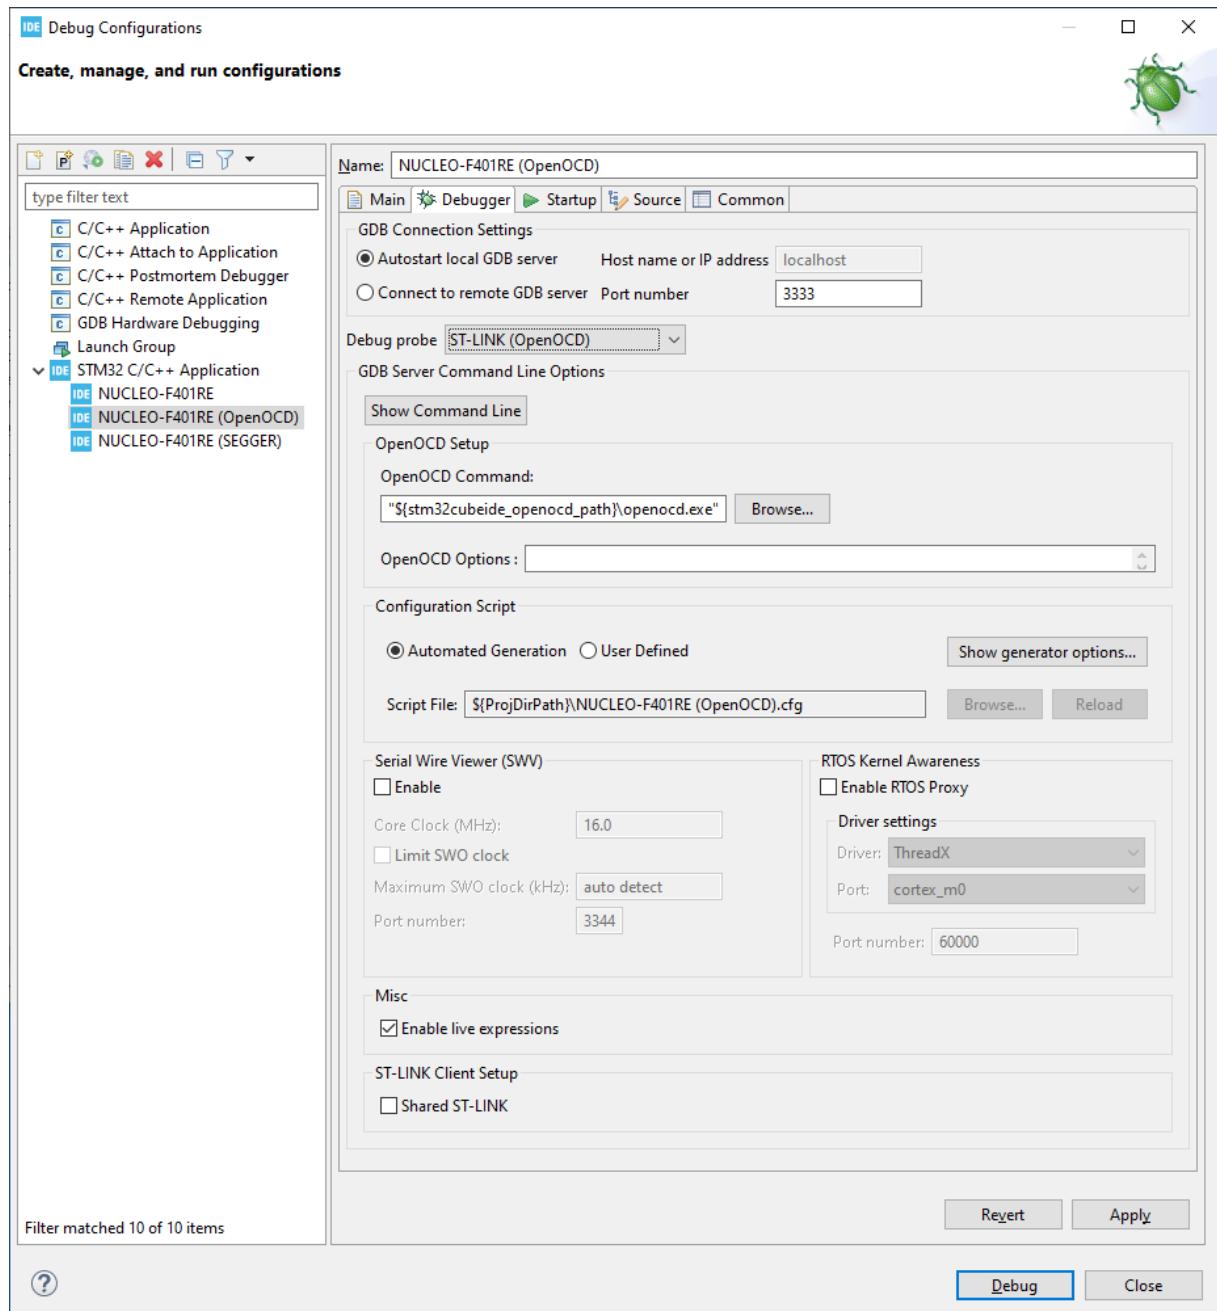

The [OpenOCD Command] edit field contains the `openocd.exe` file to be used when debugging. The [Browse] button can be used to select another version of OpenOCD.

The [OpenOCD Options] edit field can be used to add additional command-line parameters to be used when starting OpenOCD.

The [Configuration Script] selections can be [Automated Generation] or [User Defined]. When [Automated Generation] is selected, an `openocd.cfg` file is created automatically based on the selections made in the Debugger tab. When [User Defined] is selected, the file must be specified in the [Script File] edit field.

The [Interface] selection [**Swd**] or [**Jtag**] selects how the ST-LINK probe must connect with the microcontroller. [**Swd**] is usually the preferred choice.

The **Frequency** selection configures the communication speed between the ST-LINK and STM32 device.

The [Reset Mode] selection contains:

- [**Connect under reset**] (default): ST-LINK reset line is activated and ST-LINK connects in the SWD or JTAG mode while reset is active. Then the reset line is deactivated.
- [**Hardware reset**]: ST-LINK reset line is activated and deactivated (pulse on reset line), then ST-LINK connects in the SWD or JTAG mode.
- [**Software system reset**]: System reset is activated by software writing in a register. This is resetting the core and peripherals, and can reset the whole system as the reset pin of the target is asserted by itself.
- [**Core reset**]: Core reset is activated by software writing in a register (not possible on Cortex®-M0, Cortex®-M0+ and Cortex®-M33 cores). This is only resetting the core, not the peripherals nor the reset pin.
- [**None**]: For attachment to a running target where the program is downloaded into the device already. There must not be any file program command in the *Startup* tab.

[**Enable debug in low power modes**] enables debug also with the STM32 device in low-power mode.

[**Stop watchdog counters when halt**] stops the watchdog when the debug session halts the STM32 device. Otherwise, a watchdog interrupt may be triggered.

The [Serial Wire Viewer (SWV)] selections can be used only when the [**SWD**] interface is selected. When [**SWV**] is enabled, it is required to configure the [**Clock Settings**]. The [**Core Clock**] must be set to the device speed. More information about SWV configuration is available in [Section 4.2.1 SWV debug configuration](#).

The [**RTOS Kernel Awareness**] selections are used to enable RTOS-kernel-aware debugging with the ThreadX and FreeRTOS™ operating systems. When RTOS-kernel-aware debugging is enabled and a debug session is started, all threads are listed in the *Debug* view. By selecting a thread in the *Debug* view the current line executed by the thread is displayed in the editor. More information about RTOS-kernel-aware debugging is available in [Section 6.3](#).


[**Enable live expressions**] must be enabled if the *Live Expressions* view is meant to be used during debugging.

[**Shared ST-LINK**] must be enabled if other programs have to connect to the same ST-LINK during a debug session. Refer to [Section 3.6.2 Shared ST-LINK](#) for details.

3.4.3 Debug using SEGGER J-Link

When [**SEGGER J-LINK**] is selected in the *Debugger* tab, the [**GDB Server Command Line Options**] corresponds to SEGGER J-Link GDB server.

Figure 148. SEGGER debugger tab

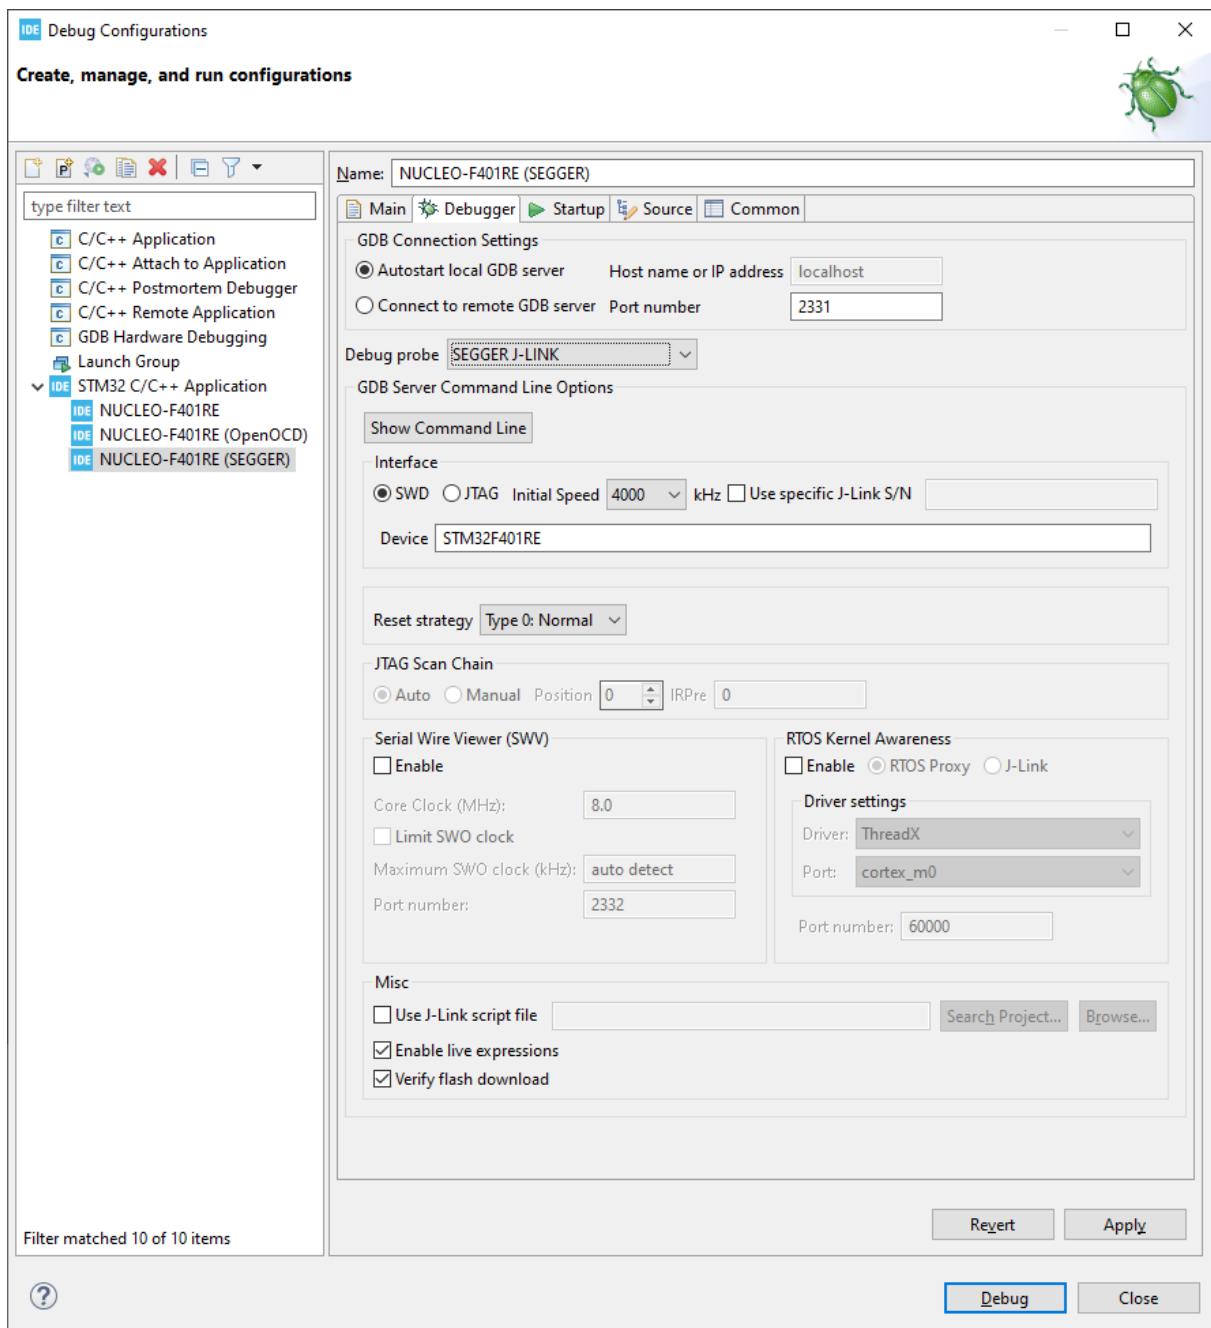

The [Interface] selection [**SWD**] or [**JTAG**] selects how the SEGGER J-Link probe must connect with the microcontroller. The [**SWD**] interface is usually the preferred choice; it is required if SWV is used.

The [**Initial Speed**] selection configures the communication speed used between SEGGER J-Link and the STM32 device.

When [**Use specific J-Link S/N**] is enabled, enter the S/N of the J-Link to be used when debugging in the edit/list field. When [**Use specific J-Link S/N**] is enabled, the SEGGER J-Link GDB server is started and connects only to the J-Link with the selected S/N.

The **Device** edit field is used if it contains an entry. This field can be used if there is a problem to start the SEGGER J-Link GDB server with the default device name used in [STM32CubeIDE](#). In such case, enter the device name used by the SEGGER GDB server in the edit field.

The [Reset strategy] selection contains:

- [Type 0: Normal] - Default.
- [None] - Intended to be used for attaching to the running target. In this case, the program must already be downloaded into the device. There must not be any file program command in the *Startup* tab.

The [JTAG Scan Chain] selections can be used only when the [JTAG] interface is selected.

The [Serial Wire Viewer (SWV)] selections can be used only when the [SWD] interface is selected. When [SWV] is enabled, it is required to configure the [Clock Settings]. The [Core Clock] must be set to the device speed. More information about SWV configuration is available in [Section 4.2.1 SWV debug configuration](#).

The [RTOS Kernel Awareness] selections are used to enable RTOS-kernel-aware debugging with the ThreadX and FreeRTOS™ operating systems. When RTOS-kernel-aware debugging is enabled and a debug session is started, all threads are listed in the *Debug* view. By selecting a thread in the *Debug* view the current line executed by the thread is displayed in the editor. More information about RTOS-kernel-aware debugging is available in [Section 6.3](#).

The [Misc] selections contains:

- [Use J-Link script file]
- [Enable live expressions]
To be able to use the *Live Expressions* view during debug, the live expression mechanism must be enabled during startup.
- [Verify flash download]
- [Select RTOS variant] list box can be used if [Thread-aware RTOS support] is used with [FreeRTOS] and [embOS].
When [Thread-aware RTOS support] is used, update the *Startup* tab: disable [Resume] and [in Run Commands], add `thread 2` and `continue`. This forces a thread context switch before the `continue` command is sent.

Note: A detailed description of SEGGER J-Link GDB server is available in the SEGGER J-Link manual, which can be accessed from the “Information Center”.

3.5

Start and stop debugging

When a debug configuration is created for the project with the preferred JTAG probe, it is ready for debugging. In the following sections, the ST-LINK GDB server is used. However, the way to debug the STM32 project is quite independent of the choice among ST-LINK GDB server, OpenOCD or SEGGER J-Link.

Perform the following steps to prepare for debug:

1. Determine whether the board supports the JTAG debug, SWD debug, or both. SWD-mode debug is usually the preferred choice.
2. Connect the JTAG cable between the JTAG probe and the target board.
When using STMicroelectronics STM32 Nucleo and Discovery boards, the ST-LINK is usually integrated on the board. Also, most STMicroelectronics STM32 Evaluation boards contain an embedded ST-LINK.
3. Connect the USB cable between the PC and the JTAG probe.
4. Make sure that the target board has a proper power supply attached.

Once the steps above are performed, a debug session can be started.

3.5.1

Start debugging

Open the *Debug Configurations* dialog with a right click on the project name in the *Project Explorer* view and select [Debug As]>[Debug Configurations...].


It is also possible to open the dialog using the menu [Run]>[Debug Configurations...].

This opens the *Debug Configurations* dialog.

Note:

It is possible to select the project in the “Project Explorer” view and press [**F11**] to restart a debug session after it has been closed.


Figure 149. Debug configurations

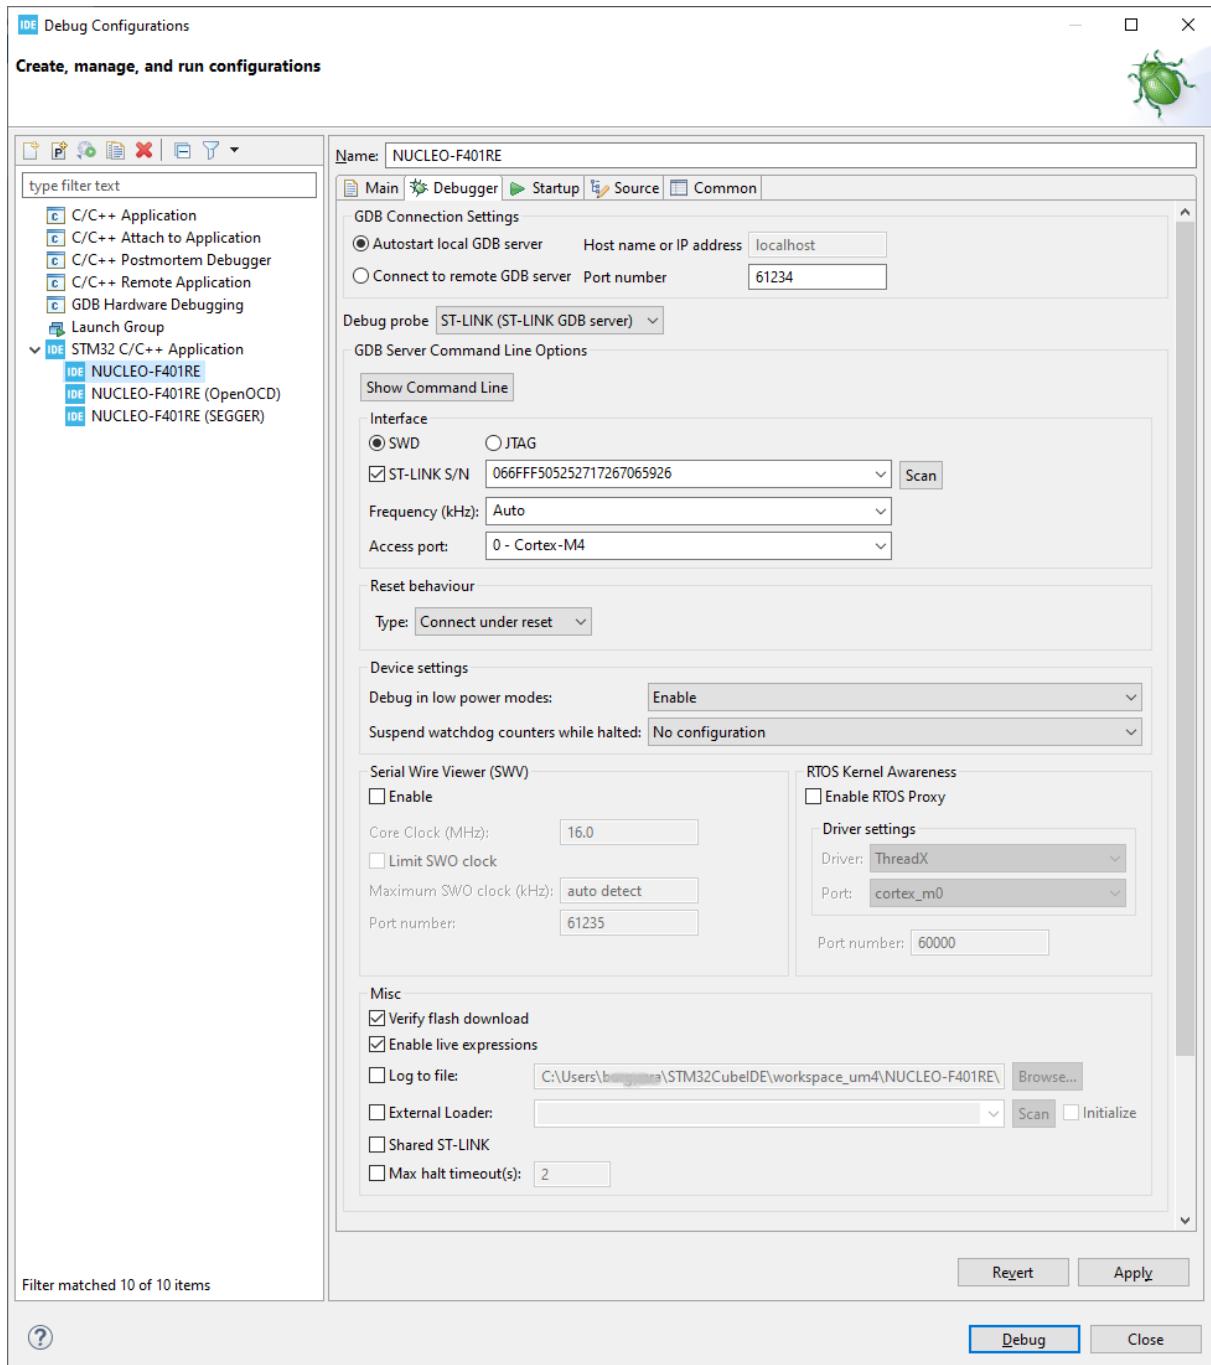

Select in the left pane the debug configuration to use. Press the [Debug] button to start a debug session if all debug configurations have been made. The project is built if file updates are made, but the building depends on the debug configuration.

STM32CubeIDE launches the debugger and the following dialog is opened.

Figure 150. Confirm perspective switch

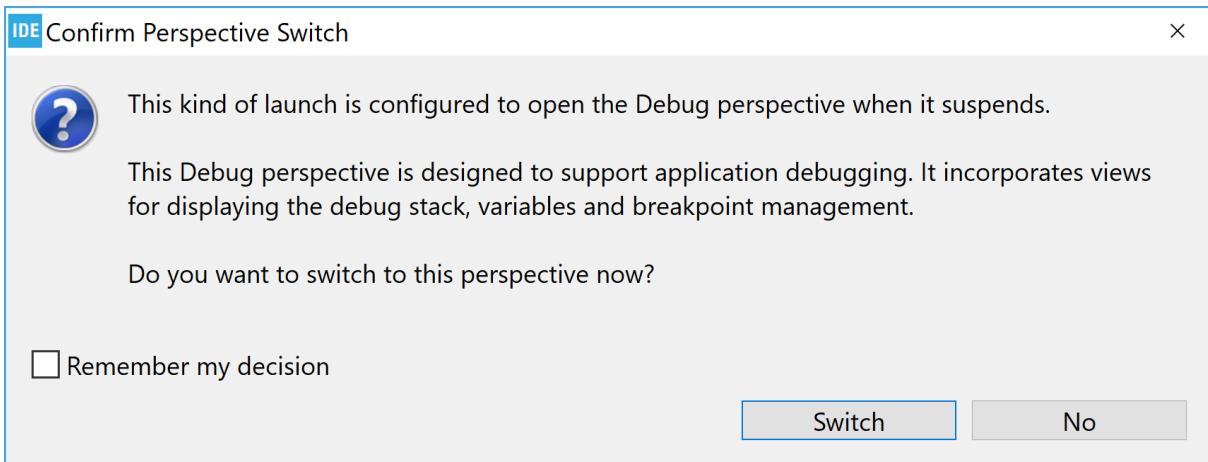

It is recommended to enable **[Remember my decision]** and press **[Switch]**. It opens the *Debug* perspective, which provides a number of views and windows suitable for debugging.

3.5.2

Debug perspective and views

The *Debug* perspective contains menus, toolbars and views frequently used during debugging.

Figure 151. Debug perspective

The screenshot shows the STM32CubeIDE interface. The main window displays the `main.c` file with the following code:

```
main.c : startup_stm32f407itexs 0x00000000 Reset Handler at startup_stm32f407itexs106 0x00000008

114 //+/- 0x00000000 [Initial] 0x00000000 [Initial]
115 //+/- 0x00000000 [Initial] 0x00000000 [Initial]
116 //+/- 0x00000000 [Initial] 0x00000000 [Initial]
117 //+/- 0x00000000 [Initial] 0x00000000 [Initial]
118 int main(void)
119 {
120     /* USER CODE BEGIN 1 */
121
122     /* USER CODE END 1 */
123
124     /* MCU Configuration... */
125
126     /* Reset of all peripherals, Initializes the Flash interface and the Systick. */
127
128     /* HAL_Init(); */
129
130     /* USER CODE BEGIN Init */
131
132     /* USER CODE END Init */
133
134     /* Configure the system clock */
135     SystemClock_Config();
136
137     /* USER CODE BEGIN SysInit */
138
139     /* USER CODE BEGIN SPI */
140
141     /* Initialize all configured peripherals */
142     MX_GPIO_Init();
143
144     /* MX_USART2_UART_Init(); */
145
146     /* USER CODE BEGIN 2 */
147
148     /* USER CODE END 2 */
149
150     /* Infinite loop */
151
152     /* USER CODE BEGIN WHILE */
153     offset+=4;
154     while (1)
155     /* USER CODE END WHILE */
156 }
```

The Registers tab shows the stack trace:

- 0x00000000: Nucleo_F401RE Debug (ST-LINK) [STM32 Cortex M C/C++ Application]
- 0x00000000: (Thread #1) [main() core 0] {Suspended: Breakpoint}
- 0x00000000: main at main.c:138 0x00000004
- 0x00000000: Reset Handler at startup_stm32f407itexs106 0x00000008

The bottom right corner indicates "Download verified successfully".

The most important views opened by default in the *Debug* perspective are:

- The *Debug* view, which displays the program under debug. It also lists threads and offers the possibility to navigate in the thread by selecting a line in threads.
 - The *Editor* view, which displays the program file. It is possible to set break points and follow program execution in the file. It is also possible to hoover the cursor over a variable to display its current value. The features available during file edition are available also during debug, such as opening the declaration of a function and others.
 - The *Variables* view, which displays local variables automatically with their current value when the program is not running.

- The *Breakpoints* view, which displays current breakpoints. It is possible to disable and enable breakpoints in the list. The *Breakpoints* view also contains a toolbar, which, for instance, enables to remove breakpoints, and skip breakpoints with one click on the [**Skip All Breakpoints**] icon.
- The *Expressions* view, which is used to add and view expressions. An expression may be a single global variable, structure, or an expression calculating some variables. The values are only updated when the program is stopped. It is possible to select a global variable in the *Editor* and drag it over to the *Expressions* view instead of entering the variable name.
- The *Registers* view, which displays the debugged device current values. The values are only updated when the program is stopped.
- The *Live Expressions* view, which displays expression values sampled and updated regularly during program execution. The view allows the creation of mathematical expressions that are evaluated automatically, such as `(Index*4+Offset)`. The *Live Expressions* view update requires that live expressions are enabled in the debug configuration. Refer to [Section 3.6.1 Live Expressions view](#) for details.
- The *SFRs* view, which displays the Special Function Registers in the debugged device. Refer to [Section 5 Special Function Registers \(SFRs\)](#) for details.
- The *Console* view, which displays different console outputs. By default, the console output from the GDB server log is displayed. It is possible to change the console log by pressing the [**Display Selected Console**] icon to the right of the *Console* view.

Other views are also useful during debug, among which:

- The *Debugger Console* view, which can be used if there is a need to manually enter GDB commands. The easiest way to open the *Debugger Console* view is to use the [**Quick Access**] field and enter *Debugger* in this field. It lists choices containing the *Debugger Console* view. Select it to open the view. GDB can be entered in the *Debugger Console* view.

For instance, to display 16 words of memory from address `0x800 0000`, enter the GDB command `x /16 0x8000000`.


```
x /16 0x8000000
0x8000000: 0x20018000 0x080008b1 0x080007e9 0x080007f7
0x8000010: 0x080007fd 0x08000803 0x08000809 0x00000000
0x8000020: 0x00000000 0x00000000 0x00000000 0x0800080f
0x8000030: 0x0800081d 0x00000000 0x0800082b 0x08000839
```

- The *Memory* and *Memory Browser* views, which can be used to display and update memory data.
- The *Disassembly* view, which is used to view and step in the assembly code.
- The *SWV* views. Refer to [Section 4 Debug with Serial Wire Viewer tracing \(SWV\)](#) for details.
- The *Fault Analyzer* view. Refer to [Section 7 Fault Analyzer](#) for details.

3.5.3 Main controls for debugging

The [Run] menu in the *Debug* perspective contains a number of execution control functions.

Figure 152. [Run] menu

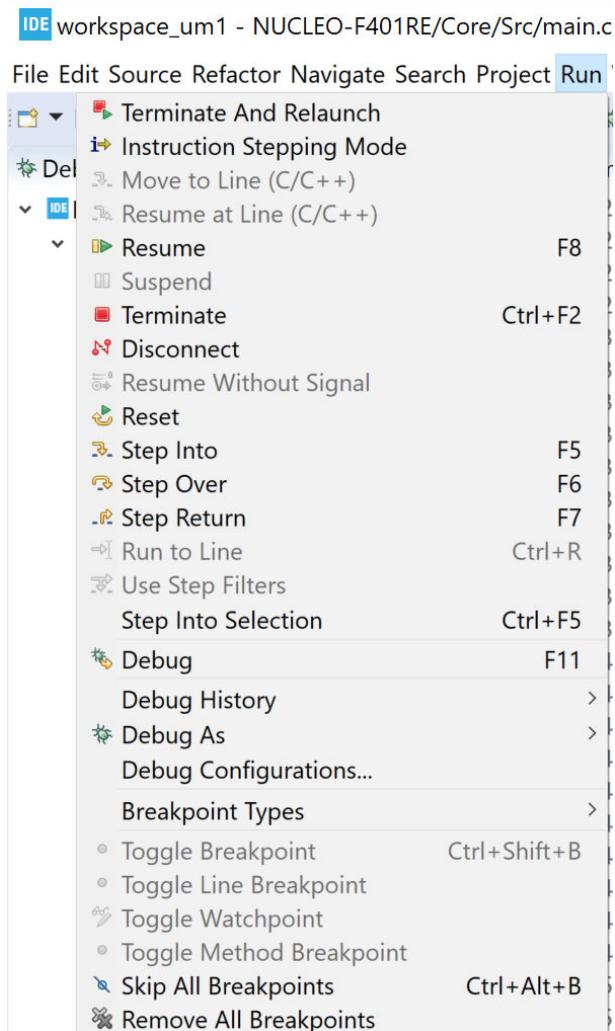

Alternatively, the *Debug* perspective toolbar has the following main debug control icons.

Figure 153. Debug toolbar



These icons are used for the following purpose, from left to right:

- Reset the device and restart the debug session
- Skip all breakpoints (**Ctrl+Alt+B**)
- Terminate and relaunch
- Resume (**F8**)
- Suspend
- Terminate (**Ctrl+F2**)
- Disconnect
- Step into (**F5**)
- Step over (**F6**)
- Step return (**F7**)
- Instruction stepping mode (assembler stepping)

Press [**Terminate and relaunch**] to terminate the current debug session, build a new program if the source code is modified, and relaunch the debug session.

When pressing [**Instruction stepping mode**], the *Disassembly* view is opened and further stepping uses assembler instruction stepping level. Press [**Instruction stepping mode**] again to toggle back to C/C++ level stepping.

3.5.4 Run, start and stop a program

Use the toolbar icons as follows to run, step, or stop the program:

- Run the program with the [**Resume**] toolbar icon ([**F8**])
- Step into a function with the [**Step into**] toolbar icon ([**F5**])
- Step over a function with the [**Step over**] toolbar icon ([**F6**])
- Step until return from a function with the [**Step return**] toolbar icon ([**F7**])
- Abort running program with the [**Suspend**] toolbar icon


3.5.5 Set breakpoints

It is common during a debug session to set breakpoints and let the code execute until it reaches a breakpoint.

3.5.5.1 Standard breakpoint

A standard code breakpoint at a source code line can easily be inserted by double-clicking in the left editor margin, or by right-clicking in the left margin of the C/C++ source code editor. A context menu is proposed in the latter case.

Figure 154. Debug breakpoint

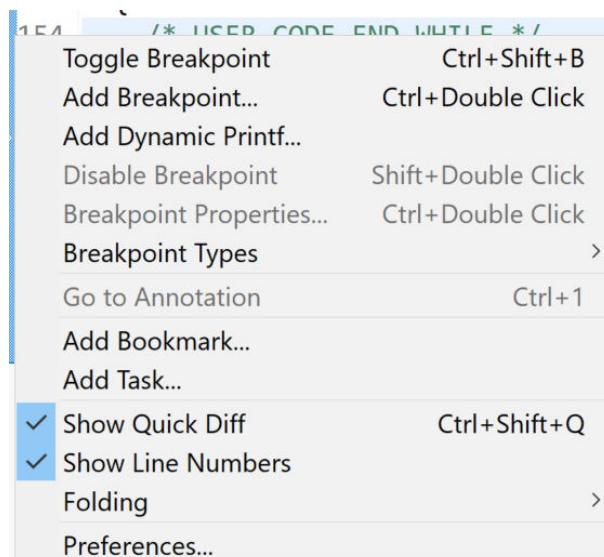

Select the [Toggle Breakpoint] menu command to set or remove a breakpoint at the corresponding source code line.


3.5.5.2

Conditional breakpoint

When setting a standard breakpoint at a source code line, the program breaks each time it reaches this line. If that is not the desired behaviour, a condition can be set on the breakpoint that regulates if the program should actually break or not on that breakpoint.


Update breakpoint properties with a right-click on the breakpoint icon visible left of the editor on a line with breakpoint set. The [Breakpoint Properties] can also be opened from the *Breakpoints* view.

Figure 155. Breakpoint properties

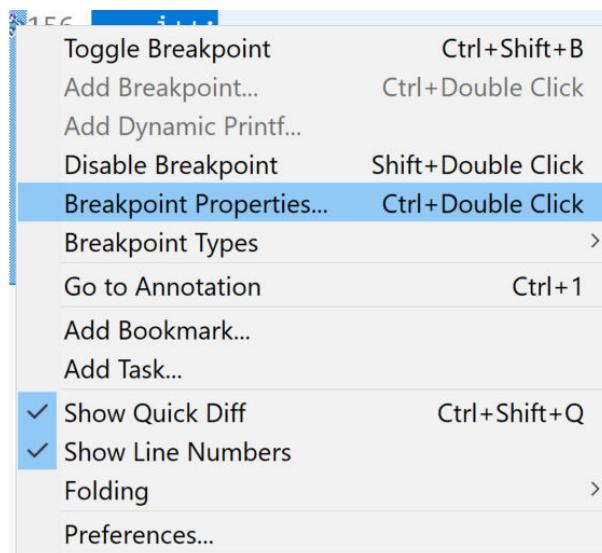

Select [Breakpoint Properties...]. The following window opens. In the example illustrated below, `i>20` is entered as a condition.

Figure 156. Conditional breakpoint

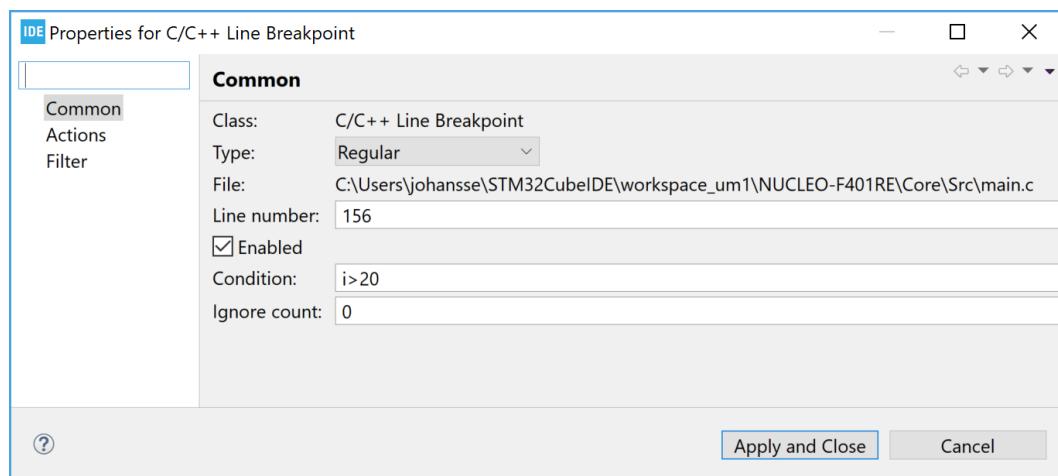

With the condition above set, the program breaks each time the line is executed, then GDB tests the condition and restarts execution if the variable `i` is not greater than 20. It takes some time for GDB to evaluate the condition.

The conditions are written in C-style. It is therefore possible to write expressions such as `i%2==0`" to set more complex conditions.

3.5.6 Attach to running target

It is possible to connect STM32CubeIDE and a debugger via JTAG/SWD to the embedded target without performing a reset. This approach is useful when trying to resolve problems that occur at rare occasions. Finding the root cause of the problem in case of a CPU crash is further simplified by learning how to use the *Fault Analyzer* view (refer to [Section 7 Fault Analyzer](#)).

Before trying this approach, consider whether halting the application in the wrong state could potentially harm the hardware (for instance in the case of a motor controller application). This is because when GDB connects to the target, the CPU is halted. This behaviour cannot be modified.

The following three or four steps are needed to update the debug configuration and to attach to running target:

1. Modify the debug configuration to attach to the running target
2. Connect the debug probe to the embedded target
3. Start a debug session using the modified debug configuration
4. Optionally, analyze the CPU fault condition with the *Fault Analyzer* tool (refer to [Fault Analyzer](#))


Step 1: Modify the debug configuration

The default generated debug configurations in STM32CubeIDE contains settings to reset the device and download new program, and sets a breakpoint at `main`. This is not of any use when connecting to a running system which may, or may not, have crashed.

In order to create a modified debug configuration, perform these steps:

1. Open the *Debug Configurations* dialog.
2. In the left frame of the *Debug Configurations* dialog, select the debug configuration associated to the project to debug and make a copy of this by right-clicking it and selecting [**Duplicate**].
3. Give the duplicate debug configuration a name.
4. Update the *Debugger* tab in *Debug Configurations*:
 - When using ST-LINK GDB server and OpenOCD, select [**None**] as [**Reset behaviour**].
 - When using SEGGER J-Link GDB server, select [**None**] as [**Reset strategy**].
5. Change needed/recommended in the *Startup* tab of *Debug Configurations* for both ST-LINK GDB server and SEGGER J-Link GDB server:
 - Disable file [**Download**] in [**Load Image and Symbols**].
 - Disable [**Set program counter at (hex)**].
 - Disable [**Set breakpoint at**].
 - [**Exception on divide by zero**] and [**Exception on unaligned access**] can be disabled or enabled.
 - Disable [**Resume**].
If the [**Resume**] is enabled, the debugger stops the target during connection and, after a short period of time, sends a `continue` command.

Figure 157. Startup tab attach

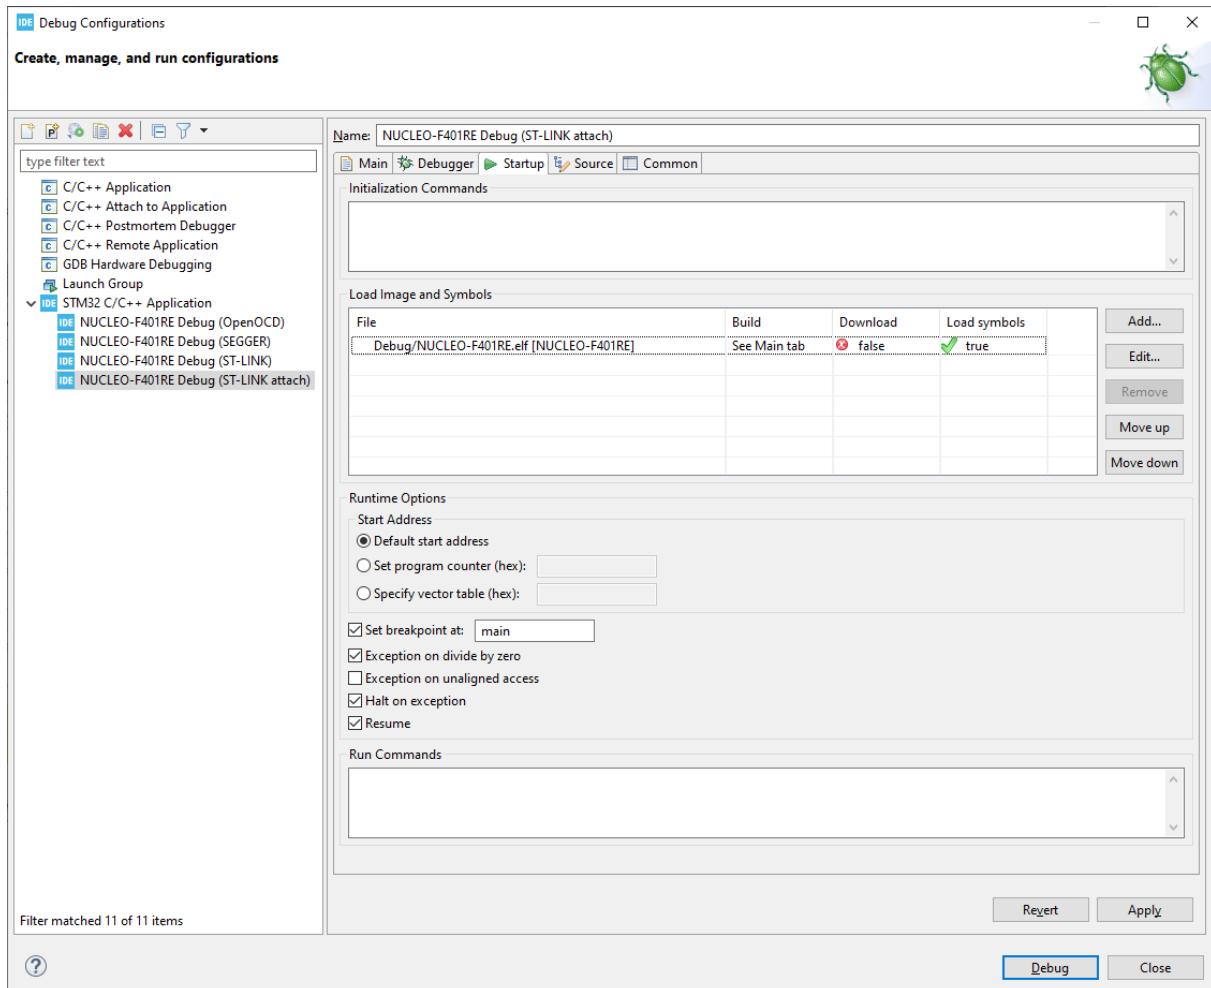

Step 2: Connect ST-LINK or SEGGER J-Link to the embedded target

Connect first ST-LINK or the SEGGER J-link to the computer. Then connect it to the embedded target. No reset is issued.

Step 3: Start a debug session using the modified debug configuration

Important: Do not launch the debug session using the wrong debug configuration, which may reprogram and reset the target. Use [Run]>[Debug Configurations...], select the modified debug configuration in the left frame, and click [Debug]. This is the safest way to launch a debug session with full control of the debug configuration applied and prevents from a potential reset.

The debugger is now connected to the embedded target, which is automatically halted. At this point, different status registers and variables can be investigated in the application. If the CPU has crashed, the *Fault Analyzer* can be used to get a better understanding of the root causes.

3.5.7 Restart or terminate debugging

This section presents various ways to restart and stop a debug session.

3.5.7.1 Restart


During debugging, it is sometimes needed to restart the program to examine more carefully problems observed during debug. In such case, restart the program using the [Reset the chip and restart debug session] toolbar button or [Run]>[Restart] menu command. This resets the device, and starts the program if [Resume] is enabled in the debug configuration.

Note: *To make restart work, the interrupt vector must be configured and used with the hardware reset. This is usually the case for STM32 programs located in the flash memory. However, if the program is located elsewhere such as in RAM, some manual handling may be needed to make the program start from the expected Reset_Handler.*

3.5.7.2 Restart configurations


It is possible to create restart configurations defining how the reset and restart of a debug session must be performed. Click on the arrow to the right of the [Reset the chip and restart debug session] toolbar icon.

Figure 158. Reset the chip toolbar

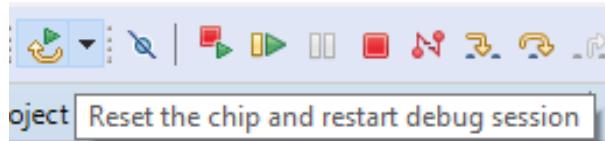


This expands the menu with the [Restart Configurations...] selection.

Figure 159. Restart configurations selection

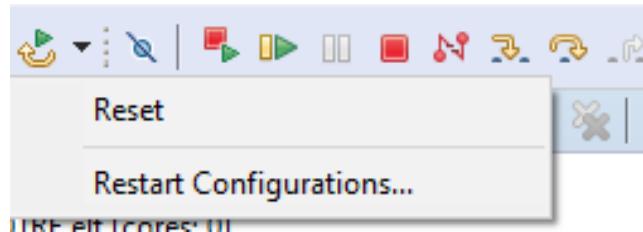

When [Restart Configurations...] is selected, the restart configurations dialog opens.

Figure 160. Restart configurations dialog

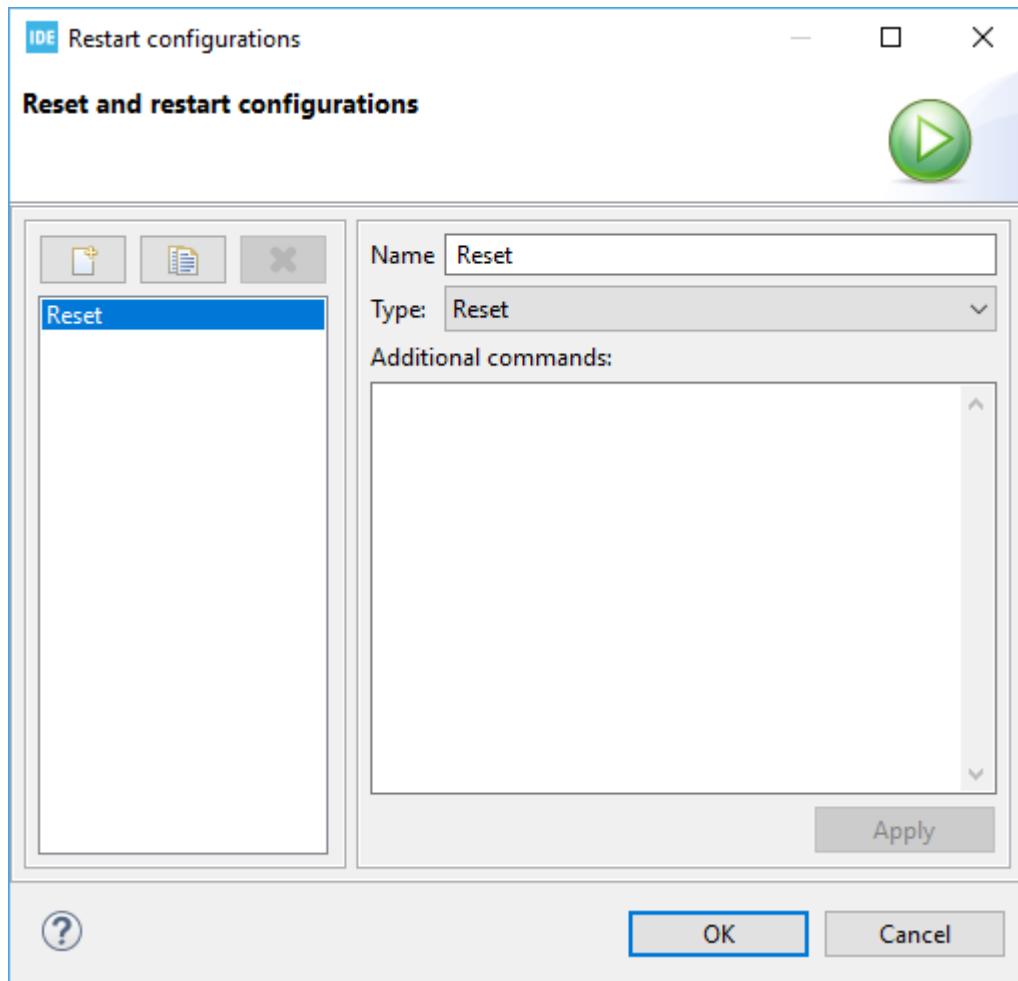


The dialog contains a left and right pane:

- The left pane is used to select and create new restart configuration, duplicate an existing restart configuration, and delete the selected restart configuration. The default restart configurations cannot be deleted.
- The right pane is used to set [**Name**] and select the [**Type**] of reset to be used for the selected configuration. It is also possible to add additional commands to be used with the reset.

Press [**Apply**] to save a setting.


Figure 161 shows a setting where a new restart configuration is created, which contains an additional command to set pc to 0x8000ca0.

Figure 161. Restart configurations dialog with additional command

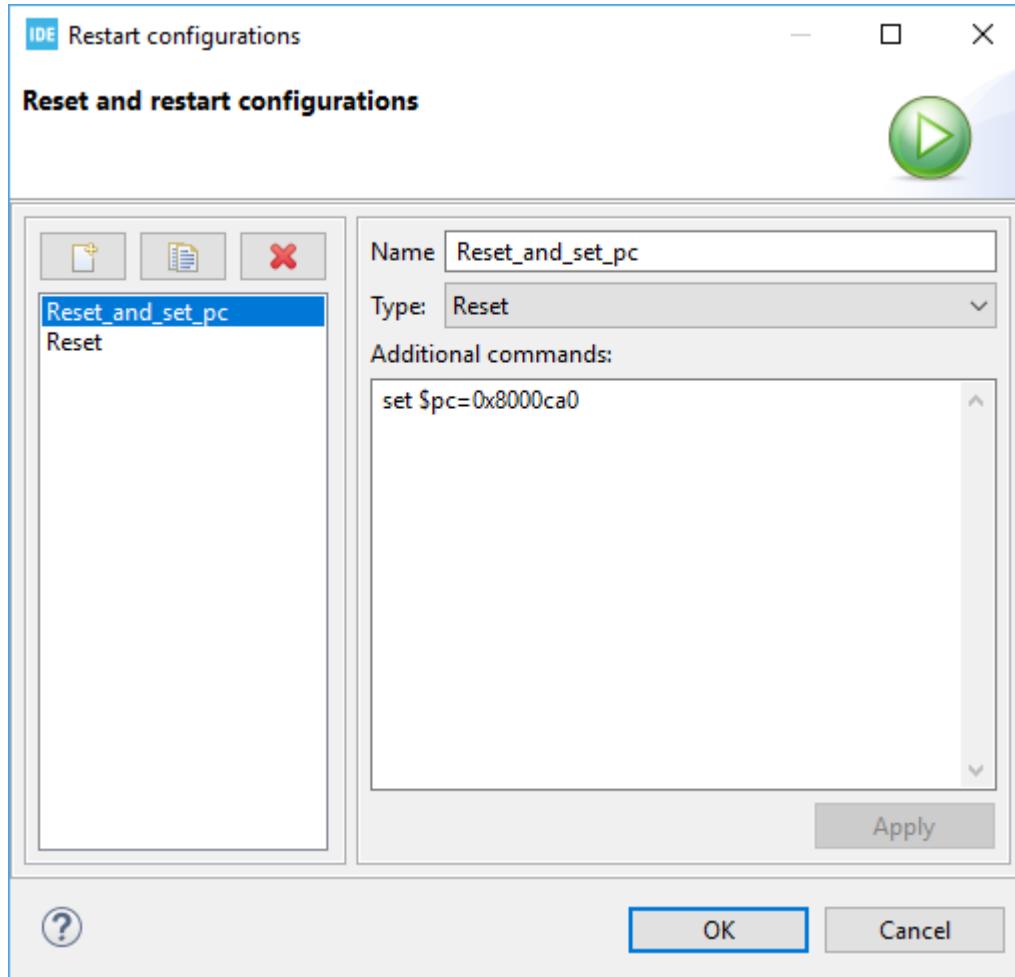

When several reset configurations are defined, they appear in the toolbar dropdown menu in order of use. Select the desired one to perform a reset.

Figure 162. Select restart configuration

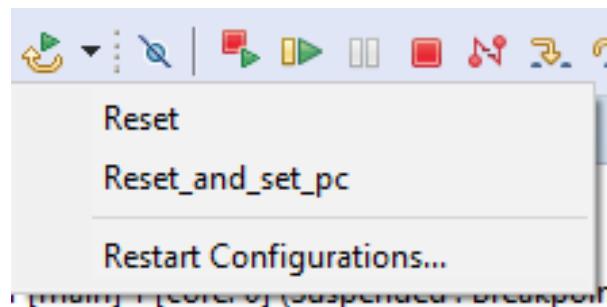

3.5.7.3 Terminate

The most common way to stop a debug session is by clicking the [Terminate] toolbar button. It is also possible to stop the debug session with the [Run]>[Terminate] menu. When the debug session is stopped, STM32CubeIDE switches automatically to the C/C++ perspective.

3.5.7.4

Terminate and relaunch

Use the [Terminate And Relaunch] toolbar button if changes in the source code have been made during the debug session. Menu command [Run]>[Terminate And Relaunch] can also be used for this purpose. This stops the debug session, rebuilds the program, and relaunches a debug session with the new program loaded.

3.6

Debug features

3.6.1

Live Expressions view

The *Live Expressions* view in STM32CubeIDE works very much like the *Expression* view with the exceptions that all the expressions are sampled live during debug execution. The sampling speed is determined by the number of expressions being sampled. An increased number of expressions being sampled results in a slower sample rate.


The view displays many different types of global variables. The view also allows users to create mathematical expressions that are evaluated automatically, such as `(i * 4 + offset)`.

Figure 163. Live Expressions

Expression	Type	Value	View Menu
<code>(x)= i</code>	uint32_t	2	
<code>(x)= offset</code>	uint32_t	8	
<code>(x)= i*4+offset</code>	unsigned int	16	
+ Add new expression			

The view can parse complicated data types and display complex data types like C-language structures. Only one format of numbers is used at the same time. To change this format, use the dropdown menu.

Figure 164. Live expressions number format

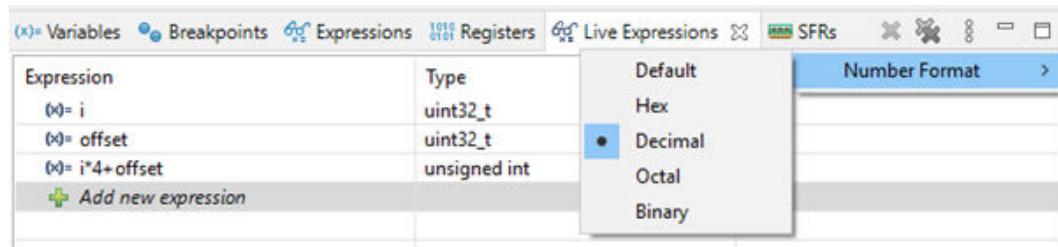

The variable values can be changed on the fly in the *Live Expressions* view while the program is running. Select the variable and change its value. It requires that only single variable name is used in the expression, and that no calculation involved.

Note:

To be able to use the *Live Expressions* view during debug, the live expression mechanism must be enabled during startup.

3.6.2

Shared ST-LINK

In the *Debugger* tab in *Debug Configurations* for ST-LINK GDB server and OpenOCD, a selection enables shared ST-LINK. When shared ST-LINK is enabled, the communication to ST-LINK goes via the ST-LINK server. The ST-LINK server makes it possible for several programs to access the same ST-LINK when shared ST-LINK is enabled.

STM32CubeProgrammer (STM32CubeProg) also contains a configuration for shared ST-LINK. This means that when shared ST-LINK is enabled in the debug configuration in STM32CubeIDE, it is possible to debug a program and let STM32CubeProgrammer access and read the device flash memory and RAM at the same time.

Enabling the shared mode causes STM32CubeIDE to launch the ST-LINK server, if it is not already running, with the default port 7184 for listening to the TCP connection. This default port is not editable from STM32CubeIDE.

3.6.3 Debug multiple boards

Debugging with multiple boards is possible using two ST-LINK or SEGGER J-Link probes at the same time. Connected to two different microcontrollers, both probes are connected to one PC on different USB ports. In this section, let us suppose that two different boards/microcontrollers are used: HW_A and HW_B.

It is possible to run one instance of STM32CubeIDE containing one project for HW_A and one project for HW_B.

The default port to be used is:

- 61234 for ST-LINK GDB server
- 3333 for OpenOCD
- 2331 SEGGER J-Link

This is presented in the *Debugger* tab in the *Debug Configurations* dialog. The port number must be changed for one of the projects to use another port, such as port 61244.

The debug configuration can use GDB connection selection [**Autostart local GDB server**]. Note that when debugging multiple boards, two or more debug probes are connected to the PC; the correct serial number must be selected for each debug configuration.

When the debug configurations has been configured for both projects so that each board is associated to a specific probe, it is time to test and debug each board individually first. When it is confirmed that this is working, the debug of both targets at the same time can be started as follow:

1. Start to debug HW_A.
2. The perspective switches automatically to the *Debug* perspective in STM32CubeIDE when a debug session for HW_A is started.
3. Switch to the C/C++ perspective.
4. Select the project for HW_B and start debugging it. The *Debug* perspective opens again.
5. There are two application stacks/nodes in the *Debug* view, one for each project. When changing the selected node in the *Debug* view, the related editor, variable view and others are updated to present information associated to the selected project.

It is also possible to start the GDB servers manually: select [**Connect to remote GDB server**] in the debug configuration. In such case, make sure that the GDB servers are started with parameters defining the individual ports and serial numbers to be used, and that the corresponding port numbers are used in the *Debug Configurations* dialog for each project.

Below is an example using SEGGER J-Link GDB server connecting to SEGGER J-Link, with port=2341 and S/N=123456789:

```
>JLinkGDBServerCL.exe -port 2341 -if SWD -select usb=123456789
```

Information on command-line parameters to be used when starting the GDB servers manually are provided in the GDB server manuals available from the *Information Center*.

3.6.4 STM32H7 multicore debugging

Information about how to use STM32H7 multicore devices in STM32CubeIDE is available in [ST-09].

3.6.5 STM32MP1 debugging

Information about how to use STM32MP1 devices in STM32CubeIDE is available in [ST-08].

Users are advised to keep updated with the documentation evolution of the STM32MP1 Series at www.st.com/en/microcontrollers-microprocessors/stm32mp1-series.

3.6.6 STM32L5 debugging

Information about how to use STM32L5 devices with TrustZone® in STM32CubeIDE is available in [ST-10].

Note: TrustZone is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.


3.7 Run configurations

It is possible to create run configurations to download applications and reset the target without launching a full debug session. The *Run Configurations* dialog is similar to the *Debug Configurations* dialog, however disabled widgets in the lower part of the *Startup* tab are not performed. When running a run configuration, the specified program is flashed but, after the program counter is set, the program execution is started in the target and the "run" session in STM32CubeIDE is closed.

To create a run configuration for the project, right-click on the project name in the *Project Explorer* view and select **[Run As]>[STM32 C/C++ Application]**.

Another way to create a run configuration is to select the project name in the *Project Explorer* view and use the menu **[Run]>[Run As]>[STM32 C/C++ Application]**.

Figure 165. Run configurations startup tab

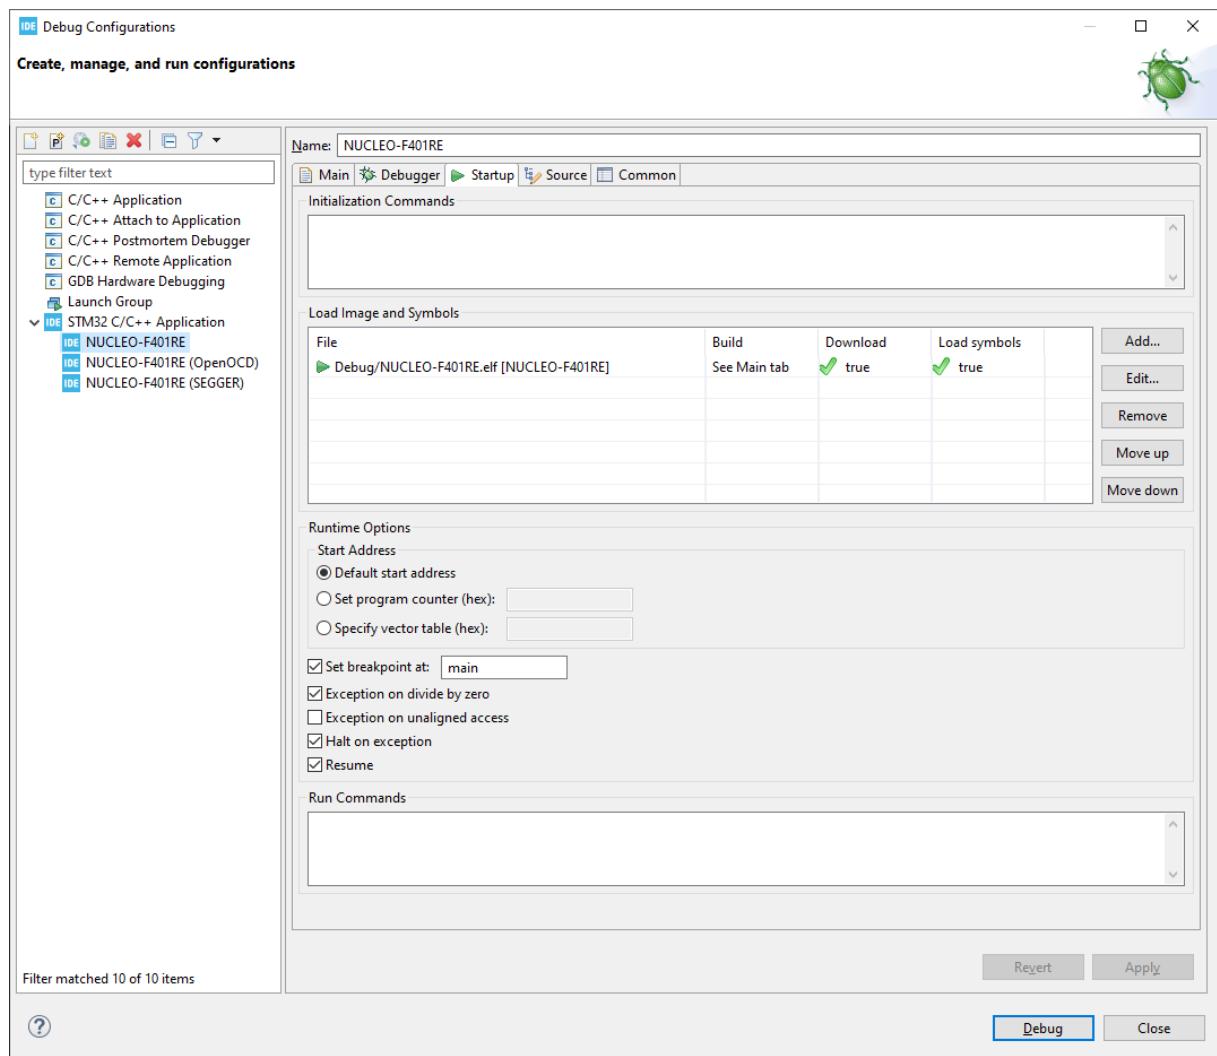


3.8

Import STM32 Cortex®-M executable


Use menu [File]>[Import...] to open the *Import* dialog.

Figure 166. Cortex®-M executable import dialog

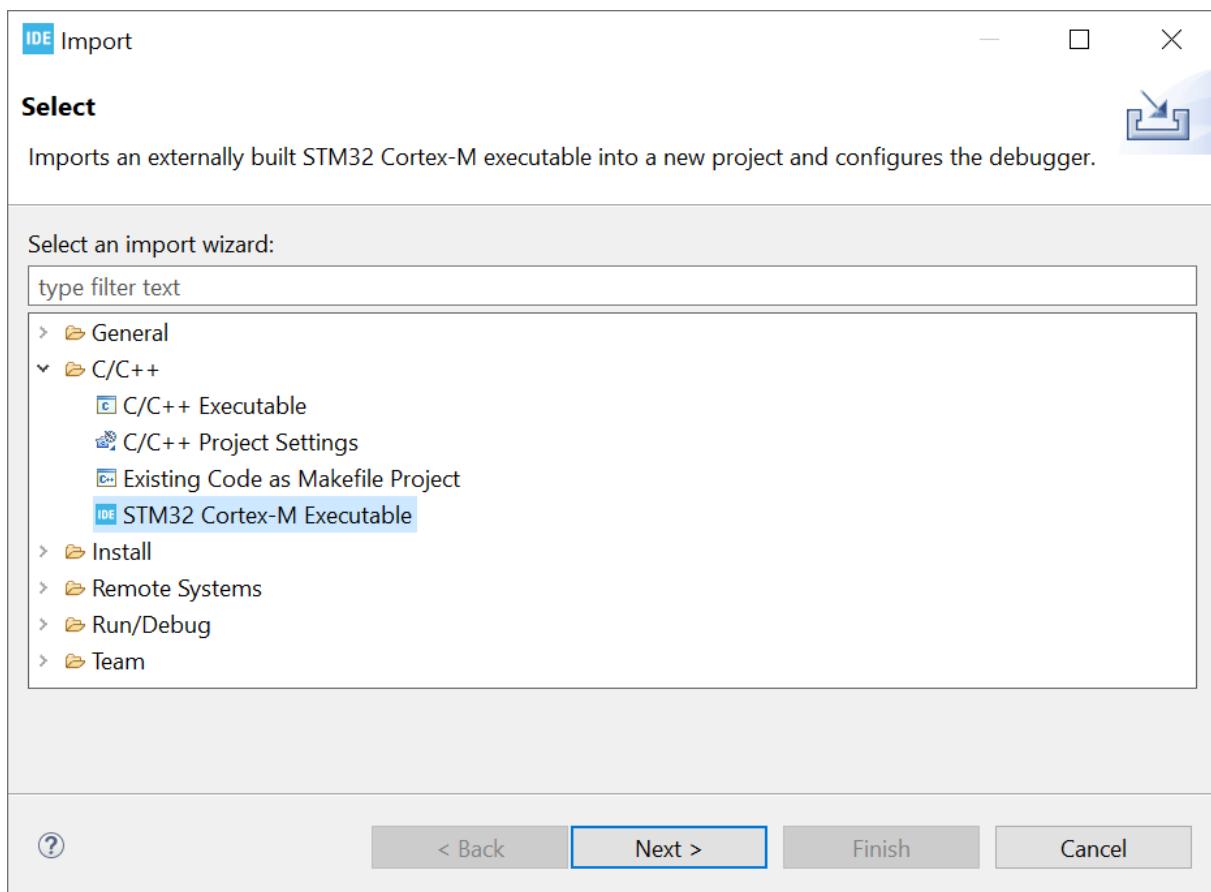

Select [STM32 Cortex-M Executable] and press [Next >].


Figure 167. STM32 Cortex®-M executable dialog

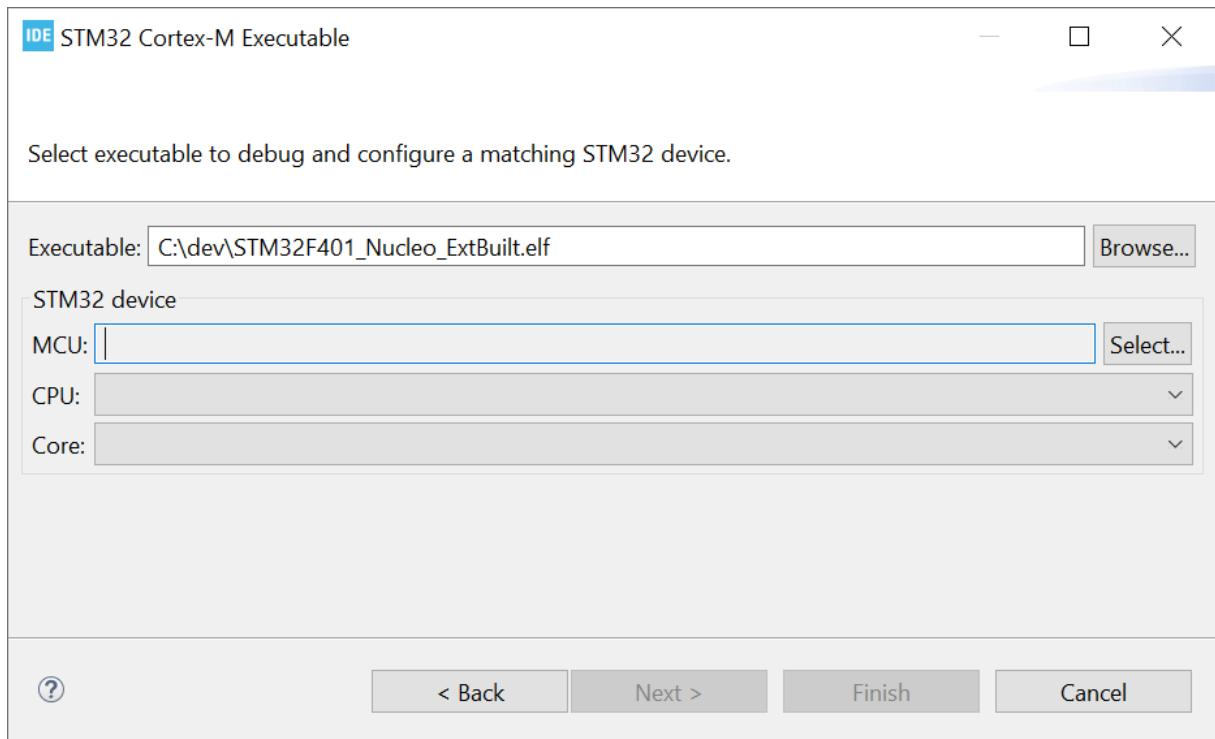

Use the [Browse...] button and select the `.elf` file to import. When the `.elf` file is selected, the STM32 device must be selected manually so that STM32CubeIDE can be used for debugging.

Press [Select...] to open the MCU/MPU Selector dialog.


Figure 168. STM32 Cortex®-M executable MCU/MPU selection

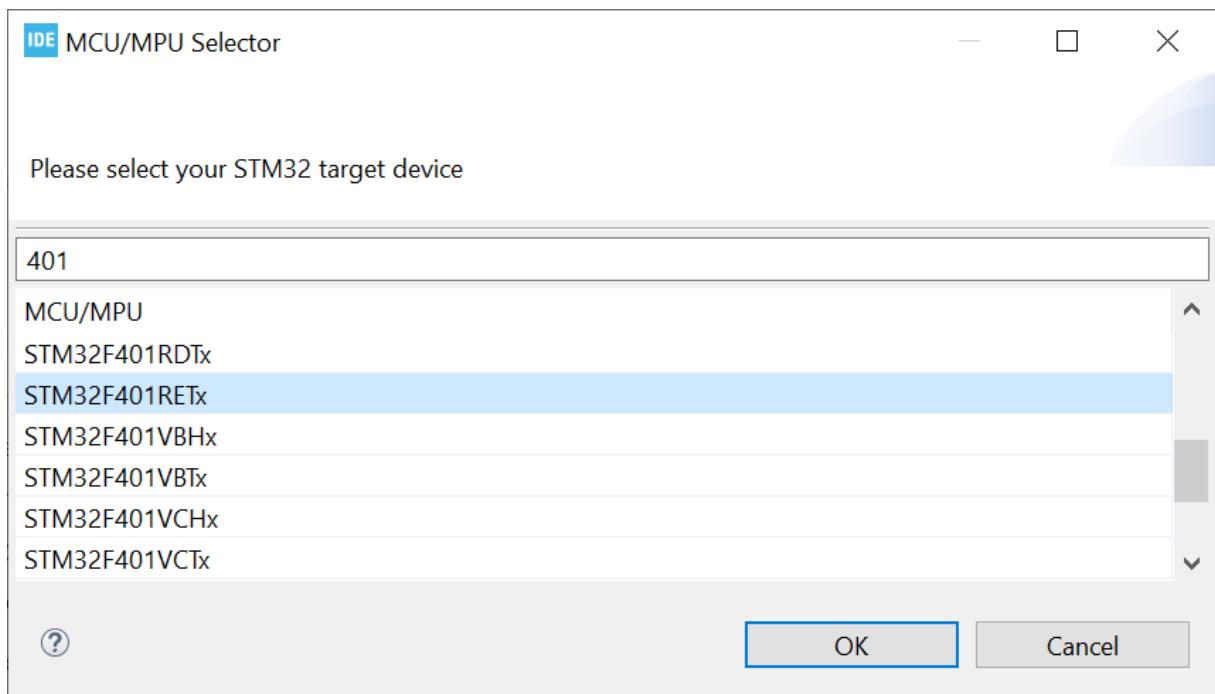

Select the microcontroller or microprocessor to be used. The search field can be used to find the device. Press [OK] once the device is selected.


As a result, the CPU and core are presented in the dialog.

Figure 169. STM32 Cortex®-M CPU and core

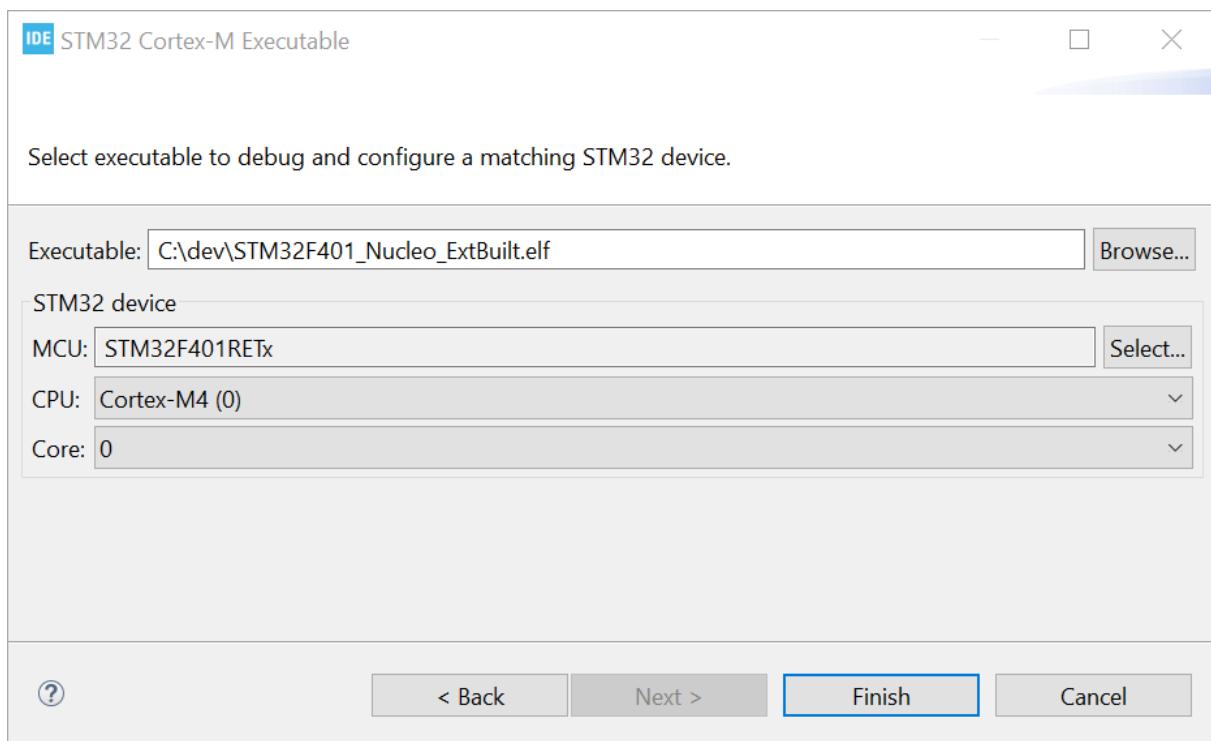

Press [Finish] and the debug configuration dialog automatically opens.


Figure 170. Cortex®-M debug configuration for imported project

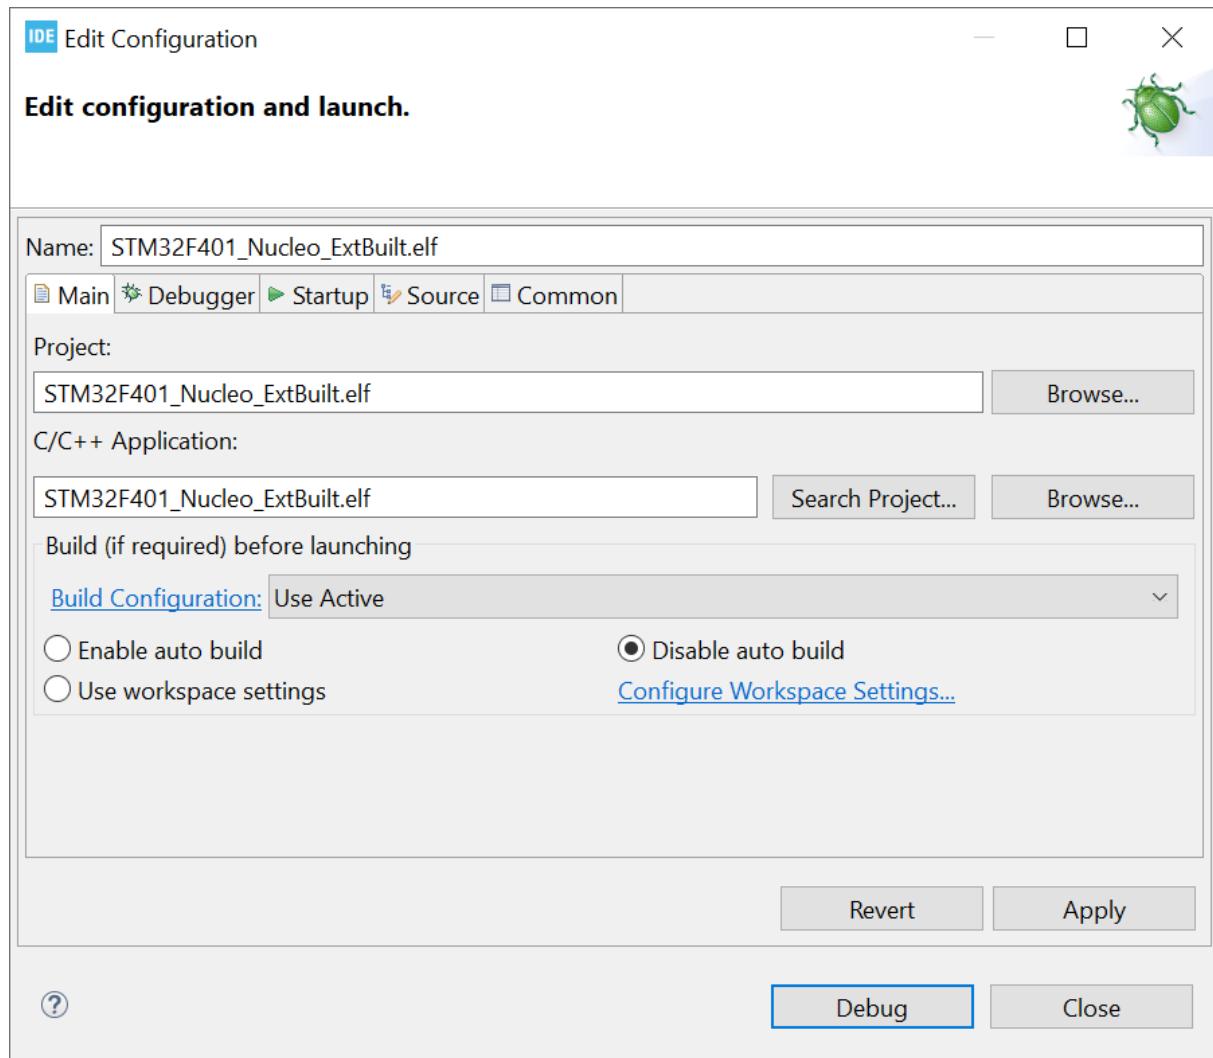

The debug configuration can then be set up in similar way as with any other STM32CubeIDE project. Once the configuration is completed, press [Debug] to start a debug session.

The imported project is displayed in the *Project Explorer* view.

Figure 171. Project explorer view with imported project

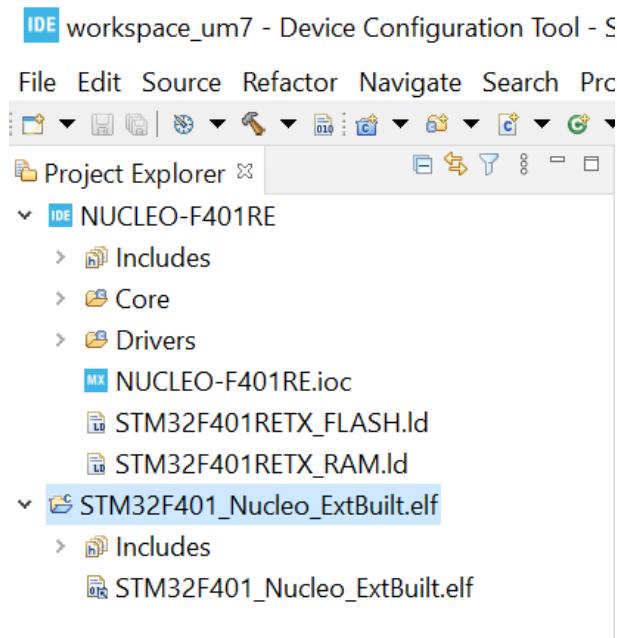

4 Debug with Serial Wire Viewer tracing (SWV)

4.1 Introduction to SWV and ITM

This section provides information on how to use Serial Wire Viewer tracing (SWV) in STM32CubeIDE.

System analysis and real-time tracing in STM32 requires a number of interaction technologies: Serial Wire Viewer (SWV), Serial Wire Debug (SWD), Instrumentation Trace Macrocell (ITM) and Serial Wire Output (SWO). These technologies are part of the Arm® CoreSight™ debugger technology. They are explained below.

Serial Wire Debug (SWD) is a debug port similar to JTAG. It provides the same debug capabilities (run, stop on breakpoints, single-step) but with fewer pins. It replaces the JTAG connector with a 2-pin interface (one clock pin and one bi-directional data pin). The SWD port alone does not allow real-time tracing.

The Serial Wire Output (SWO) pin can be used in combination with SWD. It is used by the processor to emit real-time trace data, thus extending the two SWD pins with a third pin. The combination of the two SWD pins and SWO pin enables Serial Wire Viewer (SWV) real-time tracing in compatible Arm® processors.

Beware that, SWO being just one pin, it is easy to set a configuration that produces more data than the SWO is able to send.

The Serial Wire Viewer (SWV) is a real-time trace technology that uses the Serial Wire Debug (SWD) port and the Serial Wire Output (SWO) pin. The Serial Wire Viewer provides advanced system analysis and real-time tracing without the need to halt the processor to extract the debug information.

Serial Wire Viewer (SWD) provides the following types of target information:

- Event notification on data reading and writing
- Event notification on exception entry and exit
- Event counters
- Timestamp and CPU cycle information, which can be used for program statistical profiling

The Instrumentation Trace Macrocell (ITM) enables applications to write arbitrary data to the SWO pin, which can be interpreted and visualized in the debugger. For example, ITM can be used to redirect `printf()` output to a SWV console view in the debugger. The standard is to use port 0 for this purpose.

The ITM port has 32 channels. Writing different types of data to different ITM channels allows the debugger to interpret or visualize the data on various channels differently.

Writing a byte to the ITM port takes only one write cycle, thus taking almost no execution time from the application logic.

Based on SWV, and ITM trace data, STM32CubeIDE can provide advanced debugger capabilities with special SWV views.

Note:

Arm® does not include SWV/ITM in Cortex®-M0 or Cortex®-M0+ cores. Therefore, STM32 devices based on these cores, such as STM32L053 microcontrollers, do not support SWV/ITM.

4.2 SWV debugging

To debug and use the Serial Wire Viewer (SWV) in STM32CubeIDE, the JTAG probe and the GDB server must support SWV. The board must also support SWD, and the SWO pin needs to be available and connected to the JTAG probe.

The following sections describe the process to create a debug configuration, SWV settings configuration, and how to use SWV tracing in a debug session.

4.2.1

SWV debug configuration

Step 1: Open the *Debug Configurations* dialog

Use for instance menu [Run]>[Debug Configurations...] and select the STM32 Cortex®-M debug configuration to update.

Step 2: Select the SWD interface

Select the [SWD] interface in the *Debug Configurations* dialog.

Step 3: Enable SWV

Enable [SWV] in the *Debug Configurations* dialog.

Step 4: Enter the core clock frequency

Enter the [Core Clock] frequency in the *Debug Configurations* dialog. This must correspond to the value set by the application program to be executed.

Usually, the core clock setting is stored in the `SystemCoreClock` variable when using projects imported from STM32 firmware examples or created with [STM32CubeMX](#). One method to inspect the core clock value is to start a debug session and add the `SystemCoreClock` variable to the *Expressions* view. Make sure that the system core clock is configured by the application before reading the value.

If the `SystemCoreClock` is not updated, change the program and add a call to the function `SystemCoreClockUpdate()`. Rebuild the program, restart debugging and inspect the `SystemCoreClock` value again.

Figure 172. SWV core clock

Expression	Type	Value
<code>(*) SystemCoreClock</code>	<code>uint32_t</code>	84000000
Add new expression		

Step 5: Enter the SWO clock frequency

The [Serial Wire Viewer (SWV)] selections in the *Debug Configurations* dialog can be used only when the [SWD] interface is selected. When [SWV] is enabled, it is required to configure the [Clock Settings]. The [Core Clock] must be set to the device speed. The SWO clock is automatically set to the highest possible speed depending on debug probe used and core clock. However, if the debugged hardware does not allow too-high SWO clock speed, it is possible to enable [Limit SWO clock] and enter the maximum SWO clock speed in kHz. The SWV [Port number] must be set to the port to be used for SWV data communication. The SWV port cannot be set equal to the GDB connection [Port number].

Figure 173. SWV debug configuration

Serial Wire Viewer (SWV)

Enable

Core Clock (MHz):

Limit SWO clock

Maximum SWO clock (kHz):

Port number:

Step 6: Save the configuration

Press [Apply] in the *Debug Configurations* dialog to save the configuration.

Step 7: Start a debug session

Press [Debug] to start a debug session. Make sure that the probe and board are connected.

Step 8: Possibly suspend the target


[Suspend] the target if it has not stopped at a breakpoint.

Step 9: Open a SWV view

Open one of the SWV views. For first-time users, it is recommended to open the *SWV Trace log* view because it gives a good overview of incoming SWV packets and how well the tracing is working.

Select the [Window]>[Show View]>[SWV]>[SWV Trace log] menu command to open the *SWV Trace log* view.


Figure 174. SWV show view

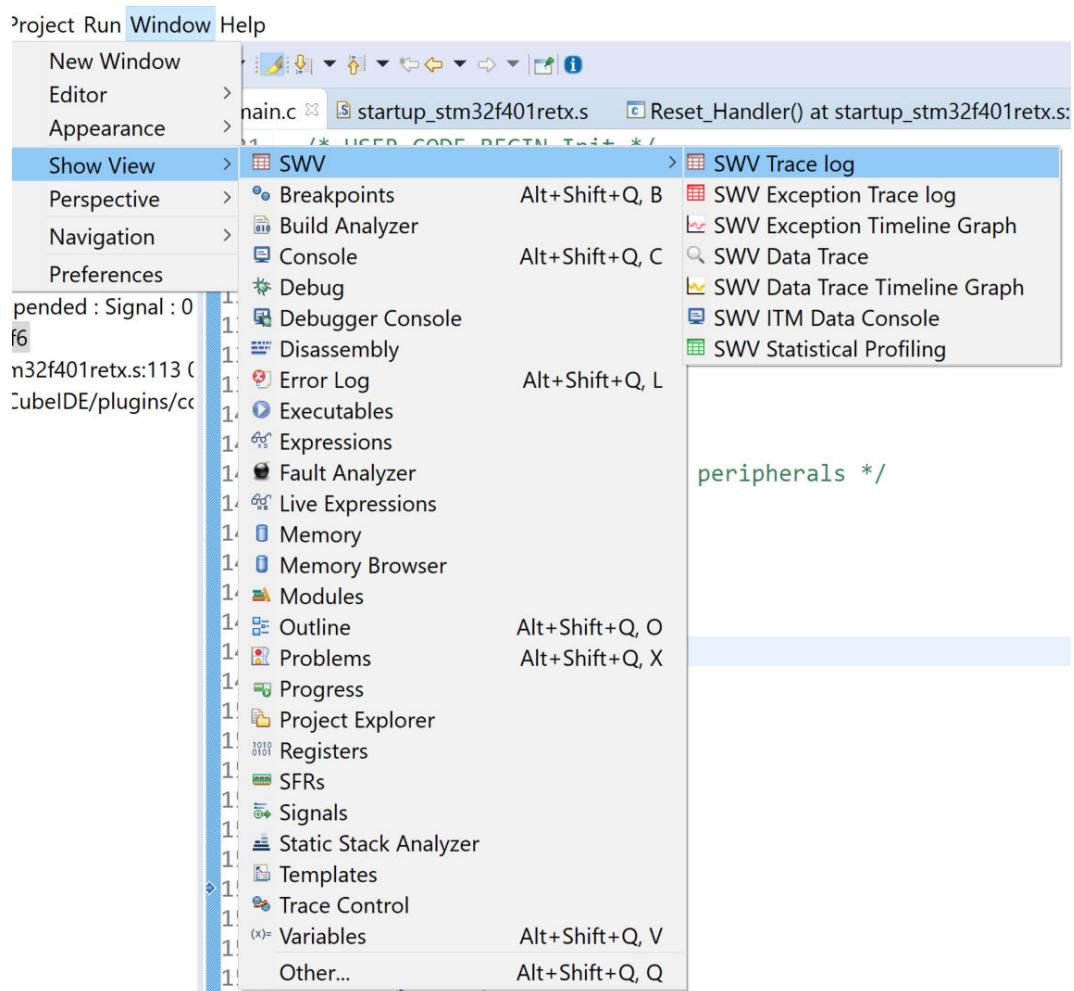

Step 10: View the trace log

The *SWV Trace log* view is now visible.

Figure 175. SWV Trace log view

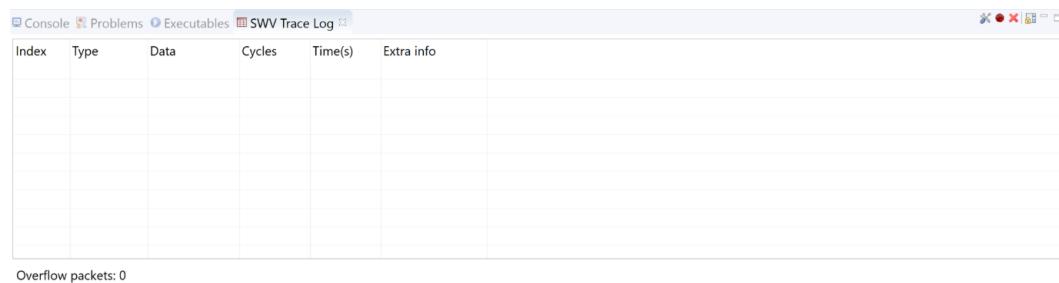

4.2.2

SWV settings configuration

Step 1: Open the *Serial Wire Viewer settings*

Click on the [Configure Trace] toolbar button in the *SWV Trace Log* view to open the *Serial Wire Viewer settings* dialog.

Figure 176. SWV [Configure Trace] toolbar button



Note:


The [Configure Trace] toolbar button is available in all SWV views.

Step 2: Configure the trace data

Configure the data to be traced in the *Serial Wire Viewer settings* dialog.

For this example [**PC Sampling**] and [**Timestamps**] are enabled.

Figure 177. SWV settings dialog

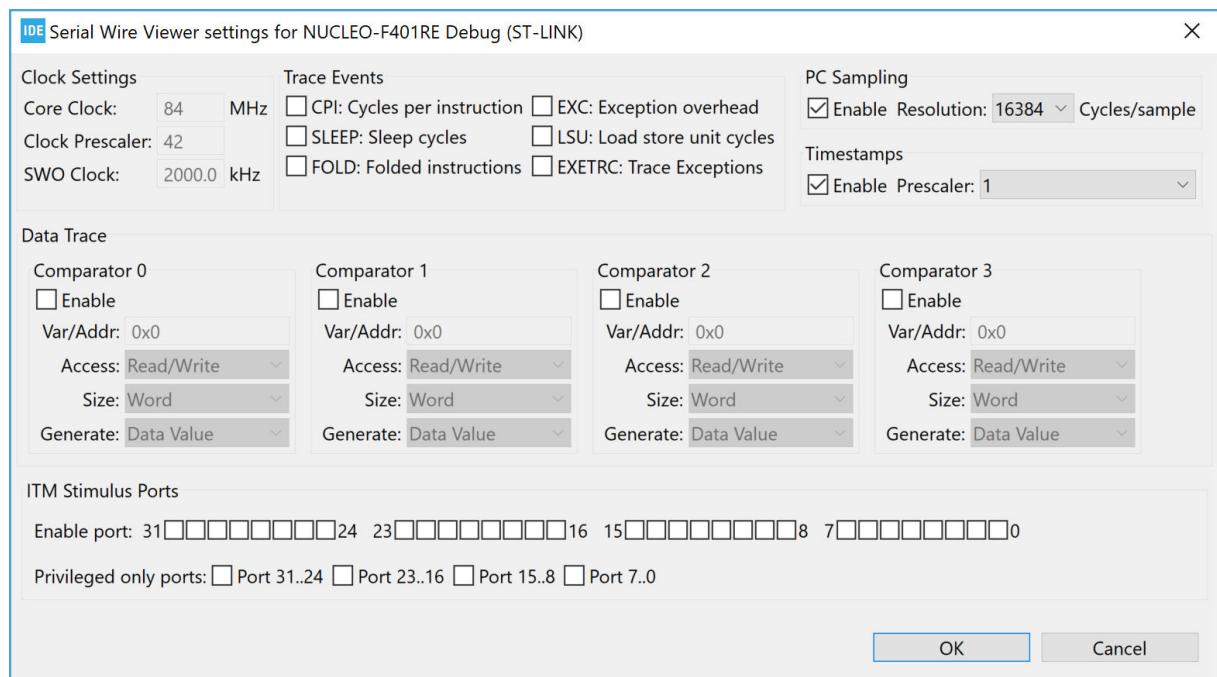

The SWV settings dialog has the following configurations:

- **[Clock Settings]:** These fields are disabled and only present the values used and configured in the *Debug Configurations* for the debug session. If these values need to be changed, close the debug session and open the *Debug Configurations* to modify them.
- **[Trace Events]:** The following events can be traced.
 - **[CPI]:** Cycles per instruction. For each cycle beyond the first one that an instruction uses, an internal counter is increased with one. The counter (`DWT CPI count`) can count up to 256 and is then set to 0. Each time that happens, one of these packets are sent. This is one aspect of the processors performance and used to calculate instructions per seconds. The lower the value, the better the performance.
 - **[SLEEP]:** Sleep cycles. The number of cycles the CPU is in sleep mode. Counted in `DWT Sleep count` register. Each time the CPU has been in sleep mode for 256 cycles, one of these packets is sent. This is used when debugging for power consumption or waiting for external devices.
 - **[FOLD]:** Folded instructions. A counter for how many instructions are folded (removed). Every 256 instruction folded (taken zero cycles) will receive one of these events. Counted in `DWT Fold count` register.
Branch folding is a technique where, on the prediction of most branches, the branch instruction is completely removed from the instruction stream presented to the execution pipeline. Branch folding can significantly improve the performance of branches, taking the CPI for branches below 1.
 - **[EXC]:** Exception overhead. The `DWT Exception count` register keeps track of the number of CPU cycles spent in exception overhead. This includes stack operations and returns but not the time spent processing the exception code. When the timer overflows, one of these events is sent. Used to calculate the actual exception handling cost to the program.
 - **[LSU]:** Load Store Unit Cycles. The `DWT LSU count` register counts the total number of cycles the processor is processing an LSU operation beyond the first cycle. When the timer overflows, one of these events is sent.
With this measurement, it is possible to track the amount of time spent in memory operations.
 - **[EXETRC]:** Trace Exceptions. Whenever an exception occurs, exception entry, exception exit and exception return events are sent. These events can be monitored in the *SWV Exception Trace Log* view. From this view, it is possible to jump to the exception handler code for that exception.
- **[PC Sampling]:** Enabling this starts sampling the Program Counter at some cycle interval. Since the SWO pin has a limited bandwidth, it is not advised to sample too fast. Experiment with the **[Resolution]** (cycles/sample setting) to be able to sample often enough. The results from the sampling are used, among other things, for the *SWV Statistical Profiling* view.
- **[Timestamps]:** Must be enabled to know when an event occurred. The **[Prescaler]** should only be changed as a last effort to reduce overflow packets.
- **[Data Trace]:** It is possible to trace up to four different C variable symbols, or fixed numeric areas of the memory. To do that, enable one comparator and enter the name of the variable or the memory-address to trace. The value of the traced variables can be displayed both in the *Data Trace* and *Data Trace Timeline Graph* views.
- **[ITM Stimulus Ports]:** There are 32 ITM ports available, which can be used by the application. For instance, the CMSIS function `ITM_SendChar` can be used to send characters to port 0 refer to [Section 4.3.5 SWV /ITM Data Console and printf redirection](#)). The packets from the ITM ports are displayed in the *SWV ITM Data Console* view.

Note:

It is recommended to limit the amount of data traced. Most STM32 microcontrollers read and write data faster than the maximum SWO pin throughput. Too many trace data result in data overflow, lost packets and possibly corrupt data. For optimum performance, trace only data necessary to the task at hand.

Overflow while running SWV is an indication that SWV is configured to trace more data than the SWO pin is able to process. In such a case, decrease the amount of data traced.

Enable **[Timestamps]** to use any of the timeline views in STM32CubeIDE. The default **[Prescaler]** is 1. Keep this value, unless problems occur related to SWV packet overflow.

Three examples are provided below for illustrating SWV trace configuration:

- **Example 1:** To trace the value of a global variable, enable [**Comparator**] and enter the name of the variable or the memory address to be traced.
The value of the traced variable is displayed both in the *Data Trace* and *Data Trace Timeline Graph* views.
- **Example 2:** To profile program execution, enable [**PC sampling**]. In the beginning, a high value for the [**Cycles/sample**] is recommended.
The result from the PC sampling is then displayed in the *SWV Statistical Profiling* view.
- **Example 3:** To trace the exceptions occurring during program execution, enable [**Trace Event EXETRC: Trace Exceptions**].
Information about the exceptions is then displayed in the *SWV Exception Trace Log* view.

Step 3: Save the SWV configuration

Click on the [**OK**] button to save the SWV configuration. The configuration is saved together with other debug configurations and remains effective until changed.

4.2.3 SWV tracing

Step 1: Start SWV trace recording

Press the [**Start/Stop Trace**] toolbar button in one of the SWV views to send the SWV settings to the target board and start the SWV trace recording. This toolbar button is available in all SWV views. The board does not send any SWV packet until it is properly configured. The SWV configuration must be resent if the configuration registers on the target board are reset. Actual tracing does not start until the target starts to execute.

Figure 178. SWV [Start/Stop Trace] toolbar button



Note:

*The tracing cannot be configured while the target is running. Pause the debugging before attempting to send a new configuration to the board. Each new or updated configuration must be sent to the board to take effect. The configuration is sent to the board when the [**Start/Stop Trace**] button is pressed.*

Step 2: Start the target

Press the [**Resume**] toolbar button on top of the *Debug* perspective to start the target.

Step 3: SWV Trace Log view

SWV packets are displayed in the **SWV Trace Log** view.

Figure 179. SWV Trace Log PC sampling

Index	Type	Data	Cycles	Time(s)	Extra info
10362	PC Sample	0x8000508	169777034	2.021155 s	
10363	PC Sample	0x8000516	169793417	2.021350 s	
10364	PC Sample	0x8000528	169809800	2.021545 s	
10365	PC Sample	0x8000500	169826183	2.021740 s	
10366	PC Sample	0x8000510	169842566	2.021935 s	
10367	PC Sample	0x80004f2	169858949	2.022130 s	
10368	PC Sample	0x8000504	169875332	2.022325 s	
10369	PC Sample	0x8000516	169891715	2.022520 s	
10370	PC Sample	0x8000528	169908098	2.022715 s	

Overflow packets: 0

Step 4: Clear collected SWV data

When the target is not running, the collected SWV data can be cleared by pressing the [Remove all collected SWV data] toolbar button. This toolbar button is available in all SWV views.

Figure 180. [Remove all collected SWV data] toolbar button




4.3 SWV views

The SWV views that display SWV traces data are:

- *SWV Trace Log*: Lists all incoming SWV packets in a spreadsheet. Useful as a first diagnostic for the trace quality.
- *SWV Exception Trace Log*: The view has two tabs, one is similar to the *SWV Trace Log* view and the other tab displays statistical information about exception events.
- *SWV Data Trace*: Tracks up to four different symbols or areas in the memory.
- *SWV Data Trace Timeline Graph*: A graphical display that shows the distribution of variable values over time.
- *SWV ITM Data Console*: Prints readable text output from the target application. Typically this is done via `printf()` with output redirected to ITM channel 0.
- *SWV Statistical Profiling*: Displays statistics based on the Program Counter (PC) sampling. Shows the amount of execution time spent within various functions.

Figure 181. SWV views selectable from the menu

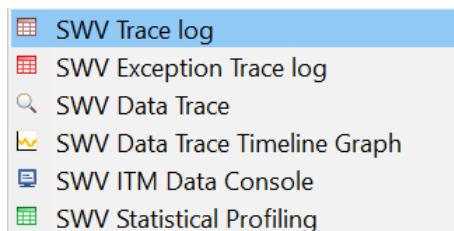

Note: More than one SWV view may be open at the same time for the simultaneous tracking of various events.

The SWV views toolbars contain these usual control icons.

Figure 182. SWV views common toolbar



These icons are used for the following purpose, from left to right:

- Configure trace
- Start/Stop trace
- Remove all collected SWV data
- Scroll lock
- Minimize
- Maximize

The SWV graph views toolbars contain these extra control icons.

Figure 183. SWV graph views extra toolbar



These icons are used for the following purpose, from left to right:

- Save graph as image
- Switch between seconds and cycle scale
- Adjust the Y-axis to best fit
- Zoom in
- Zoom out

4.3.1 SWV Trace Log

The *SWV Trace Log* view lists all incoming SWV packets in a spreadsheet. The data in this view can be copied to other applications in CSV format by selecting the rows to copy and type **Ctrl+C**. The copied data can be pasted into another application with the **Ctrl+V** command.

Figure 184. SWV Trace Log PC sampling and exceptions

SWV Trace Log					
Index	Type	Data	Cycles	Time(s)	Extra info
25012	PC Sample	0x80004f6	258481871	3.077165 s	
25013	PC Sample	0x8000508	258498254	3.077360 s	
25014	PC Sample	0x8000518	258514637	3.077555 s	
25015	Exception entry	SYSTICK (EXC 15)	258522309	3.077647 s	
25016	Exception exit	SYSTICK (EXC 15)	258522367	3.077647 s	
25017	Exception return	N/A (EXC 0)	258522374	3.077647 s	
25018	PC Sample	0x80004fc	258531017	3.077750 s	
25019	PC Sample	0x800050e	258547400	3.077945 s	
25020	PC Sample	0x800051e	258563783	3.078140 s	
25021	PC Sample	0x80004fa	258580166	3.078325 s	

The column information in the *SWV Trace Log* view is described in Table 6.

Table 6. SWV Trace Log columns details

Name	Description
Index	The packet ID. Shared with the other SWV packets.
Type	The type of packet (example PC sample, data PC value (comp 1), exceptions, overflow).
Data	The packet data information.
Cycles	The timestamp of the packet in cycles.
Time(s)	The timestamp of the packet in seconds.
Extra info	Optional extra packet information.

4.3.2 SWV Exception Trace Log

The *SWV Exception Trace Log* view is composed of two tabs.

Data tab

The first tab is similar to the *SWV Trace Log* view, but is restricted to exception events. It also provides additional information about the type of event. The data can be copied and pasted into other applications. Each row is linked to the code for the corresponding exception handler. Double-click on the event to open the corresponding interrupt handler source code in the *Editor* view.

Note: *Enable [Trace Event EXETRC: Trace Exceptions] in the Serial Wire Viewer settings dialog to trace exceptions during program execution. Enable [Timestamps] to log cycle and time for each interrupt packet.*

Figure 185. SWV Exception Trace Log – Data tab

Index	Type	Name	Peripheral	Function	Cycles	Time(s)	Extra info
17629	Exception exit	SYSTICK (EXC 15)		SysTick_Handler()	58204401	692.909536 ms	
17630	Exception return	N/A (EXC 0)			58205926	692.927690 ms	Timestamp delayed. Packet delayed.
17636	Exception entry	SYSTICK (EXC 15)		SysTick_Handler()	58288335	693.908750 ms	
17637	Exception exit	SYSTICK (EXC 15)		SysTick_Handler()	58288393	693.909440 ms	
17638	Exception return	N/A (EXC 0)			58288400	693.909524 ms	
17644	Exception entry	SYSTICK (EXC 15)		SysTick_Handler()	58372327	694.908655 ms	
17645	Exception exit	SYSTICK (EXC 15)		SysTick_Handler()	58372385	694.909345 ms	
17646	Exception return	N/A (EXC 0)			58372392	694.909429 ms	

Overflow packets: 0

The column information in the *SWV Exception Trace Log – Data* tab is described in [Table 7](#).

Table 7. SWV Exception Trace Log – Data columns details

Name	Description
Index	The exception packet ID. Shared with the other SWV packets.
Type	Each exception generates three packets: Exception entry, Exception exit and then an Exception return packet.
Name	The name of the exception. Also the exception or interrupt number.
Peripheral	The peripheral for the exception.
Function	The name of the interrupt handler function for this interrupt. Updated when debug is paused. Is cached during the whole debug session. By double clicking the function, the editor will open that function in the source code.
Cycles	The timestamp for the exception in cycles.
Time(s)	The timestamp for the exception in seconds.
Extra info	Optional extra information about that packet.

Statistics tab

The second tab displays statistical information about exception events. This information may be of great value when optimizing the code. Hypertext links to exception handler source code in the editor is included.

Figure 186. SWV Exception Trace Log – Statistics tab

Exception	Handler	% of time	Number of events	% of exceptions	% of debug time	Total runtime	Avg runtime	Fastest	Slowest	First	First (s)	Latest	Latest (s)
SYSTICK (EXC 15)	SysTick_Handler()	100.0000%	2172	100.0000%	0.0690%	40309	57	57	58	71567	851.988095 µs	58372327	694.908655 ms
Total for all			2172		0.0690%	40309	18						

Overflow packets: 0

The column information in the *SWV Exception Trace Log – Statistics* tab is described in [Table 8](#).

Table 8. SWV Exception Trace Log – Statistics columns details


Name	Description
Exception	The name of the exception provided by the manufacturer. Also the exception or interrupt number.
Handler	The name of the interrupt handler for this interrupt. Updated when debug is paused. Is cached during the whole debug session. By double clicking the handler, the editor will open that function in the source code.
% of	This exception type's share, in percentage, of all exceptions.
Number of	The total number of entry packets received by SWV of this exception type.
% of exception time	How big part of the execution time for all exceptions that this exception type have.
% of debug time	How big part of the total execution time for this debug session that this exception type have. All the timers are restarted when the Empty SWV-Data button is pressed.
Total runtime	The total execution time in cycles for this exception type.
Avg runtime	The average execution time in cycles for this exception type.
Fastest	The execution time in cycles for the fastest exception of this exception type.
Slowest	The execution time in cycles for the slowest exception of this exception type.
First	The first encounter of an entry event for this exception type in cycles.
First(s)	The first encounter of an entry event for this exception type in seconds.
Latest	The latest encounter of an entry event for this exception type in cycles.
Latest(s)	The latest encounter of an entry event for this exception type in seconds.

4.3.3 SWV Data Trace

The *SWV Data Trace* view tracks up to four different symbols or areas in the memory. For example, global variables can be referenced by name. The data can be traced on Read, Write and Read/Write.

Enable **[Data Trace]** in *Serial Wire Viewer settings*. In [Figure 187](#), two global variables `pos1` and `pos2` in the program are traced on **[Write]** access.

Figure 187. SWV Data Trace configuration

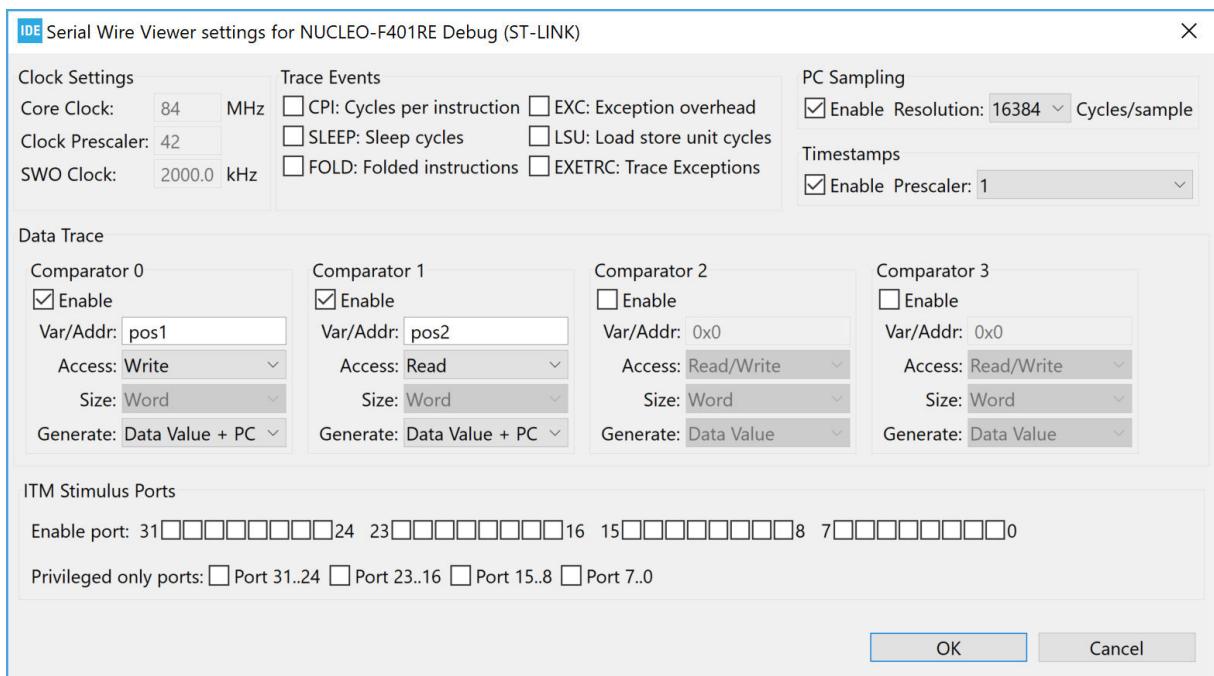

When running the program in debugger with SWV trace enabled the **SWV Data Trace** view displays this information when [**Comparator 0**] with **pos1** data is selected in the [**Watch**] list.

Figure 188. SWV Data Trace

Watch

Comp	Name	Value
0	pos1	10
1	pos2	0

History (pos1)

Access	Value	PC	Cycles	Time
WRITE	8	0x8000578	642414276	7.647789 s
WRITE	1	0x8000578	645655051	7.686370 s
WRITE	2	0x8000578	649164268	7.728146 s
WRITE	3	0x8000578	652673485	7.769922 s
WRITE	4	0x8000578	656182631	7.811698 s
WRITE	5	0x8000578	659691850	7.853474 s
WRITE	6	0x8000578	663004479	7.892910 s
WRITE	7	0x8000578	666513696	7.934687 s
WRITE	9	0x8000578	673532061	8.018239 s
WRITE	10	0x8000578	677041280	8.060015 s

The column information in the *SWV Data Trace* described in Table 9.


Table 9. SWV Data Trace columns details

Name	Description
Access	Read or Write access type.
Value	The value of data read or written.
PC	The PC location where read or write access occurs.
Cycles	The timestamp for the packet in cycles.
Time(s)	The timestamp for the packet in seconds.

4.3.4 SWV Data Trace Timeline Graph

The *SWV Data Trace Timeline Graph* view contains a graphical display that shows the distribution of variable values over time. It applies to the variables or memory areas in the SWV Data Trace. The following is displayed when using the timeline graph displaying global variables `pos1` and `pos2` counting up and down.

Figure 189. SWV Data Trace Timeline Graph

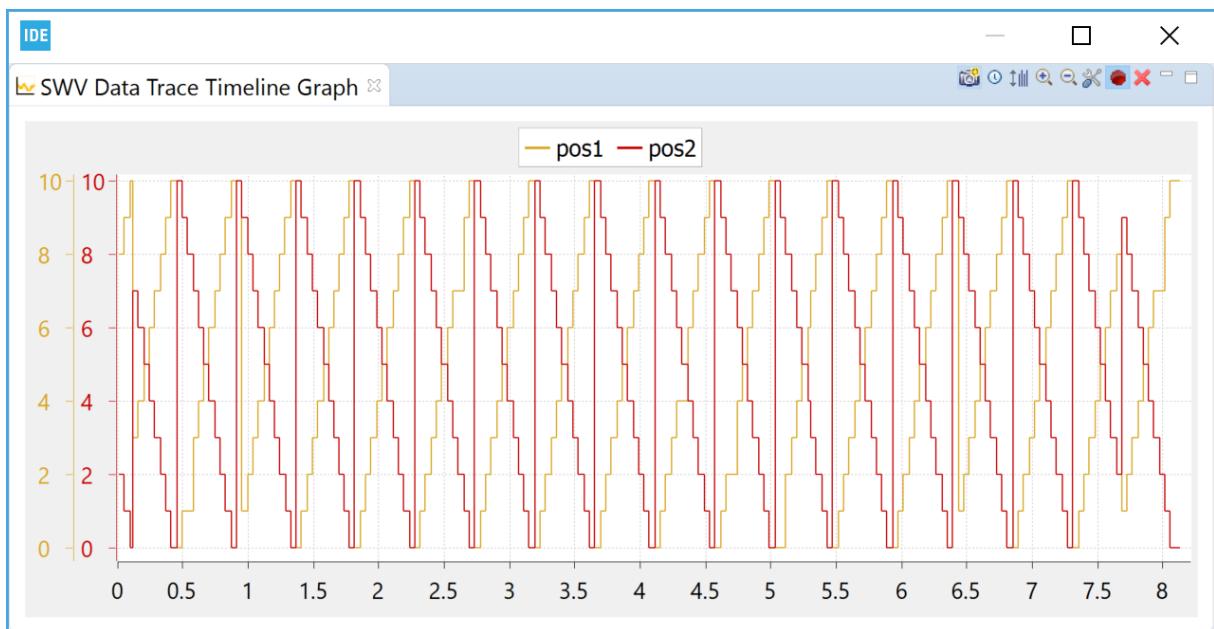

The *SWV Data Trace Timeline Graph* has the following features:


- The graph can be saved as a JPEG image file by clicking on the camera toolbar button.
- The graph shows the time in seconds by default but can be changed to cycles by clicking on the clock toolbar button.
- Y-axis can be adjusted to best fit by clicking on the y-axis toolbar button.
- Zoom in and out by clicking on the [+] and [-] toolbar buttons.
- The zoom range is limited while debug is running. Zoom details are available when debug is paused.

4.3.5 SWV ITM Data Console and printf redirection

The *SWV ITM Data Console* prints readable text output from the target application. Typically, this is done via `printf()` with output redirected to ITM channel 0. Other ITM channels can get their own console views.

To use the *SWV ITM Data Console* view, first enable one or more of the 32 ITM ports in the *Serial Wire Viewer settings* dialog.

Figure 190. SWV settings

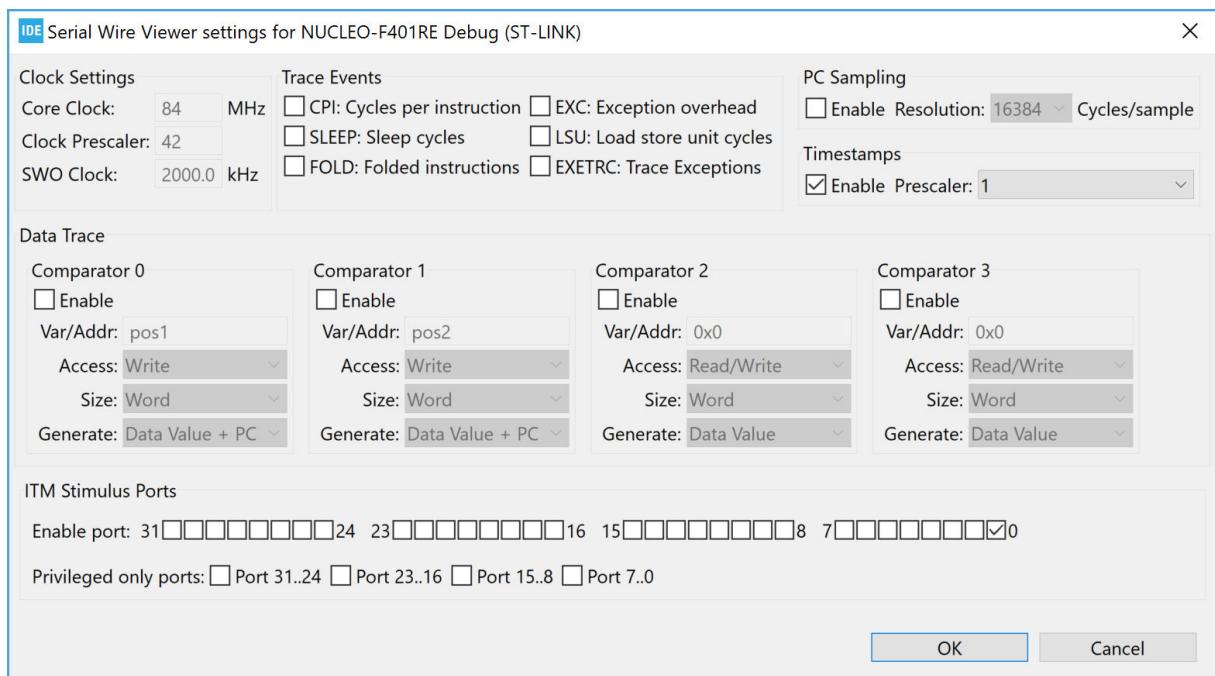

The packets from the ITM ports are displayed in the *SWV ITM Data Console* view. The CMSIS function `ITM_SendChar()` can be used by the application to send characters to the port 0, and the `printf()` function can be redirected to use the `ITM_SendChar()` function.

The following describes how to setup `printf` redirection over ITM:

1. Configure first file `syscalls.c`. Usually, the `syscalls.c` file is located in the same source folder as `main.c`.

If no `syscalls.c` file is available in the project, it can be copied from another STM32CubeIDE project.

One way to get the file is to create a new STM32 empty project for the device. In the `Src` folder, this project contains a `syscall.c` file. Copy this file to a source folder in the project where it is needed.

2. Inside the `syscalls.c` file, replace the `_write()` function with code calling `ITM_SendChar()` instead of `_io_putchar()`

```
int _write(int file, char *ptr, int len)
{
    int DataIdx;

    for (DataIdx = 0; DataIdx < len; DataIdx++)
    {
        // _io_putchar(*ptr++);
        ITM_SendChar(*ptr++);
    }
    return len;
}
```

3. Locate the `core_cmX.h` file, which contains the function `ITM_SendChar()`. The `core_cmX.h` file is included by the Device Peripheral Access Layer header file (for instance `stm32f4xx.h`, which in turn must be included in the `syscalls.c` file).

```
#include "stm32f4xx.h"
```

Use the *Include Browser* view to find the Device Peripheral Access Layer header file. Drop the core file in the *Include Browser* view, and check which files are including the `core_cmX.h` file.


4. Test by adding include `<stdio.h>` and call to `printf()` into the application. Make sure that `printf()` is not called too often.

```
#include <stdio.h>

printf("Hello World %d\n", pos1);
```


5. Start a debug session and enable [ITM port 0] in the SWV ITM Data Console view.
6. Open the SWV ITM Data Console view and start tracing using the red [Start/Stop Trace] button on the toolbar in this view.
7. Start the program. Print commands are logged to the Port 0 tab in the view.

Figure 191. SWV ITM Data Console

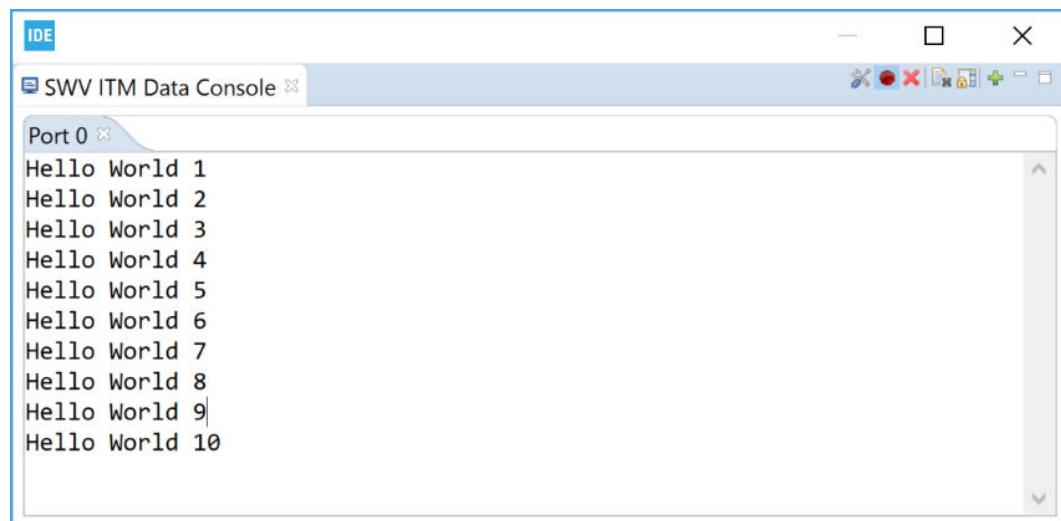

8. It is possible to open new port x tabs (x from 1 to 31) by pressing the green [+] button on the toolbar. This opens the Add Port dialog. In the dialog select the [ITM Port number] to be opened to display it as a tab in the SWV ITM Data Console view.

Figure 192. SWV ITM port configuration

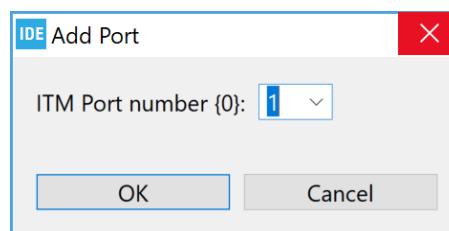


Note: Study the `ITM_SendChar()` function to learn how to write a function that transmits characters to another ITM port channel.

4.3.6 SWV Statistical Profiling

The SWV Statistical Profiling view displays statistics based on Program Counter (PC) sampling. It shows the amount of execution time spent within various functions. This is useful when optimizing code. The data can be copied and pasted into other applications. The view is updated when debugging is suspended.


1. Configure SWV to send Program Counter samples, as shown in Figure 193. Enable [PC Sampling] and [Timestamps].
With the given [Core Clock] cycle intervals, SWV reports the Program Counter values to STM32CubeIDE. Set the [PC Sampling] to a high [Cycle/sample] value to avoid interface overflow.

Figure 193. SWV PC sampling enable

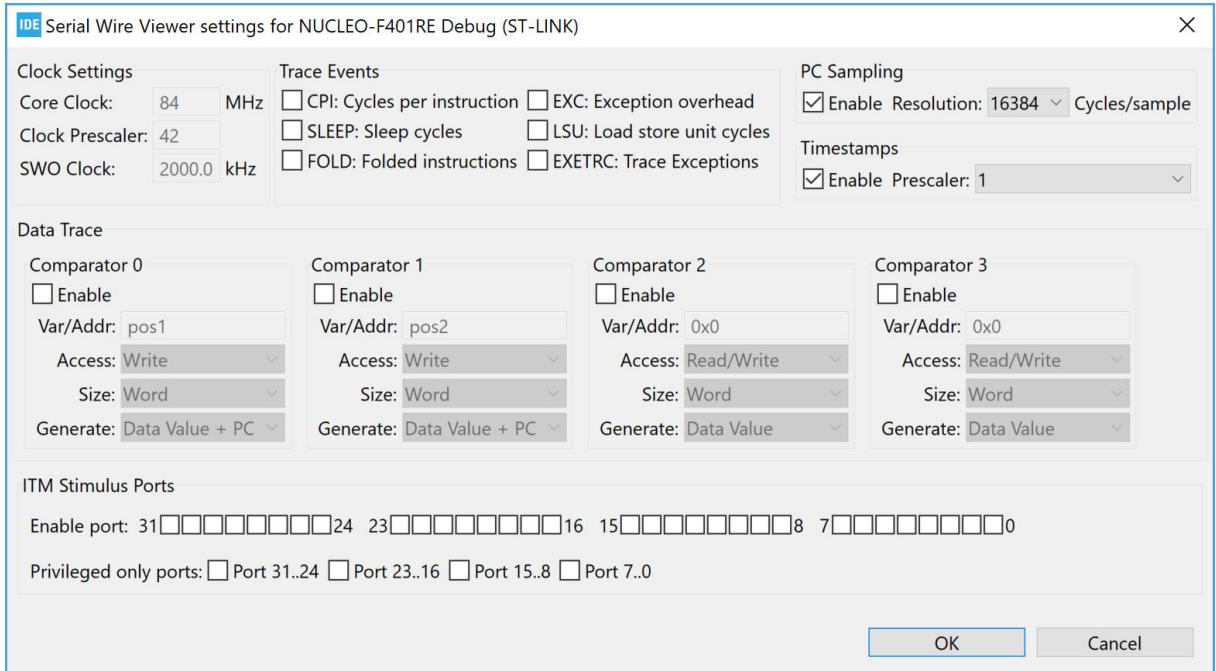

2. Open the *SWV Statistical Profiling* view by selecting [Window]>[Show View]>[SWV Statistical Profiling]. The view is empty since no data is collected yet.
3. Press the red [Start/Stop Trace] button to send the configuration to the board.
4. Resume program debugging. STM32CubeIDE starts collecting statistics about function usage via SWV when the code is executing in the target system.
5. Suspend (Pause) the debugging. The view displays the collected data. The longer the debugging session, the more statistics are collected.

Figure 194. SWV Statistical Profiling

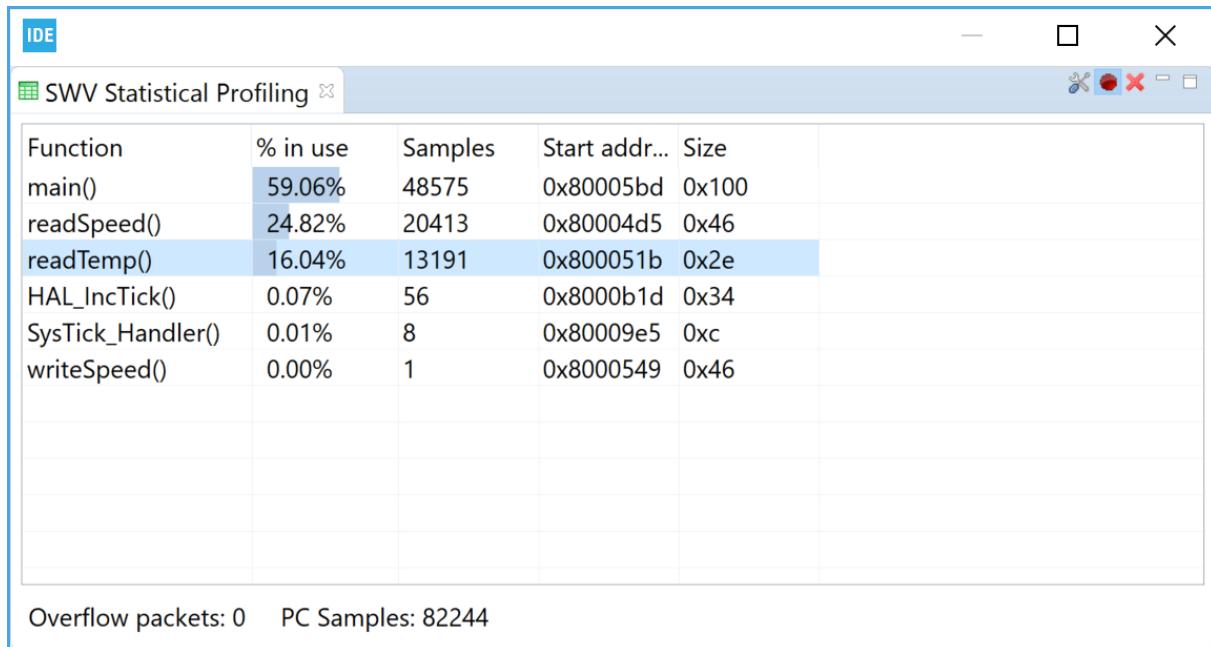**Note:**

A double-click on a function line in the SWV Statistical Profiling view opens the file containing the function in the editor.

The column information in the SWV Statistical Profiling is described in Table 10.

Table 10. SWV Statistical Profiling columns details

Name	Description
Function	The name of the function which is calculated by comparing address information in SWV packets with the program elf file symbol information.
% in use	The calculated percentage of time the function is used.
Samples	The number of samples received from the function.
Start address	The start address for the function.
Size	The size of the function.


4.4

Change the SWV trace buffer size

The incoming SWV packets are saved in the Serial Wire Viewer trace buffer, which has a default maximum size of 2 000 000 packets. To trace more packets, this figure must be increased.

Select the [Windows]>[Preferences] menu. In the *Preferences* dialog, select [STM32Cube]>[Serial Wire Viewer]. Update [Trace buffer size] if needed.

Figure 195. SWV Preferences

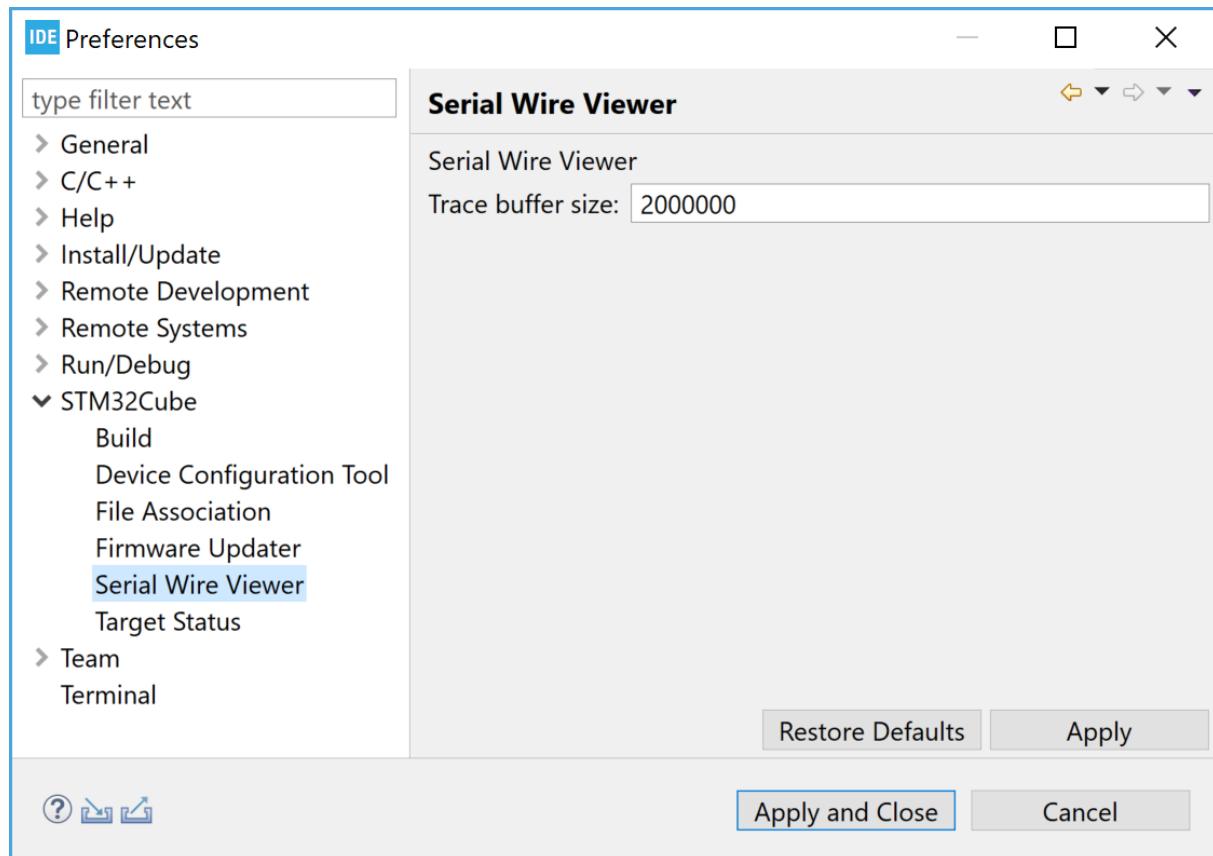

The buffer is stored in the heap. The allocated heap is displayed by first selecting the [Windows]>[Preferences] menu. In the *Preferences* dialog, select [General]. Enable [Show heap status] to display the current heap and allocated memory in the bottom right corner of STM32CubeIDE. There is an upper limit to the amount of memory STM32CubeIDE can allocate. This limit can be increased to store more information during a debug session.

To update the memory limit, proceed as follows:

1. Navigate to the STM32CubeIDE installation directory. Open the folder in which the IDE is stored.
2. Edit the `stm32cubeide.ini` file and change the `-Xmx1024m` parameter to the desired size in megabytes.
3. Save the file and restart STM32CubeIDE.

4.5

Common SWV problems

The following issues can occur when attempting to debug with SWV tracing:

- SWV is not enabled in the debug configuration currently used.
- The SWV Trace is not started, the red **Start/Stop Trace** button on the toolbar in some SWV view needs to be pressed to enable SWV and send SWV configuration to the target board. Then start the program to receive SWV data. For some SWV views the program then needs to be stopped again to visualize received SWV information.
- The SWO receives an excess of data. Reduce the amount of data enabled for tracing.
- The JTAG probe, the GDB server, the target board, or possibly some other part, does not support SWV.

- The target [**Core Clock**] is incorrectly set. It is very important to select the right [**Core Clock**]. If the frequency of the target [**Core Clock**] is unknown, it can sometimes be found by setting a breakpoint in a program loop and open the *Expressions* view, when the breakpoint is hit. Click on [**Add new expression**], type `SystemCoreClock` and press [**Enter**]. This is a global variable that, according to the CMSIS standard, must be set by the software to the correct speed of the [**Core Clock**]. In CMSIS standard libraries, a function called `SystemCoreClockUpdate()` can be included in `main()` to set the `SystemCoreClock` variable. Use the *Variable* view to track it.

Note: *If the software dynamically changes the CPU clock speed during runtime, this might cause SWV to stop as the clocking suddenly becomes wrong during execution.*

To make sure that all data is received, apply the following steps:


1. Open the SWV configuration. Disable all tracing except [**PC Sampling**] and [**Timestamps**]. Set the [**Resolution**] to the highest possible value.
2. Save, and open the *SWV Trace Log* view.
3. Start tracing.
4. Make sure that incoming packets can all be seen in the *SWV Trace Log* view.

5 Special Function Registers (SFRs)

5.1 Introduction to SFRs

Special Function Registers (SFRs) can be viewed, accessed and edited via the *SFRs* view. The view displays the information for the current project. Its content changes if another project is selected. To open the view from the menu, select the [Window]>[Show View]>[SFRs] menu command or use the [Quick Access] field, search for "SFR", and select it from the views.


Figure 196. Open the *SFRs* view using the [Quick Access] field

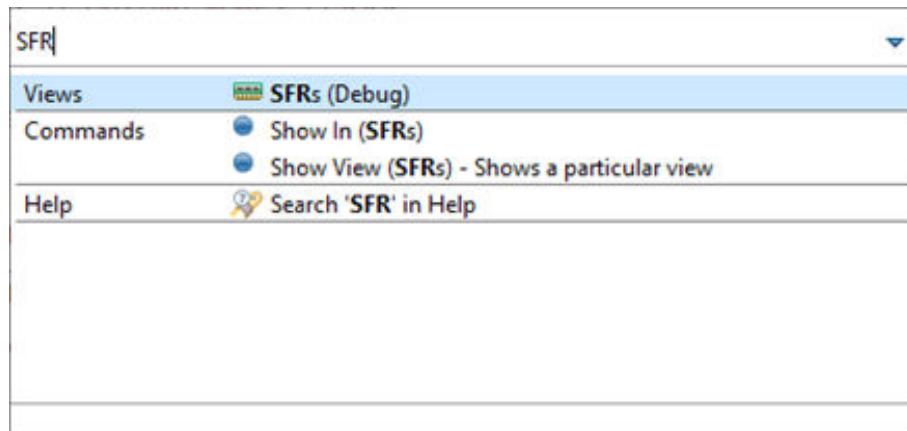

5.2 Using the *SFRs* view

The *SFRs* view contains information about peripherals, registers and bit fields for the STM32 device used in the project. When debugging the project, the registers and bit fields are populated with the values read from the target. The view contains two main nodes, the Cortex®-M node and the STM32 node. The Cortex®-M node includes common Cortex®-M core information and the STM32 node includes the STM32 device specific peripherals.

Figure 197. SFRs view

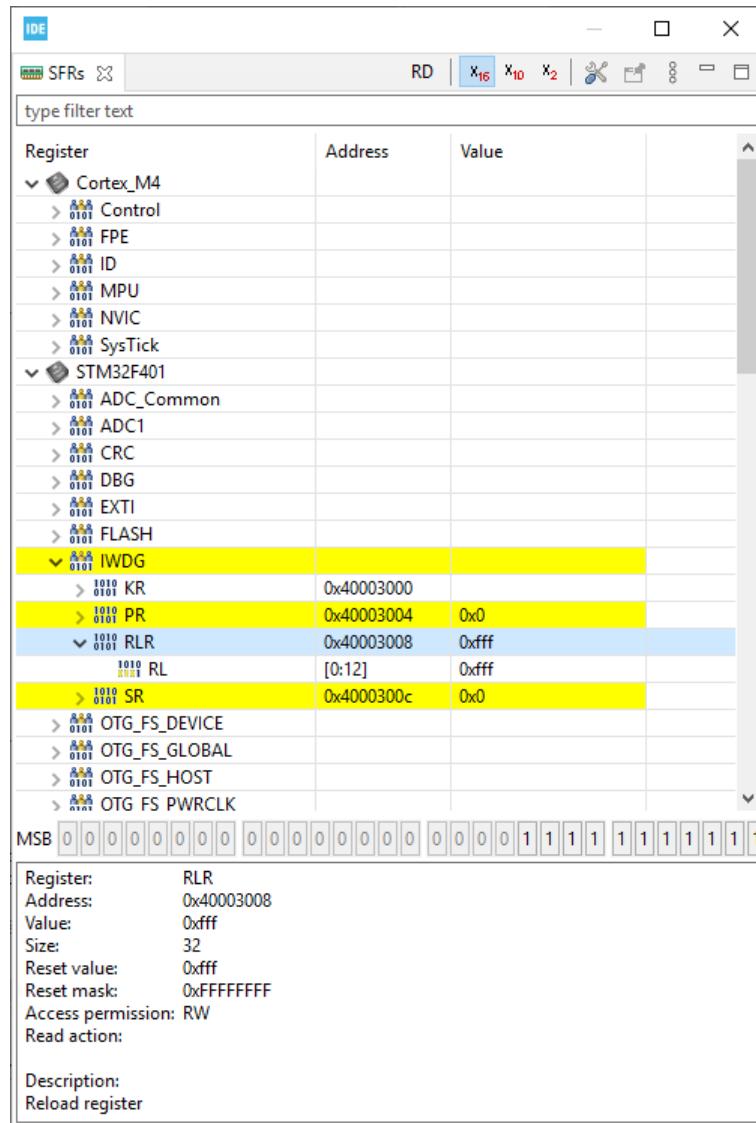

The top of the *SFRs* view contains a search field to filter visible nodes, such as peripherals, registers, bit fields. Upon text entry in the search field, only the nodes containing this text are displayed.

The information at the bottom of the *SFRs* view displays detailed information about the selected line. For registers and bit fields, this includes [Access permission] and [Read action] information.

The [Access permission] contains the following details:

- [RO](read-only)
- [WO](write-only)
- [RW](read-write)
- [W1](writeOnce)
- [RW1](read-writeOnce)

The **Read action** contains information only if there is a read action when reading the register or bit field:

- [clear]
- [set]
- [modify]
- [modifyExternal]

The toolbar buttons are located at the top-right corner of the *SFRs* view.

Figure 198. SFRs view toolbar buttons



The [RD] button in the toolbar is used to force a read of the selected register. It causes a read of the register even if the register, or some of the bit fields in the register, contains a `ReadAction` attribute set in the SVD file.

When the register is read by pressing the [RD] button, all the other registers visible in the view are read again also to reflect all register updates.

The program must be stopped to read registers.

The base format buttons ([X16], [X10], [X2]) are used to change the registers display base.

The [Configure SVD settings] button opens the *CMSIS-SVD Settings Properties Panel* for the current project.

The [Pin] button ("don't follow" selection) can be used to keep focus on the current displayed SVD file even if the *Project Explorer* view is switched to another project.


5.2.1 Favorite lists

During a debug session, the user is interested usually only in certain information about peripherals, registers, or bit fields related to a specific problem. Favorite lists help the user to organize registers into different tabs to better focus on a particular problem area.

To add a set of peripherals, registers, or bit fields to a favorite list, follow these steps:


1. Select a project.
2. Right-click on a node in the *SFRs* view and select [**Add as favorite...**].

Figure 199. Debug - Addition of a node SFRs view as favorite

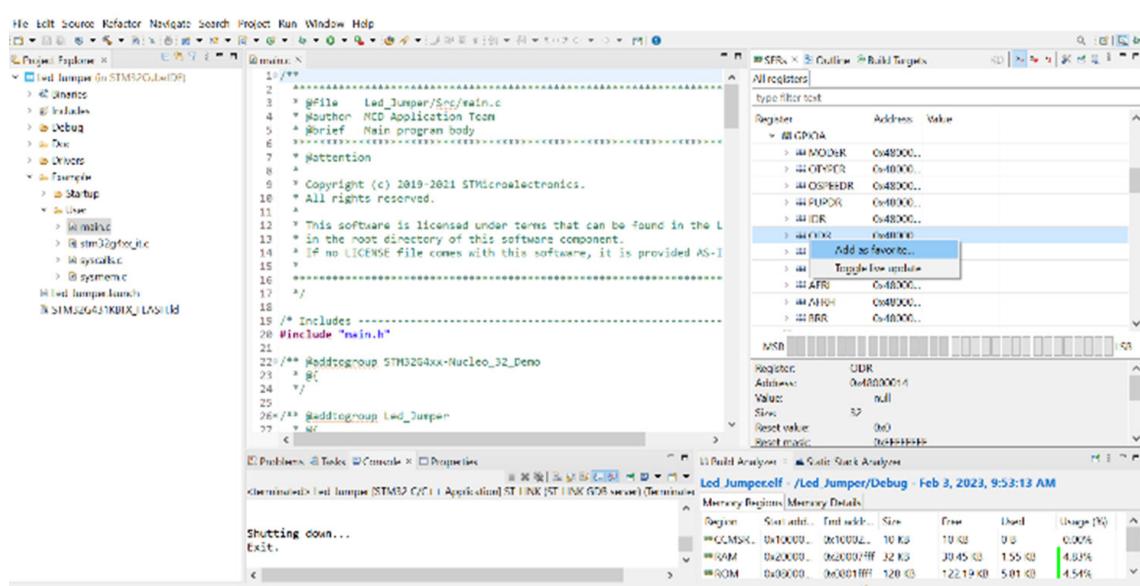


3. Use the dialog that opens to add the selected node to an existing favorite list or create a new list.

Figure 200. Debug - SFRs view favorite list creation pop-up

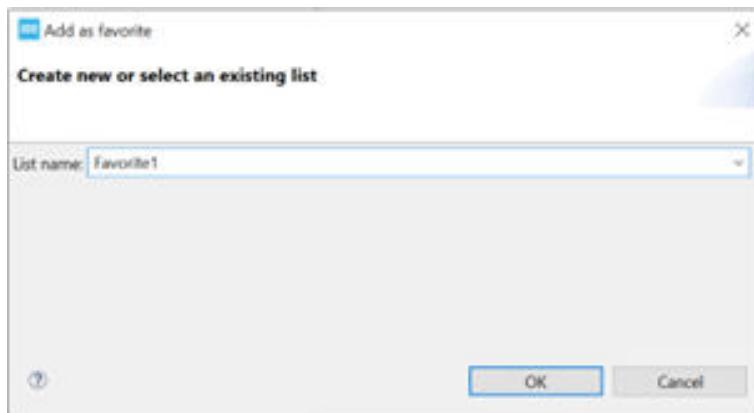

4. The new tab *Favorite1* contains only the selected node added to the view.

Figure 201. Debug - Favorite SFRs view

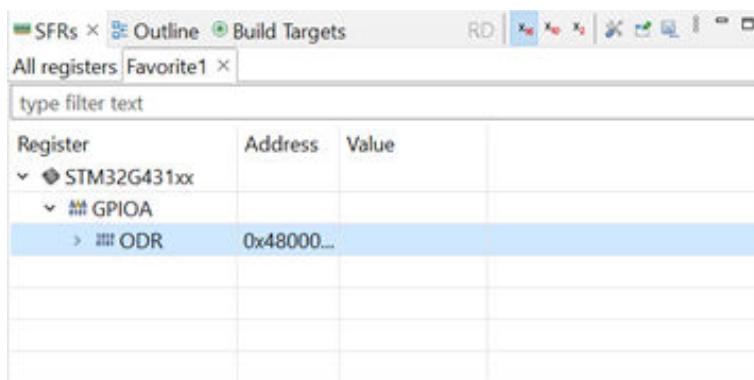


5.2.2 Live update

When debugging a project in the standard way, the program must be stopped to read the registers. With STM32CubeIDE, it is also possible to use the live update debug with the *SFRs* view collecting register values periodically, even when the target is running.


To use the live update debug, first enable the live channel before starting the debugging session.

Figure 202. Debug - Live channel checkbox

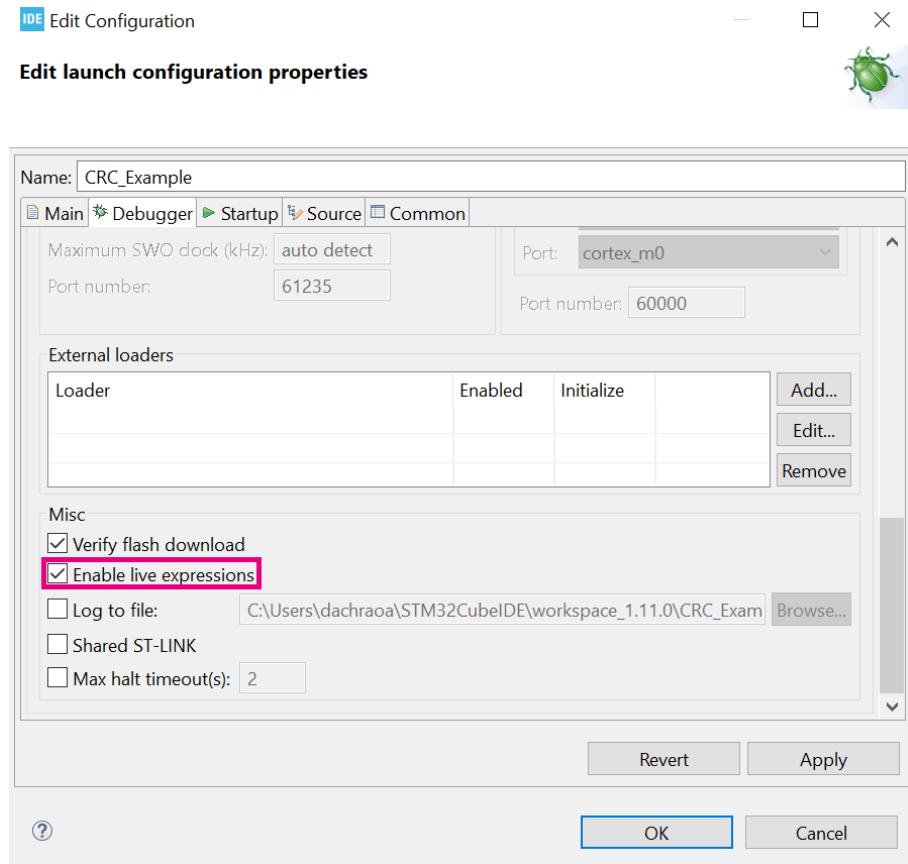

Then, right-click on the desired register node in the SFRs view and select [Toggle live update].

Figure 203. Debug - Live update

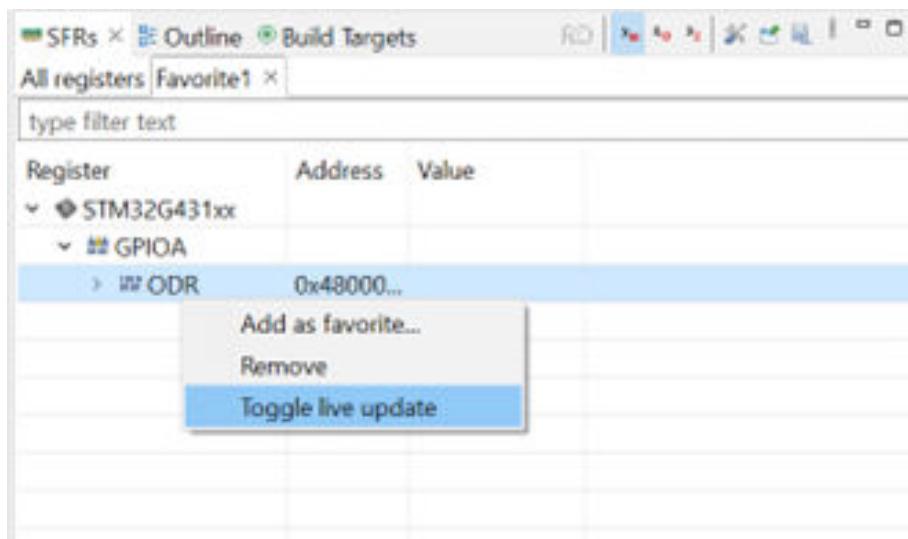

5.2.3 Exporting registers


During an active debugging session, all registers and their corresponding values can be exported to a text file. This allows the user to have a snapshot of all registers, or of the desired registers selected in the favorite list, when the program is stopped at a defined point.

With this feature, the user can easily compare the values of registers between different execution points of the application. This is done using the diff utilities available for comparing previously exported files.

To export registers, perform the following steps in the halted debug session:

1. Select the tab relevant for export.
Exporting the entire device register map from the *All registers* tab might be time consuming. It is more convenient to use the favorites lists as the basis for export.
2. Select [**Export view data to file**] from the *SFRs* view toolbar.

Figure 204. Debug – Export view data to file

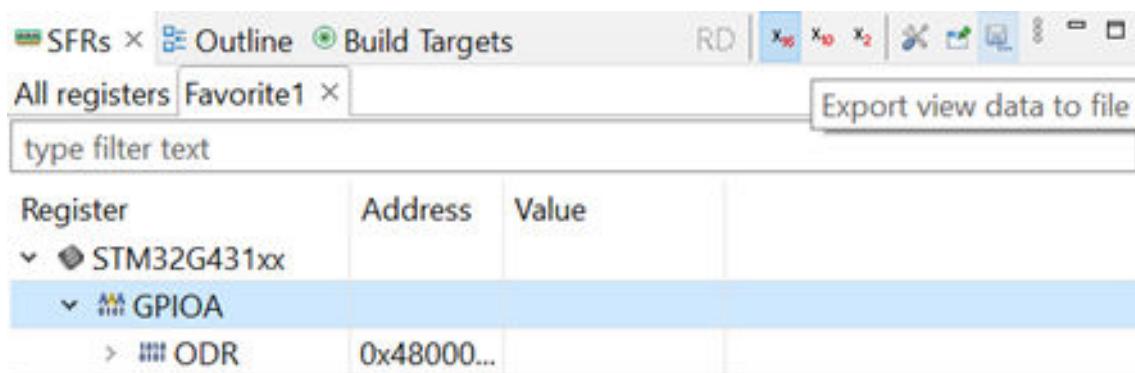


A *View export* dialog opens, where it is possible to define the destination of the export file.

Note that the exported file is placed by default in the `SFR_export` directory of the associated project as a `.txt` file. The file basename is incremented each time.

3. - Select [**Open generated file with associated editor**]>[OK].

Figure 205. Debug – Export destination file

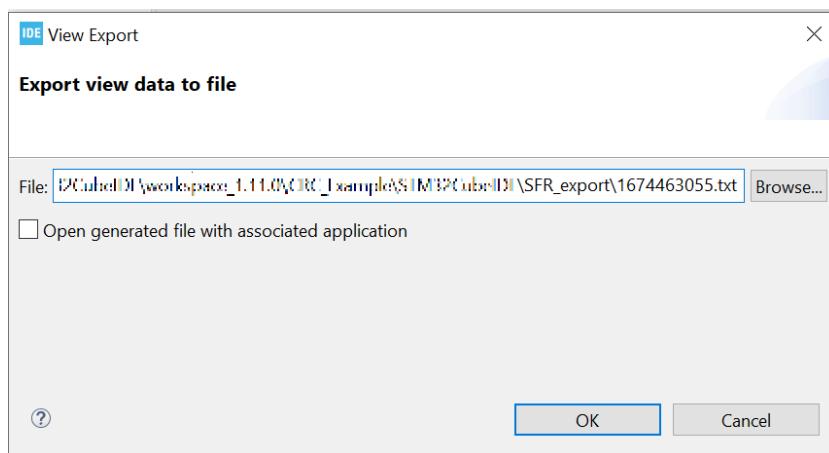

To compare the register values between two different execution points:

1. Select the two files in the *Project Explorer* view.
2. Select [**Compare With**]>[**Each Other**] from the context menu.

5.3


Updating CMSIS-SVD settings

The *SFRs* view for a project can display two CMSIS-SVD (System View Description) files for this project:

- The default file selected by STM32CubeIDE is the SVD file for the selected device in the project
- The other file can be a custom SVD file made to visualize specific user hardware configuration

To update the settings, use the [**Configure SVD settings**] toolbar button in the *SFRs* view to open the *CMSIS-SVD Settings* properties.

Figure 206. *SFRs CMSIS-SVD Settings*

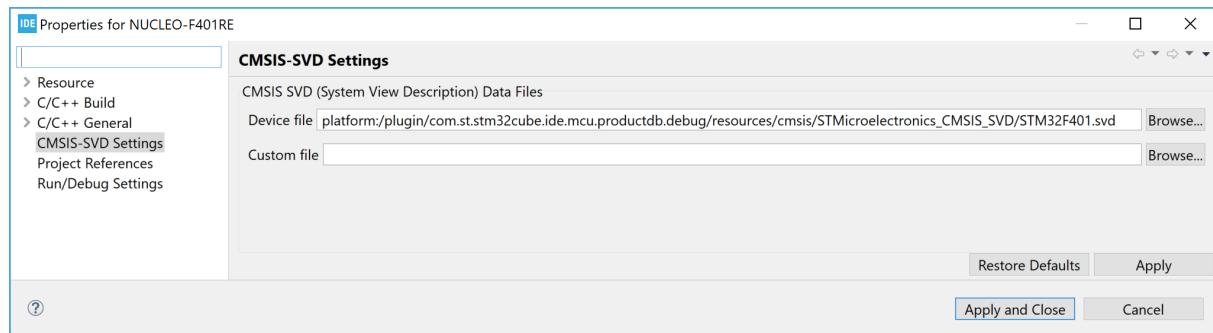

All SVD files must comply with the syntax outlined in the CMSIS-SVD specification available on Arm® website. If these requirements are not met, the *SFRs* view is likely not to show any register information.

The [**Device file**] field is used for the System View Description (SVD) file. This file must describe the whole device. Other views may fetch information from the SVD file pointed out by this field, therefore it is recommended to use this field only for SVD files containing full STM32 device description. Updated SVD files can be obtained from STMicroelectronics (refer to the *HW Model, CAD Libraries and SVD* columns in the device description section on the STMicroelectronics website at www.st.com).

The [**Custom file**] field can be used to define special function registers related to custom hardware, in order to simplify the viewing of different register states. Another possible use case is to create an SFR favourites' file, containing a subset of the content in the [**Device file**]. This subset may be for instance composed of frequently checked registers. If a [**Custom file**] is pointed out, a new top-node in the *SFRs* view is created, which contains the [**Custom file**] related register information.

Both fields may be changed by the user and both fields may be used at the same time.

Note:

- *It is possible to write new values in the value columns of registers and bit fields when these have write access permission.*
- *It is possible to use the SFRs view while the target is running when using the ST-LINK GDB server. However the [**Live expression**] option in the debug configuration must be enabled in this case.*
- *It is not possible to use SFRs view while the target is running when using OpenOCD or SEGGER J-Link.*
- *The SFRs view can also be useful in the C/C++ Editing perspective, however then only the names and addresses of the registers are displayed.*

6 RTOS-aware debugging

Real-time operating systems (RTOS) add different kinds of objects to the design such as threads, semaphores, and timers. STM32CubeIDE includes dedicated set of views to handle Microsoft® Azure® RTOS ThreadX and FreeRTOS™ kernel objects.

These views visualize the status of the RTOS objects when stepping through the code or when the program hits a breakpoint during a debug session.

Note: *FreeRTOS is a trademark of Amazon in the United States and/or other countries.
All other trademarks are the property of their respective owners.*

6.1 Azure® RTOS ThreadX


The following views are available for ThreadX:

- *ThreadX Thread List*
- *ThreadX Semaphores*
- *ThreadX Mutexes*
- *ThreadX Message Queues*
- *ThreadX Event Flags*
- *ThreadX Timers*
- *ThreadX Memory Block Pools*
- *ThreadX Memory Byte Pools*

6.1.1 Finding the views

In the *Debugger* perspective, the ThreadX-related views are opened from the menu. Select the menu command **[Window]>[Show View]>[ThreadX]>[...]** or use **[Quick Access]** and search for “*ThreadX*” and select it from the views.

Figure 207. ThreadX views selectable from the menu

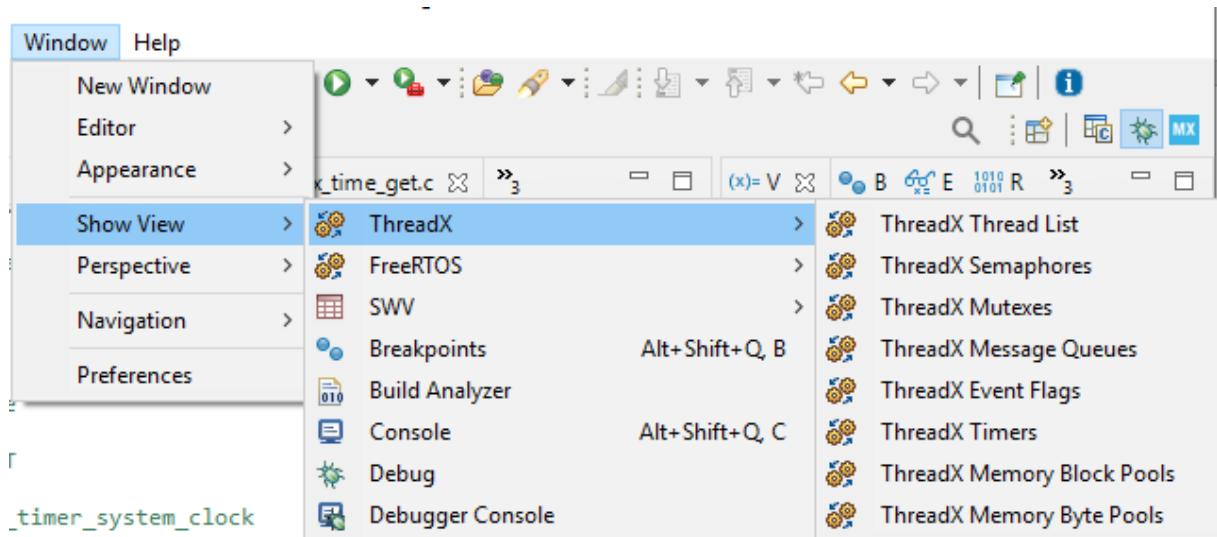


6.1.2 ThreadX Thread List view

The *ThreadX Thread List* view displays detailed information regarding all available threads in the target system. The thread list is updated automatically each time the target execution is suspended.

There is one column for each type of thread parameter, and one row for each thread. If the value of any parameter for a thread has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.


Figure 208. *ThreadX Thread List view (default)*

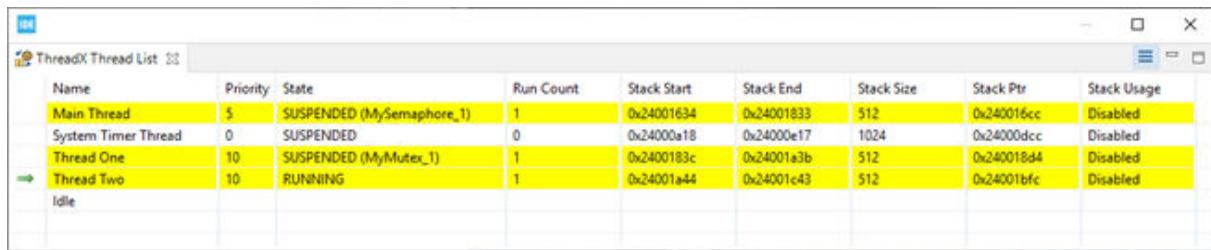

Name	Priority	State	Run Count	Stack Start	Stack End	Stack Size	Stack Ptr	Stack Usage
Main Thread	5	SUSPENDED (MySemaphore_1)	1	0x24001634	0x24001833	512	0x240015cc	Disabled
System Timer Thread	0	SUSPENDED	0	0x24000a18	0x24000e17	1024	0x24000dcc	Disabled
Thread One	10	SUSPENDED (MyMutex_1)	1	0x2400183c	0x24001a3b	512	0x240018d4	Disabled
Thread Two	10	RUNNING	1	0x24001a44	0x24001c43	512	0x24001bfc	Disabled
Idle								

Due to performance reasons, the *Stack Usage* column is disabled by default. To enable the stack analysis, use the [Toggle Stack Checking] toolbar button (circled in pink in Figure 209) in the *ThreadX Thread List* view toolbar.

Figure 209. *ThreadX Thread List view (Stack Usage enabled)*

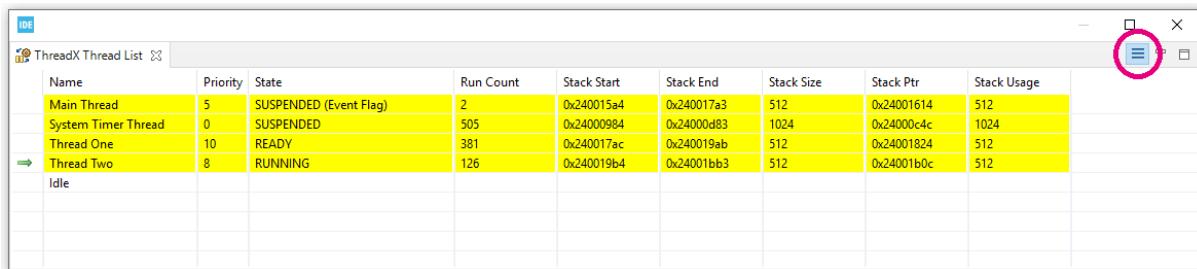

Name	Priority	State	Run Count	Stack Start	Stack End	Stack Size	Stack Ptr	Stack Usage
Main Thread	5	SUSPENDED (Event Flag)	2	0x240015a4	0x240017a3	512	0x24001614	512
System Timer Thread	0	SUSPENDED	505	0x24000984	0x24000d83	1024	0x24000c4c	1024
Thread One	10	READY	381	0x240017ac	0x240019ab	512	0x24001824	512
Thread Two	8	RUNNING	126	0x240019b4	0x24001bb3	512	0x24001b0c	512
Idle								

The column information in the *ThreadX Thread List* view is described in Table 11.

Table 11. ThreadX Thread List details

Name	Description
N/A	A green arrow symbol indicates the currently running thread.
Name	The name assigned to the thread.
Priority	The thread priority.
State	The current state of the thread.
Run Count	The threads run counter.
Stack Start	The start address of the stack area.
Stack End	The end address of the stack area.
Stack Size	The size of the stack area (bytes).
Stack Ptr	The address of the stack pointer.
	The maximum thread stack (bytes).
Stack Usage	By default, ThreadX fills every byte of thread stacks with a 0xEF data pattern during thread creation. See the note below for more information.

Note:

If the Stack Usage column contains the same values as the Stack Size column for all threads, the reason could be that the thread stack has not been filled with the 0xEF data pattern during task creation. This happens if the ThreadX kernel is built with stack data pattern filling disabled. Normally, a <tx_user.h> file is used, which contains a TX_DISABLE_STACK_FILLING define. Comment this define as shown in the example below and rebuild the project to solve the problem. It is good to know that the <tx_user.h> file also contains a TX_ENABLE_STACK_CHECKING define, which can be enabled to get run-time stack checking if stack corruption is detected. Additional information can be found in the ThreadX user guide.

Example of tx_user.h file from ThreadX header file with commented TX_ENABLE_STACK_CHECKING define:

```
/* Determine if stack filling is enabled. By default, ThreadX stack filling is enabled,
   which places an 0xEF pattern in each byte of each thread's stack. This is used by
   debuggers with ThreadX-awareness and by the ThreadX run-time stack checking feature. */

/* #define TX_DISABLE_STACK_FILLING */

/* Determine whether or not stack checking is enabled. By default, ThreadX stack checking is
   disabled. When the following is defined, ThreadX thread stack checking is enabled. If stack
   checking is enabled (TX_ENABLE_STACK_CHECKING is defined), the TX_DISABLE_STACK_FILLING
   define is negated, thereby forcing the stack fill which is necessary for the stack checking
   logic. */

/*#define TX_ENABLE_STACK_CHECKING*/
```

6.1.3

ThreadX Semaphores view

The *ThreadX Semaphores* view displays detailed information regarding all available resource semaphores in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of semaphore parameter, and one row for each semaphore. If the value of any parameter for a particular semaphore has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 210. ThreadX Semaphores view

Name	Count	Suspended
MySemaphore_1	0	Main Thread
MySemaphore_2	5	
MySemaphore_3	8	

Table 12. ThreadX Semaphores details

Name	Description
Name	The name assigned to the semaphore.
Count	The current semaphore count.
Suspended	The threads currently suspended because of the semaphore state.

6.1.4 ThreadX Mutexes view

The *ThreadX Mutexes* view displays detailed information regarding all available mutexes in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of mutex parameter, and one row for each mutex. If the value of any parameter for a particular mutex has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 211. ThreadX Mutexes view

Name	Owner	Owner Count	Suspended
MyMutex_1	Main Thread	1	Thread One, Thread Two
MyMutex_2		0	
MyMutex_3		0	

Table 13. ThreadX Mutexes details


Name	Description
Name	The name assigned to the mutex.
Owner	The thread that currently owns the mutex.
Owner Count	The mutex owner count (number of get operations performed by the owner thread).
Suspended	The threads currently suspended because of the mutex state.

6.1.5 ThreadX Message Queues view

The *ThreadX Message Queues* view displays detailed information regarding all available message queues in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of message queue parameter, and one row for each message queue. If the value of any parameter for a particular message queue has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 212. *ThreadX Message Queues* view

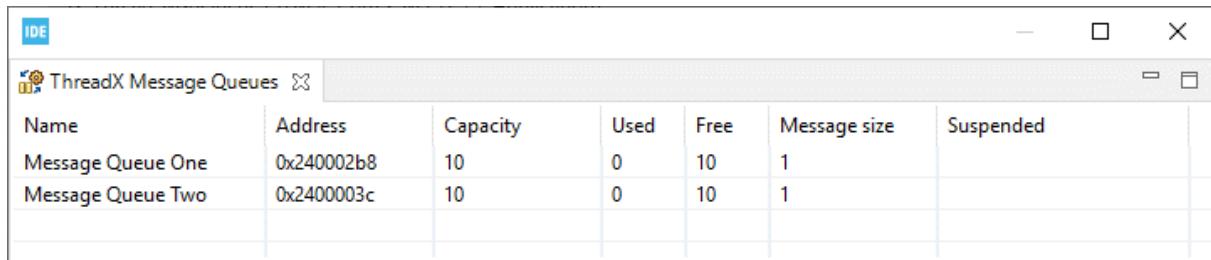

Name	Address	Capacity	Used	Free	Message size	Suspended
Message Queue One	0x240002b8	10	0	10	1	
Message Queue Two	0x2400003c	10	0	10	1	

Table 14. *ThreadX Message Queues* details

Name	Description
Name	The name assigned to the message queue.
Address	The address of the message queue.
Capacity	The maximum number of entries allowed in the queue.
Used	The current number of used entries in the queue.
Free	The current number of free entries in the queue.
Message size	The size (in 32-bit words) of each message entry.
Suspended	The threads currently suspended because of the message queue state.

6.1.6 ThreadX Event Flags view

The *ThreadX Event Flags* view displays detailed information regarding all available event flag groups in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of parameter, and one row for each event flag group. If the value of any parameter for a particular event flag group has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 213. ThreadX Event Flags view

Name	Flags	Suspended
Event Flag1	0	Main Thread
Event Flag2	0	

Table 15. ThreadX Event Flags details

Name	Description
Name	The name assigned to the event flag group.
Flags	The current value of the event flag group.
Suspended	The threads currently suspended because of the event flag group.

6.1.7 ThreadX Timers view

The *ThreadX Timers* view displays detailed information regarding all available software timers in the target system. The timers view is updated automatically each time the target execution is suspended.

There is one column for each type of timer parameter, and one row for each timer. If the value of any parameter for a particular timer has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 214. ThreadX Timers view

Name	Remaining	Re-init	Function
MyTimer_1	68	100	0x80005d1 <MyTimerFunction1>
MyTimer_2	72	200	0x80005f3 <MyTimerFunction2>
MyTimer_3	276	500	0x8000615 <MyTimerFunction3>

Table 16. ThreadX Timers details


Name	Description
Name	The name assigned to the timer.
Remaining	The remaining number of ticks before the timer expires.
Re-init	The timer re-initialization value (ticks) after expiration. It contains value 0 for one-shot timers.
Function	The address and name of the function that is called when the timer expires.

6.1.8 ThreadX Memory Block Pools view

The *ThreadX Memory Block Pools* view displays detailed information regarding all available memory block pools in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of parameter, and one row for each memory block pool. If the value of any parameter for a particular memory block pool has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 215. *ThreadX Memory Block Pools* view

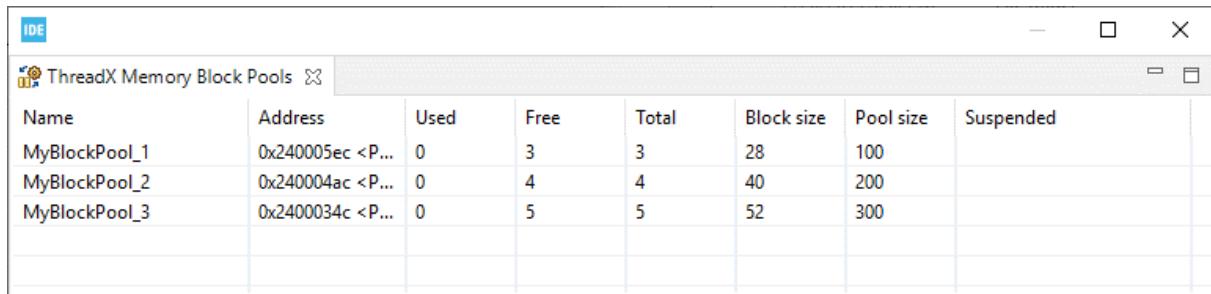

Name	Address	Used	Free	Total	Block size	Pool size	Suspended
MyBlockPool_1	0x240005ec <P...	0	3	3	28	100	
MyBlockPool_2	0x240004ac <P...	0	4	4	40	200	
MyBlockPool_3	0x2400034c <P...	0	5	5	52	300	

Table 17. *ThreadX Memory Block Pools* details

Name	Description
Name	The name assigned to the memory block pool.
Address	The starting address of the memory block pool.
Used	The current number of allocated blocks.
Free	The current number of free blocks.
Total	The total number of memory block pools available.
Block size	The size (bytes) of each block.
Pool size	The total pool size (bytes).
Suspended	The threads currently suspended because of the memory block pool state.

6.1.9 ThreadX Memory Byte Pools view

The *ThreadX Memory Byte Pools* view displays detailed information regarding all available memory byte pools in the target system. The view is updated automatically each time the target execution is suspended.

There is one column for each type of parameter, and one row for each memory byte pool. If the value of any parameter for a particular memory byte pool has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 216. *ThreadX Memory Byte Pools* view

ThreadX Memory Byte Pools						
Name	Address	Used	Free	Size	Fragments	Suspended
Byte Pool	0x24000f84 "\214\021"	1664	6528	8192	7	

Table 18. *ThreadX Memory Byte Pools* details


Name	Description
Name	The name assigned to the memory byte pool.
Address	The starting address of the memory byte pool.
Used	The current number of allocated bytes.
Free	The current number of free bytes.
Size	The number of fragments.
Fragments	The size (bytes) of each block.
Suspended	The threads currently suspended because of the memory byte pool state.

6.1.10 Azure® RTOS TraceX tool

Important: The Microsoft® Azure® RTOS TraceX tool (TraceX) only exists for Windows®.

To open TraceX automatically upon data export, select the [Windows]>[Preferences] menu to associate the file type .trx with TraceX through the *Preferences* window as shown in Figure 217.

Figure 217. File associations

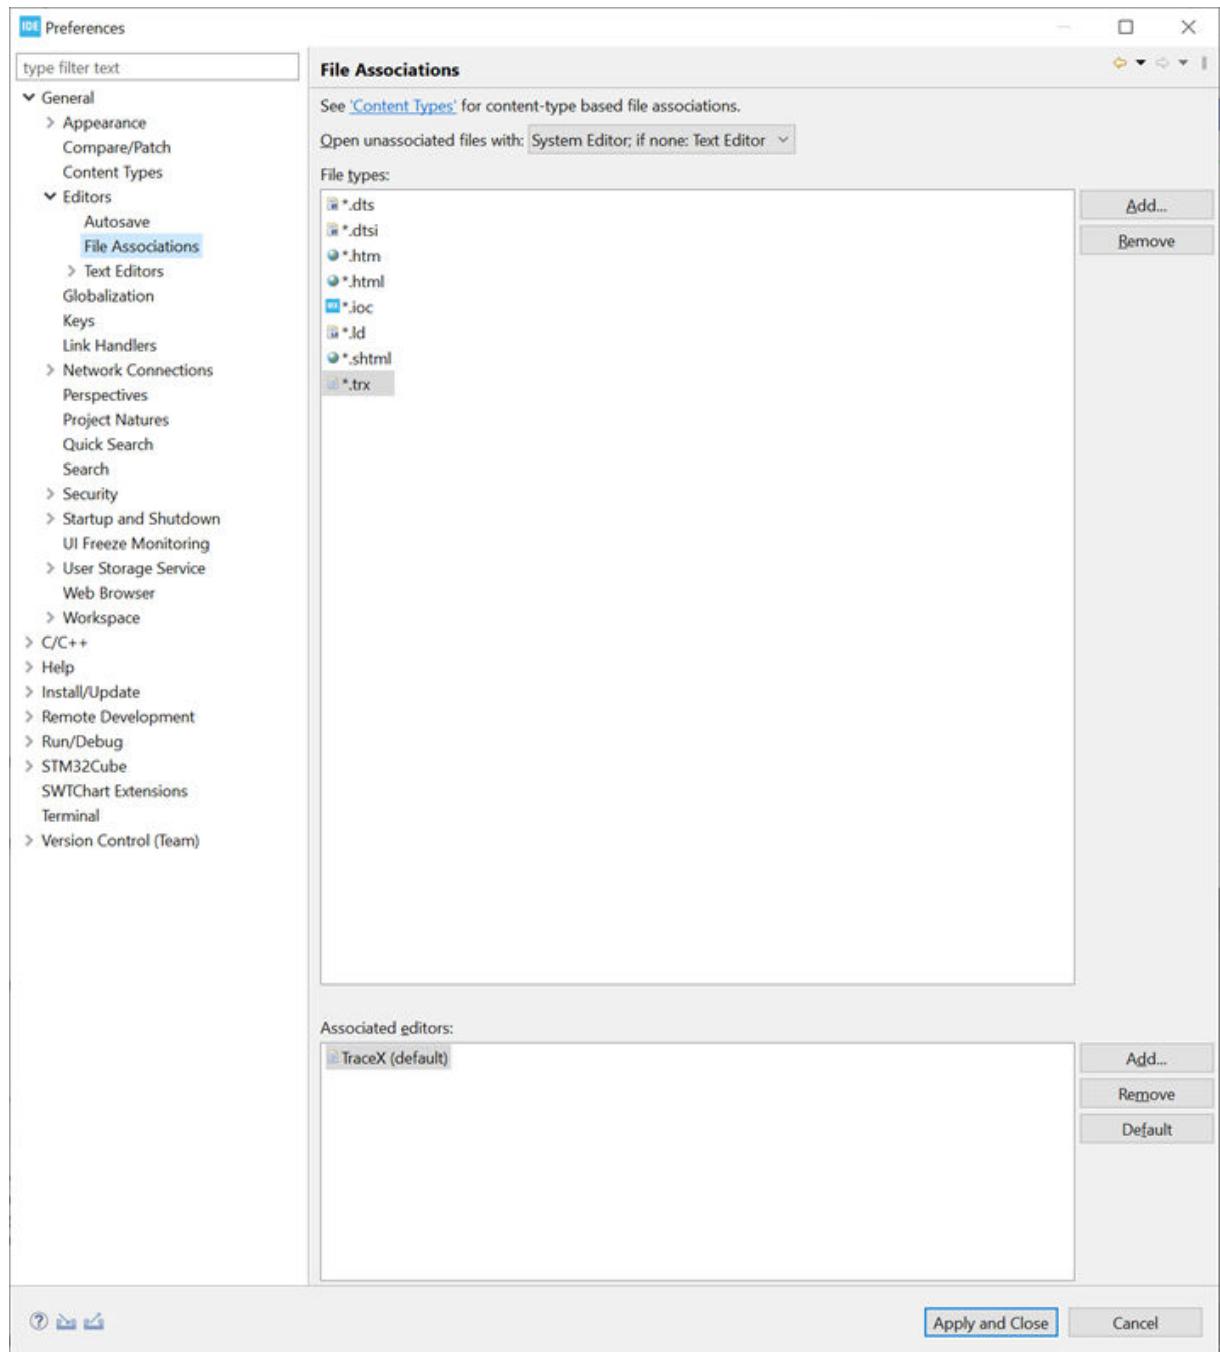

The Azure® RTOS ThreadX kernel can generate various system events into the MCU RAM buffer. These events can later be analyzed “off target” by the TraceX application. This requires an export of the RAM buffer to a suitable file format. Trace data can be exported using the [Export trace] button available from the menu of any Azure® RTOS ThreadX view as shown in Figure 218 and Figure 219.

Figure 218. RAM buffer export (1 of 2)

Name	Pri...	State	Run Count	Stack Start	Stack End	Stack Size	Stack Ptr	Stack Usa...	View Menu
sine wave	8	SLEEP (1)	124	0x24002...	0x24002...	1024	0x24002...	Disabled	
System Timer T...	0	SUSPENDED	123	0x24013...	0x24013...	1024	0x24013...	Disabled	
thread 0	1	SLEEP (10)	13	0x24000...	0x24000...	1024	0x24000...	Disabled	
thread 1	16	READY	1874	0x24000...	0x24000...	1024	0x24000...	Disabled	
↳ thread 2	16	RUNNING	1876	0x24000...	0x24000...	1024	0x24000...	Disabled	
thread 3	8	SUSPENDED (semaph...	62	0x24000...	0x24001...	1024	0x24000f...	Disabled	
thread 4	8	SLEEP (2)	62	0x24001...	0x24001...	1024	0x24001...	Disabled	
thread 5	4	SUSPENDED (event fl...	13	0x24001...	0x24001...	1024	0x24001...	Disabled	
thread 6	8	SUSPENDED (mutex 0)	62	0x24001...	0x24001...	1024	0x24001...	Disabled	
thread 7	8	SLEEP (2)	62	0x24001...	0x24002...	1024	0x24001f...	Disabled	
Idle									

Figure 219. RAM buffer export (2 of 2)

Name	Pri...	State	Run Count	Stack Start	Stack End	Stack Size	Stack Ptr	Stack Usa...	Show view... >	Export trace
sine wave	8	SLEEP (1)	124	0x24002...	0x24002...	1024	0x24002...	Disabled		
System Timer T...	0	SUSPENDED	123	0x24013...	0x24013...	1024	0x24013...	Disabled		
thread 0	1	SLEEP (10)	13	0x24000...	0x24000...	1024	0x24000...	Disabled		
thread 1	16	READY	1874	0x24000...	0x24000...	1024	0x24000...	Disabled		
↳ thread 2	16	RUNNING	1876	0x24000...	0x24000...	1024	0x24000...	Disabled		
thread 3	8	SUSPENDED (semaph...	62	0x24000...	0x24001...	1024	0x24000f...	Disabled		
thread 4	8	SLEEP (2)	62	0x24001...	0x24001...	1024	0x24001...	Disabled		
thread 5	4	SUSPENDED (event fl...	13	0x24001...	0x24001...	1024	0x24001...	Disabled		
thread 6	8	SUSPENDED (mutex 0)	62	0x24001...	0x24001...	1024	0x24001...	Disabled		
thread 7	8	SLEEP (2)	62	0x24001...	0x24002...	1024	0x24001f...	Disabled		


There are four prerequisites to export traces:

- The Azure® RTOS ThreadX kernel must be built with trace enabled
 - The embedded STM32CubeMX editor provides GUI support to enable the trace events
- The function `tx_trace_enable()` must be called before any data can be exported
- The trace export operation must not be performed inside the kernel API to avoid data file corruption
- The RAM buffer can only be read when the target is halted

On run

When exporting, the export destination is prepopulated from the active debug context available at: \$PATH_TO_PROJECT/TraceX/\$LAUNCH_CONFIGNAME.trx. If previous trace data already exists, the user is prompted whether to overwrite them as shown in Figure 220.


Figure 220. Existing trace overwrite

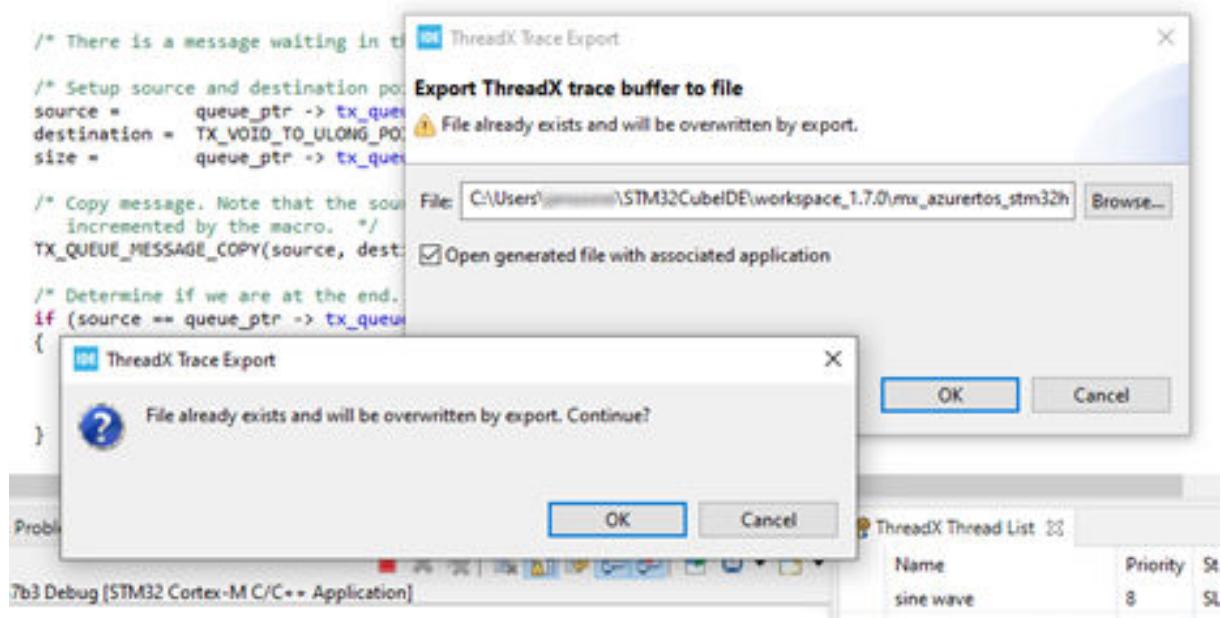

On export

When exporting the data to TraceX, STM32CubeIDE reads the RAM buffer from the target. The corresponding data is then used to create a *.trx file, which can later be opened with the TraceX tool. By default, a TraceX directory is created in the project, containing the .trx file.

Figure 221. TraceX analysis

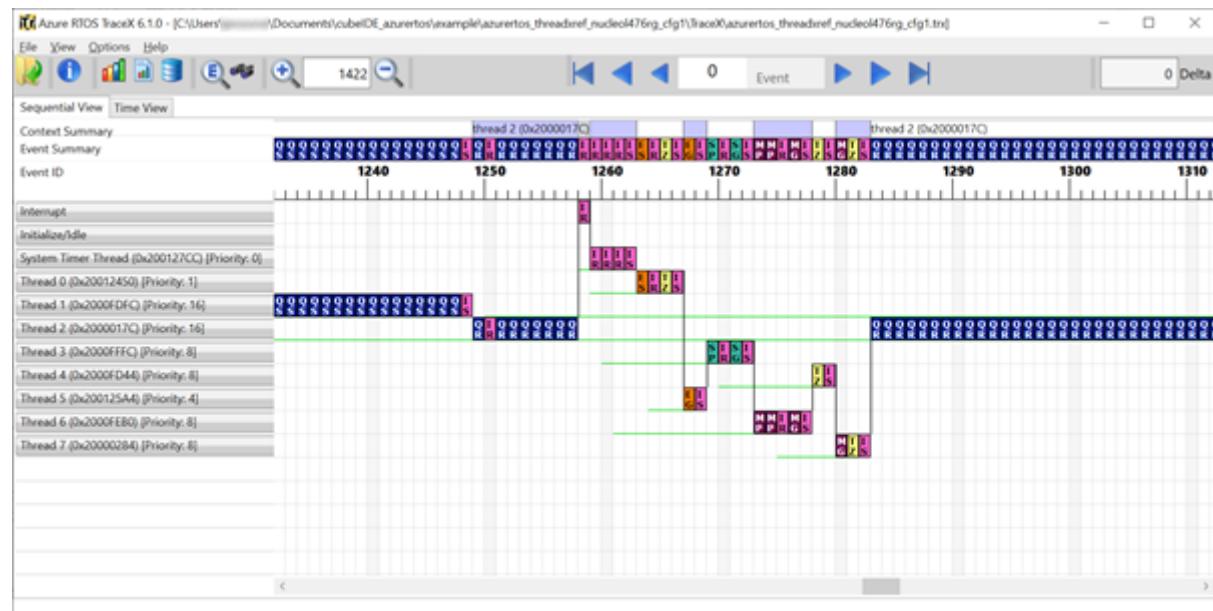

- Remember:
- The export function only works once TraceX is initialized (`tx_trace_enable()`). The tool exports the last N trace events.
 - There is a risk of exported trace data corruption if the export is performed inside the kernel API. To avoid such a corruption, make sure that the export is performed when the target is at a suitable location. For instance, set a breakpoint outside the kernel API or configure the trace full callback.

6.2 FreeRTOS™

The following views are available for FreeRTOS™:

- FreeRTOS Task List
- FreeRTOS Timers
- FreeRTOS Semaphores
- FreeRTOS Queues

6.2.1 Requirements

To be able to populate the FreeRTOS™-related views with detailed information about the RTOS status, some files in the FreeRTOS™ kernel must be configured. The following sections describes some required configurations. Consult the *FreeRTOS reference manual* for detailed information.

6.2.1.1 Enable trace information

The define `configUSE_TRACE_FACILITY` in `freeRTOSConfig.h` must be enabled (set to 1). It results in additional structure members and functions to be included in the build and enables for instance stack checking in the *FreeRTOS Task List* view and lists the semaphore types in the *FreeRTOS Semaphores* view.

Example:

```
freeRTOSConfig.h
#define configUSE_TRACE_FACILITY           1
```

6.2.1.2 Add to registry

The application software must call the `vQueueAddToRegistry()` function to make the *FreeRTOS Queues* and *FreeRTOS Semaphores* views able to display objects. The function adds an object to the FreeRTOS™ Queue registry and takes two parameters, the first is the handle of the queue, and the second is a description of the queue, which is presented in FreeRTOS™-related views.

Example:

```
vQueueAddToRegistry(mailId, "osMailQueue");
vQueueAddToRegistry(osQueueHandle, "osQueue");
vQueueAddToRegistry(osSemaphoreHandle, "osSemaphore");
```

6.2.1.3 RTOS profiling information

To get valid RTOS run time statistics, the application must set up a run time statistics time base. The time-base clock is recommended to run at least 10 times faster than the frequency of the clock used to handle the RTOS tick interrupt. To enable the FreeRTOS™ collection of run time statistics, file `freeRTOSConfig.h` must include:

1. Define `configGENERATE_RUN_TIME_STATS` 1
2. Define `portCONFIGURE_TIMER_FOR_RUN_TIME_STATS()` to call the function that configures a timer to be used for profiling
3. Define `portGET_RUN_TIME_COUNTER_VALUE()` to call the function that reads the current value from the profiling timer

Example:

```
freeRTOSConfig.h
#define configGENERATE_RUN_TIME_STATS           1
#define portCONFIGURE_TIMER_FOR_RUN_TIME_STATS()  configureRunTime()
#define portGET_RUN_TIME_COUNTER_VALUE()         getRunTimeCounter()
```

Or, if a run time variable is available in the system:

```
freeRTOSConfig.h
#define configGENERATE_RUN_TIME_STATS           1
#define portCONFIGURE_TIMER_FOR_RUN_TIME_STATS() (RunTime=0UL)
#define portGET_RUN_TIME_COUNTER_VALUE()         RunTime
```

If the *Run Time* column in the *FreeRTOS Task List* view displays N/A after making these three settings, the problem can arise if project is not built with optimization level -O0. The reason is quite likely found in the declaration in `tasks.c` of `ulTutorialRunTime`.

Example:

```
#if ( configGENERATE_RUN_TIME_STATS == 1 )
    PRIVILEGED_DATA static uint32_t ulTaskSwitchedInTime = 0UL;
    /*< Holds the value of a timer/counter the last time a task was switched in. */
    PRIVILEGED_DATA static uint32_t ulTotalRunTime = 0UL;
    /*< Holds the total amount of execution time as defined by the run time counter clock. */
#endif
```

Solutions:

- Either declare the variable as volatile:


```
PRIVILEGED_DATA volatile static uint32_t ulTotalRunTime = 0UL;
/*< Holds the total amount of execution time as defined by the run time counter clock.
 */
```

- Or simply change the optimization level only for `tasks.c` by
 1. Right-clicking it in *Project Explorer* view and open *Properties*
 2. Select [Properties]>[C/C++ Build]>[Settings]>[Tool Settings]>[Optimization]
 3. Set [Optimization Level] to None (-O0)

6.2.2 Finding the views

In the *Debugger* perspective, the FreeRTOS™-related views are opened from the menu. Select the menu command [Window]>[Show View]>[FreeRTOS]>[...] or use [Quick Access], search for “FreeRTOS” and select from the views.

Figure 222. FreeRTOS™-related views selectable from the menu

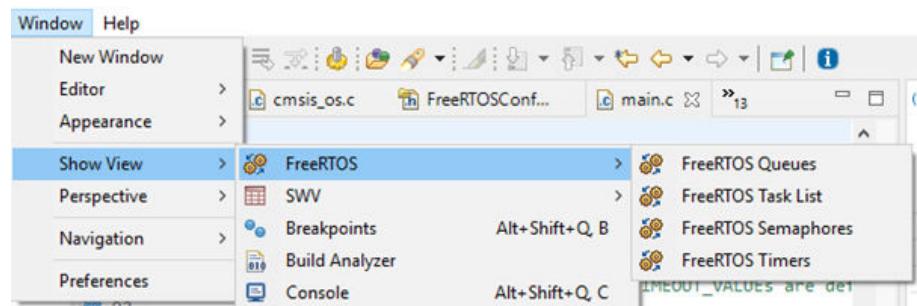

6.2.3 FreeRTOS Task List view

The *FreeRTOS Task List* view displays detailed information regarding all available tasks in the target system. The task list is updated automatically each time the target execution is suspended.

There is one column for each type of task parameter, and one row for each task. If the value of any parameter for a task has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow, as shown in the example in Figure 223.

Figure 223. FreeRTOS Task List (default)

Name	Priority (Base/...	Start of Stack	Top of Stack	State	Event Object	Min Free Stack	Run Time (%)
10xE	0/0	0x200001c0	0x20000558 <ucHeap+1308>	RUNNING		Disabled	99%
LEDThread	3/3	0x20000150	0x20000308 <ucHeap+716>	SUSPENDED		Disabled	0%
Tmr Svc	2/2	0x20000630	0x200009b0 <ucHeap+2420>	BLOCKED	TimQ	Disabled	1%

Due to performance reasons, stack analysis (the *Min Free Stack* column) is disabled by default. To enable stack analysis (refer to Figure 225), use the *Toggle Stack Checking* toolbar button in the *FreeRTOS Task List* view toolbar as shown in Figure 224.

Figure 224. FreeRTOS™ *Toggle Stack Checking*

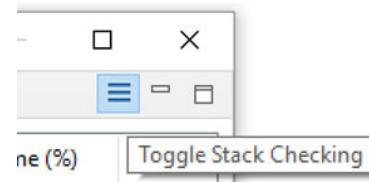


Figure 225. FreeRTOS Task List (*Min Free Stack* enabled)

Name	Priority (Base...)	Start of St...	Top of St...	State	Event Object	Min Free Stack	Run Time (%)
IDLE	0/0	0x200003c0	0x20000560 <ucHeap+1316>	RUNNING		>256	99%
LEDThread	3/3	0x20000150	0x200002b0 <ucHeap+636>	DELAYED		>256	0%
Tmr Svc	2/2	0x20000630	0x200009b0 <ucHeap+2420>	BLOCKED	TmrQ	>256	1%

The *FreeRTOS Task List* view in Figure 225 contains a *Min Free Stack* column. The column information is changed to *Stack Usage* if the project is built with the following define set:

```
#define configRECORD_STACK_HIGH_ADDRESS 1
```

In this case, the full stack usage is presented according to the format *Used/Total(%Used)* as shown in Figure 226.

Figure 226. FreeRTOS Task List with *ConfigRECORD_STACK_HIGH_ADDRESS* enabled

Name	Priority (B...)	Start of St...	Top of St...	State	Event Object	Stack Usage	Run Time...
IDLE	0/0	0x20000...	0x20000...	RUNNING		96B / 2052B (4.7%)	N/A
THREAD1	24/24	0x20001...	0x20001...	DELAYED		144B / 512B (28.1%)	N/A
THREAD2	24/24	0x20001...	0x20001...	DELAYED		144B / 512B (28.1%)	N/A
Tmr Svc	2/2	0x20000...	0x20000...	BLOCKED	TmrQ	168B / 1028B (16.3%)	N/A

The column information in the *FreeRTOS Task List* view is described in [Table 19](#).

Table 19. FreeRTOS Task List details


Name	Description
N/A	A green arrow symbol indicates the task currently running.
Name	The name assigned to the task.
Priority (Base/Actual)	The task base priority and actual priority. The base priority is the priority assigned to the task. The actual priority is a temporary priority assigned to the task due to the priority inheritance mechanism.
Start of Stack	The address of the stack region assigned to the task.
Top of Stack	The address of the saved task stack pointer.
State	The current state of the task.
Event Object	The name of the resource that has caused the task to be blocked.
Min Free Stack ⁽¹⁾	The stack “high watermark”. Displays the minimum number of bytes left on the stack for a task. A value of 0 (most likely) indicates that a stack overflow has occurred. Note: <i>This feature must be enabled in the “View” toolbar.</i>
Run Time (%)	The run time statistics provide information on the percentage of time the task has been used. This can be used for profiling the system during development.

- When the application is built with `configRECORD_STACK_HIGH_ADDRESS = 1`, the column name is changed to “Stack Usage”. It displays the stack usage in detailed format as “Used/Total(%Used)”.

6.2.4 FreeRTOS Timers view

The *FreeRTOS Timers* view displays detailed information regarding all available software timers in the target system. The view is updated automatically each time the target execution is suspended. There is one column for each type of timer parameter, and one row for each timer. If the value of any parameter for a timer has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 227. FreeRTOS Timers

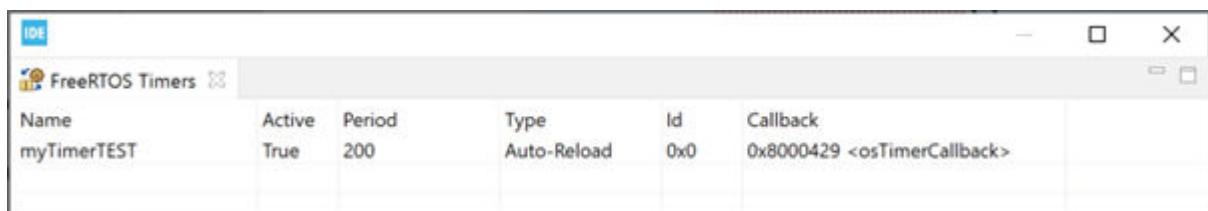

The column information in the *FreeRTOS Timers* view is described in Table 20.

Table 20. *FreeRTOS Timers* details

Name	Description
Name	The name assigned to the timer.
Active	The active status information.
Period	The time (in ticks) between timer start and the execution of the callback function.
Type	The type of timer. Auto-reload timers are automatically reactivated after expiration. One-shot timers expire only once.
Id	The timer identifier.
Callback	The address and name of the callback function executed when the timer expires.

Note:

1. If no name appears in the Name field, check that the timer is created with a name. The first parameter when calling `xTimerCreate()` must contain the timer name string.
2. When using software timers, a `Tmr_Svc` task and a `TmrQ` queue are created automatically. These objects are displayed in the FreeRTOS Task List view and FreeRTOS Queues view.


6.2.5 FreeRTOS Semaphores view

The *FreeRTOS Semaphores* view displays detailed information regarding all available synchronization objects in the target system, including:

- Mutexes
- Counting semaphores
- Binary semaphores
- Recursive semaphores

The view is updated automatically each time the target execution is suspended. There is one column for each type of semaphore parameter, and one row for each semaphore. If the value of any parameter for a semaphore has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 228. *FreeRTOS Semaphores*

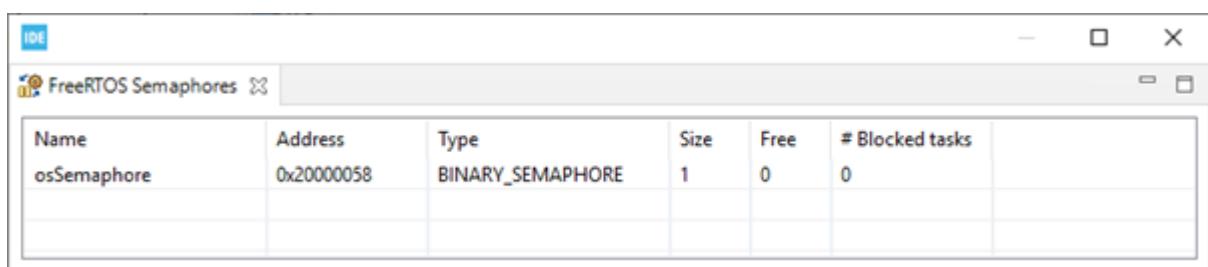

Note:

If the Type information displays N/A, make sure that the define `configUSE_TRACE_FACILITY` is enabled in file `FreeRTOSconfig.h`.

The column information in the *FreeRTOS Semaphores* view is described in Table 21.


Table 21. *FreeRTOS Semaphores* details

Name	Description
Name	The name assigned to the semaphore.
Address	The address of the object.
Type	The type of the object.
Size	The maximum number of owning tasks.
Free	The number of free slots currently available.
#Blocked tasks	The number of tasks currently blocked waiting for the object.

6.2.6 FreeRTOS Queues view

The *FreeRTOS Queues* view displays detailed information regarding all available queues in the target system. The view is updated automatically each time the target execution is suspended. There is one column for each type of queue parameter, and one row for each queue. If the value of any parameter for a queue has changed since the last time the debugger was suspended, the corresponding row is highlighted in yellow.

Figure 229. *FreeRTOS Queues*

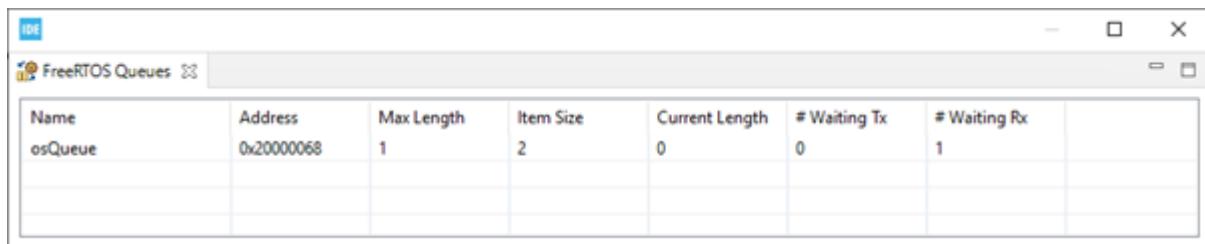

The column information in the *FreeRTOS Queues* view is described in Table 22.

Table 22. *FreeRTOS Queues* details

Name	Description
Name	The name assigned to the queue in the queue registry.
Address	The address of the queue.
Max Length	The maximum number of items that the queue can hold.
Item Size	The size in bytes of each queue item.
Current Length	The number of items currently in the queue.
#Waiting Tx	The number of tasks currently blocked waiting to be sent to the queue.
#Waiting Rx	The number of tasks currently blocked waiting to be received from the queue.

6.3 RTOS-kernel-aware debug

The RTOS-kernel-aware debug in STM32CubeIDE supports the Microsoft® Azure® RTOS ThreadX and FreeRTOS™ operating systems using an RTOS proxy. The RTOS proxy is included in STM32CubeIDE and can be used with ST-LINK GDB server, OpenOCD, and SEGGER J-Link GDB server.

When RTOS-kernel-aware debugging is enabled and a debug session is started, all threads are listed in the *Debug* view. By selecting a thread in the *Debug* view, the thread current context is visualized in views. For instance, the *Variables*, *Registers*, *Editor* views reflect the active stack frame.

Figure 230 shows a debug session. The *ThreadX Thread List* view displays that the Message Queue Receiver Thread is RUNNING. This can also be seen in the *Debug* view. In the *Debug* view the `MsgSenderThreadTwo_Entry` function is selected, and the editor area displays that the thread is waiting in a sleep for 500 ms state.

Figure 230. RTOS-kernel-aware debug

The screenshot shows the STM32CubeIDE interface during a debug session. The left pane displays the Project Explorer with several threads listed under the Tx_Thread_MsgQueue project. The center pane shows the code editor with the `MsgSenderThreadTwo_Entry` function selected. A specific line of code, `tx_thread_sleep(500)`, is highlighted. The right pane features two windows: the Variables window and the ThreadX Thread List window. The ThreadX Thread List window shows the following table:

Name	Pri...	State	Run Count	Stack Start	Stack End	Stack Size	Stack Ptr	Stack Usage
Message Queue Receiver Thread	10	RUNNING	875	0x2400139c	512	0x240014fc		Disabled
Message Queue Sender Thread One	5	SLEEP (200)	74	0x24000f8c	512	0x2400118b		Disabled
Message Queue Sender Thread Two	5	SLEEP (404)	30	0x24001194	512	0x24001393		Disabled
System Timer Thread	0	SUSPENDED	874	0x2400096f	1024	0x24000570		Disabled
Idle								

To enable RTOS-kernel-aware debugging the *Debugger* tab in the *Debug Configurations* dialog contains settings to enable RTOS proxy, driver (RTOS ThreadX or FreeRTOS™), port (Cortex® core) and configuration of port number to use with the proxy.

The *RTOS* tab also contains a *Driver settings* selection to select the *Driver* ("ThreadX" or "FreeRTOS") and the port used. The "Auto-detect" driver setting is still experimental.

Figure 231. RTOS-kernel-awareness debug configuration


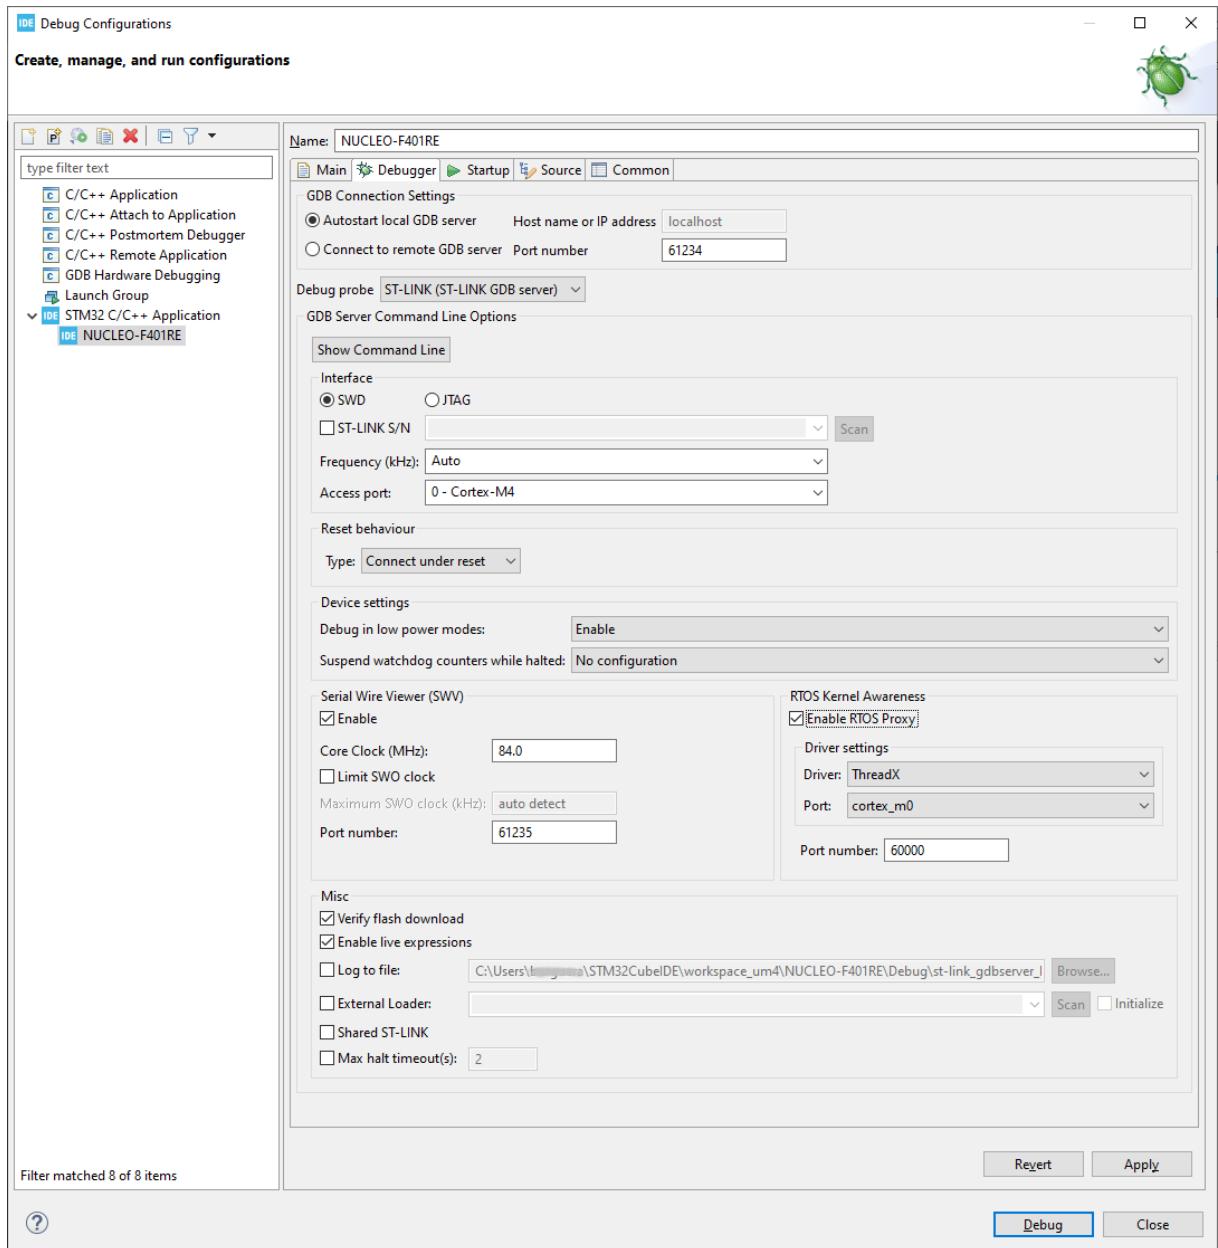


Figure 232. ThreadX-kernel-aware debug configuration

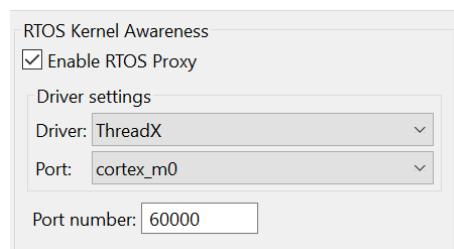

The port selection lists the supported cores. The items listed depend on the selected RTOS driver as displayed in Figure 233 and Figure 234.

Figure 233. ThreadX port configuration


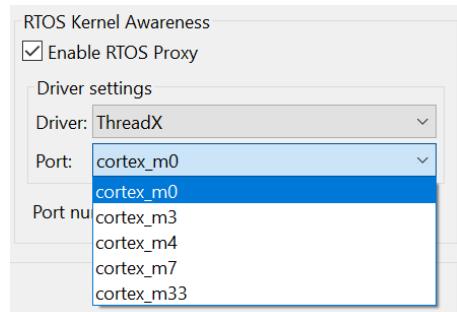


Figure 234. FreeRTOS™ port configuration

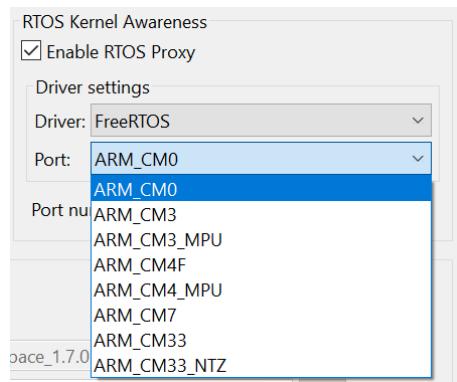

Known limitations

- Live expressions must be disabled when used with the ST-LINK GDB server
- The *Registers* view content for swapped out threads is intermixed with active CPU context for some registers (all registers are not saved by the context switcher)
- The *Registers* view floating point registers are not updated correctly

7 Fault Analyzer

7.1 Introduction to the Fault Analyzer

The STM32CubeIDE Fault Analyzer feature interprets information extracted from the Cortex®-M nested vector interrupt controller (NVIC) in order to identify the reasons that caused a fault. This information is visualized in the *Fault Analyzer* view. It helps to identify and resolve hard-to-find system faults that occur when the CPU is driven into a fault condition by the application software.

Among such conditions are:

- Accessing invalid memory locations
- Accessing memory locations on misaligned boundaries
- Executing undefined instruction
- Division by zero


Upon fault occurrence, the code line where the fault occurred is displayed in the debugger. The view displays the reasons for the error condition. Faults are coarsely categorized into hard, bus, usage and memory faults.

- Hard and bus faults occur when an invalid access attempt is made across the bus, either of a peripheral register or a memory location
- Usage faults are the result of illegal instructions or other program errors
- Memory faults include attempts of access to an illegal location or violations of rules maintained by the memory protection unit (MPU)

To further assist fault analysis, an exception stack frame visualization option provides a snapshot of the MCU register values at the time of the crash. Isolating the fault to an individual instruction allows to reconstruct the MCU condition at the time the faulty instruction was executed.

In the *Debugger* perspective, the *Fault Analyzer* view is opened from the menu. Select the menu command [**Window**]>[**Show View**]>[**Fault Analyzer**] or use the [**Quick Access**] field, search for “*Fault Analyzer*” and select it from the views.

Figure 235. Open the *Fault Analyzer* view

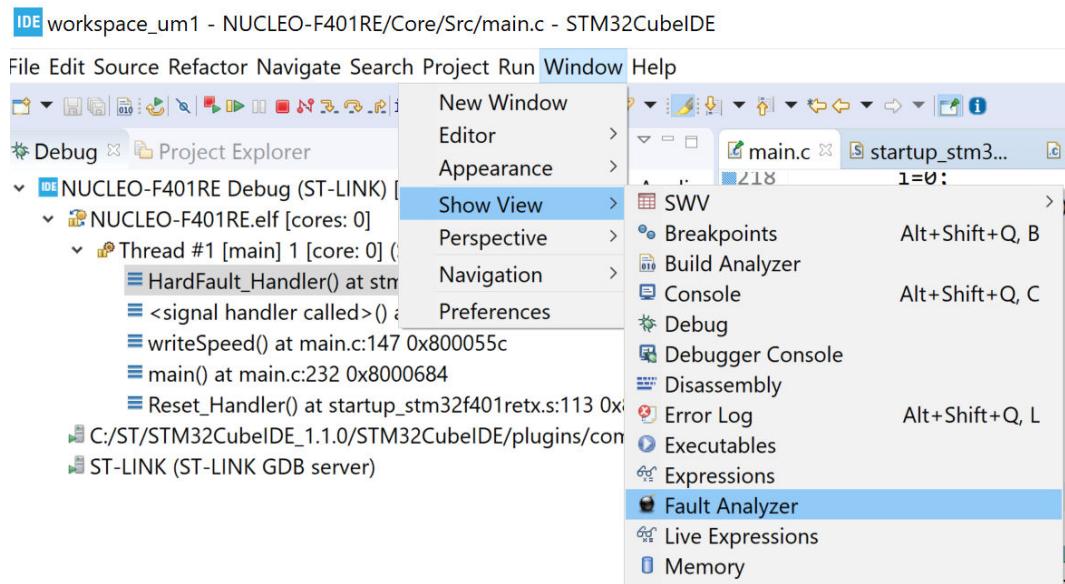

7.2

Using the *Fault Analyzer* view

The *Fault Analyzer* view has five main sections, which can be expanded and collapsed. The sections contain different kinds of information for better understanding the reason that caused a particular fault to occur. The sections are:


- Hard Fault Details
- Bus Fault Details
- Usage Fault Details
- Memory Management Fault Details
- Register Content During Fault Exception

When a fault has occurred, it is possible to [**Open editor on fault location**] and [**Open disassembly on fault location**] by pressing the buttons in the view.

Figure 236 shows an example of the *Fault Analyzer* view when an error is detected. In this example, the error is caused by a project making a divide by zero with the debugger stopped in the `HardFault_Handler()`.

Opening the *Fault Analyzer* view when this happens displays the reason of the error. In the example, it displays [**Usage Fault Detected**] and [**Attempt to perform a division by zero (DIVBYZERO)**]. The *Register Content During Fault Exception* presents register values when the problem occurred.

Figure 236. Fault Analyzer view

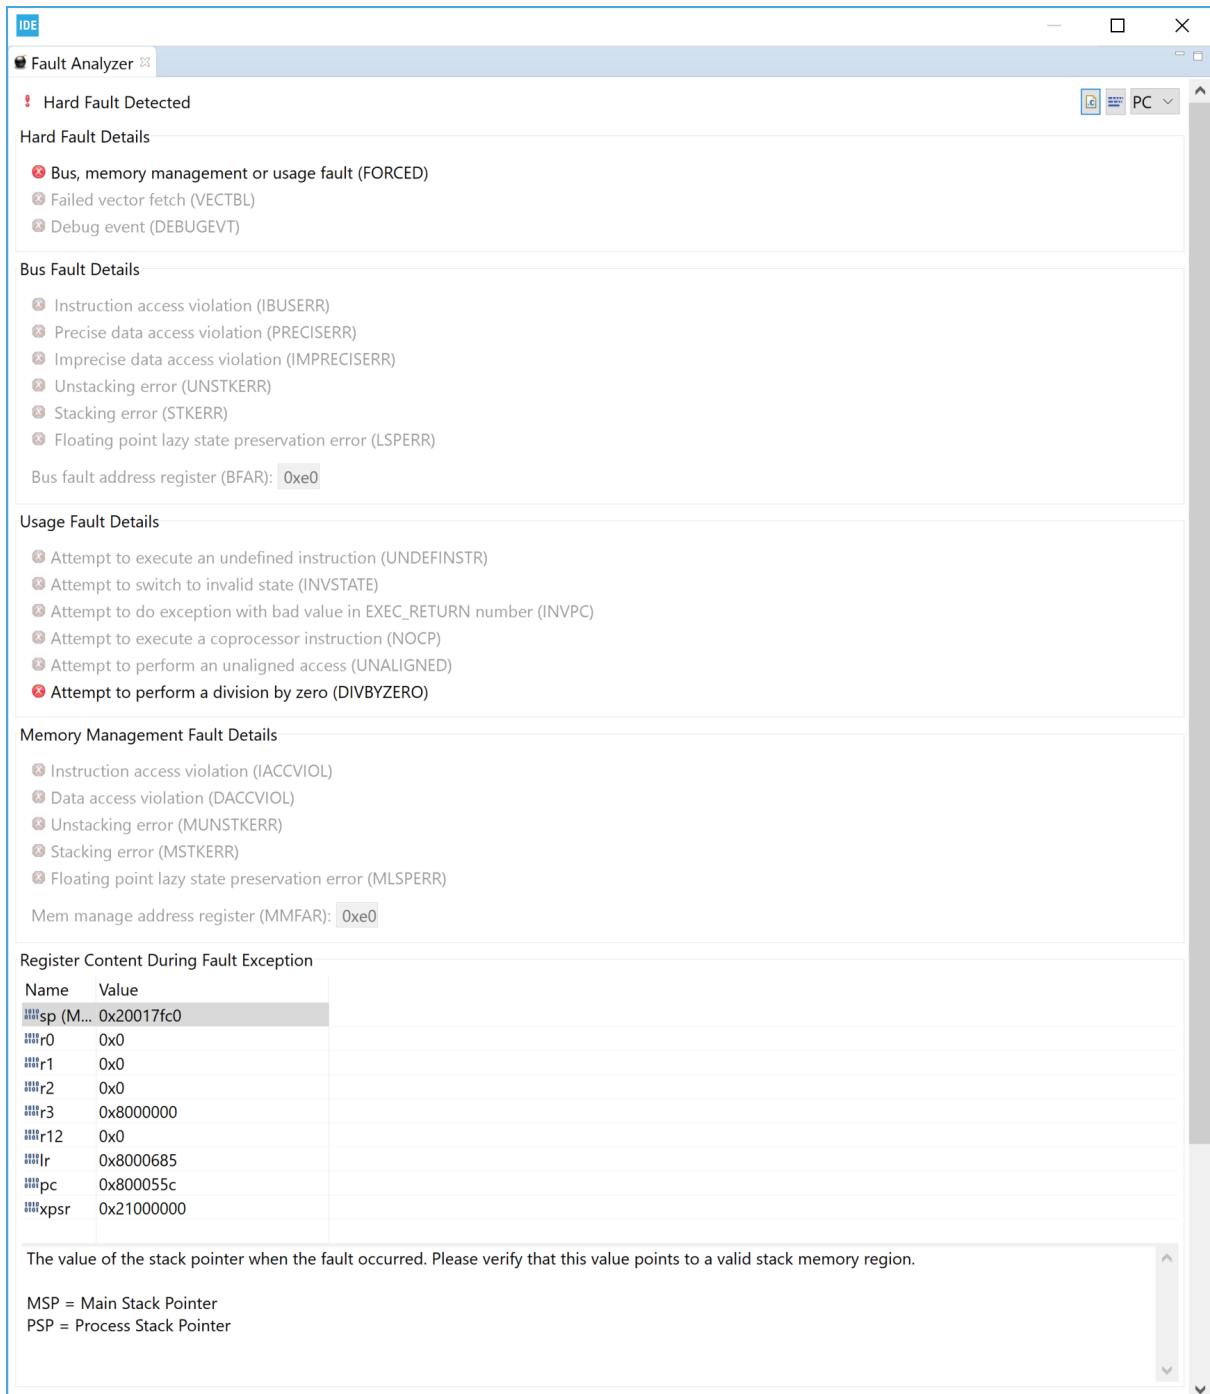

The *Fault Analyzer* view contains these toolbar buttons:

Figure 237. *Fault Analyzer* toolbar



- The first toolbar button (left) opens the *Editor* on the fault location return address by using the information in the PC and LR registers in the stack and the symbol information in the debugged *elf* file.
- The second toolbar button (middle) opens the *Disassembly* view on the fault location return address by using the information in PC and LR registers in the stack and the symbol information in the debugged *elf* file.
- The third toolbar button (right) selects if the PC or LR register is used when opening the *Editor* or *Disassembly* view on error location.

Figure 238 and Figure 239 show the *Editor* and *Disassembly* views opened using the toolbar buttons to find the fault location in the example.

Figure 238. Fault analyzer open editor on fault

```
main.c x startup_stm3... system_stm3... STM32F401RET...
142
143 int writeSpeed(int pos)
144 {
145
146     // update speed
147     speed= pos/tsec;
148     return speed;
149
150 }
```

Figure 239. Fault Analyzer open disassembly on fault

```
Variables Breakpoints Modules Disassembly Registers SFRs Live Expressions Enter location here
0800055c: sdiv    r2, r1, r2
08000560: ldr     r1, [pc, #28] ; (0x8000580 <writeSpeed+56>)
08000562: ldr     r1, [r3, r1]
08000564: str     r2, [r1, #0]
148      return speed;
```

Note:

The *Fault Analyzer* can be used on all STM32 projects. It requires no special code and no special build configuration. All data are collected for the Cortex®-M registers. The symbol information is read from the debugged *elf* file.

8 Build Analyzer

8.1

Introduction to the *Build Analyzer*

The STM32CubeIDE Build Analyzer feature interprets program information from the `elf` file in detail and presents the information in a view. If a `map` file, with similar name, is found in the same folder as the `elf` file the information from the `map` file is also used and even more information can be presented.

The *Build Analyzer* view is useful to optimize or simplify a program. The view contains two tabs, the *Memory Regions* and *Memory Details* tabs:

- The *Memory Regions* tab is populated with data if the `elf` file contains a corresponding `map` file. When the `map` file is available, this tab can be seen as a brief summary of the memory regions with information about the region name, start address and size. The size information also comprises the total size, free and used part of the region, and usage percentage.
- The *Memory Details* tab contains detailed program information based on the `elf` file. The different section names are presented with address and size information. Each section can be expanded and collapsed. When a section is expanded, functions/data in this section is listed. Each presented function/data contains address and size information.

8.2


Using the *Build Analyzer*

The *Build Analyzer* view is by default open in the C/C++perspective. If the view is closed it can be opened from the menu. Select the menu command [Window]>[Show View]>[Build Analyzer] or use the [Quick Access] field, search for “Build Analyzer” and select it from the views.

When the *Build Analyzer* view is open, select an `elf` file in the *Project Explorer* view. The *Build Analyzer* view is then updated with the information from this file. When an `elf` file is selected and a `map` file, with similar name, is found in the same folder, additional information from the `map` file is also used by the view.

The *Build Analyzer* view is also updated if a project node in the *Project Explorer* view is selected. In this case the *Build Analyzer* uses the `elf` file that corresponds to the current active build configuration of the project.

Figure 240. Build analyzer

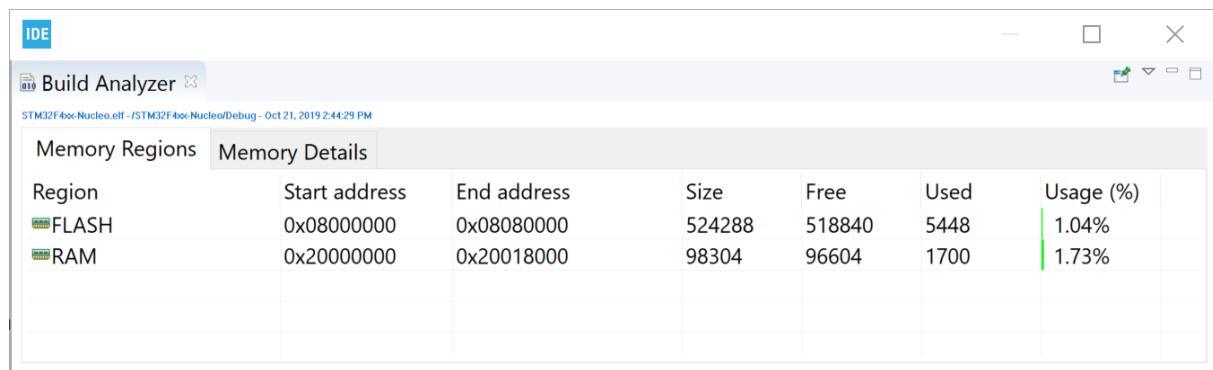

8.2.1

Memory Regions tab


The *Memory Regions* tab in the *Build Analyzer* view displays information based on the corresponding `map` file. If no information is displayed, it means that there is no corresponding `map` file found. When a `map` file is found, the region names, start address, end address, total size of region, free size, used size and usage information are presented.

These regions are usually defined in the linker script file (`.ld`) used when building the program. Update the linker script file if a memory region location or size must be changed.

Note:

The Memory Regions tab is empty if the `elf` file has no corresponding `map` file.

Figure 241. Memory Regions tab

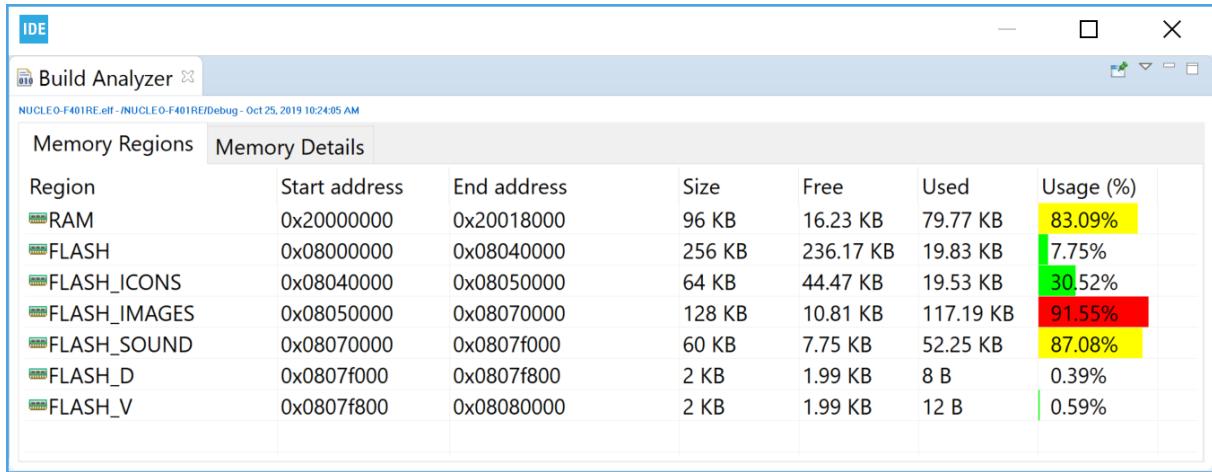

Region	Start address	End address	Size	Free	Used	Usage (%)
RAM	0x20000000	0x20018000	96 KB	16.23 KB	79.77 KB	83.09%
FLASH	0x08000000	0x08040000	256 KB	236.17 KB	19.83 KB	7.75%
FLASH_ICONS	0x08040000	0x08050000	64 KB	44.47 KB	19.53 KB	30.52%
FLASH_IMAGES	0x08050000	0x08070000	128 KB	10.81 KB	117.19 KB	91.55%
FLASH_SOUND	0x08070000	0x0807f000	60 KB	7.75 KB	52.25 KB	87.08%
FLASH_D	0x0807f000	0x0807f800	2 KB	1.99 KB	8 B	0.39%
FLASH_V	0x0807f800	0x08080000	2 KB	1.99 KB	12 B	0.59%

The column information is described in the Table 23.

Table 23. Memory Regions tab information

Name	Description
Region	Name of memory region (if a corresponding map file is found).
Start address	The start address of the region, defined in the linker script.
End address	End address of the region.
Size	The total size of memory region.
Free	The free size in the memory region.
Used	The used size in the memory region.
Usage %	The percentage of used size relative to the total memory region size. See Table 24 for the bar icon color information.

The *Usage (%)* column contains a bar icon corresponding to the percentage value. The bar has different colors depending on the percentage of used memory.

Table 24. Memory Regions usage color

Usage color	Description
Green	Less than 75% of memory used.
Yellow	75% to 90% of memory used.
Red	More than 90% of memory used.

8.2.2 Memory Details tab

The *Memory Details* tab of the *Build Analyzer* view contains information for the `elf` file. Each section in the *Memory Details* tab can be expanded so that individual functions and data can be seen. The tab presents columns with name, run address, load address, and size information.

Figure 242. Memory Details tab

Name	Run address (VMA)	Load address (LMA)	Size
RAM	0x20000000		96 KB
.data	0x20000000	0x08004f49	12 B
.bss	0x2000000c		78.25 KB
.user_heap_stack	0x2001390c		1.5 KB
FLASH	0x08000000		256 KB
FLASH_ICONS	0x08040000		64 KB
FLASH_IMAGES	0x08050000		128 KB
.flash_images	0x08050000	0x08050000	117.19 KB
image3	0x08064c08	0x08064c08	34.18 KB
image2	0x080561a8	0x080561a8	58.59 KB
image1	0x08050000	0x08050000	24.41 KB
FLASH_SOUND	0x08070000		60 KB
.flash_sound	0x08070000	0x08070000	52.25 KB
FLASH_D	0x0807f000		2 KB
.flash_d	0x0807f000		8 B
FLASH_V	0x0807f800		2 KB
.flash_v	0x0807f800	0x0807f800	12 B

The column information is described in Table 25.

Table 25. Memory Details tab information

Name	Description
Name	Name of memory region, section, function, and data. A green icon is used to mark functions while the blue icon is used for data variables.
Run Address (VMA)	The Virtual Memory Address contains the address used when the program is running.
Load Address (LMA)	The Load Memory Address is the address used for load, for instance for the initialization values of global variables.
Size	Used size (total size for <i>Memory Regions</i>).

Note: The memory region name is only displayed if a corresponding `map` file is found.

8.2.2.1 Size information

The size information in the *Memory Details* tab is calculated from the symbol size in the `elf` file. If a corresponding `map` file is investigated, it may contain a different size value. The size is usually correct for C files but the value presented for assembler files depends on how the size information is written in the assembler files. The constants used by the function must be defined within the section definition. At the end of the section, the size directive is used by the linker to calculate the size of the function.

Example: Reset_Handler in startup.s file

This example shows how to write the `Reset_Handler` in an assembler startup file to include the constants `_sidata`, `_sdata`, `_edata`, `_sbss`, and `_ebss` in the `Reset_Handler` size information in the `elf` file. If these constants are defined out of the `Reset_Handler` section definition, their sizes are not included in the calculated size of the `Reset_Handler`. To include them in the size of the `Reset_Handler`, these definitions must be placed inside the `Reset_Handler` section as presented in the code example below.

```
.section .text.Reset_Handler
.weak Reset_Handler
.type Reset_Handler, %function

Reset_Handler:
ldr sp, =_estack /* set stack pointer */

/* Copy the data segment initializers from flash to SRAM */
movs r1, #0
b LoopCopyDataInit

CopyDataInit:
ldr r3, =_sidata

/* initialization code data, bss, ... */
...

/* Call the application's entry point */
bl main
bx lr

/* start address for the initialization values defined in linker script */
.word _sidata
.word _sdata
.word _edata
.word _sbss
.word _ebss

.size Reset_Handler, .-Reset_Handler
```

8.2.2.2 Sorting

The sort order of a *Memory Details* tab column can be changed by clicking on the column name.

Figure 243. *Memory Details* sorted by size

The screenshot shows the Build Analyzer interface with the 'Memory Details' tab selected. The table is sorted by the 'Size' column, with the largest entries at the top. The 'FLASH_SOUND' row is highlighted with a blue background.

Name	Run address (VMA)	Load address (LMA)	Size
> FLASH	0x08000000		256 KB
FLASH_IMAGES	0x08050000		128 KB
.flash_images	0x08050000	0x08050000	117.19 KB
image2	0x080561a8	0x080561a8	58.59 KB
image3	0x08064c08	0x08064c08	34.18 KB
image1	0x08050000	0x08050000	24.41 KB
RAM	0x20000000		96 KB
.bss	0x2000000c		78.25 KB
.user_heap_stack	0x2001390c		1.5 KB
.data	0x20000000	0x08004f49	12 B
FLASH_ICONS	0x08040000		64 KB
FLASH_SOUND	0x08070000		60 KB
FLASH_D	0x0807f000		2 KB
.flash_d	0x0807f000		8 B
FLASH_V	0x0807f800		2 KB
.flash_v	0x0807f800	0x0807f800	12 B

8.2.2.3 Search and filter

The information in the *Memory Detailstab* can be filtered by entering a string in the search field.

Figure 244 shows a search example for names including the string "sound".

Figure 244. *Memory Details* search and filter

The screenshot shows the Build Analyzer interface with the 'Memory Details' tab selected. The table is filtered to show only rows containing the string 'sound' in the 'Name' column. The 'FLASH_SOUND' row is highlighted with a blue background.

Name	Run address (VMA)	Load address (LMA)	Size
> FLASH_SOUND	0x08070000		60 KB
.flash_sound	0x08070000	0x08070000	52.25 KB
sound1	0x08070000	0x08070000	19.53 KB
sound2	0x08074e20	0x08074e20	19.53 KB
sound4	0x0807afc8	0x0807afc8	8.3 KB
sound3	0x08079c40	0x08079c40	4.88 KB

8.2.2.4 Calculate the sum of sizes

The sum of the sizes of several lines in the *Memory Details* tab can be calculated by selecting these lines in the view. The sum of the selection is presented above the *Name* column in the view.

Figure 245. Sum of sizes

Name	Run address (VMA)	Load address (LMA)	Size
> FLASH	0x08000000		256 KB
FLASH_IMAGES	0x08050000		128 KB
.flash_images	0x08050000	0x08050000	117.19 KB
image2	0x080561a8	0x080561a8	58.59 KB
image3	0x08064c08	0x08064c08	34.18 KB
image1	0x08050000	0x08050000	24.41 KB
> RAM	0x20000000		96 KB
FLASH_ICONS	0x08040000		64 KB
FLASH_SOUND	0x08070000		60 KB
.flash_sound	0x08070000	0x08070000	52.25 KB
FLASH_D	0x0807f000		2 KB
FLASH_V	0x0807f800		2 KB

8.2.2.5 Display the size information in byte format

The *Build Analyzer* view can display size information in different format according to the [**Show Byte**], [**Show Hex**] or [**Show Human**] selection. The icon in the *Build Analyzer* toolbar is used to switch between these formats. Prefer [**Show Byte**] or [**Show Hex**] when copying and pasting of data into an Excel® document for later calculations.

Figure 246. Show byte count

Name	Run address (VMA)	Load address (LMA)	Size
> RAM	0x20000000		98304
FLASH_V	0x0807f800		2048
FLASH_SOUND	0x08070000		61440
.flash_sound	0x08070000	0x08070000	53500
FLASH_IMAGES	0x08050000		131072
.flash_images	0x08050000	0x08050000	120000
image3	0x08064c08	0x08064c08	35000
image2	0x080561a8	0x080561a8	60000
image1	0x08050000	0x08050000	25000
FLASH_ICONS	0x08040000		65536
FLASH_D	0x0807f000		2048
FLASH	0x08000000		262144

Figure 247. Show hex count

The screenshot shows the ST-Connect IDE's Build Analyzer window. The 'Memory Details' tab is active. A context menu is open in the top right corner, with 'Show Hex' selected. The table lists memory regions and their details:

Name	Run address (VMA)	Load address (LMA)	Size
> RAM	0x20000000		0x18000
> FLASH_V	0x0807f800		0x800
FLASH_SOUND	0x08070000		0xf000
.flash_sound	0x08070000	0x08070000	0xd0fc
FLASH_IMAGES	0x08050000		0x20000
.flash_images	0x08050000	0x08050000	0x1d4c0
image3	0x08064c08	0x08064c08	0x88b8
image2	0x080561a8	0x080561a8	0xea60
image1	0x08050000	0x08050000	0x61a8
FLASH_ICONS	0x08040000		0x10000
FLASH_D	0x0807f000		0x800
FLASH	0x08000000		0x40000

8.2.2.6 Copy and paste

The data in the *Memory Details* tab can be copied to other applications in CSV format by selecting the rows to copy and typing **Ctrl+C**. The copied data can be pasted into another application with the **Ctrl+V** command.

Figure 248. Copy and paste

The screenshot shows the ST-Connect IDE's Build Analyzer window. The 'Memory Details' tab is active. Multiple rows are selected in the table, indicated by blue highlights. The table lists memory regions and their details:

Name	Run address (VMA)	Load address (LMA)	Size
> RAM	0x20000000		98304
> FLASH_V	0x0807f800		2048
FLASH_SOUND	0x08070000		61440
.flash_sound	0x08070000	0x08070000	53500
sound4	0x0807afc8	0x0807afc8	8500
sound3	0x08079c40	0x08079c40	5000
sound2	0x08074e20	0x08074e20	20000
sound1	0x08070000	0x08070000	20000
FLASH_IMAGES	0x08050000		131072
.flash_images	0x08050000	0x08050000	120000
image3	0x08064c08	0x08064c08	35000
image2	0x080561a8	0x080561a8	60000
image1	0x08050000	0x08050000	25000
FLASH_ICONS	0x08040000		65536
.flash_icons	0x08040000	0x08040000	20000
icons	0x08040000	0x08040000	20000
FLASH_D	0x0807f000		2048
FLASH	0x08000000		262144

The **Ctrl+C** copy of the lines selected in Figure 248 provides the **Ctrl+V** results below:

```
"sound4";"0x0807afc8";"0x0807afc8";"8500"  
"sound3";"0x08079c40";"0x08079c40";"5000"  
"sound2";"0x08074e20";"0x08074e20";"20000"  
"sound1";"0x08070000";"0x08070000";"20000"  
"image3";"0x08064c08";"0x08064c08";"35000"  
"image2";"0x080561a8";"0x080561a8";"60000"  
"image1";"0x08050000";"0x08050000";"25000"  
"icons";"0x08040000";"0x08040000";"20000"
```

9 Static Stack Analyzer

9.1

Introduction to the Static Stack Analyzer

The STM32CubeIDE Static Stack Analyzer calculates the stack usage based on the built program. It analyzes the .s_u files, generated by gcc, and the .elf file in detail, and presents the resulting information in the view.

The view contains two tabs, the *List* and *Call Graph* tabs.

The *List* tab is populated with the stack usage for each function included in the program. The tab lists one line per function, each line consisting of the *Function*, *Local cost*, *Type*, *Location* and *Info* columns.

Figure 249. Static Stack Analyzer List tab

The screenshot shows the STM32CubeIDE interface with the "Static Stack Analyzer" view open. The "List" tab is selected. A checkbox labeled "Hide dead code" is checked. The table below displays the stack usage for 16 functions:

Function	Local cost	Type	Location	Info
main	88	STATIC	main.c:79	
TIM_TI1_SetConfig	16	STATIC	stm32f4xx_hal_tim.c:4540	
TIM_SlaveTimer_SetConfig	12	STATIC	stm32f4xx_hal_tim.c:4983	
TIM_CCxChannelCmd	8	STATIC	stm32f4xx_hal_tim.c:4739	
TIM_Base_SetConfig	0	STATIC	stm32f4xx_hal_tim.c:4481	
SystemInit	0	STATIC	system_stm32f4xx.c:148	
HAL_TIM_TriggerCallback	0	STATIC	stm32f4xx_hal_tim.c:4364	
HAL_TIM_SlaveConfigSync...	16	STATIC	stm32f4xx_hal_tim.c:4143	
HAL_TIM_ReadCapturedVal...	0	STATIC	stm32f4xx_hal_tim.c:4217	
HAL_TIM_PeriodElapsedCal...	0	STATIC	stm32f4xx_hal_tim.c:4304	
HAL_TIM_PWM_PulseFinish...	0	STATIC	stm32f4xx_hal_tim.c:4349	
HAL_TIM_OC_DelayElapsed...	0	STATIC	stm32f4xx_hal_tim.c:4319	
HAL_TIM_IRQHandler	8	STATIC	stm32f4xx_hal_tim.c:2809	
HAL_TIM_IC_Start_IT	8	STATIC	stm32f4xx_hal_tim.c:1672	

The **Call Graph** tab contains an expandable list with functions included in the program. Lines representing functions calling other functions can be expanded to see the call hierarchy.


Figure 250. Static Stack Analyzer Call Graph tab

Function	Depth	Max cost	Local cost	Type	Location	Info
UsageFault_Handler	?	?	0	STATIC	stm32f4xx_it.c:116	Max cost uncertain. Recursive
ADC_IRQHandler	?	?	0	STATIC	stm32f4xx_it.c:103	Max cost uncertain. Recursive. No stack usage information available for this ...
BusFault_Handler	?	?	0	STATIC	stm32f4xx_it.c:77	Max cost uncertain. Recursive
HardFault_Handler	?	?	0	STATIC	stm32f4xx_it.c:90	Max cost uncertain. Recursive
MemManage_Handler	?	?	0	STATIC	stm32f4xx_it.c:90	Max cost uncertain. Recursive
Reset_Handler	7	184	0			Max cost uncertain. No stack usage information available for this function
TIM4_IRQHandler	3	8	0	STATIC	stm32f4xx_it.c:173	Max cost uncertain
NMI_Handler	0	0	0	STATIC	stm32f4xx_it.c:68	
PendSV_Handler	0	0	0	STATIC	stm32f4xx_it.c:147	
frame_dummy	0	0	0			Max cost uncertain. No stack usage information available for this function
SysTick_Handler	1	0	0	STATIC	stm32f4xx_it.c:156	
SVC_Handler	0	0	0	STATIC	stm32f4xx_it.c:129	
DebugMon_Handler	0	0	0	STATIC	stm32f4xx_it.c:138	
_do_global_dtors_aux	0	0	0			Max cost uncertain. No stack usage information available for this function
_fini	0	0	0			Max cost uncertain. No stack usage information available for this function

9.2 Using the Static Stack Analyzer

The **Static Stack Analyzer** view is by default open in the C/C++ perspective. If the view is closed, it can be opened from the menu. Select the menu command [**Window**]>[**Show View**]>[**Static Stack Analyzer**]. Another way to open the **Static Stack Analyzer** view is to type “**Static Stack Analyzer**” in the [**Quick Access search bar**] and select it from the views.

Figure 251. Open the Static Stack Analyzer view

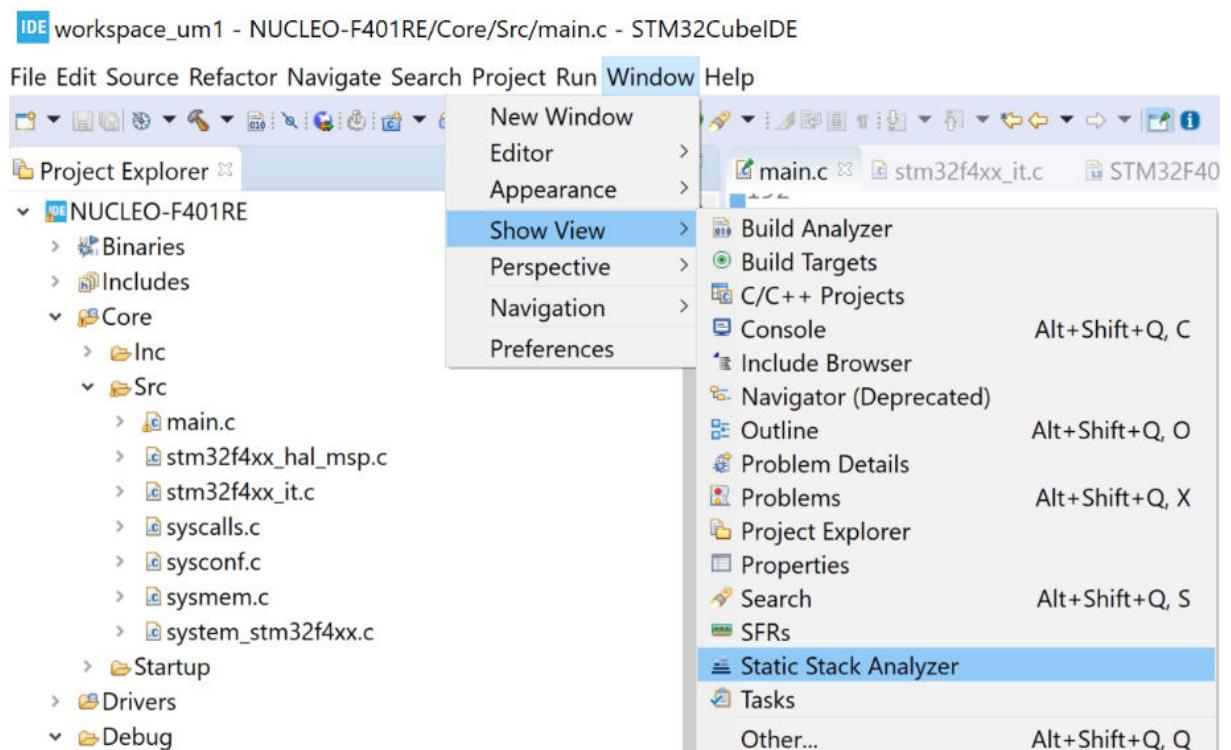

The *Static Stack Analyzer* view is populated when a built project is selected in the *Project Explorer*. The project must be built with option [**Generate per function stack usage information**] enabled, otherwise the view cannot present any stack information.

How to setup the compiler to generate stack usage information is explained in the next section.


9.2.1

Enable stack usage information

If the top of the view displays the message **No stack usage information found, please enable in the compiler settings**, the build configuration must be updated for the compiler to generate stack information:

1. Open the project properties, for instance with a right-click on the project in the *Project Explorer* view
2. Select *Properties* and, in the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the *Tool Settings* tab
4. Select [**MCU GCC Compiler**]>[**Miscellaneous**]
5. Select [**Enable stack usage information (-fstack-usage)**] as shown in Figure 252
6. Save the setting and rebuild the program

Figure 252. Enable generate per function stack usage information

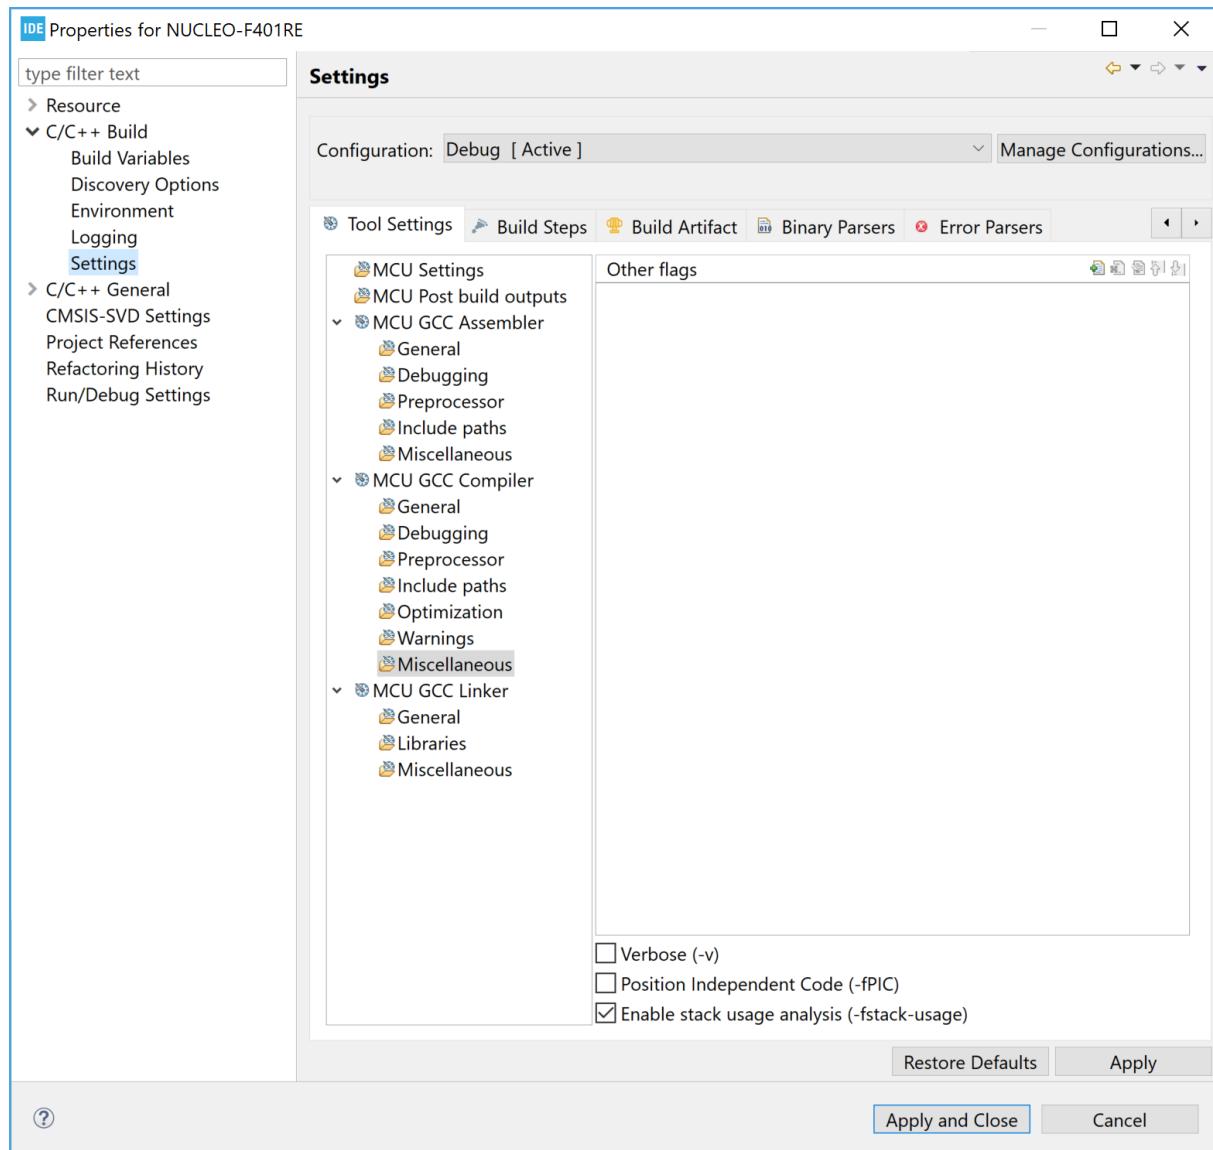

9.2.2


List tab

The *List* tab contains a list of all functions included in the selected program with options to [**Hide dead code**] functions and [**Filter**] visible functions.

Use the [**Hide dead code**] selection to enable or disable the listing of dead code functions.

If used, the [**Filter**] field restricts the display to functions matching the characters it contains.

Figure 253. *Static Stack Analyzer List tab*

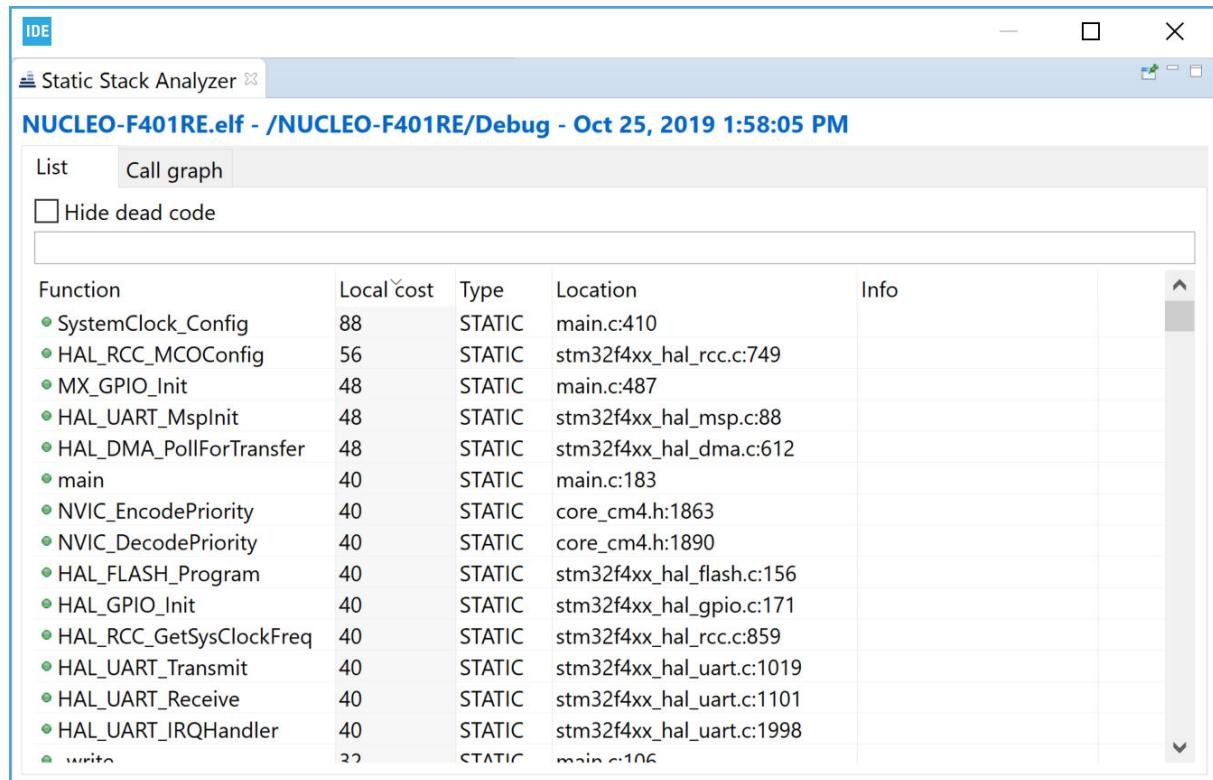

The column information in the *List* tab is described in [Table 26](#).

Table 26. *Static Stack Analyzer List tab details*

Name	Description
Function	Function name.
Local cost	The number displays how many bytes of stack the function uses.
Type	Tells if the function uses a STATIC or DYNAMIC stack allocation. When DYNAMIC allocation is used the actual stack size is run-time dependent and the the <i>Local cost</i> value is uncertain due to the dynamic size of stack.
Location	Indicates where the function is declared. It is possible to double-click on a line and open the file with the defined function in the editor.
Info	Additional information about the calculation.

The *List* tab sort order can be changed by clicking on a column name.

Note:

By double-clicking on a line that displays the file location and line number in the *List* tab, the function is opened in the *Editor* view.


9.2.3

Call Graph tab

The *Call Graph* tab contains detailed program information in a tree view. Each function included in the program but not called by any other function is presented at the top level. It is possible to expand the tree to see called functions. Only functions available in the `elf` file can be visible in the tab.

When used, the **[Search...]** button triggers the display of the functions matching the characters in the search field. The search can be made case sensitive or not depending on the selection in checkbox **[Case sensitive]**.

Figure 254. Static Stack Analyzer Call Graph tab

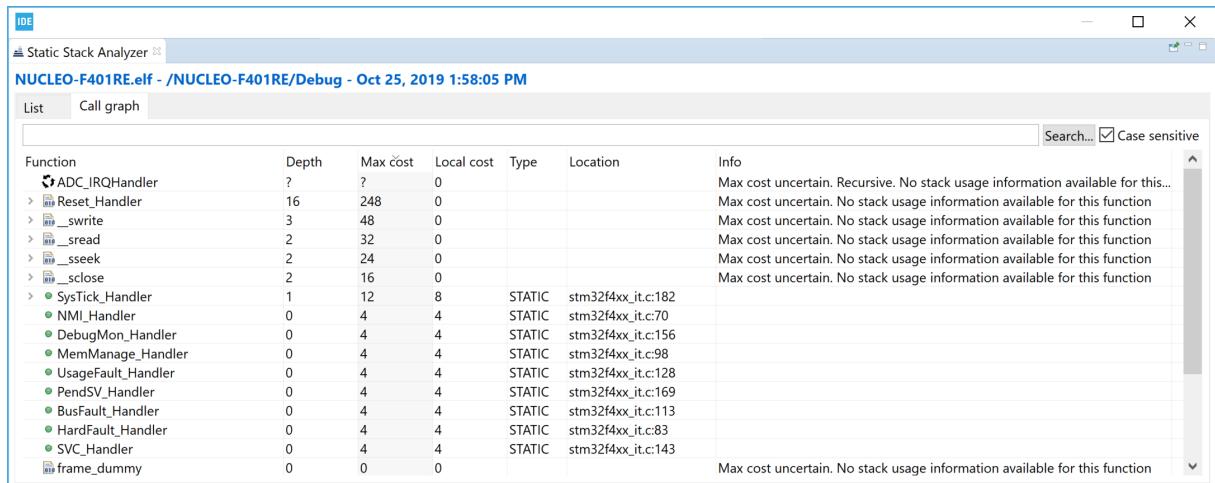

The column information in the *Call Graph* tab is described in Table 27.

Table 27. Static Stack Analyzer Call Graph tab details

Name	Description
Function	Function name.
Depth	Specifies the call stack depth this function uses: <ul style="list-style-type: none"> 0: the function does not call any other functions Number ≥ 1: the function calls other functions ? : the function makes recursive calls or the depth cannot be calculated
Max cost	Specifies how many bytes of stack the function uses including stack needed for called functions.
Local cost	Specifies how many bytes of stack the function uses. This column does not take into account any stack that may be needed by the functions it may call.
Type	Specifies if the function uses a STATIC or DYNAMIC stack allocation. <ul style="list-style-type: none"> STATIC: the function uses a fixed stack DYNAMIC: the function uses a run-time dependent stack Empty field: no stack usage information available for the function
Location	Indicates where the function is declared. It is possible to double-click on a line and open the file with the defined function in the editor.
Info	Contains specific information about the stack usage calculation. For instance, it can hold a combination of the following messages: <ul style="list-style-type: none"> Max cost uncertain: the reason can be that the function makes a call to some sub-function where the stack information is not known, the function makes recursive calls, or others Recursive: the function makes recursive calls No stack usage information available for this function: no stack usage information available for this function Local cost uncertain due to dynamic size, verify at run-time: the function allocates stack dynamically, for instance depending on a parameter

The *Call Graph* tab sort order can be changed by clicking on a column name.

By double-clicking on a line that displays the file location and line number in the tab, the function is opened in the *Editor* view.

Note: The *main* function is usually called by the *Reset_Handler* and can in those cases be seen when expanding the *Reset_Handler* node.

If unused functions are listed in the tab, check if linker option [**dead code removal**] is enabled to remove unused code from the program. Read more on this in Section 2.5.2 *Discard unused sections*.

The small icon left of the function name in column *Function* column indicates the following:

- Green dot: the function uses STATIC stack allocation (fixed stack).
- Blue square: the function uses DYNAMIC stack allocation (run-time dependent).
- 010 icon: used if the stack information is not known. This can be the case for library functions or assembler functions.
- Three arrows in a circle: used in the *Call Graph* tab when the function makes recursive calls.

Figure 255. Function symbols in Static Stack Analyzer

Function	Depth
ADC_IRQHandler	?
Reset_Handler	16
LoopCopyDataInit	15
LoopFillZeroBSS	14
main	13
SystemClock_Config	5
MX_USART2_UART_Init	4
MX_GPIO_Init	1
SystemCoreClockUpdate	0
printf	12
readTemp	0
readSpeed	0
writeSpeed	0
writeTemp	0
SystemInit	0
FillZeroBSS	0

9.2.4 Using the filter and search field

The *List* and *Call Graph* tabs contain a filter/search field, which can be used to search a specific function or functions matching the characters entered in the field.

Figure 256 displays the *List* tab where the **[Filter]** field is used to seek functions containing the “read” string in their name.

Figure 256. Static Stack Analyzer List tab using search


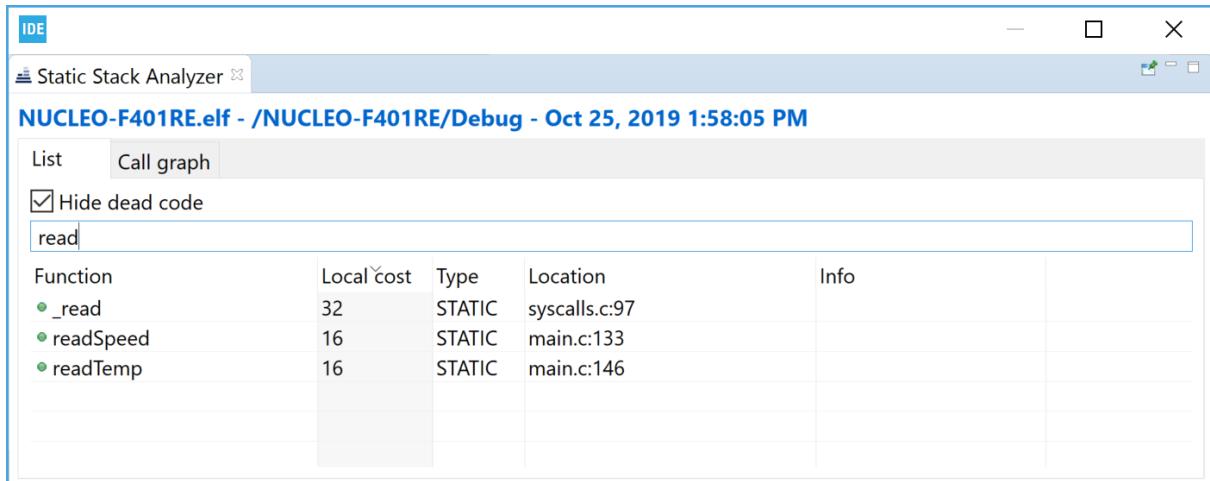


Figure 257 shows a use example of the **[Search...]** field in the *Call Graph* tab for filtering functions with name matching the “read” string.

Figure 257. Static Stack Analyzer Call Graph using search

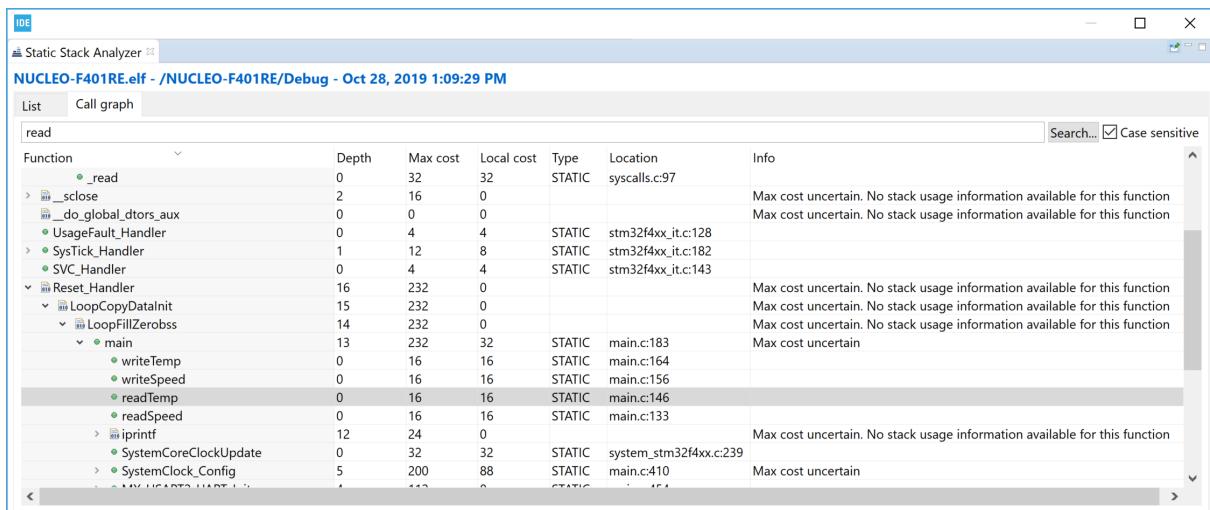

9.2.5 Copy and paste

The data in the *List* tab can be copied to other applications in CSV format by selecting the rows to copy and typing **Ctrl+C**. The copied data can be pasted into another application with the **Ctrl+V** command.

Figure 258. Copy and paste

Function	Local cost	Type	Location	Info
SystemClock_Config	88	STATIC	main.c:410	
MX_GPIO_Init	48	STATIC	main.c:487	
HAL_UART_MspInit	48	STATIC	stm32f4xx_hal_msp.c:88	
main	40	STATIC	main.c:183	
NVIC_EncodePriority	40	STATIC	core_cm4.h:1863	
HAL_GPIO_Init	40	STATIC	stm32f4xx_hal_gpio.c:171	
HAL_RCC_GetSysClockFreq	40	STATIC	stm32f4xx_hal_rcc.c:859	
_write	32	STATIC	main.c:106	
_read	32	STATIC	syscalls.c:97	
_write	32	STATIC	syscalls.c:109	
SystemCoreClockUpdate	32	STATIC	system_stm32f4xx.c:239	

The **Ctrl+C** copy of the lines selected in Figure 258 provides the **Ctrl+V** results below:

```
"SystemClock_Config";"88";"STATIC";"main.c:410"""  
"main";"40";"STATIC";"main.c:183"""  
"HAL_GPIO_Init";"40";"STATIC";"stm32f4xx_hal_gpio.c:171"""
```

10 Cyclomatic complexity

10.1 Introduction to the cyclomatic complexity view

The STM32CubeIDE cyclomatic complexity is a calculation of the built program complexity. It analyzes in detail the `.cyclo` files, generated by gcc, and the `.elf` file. It presents the resulting information in the view.

The view contains a list of all the functions included in the selected program. It provides the options to [Hide dead code] functions and [Filter] the visible functions. Use the [Hide dead code] selection to enable or disable the listing of dead code functions. If it is used, the [Filter] field restricts the display to the functions matching the filter key.

The view is populated with the complexity of each function included in the program, each line consisting of the *Function*, *Location*, and *Complexity* columns.

Figure 259. Cyclomatic complexity view

Function	Location	Complexity
main	main.c:3	1
_NVIC_SetPriorityGrouping	core_cm31a.c:2066	1
_NVIC_SetPriority	core_cm31a.c:2124	2
_NVIC_SetPriorityGrouping	core_cm31a.c:2115	1
SystemInit	system_stm32f0xx_mcu.c:162	1
SystemCoreClockUpdate	system_stm32f0xx_mcu.c:228	1
SystemClock_Config	main.c:105	4
SyTick_Config	core_cm31a.c:2173	2
HAL_I2C_SetLatencyFromMSRA...	stm32f0xx_hal_i2c.c:1994	10
HAL_I2C_GetI2CConfigFromPLISo...	stm32f0xx_hal_i2c.c:1990	6
NVIC_EncodePriority	core_cm31a.c:2171	2
HAL_SVSTICK_Config	stm32f0xx_hal_conf.c:256	1
HAL_I2C_DisConfig	stm32f0xx_hal_i2c.c:409	112
HAL_I2C_GetI2CConfig	stm32f0xx_hal_i2c.c:1437	11
HAL_I2C_SetI2CConfig	stm32f0xx_hal_i2c.c:1519	1
HAL_I2C_ClockConfig	stm32f0xx_hal_i2c.c:1138	28
HAL_PWR_Bus_SMPSPowerBefree...	stm32f0xx_hal_pwr_ex.c:1347	8
HAL_PWR_Bus_GenBurstConfig...	stm32f0xx_hal_pwr_ex.c:109	1
HAL_PWR_Bus_ConfirmVoltageGet...	stm32f0xx_hal_pwr_ex.c:113	7
HAL_NVIC_SetPriorityGrouping	stm32f0xx_hal_conf.c:170	1
HAL_NVIC_SetPriority	stm32f0xx_hal_conf.c:192	1
HAL_MspInit	stm32f0xx_hal_msp.c:103	1
HAL_MspInit	stm32f0xx_hal_msp.c:198	1

Table 28. Cyclomatic Complexity details

Name	Description
Function	Function name.
Location	Indicates where the function is declared. It is possible to double-click on a line and open the file with the defined function in the editor.
Complexity	The number displays the complexity score of the function.

The sorting order can be changed by clicking on a column name.

Note:

Double-click on a line that displays the file location and the line number in the table to open the function in the "Editor" view.

The small icon left of the function name in the column *Function* indicates the following:

- Green dot: the function has a score below the default complexity ceiling.
- Red dot: the function has a score that exceeds the default complexity ceiling.

To change the default complexity ceiling, go under [Window]>[Preferences]>[STM32Cube]>[Cyclomatic Complexity] and fill the field [Complexity Ceiling].


Figure 260. Cyclomatic complexity - Default complexity ceiling preference

Function	Location	Complexity
main	main.c:1	1
_NVIC_SetPriorityGrouping	core_cm31a.c:2066	1
_NVIC_SetPriority	core_cm31a.c:2124	2
_NVIC_GetPriorityGrouping	core_cm31a.c:2115	1
SystemInit	system_stm32f0xx_msc.c:162	1
SystemCoreClockUpdate	system_stm32f0xx_msc.c:228	1
SystemClock_Config	main.c:105	4
SyTick_Config	core_cm31a.c:2173	2
HAL_I2C_SetLastLatencyFromMSRA...	stm32f0xx_hal_i2c.c:1994	10
HAL_I2C_GetI2CConfigFromPIS...	stm32f0xx_hal_i2c.c:1990	6
_NVIC_EncodePriority	core_cm31a.c:2111	2
HAL_SYSTICK_Config	stm32f0xx_hal_context.c:256	1
HAL_I2C_DisConfig	stm32f0xx_hal_i2c.c:469	112
HAL_I2C_GetI2CConfig	stm32f0xx_hal_i2c.c:1437	11
HAL_I2C_GetNEC099s	stm32f0xx_hal_i2c.c:1519	1
HAL_I2C_ClockConfig	stm32f0xx_hal_i2c.c:1138	28
HAL_PWREx_SMPS_SetEffective...	stm32f0xx_hal_pwr_ex.c:1347	8
HAL_PWREx_GetVoltageRange	stm32f0xx_hal_pwr_ex.c:109	1
HAL_PWREx_ConfirmVoltageSel...	stm32f0xx_hal_pwr_ex.c:113	7
_HAL_NVIC_SetPriorityGrouping	stm32f0xx_hal_context.c:170	1
_HAL_NVIC_SetPriority	stm32f0xx_hal_context.c:192	1
HAL_MspInit	stm32f0xx_hal_msp.c:13	1
HAL_MspInit	stm32f0xx_hal_msp.c:198	1

10.2 Using the cyclomatic complexity view


By default, the view *Cyclomatic Complexity* is found open in the C/C++ perspective. If the view is closed, it can be opened from the menu by selecting [Window]>[Show View]>[Cyclomatic complexity].

Figure 261. Cyclomatic complexity - Open the view

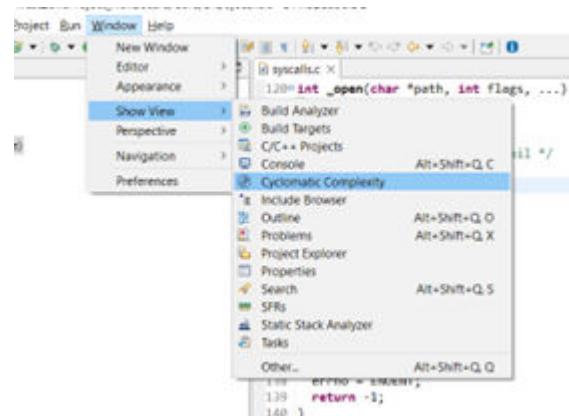

Another way to open the *Cyclomatic Complexity* view is to type “cyclomatic complexity” in the [Quick Access] search bar and select the view among the list of proposed views.

Figure 262. Cyclomatic complexity - Open the view (alternate)

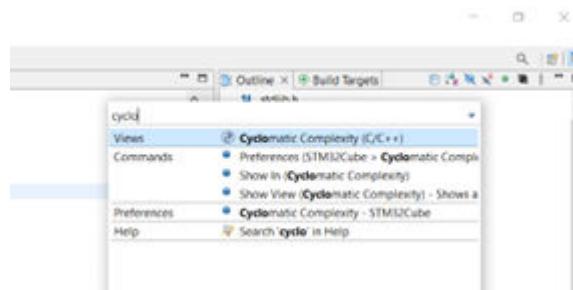

The *Cyclomatic Complexity* view is populated when a built project is selected in the *Project Explorer*. The project must be built with the option [**-fcyclomatic-complexity**] enabled, otherwise the view cannot present any information.

The next section [Enable cyclomatic complexity information](#) explains how to set up the compiler to generate cyclomatic complexity information.


10.3

Enable cyclomatic complexity information

If the top of the view displays the message “*No Cyclomatic Complexity information found, please enable in the compiler settings*”, the build configuration must be updated for the compiler to generate the cyclomatic complexity information:

1. Open the project properties, for instance with a right-click on the project in the *Project Explorer* view
2. Select [**Properties**] and, in the dialog, select [**C/C++ Build**]>[**Settings**]
3. Select the *Tool Settings* tab
4. Select [**MCU GCC Compiler**]>[**Miscellaneous**]
5. Select [**Enable Cyclomatic Complexity (-fcyclomatic-complexity)**] as shown in [Figure 263](#)
6. Save the setting and rebuild the program

[Figure 263. Cyclomatic complexity - Generate information per function](#)

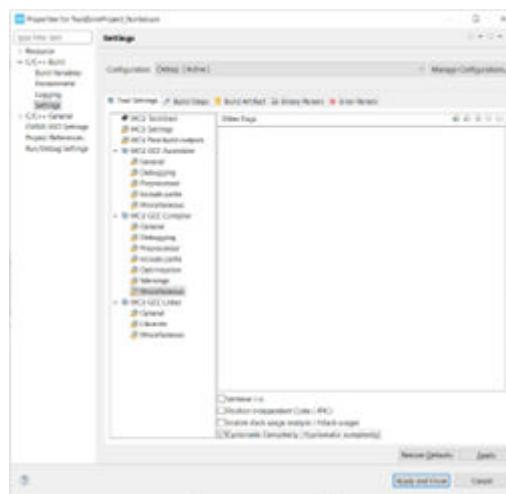

10.4

Using the filter field

The view proposes a field to search functions by their names. It selects all the function names matching the characters entered in the field.

[Figure 264. Cyclomatic complexity - Function search field](#)

Function	Location	Complexity
RCC_SetFlashLatencyFromMSIR...	stm32f5xx_hal_rcc.c:1914	10
RCC_GetSysClockFreqFromPLLSour...	stm32f5xx_hal_rcc.c:1990	6
HAL_RCC_DivConfig	stm32f5xx_hal_rcc.c:129	112
HAL_RCC_GenSysClockFreq	stm32f5xx_hal_rcc.c:1432	11
HAL_RCC_GetICLDFreq	stm32f5xx_hal_rcc.c:1519	1
HAL_RCC_ClockConfig	stm32f5xx_hal_rcc.c:1138	28


11 Installing updates and additional Eclipse® plugins

11.1 Check for updates

STM32CubeIDE checks for available updates regularly and opens the *Available Updates* dialog when a new update is detected. It is also possible to check for updates manually. Use menu [Help]>[Check for Updates] to check if new software is available.


When updates are found, select the update to install and press [Next].

Figure 265. STM32CubeIDE available updates

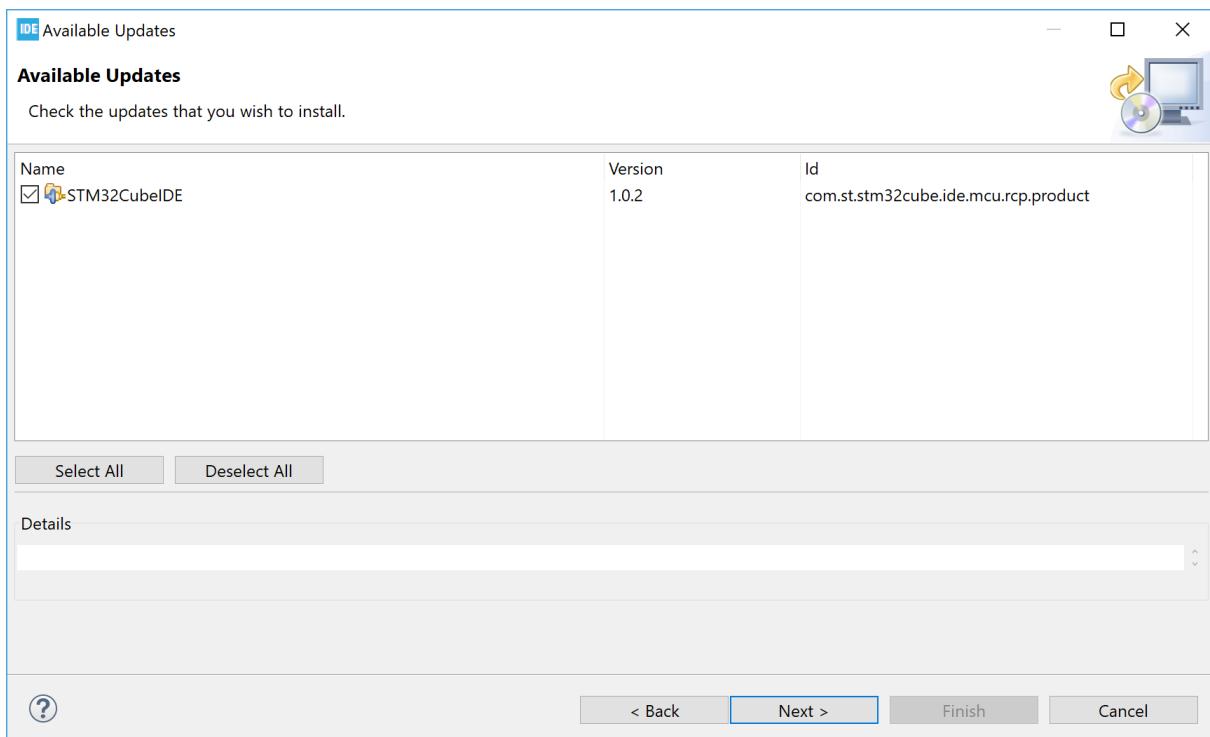


Update details is displayed. Review and confirm the update. Press **Next**.

Figure 266. STM32CubeIDE update details

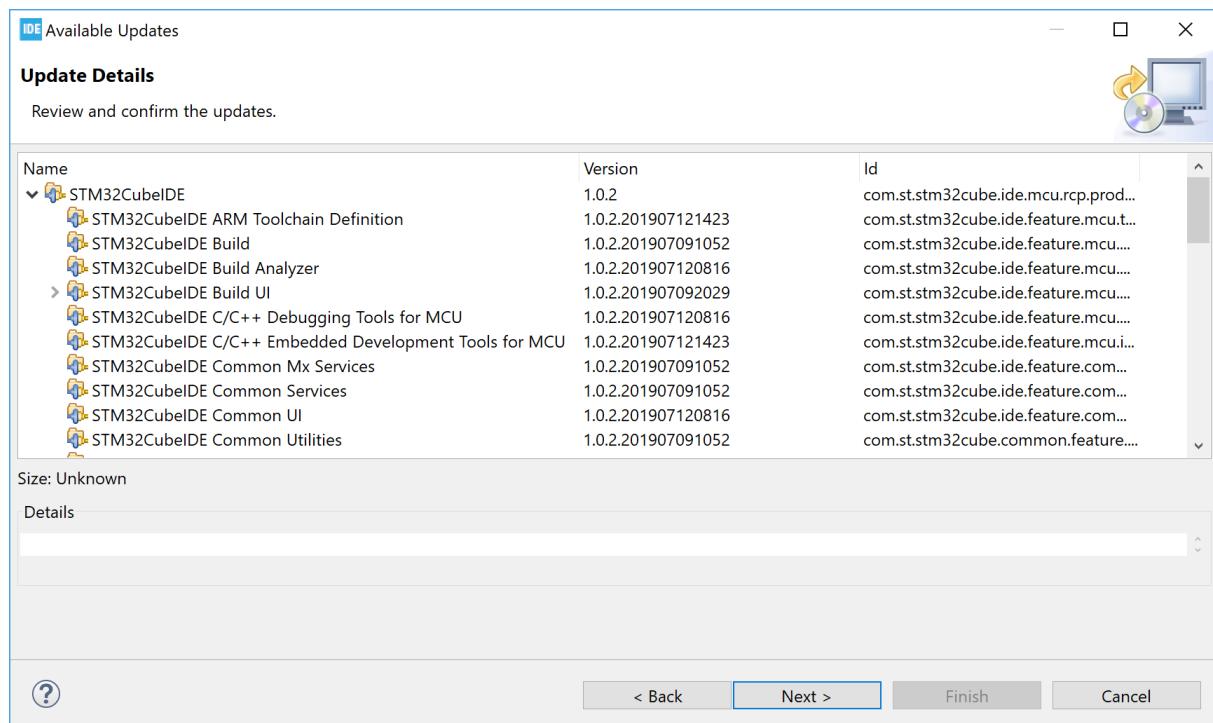

Review Licenses details are displayed. Review the licenses, select [**I accept the terms of the license agreements**] and press [**Finish**] to install the update.

Figure 267. STM32CubeIDE update review licenses

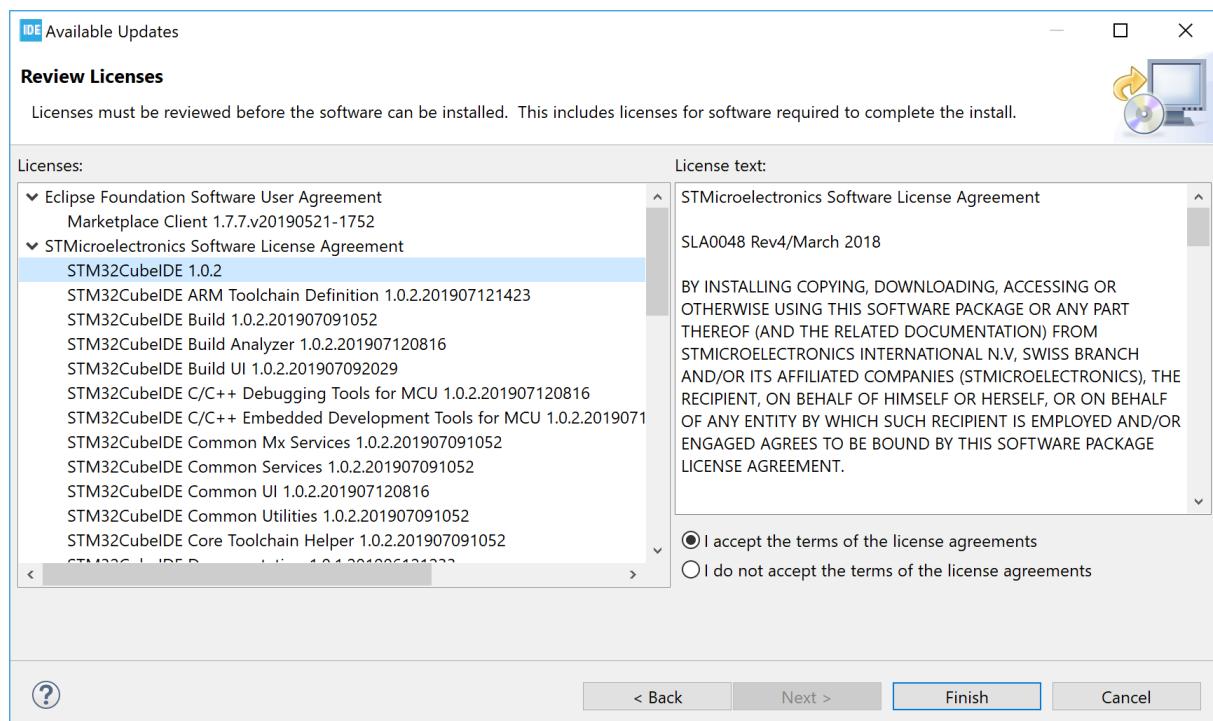


The progress bar displayed at the bottom of the STM32CubeIDE window shows the installation completion rate. Restart STM32CubeIDE when the update is finished.

11.2 Install from the Eclipse® market place


It is possible to install additional third-party Eclipse® plugins in STM32CubeIDE using the Eclipse Marketplace. To install from Eclipse Marketplace, select menu [Help]>[Eclipse Marketplace...].

Figure 268. Eclipse Marketplace menu

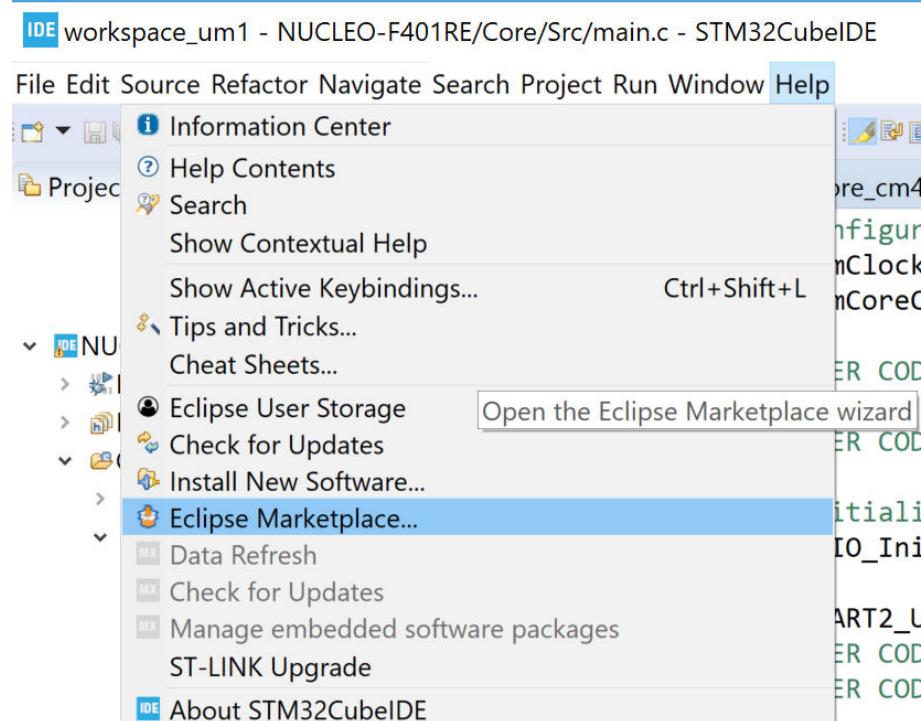

The *Eclipse Marketplace* dialog opens. Search for the plugin or use the tabs (*Recent*, *Popular*, *Favorites*) to find the software wanted and install it.

Figure 269. Eclipse marketplace

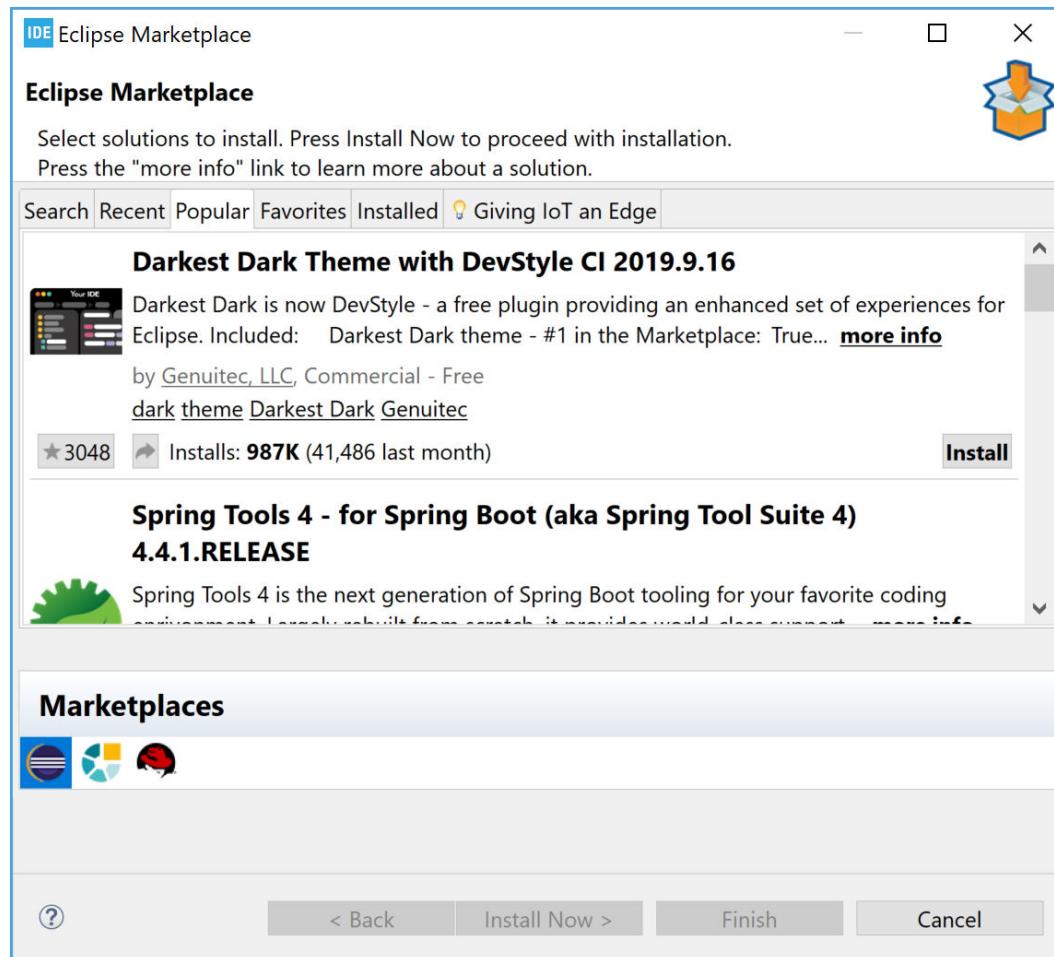

Wait until the installation is finished and restart STM32CubeIDE.

11.3


Install using [Install new software...]

Another way to install new software is to use menu [Help]>[Install New Software...].

Note:


When installing a new toolchain, it is recommended to use the Toolchain Manager described in Section 2.11 Toolchain Manager.

Figure 270. Install new software menu

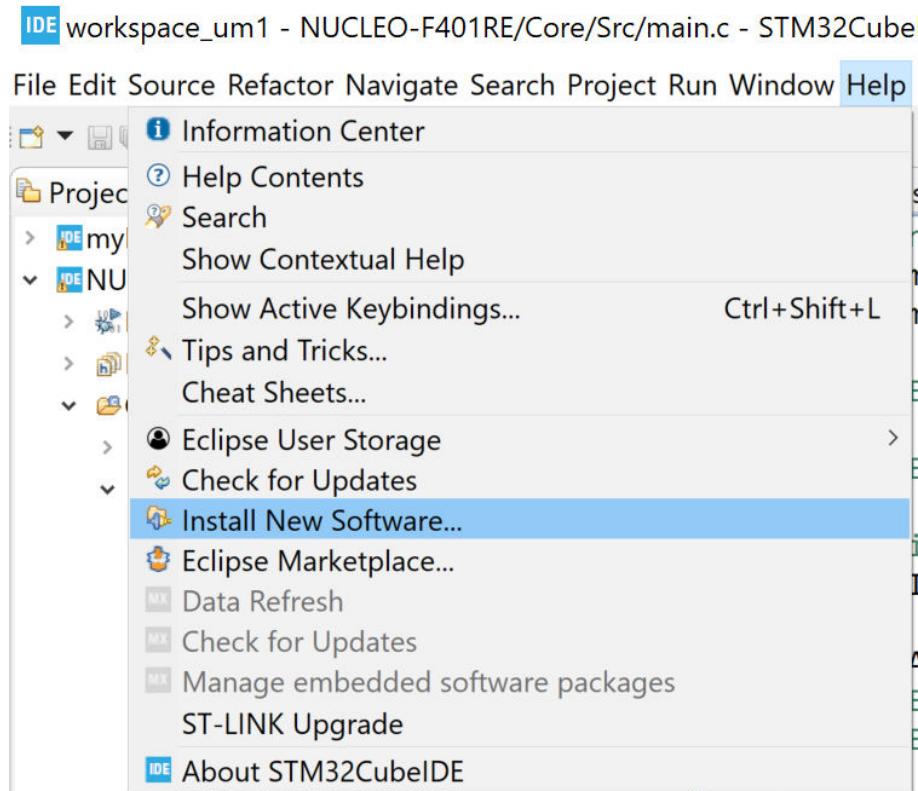


The *Install* dialog opens. Enter the plugin update site URL. If the URL is not known, use **--All Available Sites--**.

Figure 271. Install new software

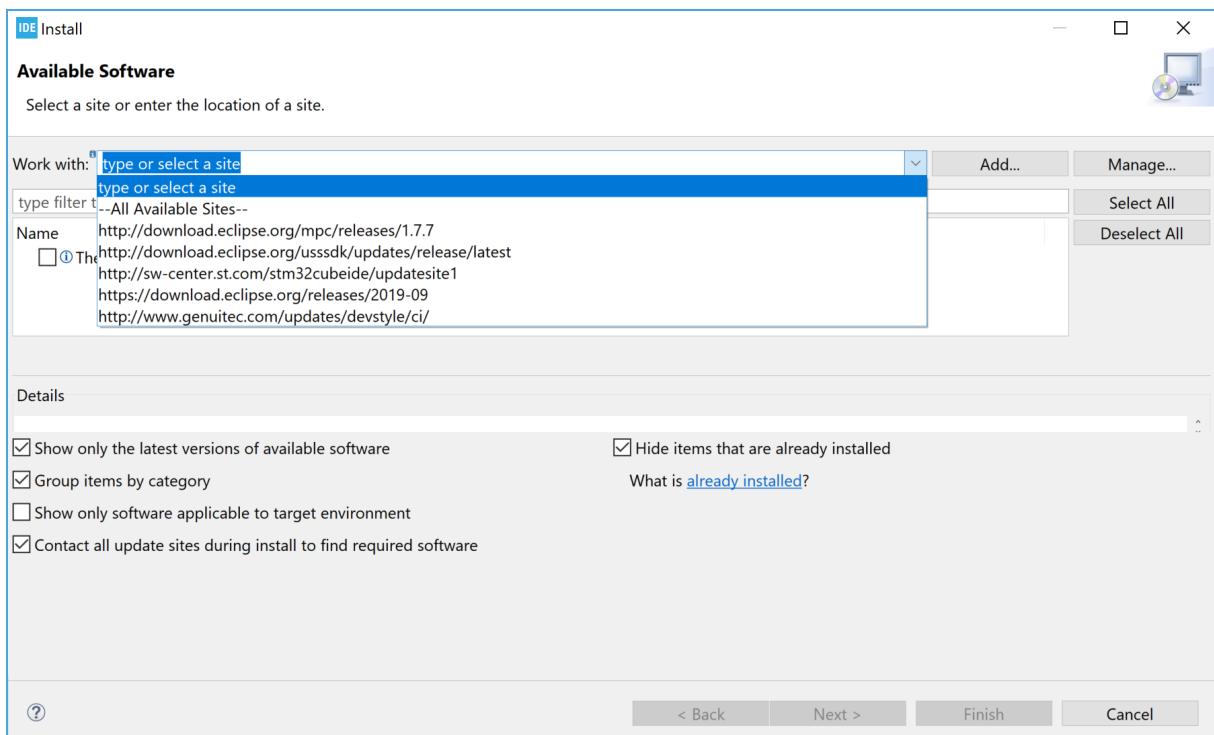

If no direct Internet connection is available, the plugin can be downloaded into an archive on a computer with an Internet connection, and then manually transferred to the computer with an STM32CubeIDE installation. Add the archived file by clicking on the [Add...] button and then select [Archive and select the downloaded file].

Figure 272. Install new software from computer

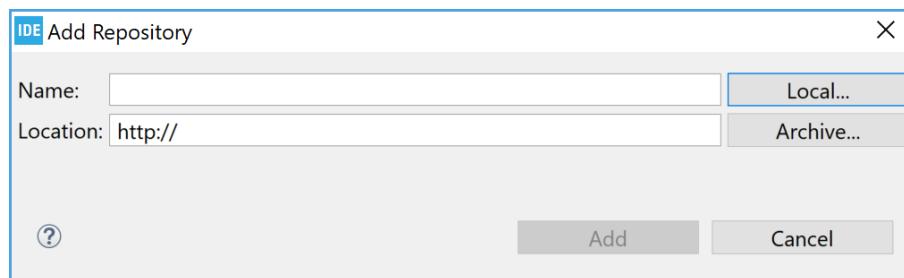


Select the appropriate plugins and install the software. Restart STM32CubeIDE when installation is finished.

Remember: Not all Eclipse® plugins are compatible with STM32CubeIDE.

11.4 Uninstalling installed additional Eclipse® plugins


To uninstall a plugin that is no longer needed, select menu [Help]>[About STM32CubeIDE].

Figure 273. About STM32CubeIDE

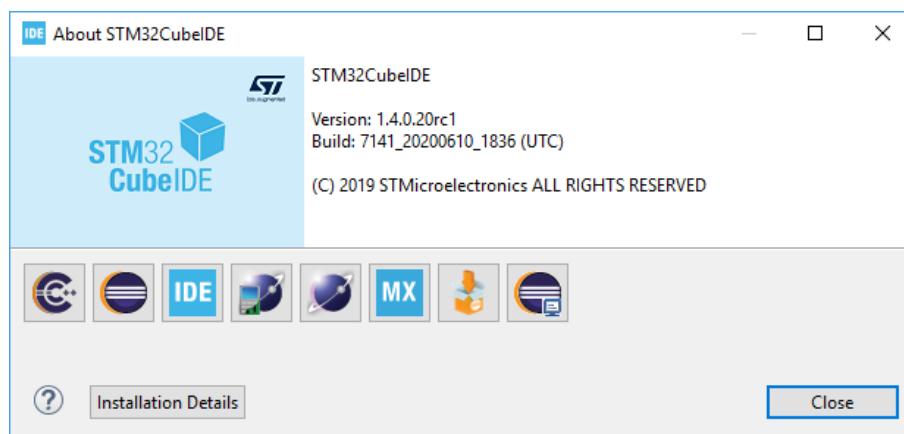

Press the [Installation Details] button to open the *STM32CubeIDE Installation Details* dialog.

Figure 274. Installation details

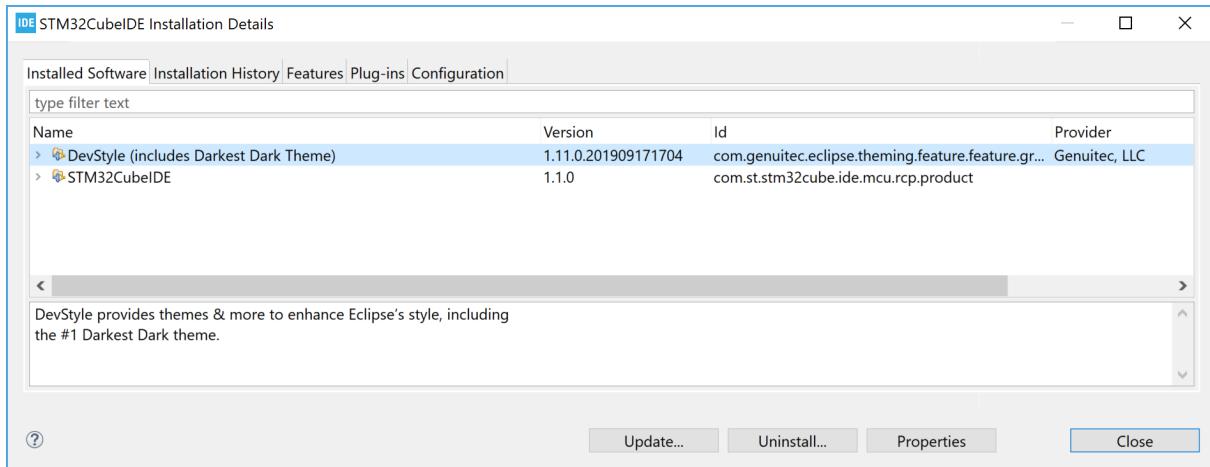


Select the plugin to uninstall in the *Installed Software* tab and press [**Uninstall...**]. Restart STM32CubeIDE when the uninstallation is finished.

11.5 Update to new CDT™

When a new version of [STM32CubeIDE](#) is installed based on a new version of Eclipse®, CDT™ or both, it is recommended to create a new workspace instead of using a former workspace. The following warning is displayed when trying to use an old workspace with a new STM32CubeIDE.

Figure 275. Older workspace version warning

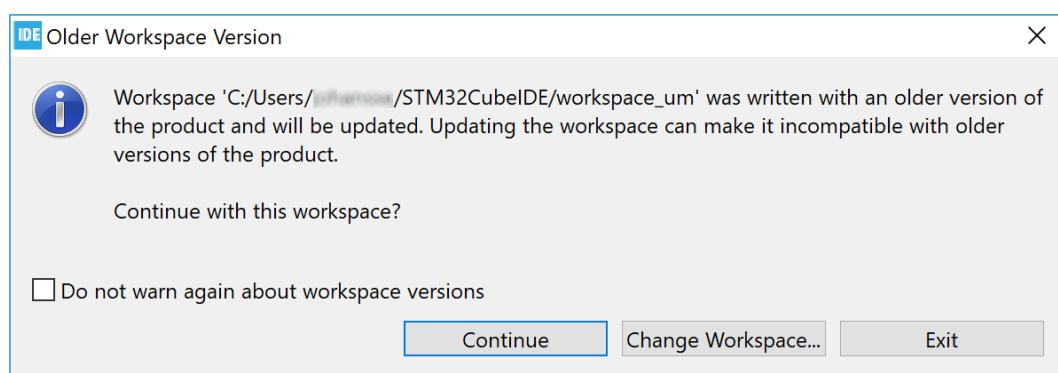

12 References

Table 29. STMicroelectronics reference documents

Reference	Document short name	Description	Document source
[ST-01]	DB3871	STM32CubeIDE data brief	www.st.com
[ST-02]	RN0114	STM32CubeIDE release note	
[ST-03]	UM2553	STM32CubeIDE quick start guide	
[ST-04]	UM2563	STM32CubeIDE installation guide	
[ST-05]	UM2578	Migration guide from to STM32CubeIDE	
[ST-06]	UM2579	Migration guide from System Workbench to STM32CubeIDE	
[ST-07]	UM2576	STM32CubeIDE ST-LINK GDB server	
[ST-08]	Getting started with projects based on the STM32MP1 Series in STM32CubeIDE ⁽¹⁾		Refer to STM32CubeIDE in the "Tools" section of wiki.st.com/stm32mpu
[ST-09]	AN5361	Getting started with projects based on dual-core STM32H7 microcontrollers in STM32CubeIDE	www.st.com
[ST-10]	AN5394	Getting started with projects based on the STM32L5 Series in STM32CubeIDE	
[ST-11]	AN5564	Getting started with projects based on dual-core STM32WL microcontrollers in STM32CubeIDE	
[ST-12]	AN4296	Use STM32F3/STM32G4 CCM SRAM with IAR Embedded Workbench®, Keil® MDK-ARM, STMicroelectronics STM32CubeIDE and other GNU-based toolchains	
[ST-13]	SLA0048	License agreement applicable to STM32CubeIDE	
[ST-14]	UM1718	STM32CubeMX for STM32 configuration and initialization C code generation	

1. Legacy application note [AN5360](#) remains available on www.st.com.

Table 30. External reference documents

Reference	Description	Document source
[EXT-01]	GNU Assembler	GNU tool suite ⁽¹⁾
[EXT-02]	GNU Compiler Collection	
[EXT-03]	GNU C Library	
[EXT-04]	GNU C Preprocessor	
[EXT-05]	GNU Linker	
[EXT-06]	GNU Binary Utilities	
[EXT-07]	Red Hat Newlib C Library	
[EXT-08]	Red Hat Newlib C Math Library	
[EXT-09]	Newlib nano readme	
[EXT-10]	Debugging with GDB	
[EXT-11]	GDB Quick Reference Card	<i>Information Center</i>
[EXT-12]	GNU Tools for STM32 Patch list	

1. For GNU documentation principles, refer to www.gnu.org.

Revision history

Table 31. Document revision history

Date	Revision	Changes
24-Jul-2020	1	Initial release.
2-Nov-2020	2	<p>Document updated for STM32CubelDE v1.5.0:</p> <ul style="list-style-type: none">Only one toolchain installed by defaultThe <i>SFRs</i> view displays Arm® Cortex® core registers nodeDebug with OpenOCD supports SWV and live expressionsAdded <i>Preferences - Build variables</i>Added <i>Toolchain Manager</i>Added <i>RTOS-aware debugging</i> with FreeRTOS™ informationAdded <i>General debug and run launch flow</i>Added <i>Post-build with makefile targets</i>
18-Feb-2021	3	<p>Document updated for STM32CubelDE v1.6.0:</p> <ul style="list-style-type: none">Added the <i>Azure RTOS ThreadX</i> section into chapter <i>RTOS-aware debugging</i>. Reorganized the <i>FreeRTOS</i> sectionUpdated the <i>Toolchain Manager</i> section for the support of local toolchainsUpdated the <i>Project C/C++ build settings</i> section, MCU toolchain selection movedUpdated <i>Information Center</i>Updated the entire document for the “SWV packet” terminologyUpdated <i>References</i>Removed Section 4.3.3 <i>SWV Exception Timeline Graph</i>
5-Jul-2021	4	<p>Document updated for STM32CubelDE v1.7.0:</p> <ul style="list-style-type: none">Added <i>Section 2.7 Thread-safe wizard for empty projects and CDT projects</i>Added <i>Section 3.8 Import STM32 Cortex-M executable</i>Added <i>Section 6.3 RTOS-kernel-aware debug</i>Updated <i>Information Center – Home page</i>Updated <i>Headless build</i> descriptionUpdated <i>Section 2.5.6 Linker script</i> with new memory map layout figure and additional descriptionUpdated <i>Position-independent code</i> descriptionUpdated debug configuration descriptions for ST-LINK GDB server, OpenOCD and SEGGER in <i>Debug using different GDB servers</i>Updated <i>FreeRTOS Task List</i> view
17-Nov-2021	5	<p>Document updated for STM32CubelDE v1.8.0:</p> <ul style="list-style-type: none">Added <i>Section 1.3.3 Videos</i>Added <i>Section 6.1.10 Azure RTOS TraceX tool</i>Updated <i>Section 2.2.2 Creating a new STM32 static library project</i>Removed <i>Section 1.3.3 Technical documentation</i> and <i>Section 1.3.4 Closing the Information Center</i>
13-Jun-2022	6	<p>Document updated for STM32CubelDE v1.10.0:</p> <ul style="list-style-type: none">Updated <i>Table 2. Key shortcut examples</i>Added a note in <i>Section 2.5.7.3 Place variables at specific addresses</i> about the possible linker garbage collection of nonreferenced variablesUpdated figures about debug configurations and tabs: <i>Figure 137</i>, <i>Figure 143</i>, <i>Figure 145</i>, <i>Figure 146</i>, <i>Figure 147</i>, <i>Figure 148</i>, <i>Figure 156</i>, <i>Figure 164</i>, and <i>Figure 223</i>
21-Nov-2022	7	<p>Document updated for STM32CubelDE v1.11.0:</p> <ul style="list-style-type: none">Updated <i>Section 2.2.2 Creating a new STM32 static library project</i> with the <i>Figure 52</i> featuring the new static lib projectUpdated the debug session name in <i>Section 3.2 Debug configurations</i>, <i>Section 3.3 Manage debug configurations</i>, and <i>Section 3.7 Run configurations</i>

Date	Revision	Changes
15-Feb-2023	8	<p>Document updated for STM32CubeIDE v1.12.0:</p> <ul style="list-style-type: none">Added Favorite lists, Live update, and Exporting registers in Section 5.2 Using the SFRs viewAdded the Cyclomatic complexity chapterUpdated Figure 4. Help menu, Figure 5. Help - Information Center menu, and Section 1.3.3 Videos

Contents

1	Getting started	2
1.1	Product information	2
1.1.1	System requirements	3
1.1.2	Downloading the latest STM32CubeIDE version	3
1.1.3	Installing STM32CubeIDE	3
1.1.4	License	3
1.1.5	Support	3
1.2	Using STM32CubeIDE	3
1.2.1	Basic concept and terminology	3
1.2.2	Starting STM32CubeIDE	5
1.2.3	Help system	6
1.3	<i>Information Center</i>	6
1.3.1	Accessing the <i>Information Center</i>	6
1.3.2	Home page	7
1.3.3	Videos	8
1.4	Perspectives, editors and views	9
1.4.1	Perspectives	9
1.4.2	Editors	13
1.4.3	Views	13
1.4.4	<i>Quick Access</i> edit field	15
1.5	Configuration - Preferences	16
1.5.1	Preferences - Editors	17
1.5.2	Preferences - Code style formatter	18
1.5.3	Preferences - Network proxy settings	20
1.5.4	Preferences - Build variables	21
1.6	Workspaces and projects	22
1.7	Managing existing workspaces	22
1.7.1	Backup of preferences for a workspace	23
1.7.2	Copy preferences between workspaces	23
1.7.3	Keeping track of Java heap space	23
1.7.4	Unavailable workspace	23
1.8	STM32CubeIDE and Eclipse® basics	24
1.8.1	Keyboard shortcuts	24
1.8.2	Editor zoom in and zoom out	27
1.8.3	Quickly find and open a file	27
1.8.4	Branch folding	28

1.8.5	Block selection mode	28
1.8.6	Compare files	31
1.8.7	Local file history	33
2	Creating and building C/C++ projects	38
2.1	Introduction to projects	38
2.2	Creating a new STM32 project	38
2.2.1	Creating a new STM32 executable project	38
2.2.2	Creating a new STM32 static library project	43
2.3	Configure the project build setting	49
2.3.1	Project build configuration	50
2.3.2	Project C/C++ build settings	55
2.4	Building the project	62
2.4.1	Building all projects	63
2.4.2	Build all build configurations	63
2.4.3	Headless build	64
2.4.4	Temporary assembly file and preprocessed C code	65
2.4.5	Build logging	65
2.4.6	Parallel build and build behaviour	65
2.4.7	Post-build with makefile targets	66
2.5	Linking the project	66
2.5.1	Run time library	67
2.5.2	Discard unused sections	69
2.5.3	Page size allocation for malloc	70
2.5.4	Include additional object files	71
2.5.5	Treat linker warnings and errors	72
2.5.6	Linker script	73
2.5.7	Modify the linker script	80
2.5.8	Include libraries	87
2.5.9	Referring to projects	89
2.6	I/O redirection	90
2.6.1	printf() redirection	91
2.7	Thread-safe wizard for empty projects and CDT™ projects	92
2.8	Position-independent code	99
2.8.1	Adding the <code>-fPIE</code> option	100
2.8.2	Run time library	100
2.8.3	Stack pointer configuration	101
2.8.4	Interrupt vector table	101

2.8.5	Global offset table	101
2.8.6	Interrupt vector table and symbols	102
2.8.7	Debugging position-independent code	102
2.9	Exporting projects	104
2.10	Importing existing projects	106
2.10.1	Importing an STM32CubeIDE project	106
2.10.2	Importing System Workbench and projects	108
2.10.3	Importing using project files association	111
2.10.4	Prevent “GCC not found in path” error	111
2.11	<i>Toolchain Manager</i>	111
2.11.1	Install new toolchain	114
2.11.2	Manage default toolchain	117
2.11.3	Uninstall toolchain	118
2.11.4	Using local toolchain	120
2.11.5	Network error	123
3	Debugging	124
3.1	Introduction to debugging	124
3.1.1	General debug and run launch flow	125
3.2	Debug configurations	126
3.2.1	Debug configuration	127
3.2.2	<i>Main</i> tab	127
3.2.3	<i>Debugger</i> tab	128
3.2.4	<i>Startup</i> tab	130
3.3	Manage debug configurations	133
3.4	Debug using different GDB servers	134
3.4.1	Debug using the ST-LINK GDB server	134
3.4.2	Debug using OpenOCD and ST-LINK	138
3.4.3	Debug using SEGGER J-Link	139
3.5	Start and stop debugging	141
3.5.1	Start debugging	141
3.5.2	Debug perspective and views	143
3.5.3	Main controls for debugging	145
3.5.4	Run, start and stop a program	146
3.5.5	Set breakpoints	146
3.5.6	Attach to running target	148
3.5.7	Restart or terminate debugging	149
3.6	Debug features	153

3.6.1	<i>Live Expressions</i> view	153
3.6.2	Shared ST-LINK	153
3.6.3	Debug multiple boards	154
3.6.4	STM32H7 multicore debugging	154
3.6.5	STM32MP1 debugging	154
3.6.6	STM32L5 debugging	154
3.7	Run configurations	154
3.8	Import STM32 Cortex®-M executable	156
4	Debug with Serial Wire Viewer tracing (SWV)	161
4.1	Introduction to SWV and ITM	161
4.2	SWV debugging	161
4.2.1	SWV debug configuration	161
4.2.2	SWV settings configuration	164
4.2.3	SWV tracing	166
4.3	SWV views	167
4.3.1	<i>SWV Trace Log</i>	168
4.3.2	<i>SWV Exception Trace Log</i>	168
4.3.3	<i>SWV Data Trace</i>	170
4.3.4	<i>SWV Data Trace Timeline Graph</i>	172
4.3.5	<i>SWV ITM Data Console</i> and printf redirection	172
4.3.6	<i>SWV Statistical Profiling</i>	174
4.4	Change the SWV trace buffer size	176
4.5	Common SWV problems	177
5	Special Function Registers (SFRs)	179
5.1	Introduction to SFRs	179
5.2	Using the <i>SFRs</i> view	179
5.2.1	Favorite lists	181
5.2.2	Live update	182
5.2.3	Exporting registers	184
5.3	Updating CMSIS-SVD settings	185
6	RTOS-aware debugging	186
6.1	Azure® RTOS ThreadX	186
6.1.1	Finding the views	186
6.1.2	<i>ThreadX Thread List</i> view	186
6.1.3	<i>ThreadX Semaphores</i> view	188
6.1.4	<i>ThreadX Mutexes</i> view	189
6.1.5	<i>ThreadX Message Queues</i> view	190

6.1.6	<i>ThreadX Event Flags</i> view	190
6.1.7	<i>ThreadX Timers</i> view	191
6.1.8	<i>ThreadX Memory Block Pools</i> view.....	192
6.1.9	<i>ThreadX Memory Byte Pools</i> view	192
6.1.10	Azure® RTOS TraceX tool.....	193
6.2	FreeRTOS™	197
6.2.1	Requirements	197
6.2.2	Finding the views	199
6.2.3	<i>FreeRTOS Task List</i> view	199
6.2.4	<i>FreeRTOS Timers</i> view.....	201
6.2.5	<i>FreeRTOS Semaphores</i> view	202
6.2.6	<i>FreeRTOS Queues</i> view	203
6.3	RTOS-kernel-aware debug	203
7	Fault Analyzer	207
7.1	Introduction to the <i>Fault Analyzer</i>	207
7.2	Using the <i>Fault Analyzer</i> view	208
8	Build Analyzer	211
8.1	Introduction to the <i>Build Analyzer</i>	211
8.2	Using the <i>Build Analyzer</i>	211
8.2.1	<i>Memory Regions</i> tab	211
8.2.2	<i>Memory Details</i> tab	212
9	Static Stack Analyzer	219
9.1	Introduction to the <i>Static Stack Analyzer</i>	219
9.2	Using the <i>Static Stack Analyzer</i>	220
9.2.1	Enable stack usage information	221
9.2.2	<i>List</i> tab	222
9.2.3	<i>Call Graph</i> tab.....	223
9.2.4	Using the filter and search field	224
9.2.5	Copy and paste.....	226
10	Cyclomatic complexity	227
10.1	Introduction to the cyclomatic complexity view	227
10.2	Using the cyclomatic complexity view.....	228
10.3	Enable cyclomatic complexity information	229
10.4	Using the filter field	229
11	Installing updates and additional Eclipse® plugins	230
11.1	Check for updates	230

11.2	Install from the Eclipse® market place	232
11.3	Install using [Install new software...].	233
11.4	Uninstalling installed additional Eclipse® plugins	235
11.5	Update to new CDT™	236
12	References	237
	Revision history	239
	List of tables	247
	List of figures	248

List of tables

Table 1.	Examples of toolchain build variables	21
Table 2.	Key shortcut examples	25
Table 3.	Memory map layout	74
Table 4.	<i>Toolchain Manager</i> column details	113
Table 5.	<i>Toolchain Manager</i> button information	113
Table 6.	<i>SWV Trace Log</i> columns details	168
Table 7.	<i>SWV Exception Trace Log – Data</i> columns details	169
Table 8.	<i>SWV Exception Trace Log – Statistics</i> columns details	170
Table 9.	<i>SWV Data Trace</i> columns details	172
Table 10.	<i>SWV Statistical Profiling</i> columns details	176
Table 11.	<i>ThreadX Thread List</i> details	188
Table 12.	<i>ThreadX Semaphores</i> details	189
Table 13.	<i>ThreadX Mutexes</i> details	189
Table 14.	<i>ThreadX Message Queues</i> details	190
Table 15.	<i>ThreadX Event Flags</i> details	191
Table 16.	<i>ThreadX Timers</i> details	191
Table 17.	<i>ThreadX Memory Block Pools</i> details	192
Table 18.	<i>ThreadX Memory Byte Pools</i> details	193
Table 19.	<i>FreeRTOS Task List</i> details	201
Table 20.	<i>FreeRTOS Timers</i> details	202
Table 21.	<i>FreeRTOS Semaphores</i> details	203
Table 22.	<i>FreeRTOS Queues</i> details	203
Table 23.	<i>Memory Regions</i> tab information	212
Table 24.	<i>Memory Regions</i> usage color	212
Table 25.	<i>Memory Details</i> tab information	213
Table 26.	<i>Static Stack Analyzer List</i> tab details	222
Table 27.	<i>Static Stack Analyzer Call Graph</i> tab details	223
Table 28.	<i>Cyclomatic Complexity</i> details	227
Table 29.	STMicroelectronics reference documents	237
Table 30.	External reference documents	238
Table 31.	Document revision history	239

List of figures

Figure 1.	STM32CubeIDE key features	2
Figure 2.	STM32CubeIDE window	4
Figure 3.	STM32CubeIDE Launcher – Workspace selection	5
Figure 4.	Help menu	6
Figure 5.	Help - Information Center menu	6
Figure 6.	Information Center – Home page	7
Figure 7.	Help – Tutorial video	8
Figure 8.	Information Center – Video browser page	8
Figure 9.	Reset perspective	9
Figure 10.	Toolbar buttons for switching perspective	9
Figure 11.	C/C++ perspective	10
Figure 12.	Debug perspective	10
Figure 13.	<i>Device Configuration Tool</i> perspective	11
Figure 14.	<i>Remote System Explorer</i> perspective	12
Figure 15.	New connection	12
Figure 16.	[Show View] menu	13
Figure 17.	Show View dialog	14
Figure 18.	Quick access	15
Figure 19.	Preferences	16
Figure 20.	<i>Preferences - Text Editors</i>	17
Figure 21.	<i>Preferences - Formatter</i>	18
Figure 22.	<i>Preferences - Code style edit</i>	19
Figure 23.	<i>Preferences - Network Connections</i>	20
Figure 24.	Preferences – Build variables	21
Figure 25.	Pre-build step using build variables	21
Figure 26.	Preferences - Workspaces	22
Figure 27.	Display of Java heap space status	23
Figure 28.	Workspace unavailable	24
Figure 29.	Shortcut keys	24
Figure 30.	Shortcut preferences	25
Figure 31.	Editor with text zoomed in	27
Figure 32.	Editor folding	28
Figure 33.	Editor block selection	29
Figure 34.	Editor text block addition	29
Figure 35.	Editor column block selection	30
Figure 36.	Editor column block paste	31
Figure 37.	Editor - Compare files	32
Figure 38.	Editor - File differences	32
Figure 39.	Local history	33
Figure 40.	Show local history	34
Figure 41.	File history	35
Figure 42.	Compare current history with local history	36
Figure 43.	Compare local file differences	37
Figure 44.	STM32 target selection	39
Figure 45.	STM32 board selection	39
Figure 46.	Project setup	40
Figure 47.	Firmware library package setup	41
Figure 48.	Initialization of all peripherals	41
Figure 49.	STM32CubeMX perspective opening	42
Figure 50.	Project creation started	42
Figure 51.	STM32CubeMX	43
Figure 52.	New C/C++ project	44
Figure 53.	Project type	45

Figure 54.	Project configuration selection	45
Figure 55.	Project default target selector	46
Figure 56.	Project MCU/MPU selector	47
Figure 57.	Project target selection	48
Figure 58.	Project target selection (advanced)	48
Figure 59.	Project target change	49
Figure 60.	Set the active build configuration using the toolbar	50
Figure 61.	Set active build configuration using right-click	51
Figure 62.	Set active build configuration using menu	52
Figure 63.	<i>Manage Configurations</i> dialog	52
Figure 64.	Create a new build configuration	53
Figure 65.	Updated <i>Manage Configurations</i> dialog	53
Figure 66.	Configuration deletion dialog	54
Figure 67.	Configuration renaming dialog	54
Figure 68.	Properties tabs	55
Figure 69.	Properties configurations	55
Figure 70.	Properties toolchain version	56
Figure 71.	Properties toolchain selection	56
Figure 72.	Properties tool MCU settings	57
Figure 73.	Properties tool MCU post-build settings	58
Figure 74.	Properties tool GCC assembler settings	59
Figure 75.	Properties tool GCC compiler settings	60
Figure 76.	Properties tool GCC linker settings	61
Figure 77.	Properties build steps settings	62
Figure 78.	Project build toolbar	62
Figure 79.	Project build console	63
Figure 80.	Project build all	63
Figure 81.	Project build-all configurations	64
Figure 82.	Headless build	65
Figure 83.	Parallel build	66
Figure 84.	Linker documentation	67
Figure 85.	Linker run time library	68
Figure 86.	Linker newlib-nano library and floating-point numbers	69
Figure 87.	Linker discard unused sections	70
Figure 88.	Linker include additional object files	71
Figure 89.	Linker fatal warnings	73
Figure 90.	Linker memory output	85
Figure 91.	Linker memory output specified order	85
Figure 92.	Linker memory displaying file <code>readme</code>	86
Figure 93.	Include a library	88
Figure 94.	Add library header files to the include paths	89
Figure 95.	Set project references	90
Figure 96.	Select a wizard	93
Figure 97.	<i>Thread-Safe Solution</i> wizard	94
Figure 98.	Thread-safe source folder location	95
Figure 99.	Thread-safe strategy selection	96
Figure 100.	Thread-safe properties	97
Figure 101.	Thread-safe files	98
Figure 102.	Thread-safe error dialog	99
Figure 103.	Position independent code, <code>-fPIE</code>	100
Figure 104.	Debugging position independent code	103
Figure 105.	Export project	104
Figure 106.	Export dialog	105
Figure 107.	Export archive	106
Figure 108.	Import project	107

Figure 109. Import dialog	107
Figure 110. Import projects	108
Figure 111. Import System Workbench projects (1 of 3)	109
Figure 112. Import System Workbench projects (2 of 3)	110
Figure 113. Import System Workbench projects (3 of 3)	110
Figure 114. Import using project files association	111
Figure 115. Open <i>Toolchain Manager</i>	112
Figure 116. <i>Toolchain Manager</i>	112
Figure 117. Install toolchain	114
Figure 118. Check items to install	114
Figure 119. Review items to install	115
Figure 120. Review and accept licenses	115
Figure 121. Security warning	116
Figure 122. Restart to apply software update	116
Figure 123. Toolchain installed	116
Figure 124. Default toolchain	117
Figure 125. Default toolchain updated	117
Figure 126. Uninstall toolchain	118
Figure 127. Uninstall details	118
Figure 128. Software updates	119
Figure 129. Toolchain uninstalled	119
Figure 130. Add local toolchain	120
Figure 131. Specify local toolchain location	121
Figure 132. Specify local toolchain prefix	121
Figure 133. Local toolchain added	122
Figure 134. Edit local toolchain	122
Figure 135. Toolchain network error	123
Figure 136. General debug and run launch flowchart	125
Figure 137. Debug as STM32 MCU	126
Figure 138. Debug as STM32 MCU menu	127
Figure 139. Debug configuration main tab	128
Figure 140. Debug configuration debugger tab	129
Figure 141. GDB server command line dialog	130
Figure 142. Debug configuration startup tab	131
Figure 143. Add/Edit item	132
Figure 144. Manage debug configurations	133
Figure 145. Manage debug configurations toolbar	133
Figure 146. ST-LINK GDB server debugger tab	135
Figure 147. OpenOCD debugger tab	138
Figure 148. SEGGER debugger tab	140
Figure 149. Debug configurations	142
Figure 150. Confirm perspective switch	143
Figure 151. Debug perspective	143
Figure 152. [Run] menu	145
Figure 153. Debug toolbar	145
Figure 154. Debug breakpoint	146
Figure 155. Breakpoint properties	147
Figure 156. Conditional breakpoint	147
Figure 157. Startup tab attach	149
Figure 158. Reset the chip toolbar	150
Figure 159. Restart configurations selection	150
Figure 160. Restart configurations dialog	151
Figure 161. Restart configurations dialog with additional command	152
Figure 162. Select restart configuration	152
Figure 163. Live Expressions	153

Figure 164.	Live expressions number format	153
Figure 165.	Run configurations startup tab	155
Figure 166.	Cortex®-M executable import dialog	156
Figure 167.	STM32 Cortex®-M executable dialog	157
Figure 168.	STM32 Cortex®-M executable MCU/MPU selection	157
Figure 169.	STM32 Cortex®-M CPU and core	158
Figure 170.	Cortex®-M debug configuration for imported project	159
Figure 171.	Project explorer view with imported project	160
Figure 172.	SWV core clock	162
Figure 173.	SWV debug configuration	162
Figure 174.	SWV show view	163
Figure 175.	SWV Trace log view	164
Figure 176.	SWV [Configure Trace] toolbar button	164
Figure 177.	SWV settings dialog	164
Figure 178.	SWV [Start/Stop Trace] toolbar button	166
Figure 179.	SWV Trace Log PC sampling	166
Figure 180.	[Remove all collected SWV data] toolbar button	167
Figure 181.	SWV views selectable from the menu	167
Figure 182.	SVW views common toolbar	167
Figure 183.	SVW graph views extra toolbar	168
Figure 184.	SWV Trace Log PC sampling and exceptions	168
Figure 185.	SWV Exception Trace Log – Data tab	169
Figure 186.	SWV Exception Trace Log – Statistics tab	169
Figure 187.	SWV Data Trace configuration	171
Figure 188.	SWV Data Trace	171
Figure 189.	SWV Data Trace Timeline Graph	172
Figure 190.	SWV settings	173
Figure 191.	SWV ITM Data Console	174
Figure 192.	SWV ITM port configuration	174
Figure 193.	SWV PC sampling enable	175
Figure 194.	SWV Statistical Profiling	176
Figure 195.	SWV Preferences	177
Figure 196.	Open the SFRs view using the [Quick Access] field	179
Figure 197.	SFRs view	180
Figure 198.	SFRs view toolbar buttons	181
Figure 199.	Debug - Addition of a node SFRs view as favorite	181
Figure 200.	Debug - SFRs view favorite list creation pop-up	182
Figure 201.	Debug - Favorite SFRs view	182
Figure 202.	Debug - Live channel checkbox	183
Figure 203.	Debug - Live update	183
Figure 204.	Debug – Export view data to file	184
Figure 205.	Debug – Export destination file	184
Figure 206.	SFRs CMSIS-SVD Settings	185
Figure 207.	ThreadX views selectable from the menu	186
Figure 208.	ThreadX Thread List view (default)	187
Figure 209.	ThreadX Thread List view (Stack Usage enabled)	187
Figure 210.	ThreadX Semaphores view	189
Figure 211.	ThreadX Mutexes view	189
Figure 212.	ThreadX Message Queues view	190
Figure 213.	ThreadX Event Flags view	191
Figure 214.	ThreadX Timers view	191
Figure 215.	ThreadX Memory Block Pools view	192
Figure 216.	ThreadX Memory Byte Pools view	193
Figure 217.	File associations	194

Figure 218.	RAM buffer export (1 of 2)	195
Figure 219.	RAM buffer export (2 of 2)	195
Figure 220.	Existing trace overwrite	196
Figure 221.	TraceX analysis	196
Figure 222.	FreeRTOS™ -related views selectable from the menu.	199
Figure 223.	<i>FreeRTOS Task List</i> (default)	199
Figure 224.	<i>FreeRTOS™ Toggle Stack Checking</i>	200
Figure 225.	<i>FreeRTOS Task List (Min Free Stack enabled)</i>	200
Figure 226.	<i>FreeRTOS Task List</i> with ConfigRECORD_STACK_HIGH_ADDRESS enabled.	200
Figure 227.	<i>FreeRTOS Timers</i>	201
Figure 228.	<i>FreeRTOS Semaphores</i>	202
Figure 229.	<i>FreeRTOS Queues</i>	203
Figure 230.	RTOS-kernel-aware debug	204
Figure 231.	RTOS-kernel-awareness debug configuration	205
Figure 232.	ThreadX-kernel-awareness debug configuration	205
Figure 233.	ThreadX port configuration	206
Figure 234.	FreeRTOS™ port configuration	206
Figure 235.	Open the <i>Fault Analyzer</i> view	207
Figure 236.	<i>Fault Analyzer</i> view	209
Figure 237.	<i>Fault Analyzer</i> toolbar	210
Figure 238.	Fault analyzer open editor on fault	210
Figure 239.	Fault Analyzer open disassembly on fault.	210
Figure 240.	Build analyzer.	211
Figure 241.	<i>Memory Regions</i> tab	212
Figure 242.	<i>Memory Details</i> tab	213
Figure 243.	<i>Memory Details</i> sorted by size	215
Figure 244.	<i>Memory Details</i> search and filter	215
Figure 245.	Sum of sizes	216
Figure 246.	Show byte count	216
Figure 247.	Show hex count	217
Figure 248.	Copy and paste	217
Figure 249.	<i>Static Stack Analyzer List</i> tab	219
Figure 250.	<i>Static Stack Analyzer Call Graph</i> tab	220
Figure 251.	Open the <i>Static Stack Analyzer</i> view	220
Figure 252.	Enable generate per function stack usage information	221
Figure 253.	<i>Static Stack Analyzer List</i> tab	222
Figure 254.	<i>Static Stack Analyzer Call Graph</i> tab	223
Figure 255.	Function symbols in <i>Static Stack Analyzer</i>	224
Figure 256.	<i>Static Stack Analyzer List</i> tab using search	225
Figure 257.	<i>Static Stack Analyzer Call Graph</i> using search	225
Figure 258.	Copy and paste	226
Figure 259.	Cyclomatic complexity view	227
Figure 260.	Cyclomatic complexity - Default complexity ceiling preference	228
Figure 261.	Cyclomatic complexity - Open the view	228
Figure 262.	Cyclomatic complexity - Open the view (alternate).	228
Figure 263.	Cyclomatic complexity - Generate information per function.	229
Figure 264.	Cyclomatic complexity - Function search field.	229
Figure 265.	STM32CubeIDE available updates	230
Figure 266.	STM32CubeIDE update details	231
Figure 267.	STM32CubeIDE update review licenses	231
Figure 268.	Eclipse Marketplace menu	232
Figure 269.	Eclipse marketplace	233
Figure 270.	Install new software menu	234
Figure 271.	Install new software.	234
Figure 272.	Install new software from computer	235

Figure 273. About STM32CubeIDE	235
Figure 274. Installation details	236
Figure 275. Older workspace version warning	236

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved