



Phantom QA results for / fbirn_out/ses-64ch_func-bold_acq-cmrrstd_task-tsnrxacpc.xml, slice 34

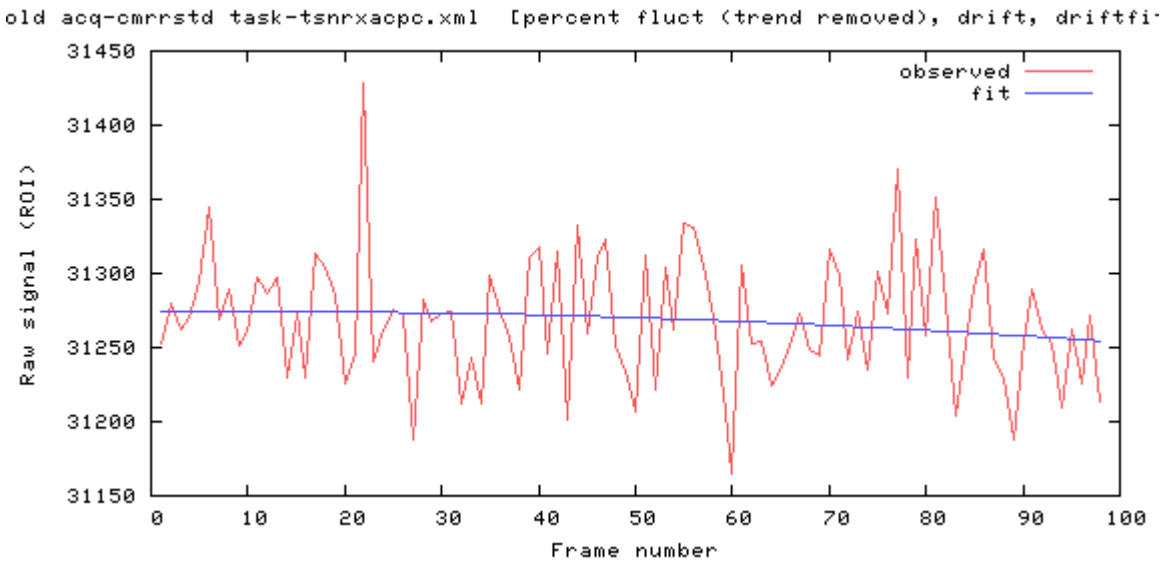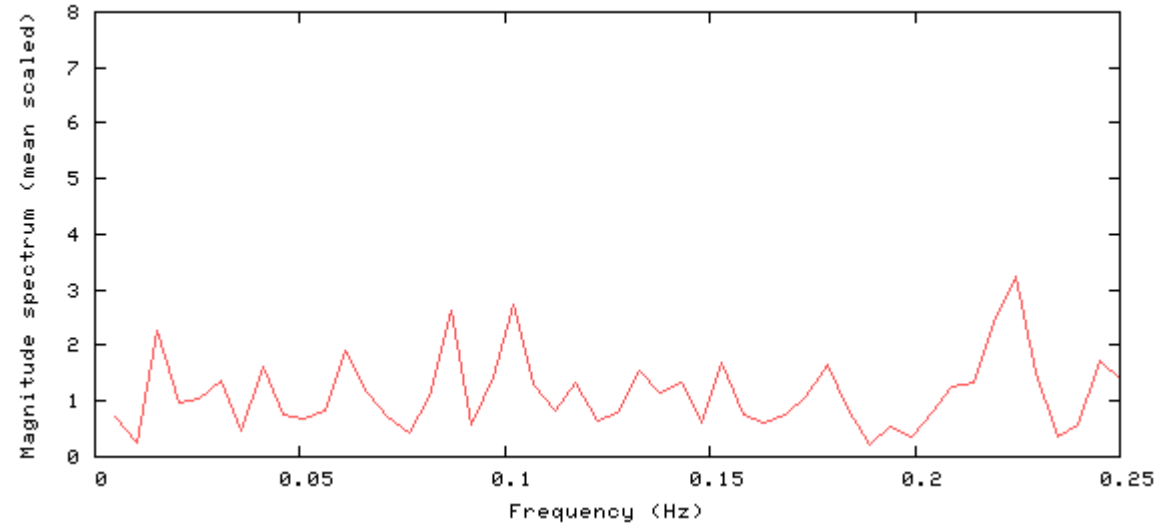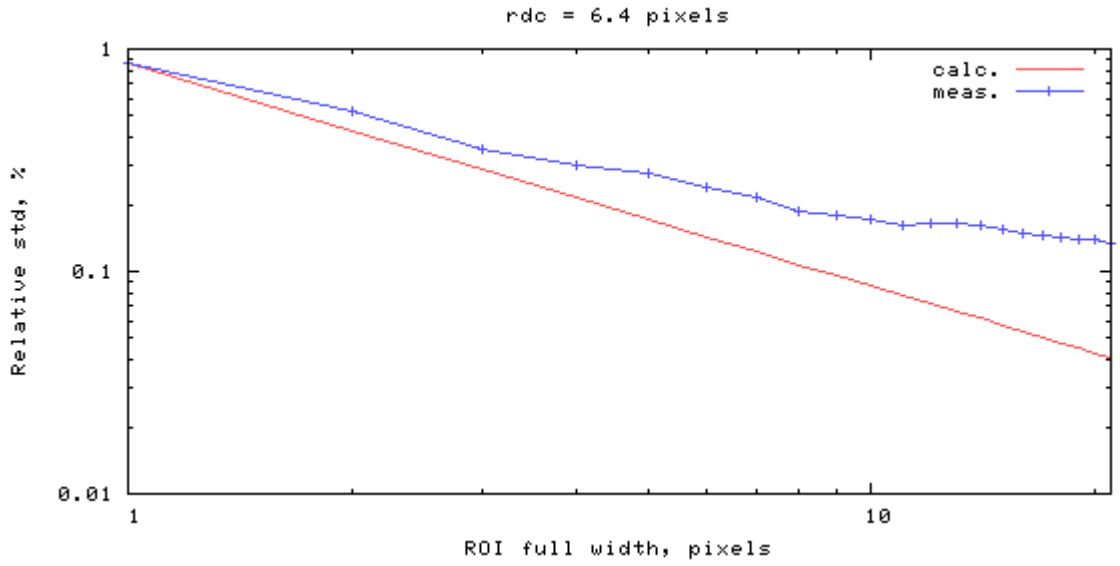



[mean, SNR, SFNR] = [31268.2 113.9 123.2]

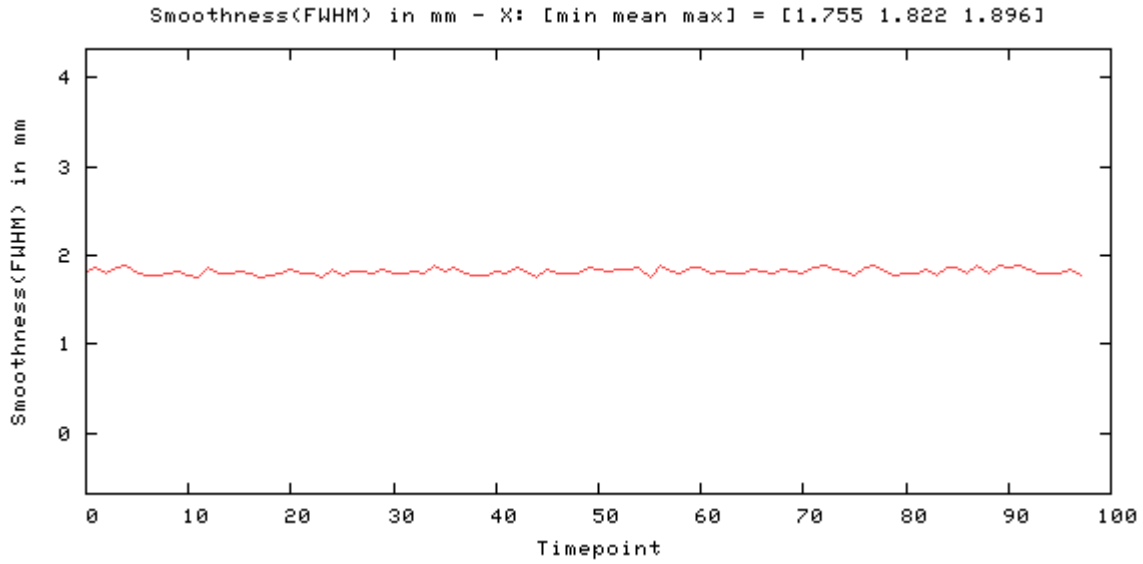




rdc = 6.4 pixels
calc.
meas.
Relative std, %
1
0.1
0.01
1
10
ROI full width, pixels



Smoothness(FWHM) in mm - X: [min mean max] = [1.755 1.822 1.896]
Smoothness(FWHM) in mm
0
1
2
3
4
0
10
20
30
40
50
60
70
80
90
100
Timepoint

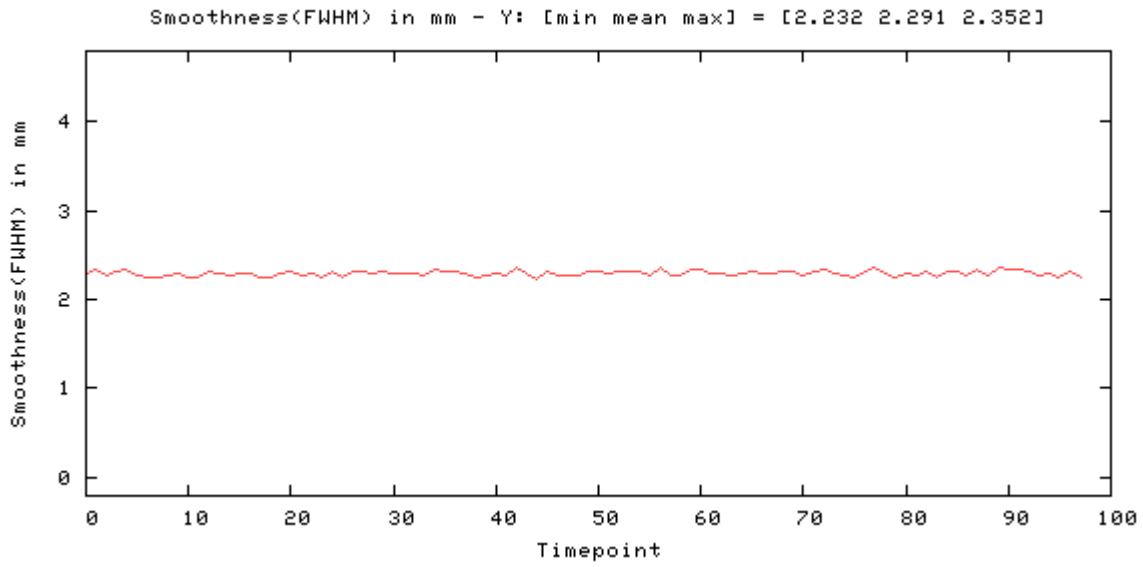

Smoothness(FWHM) in mm - Y: [min mean max] = [2.232 2.291 2.352]
Smoothness(FWHM) in mm
0
1
2
3
4
0
10
20
30
40
50
60
70
80
90
100
Timepoint

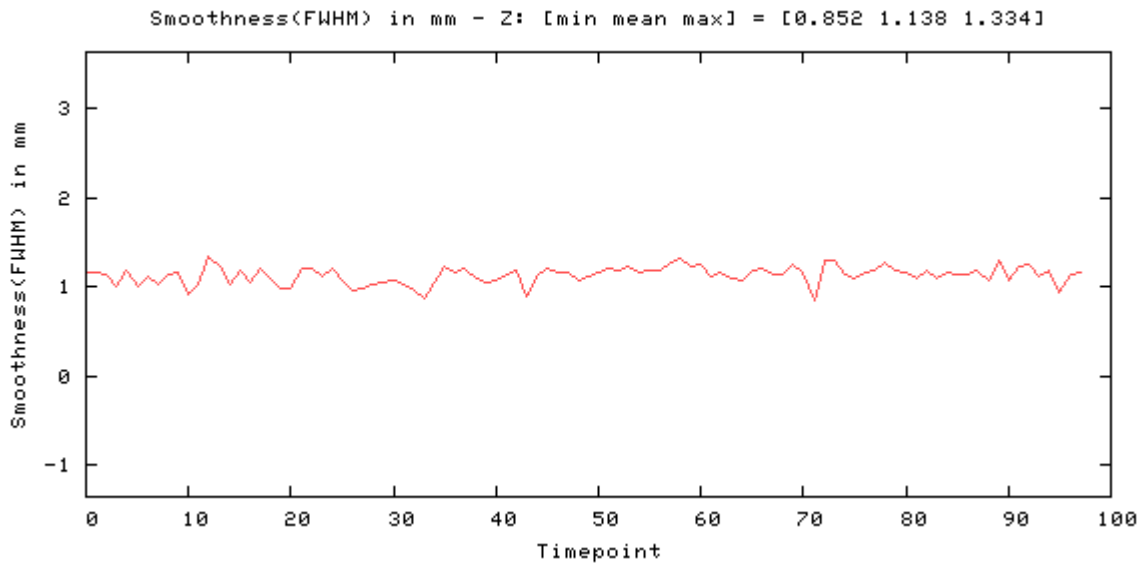
Smoothness(FWHM) in mm - Z: [min mean max] = [0.852 1.138 1.334]
Smoothness(FWHM) in mm
Timepoint

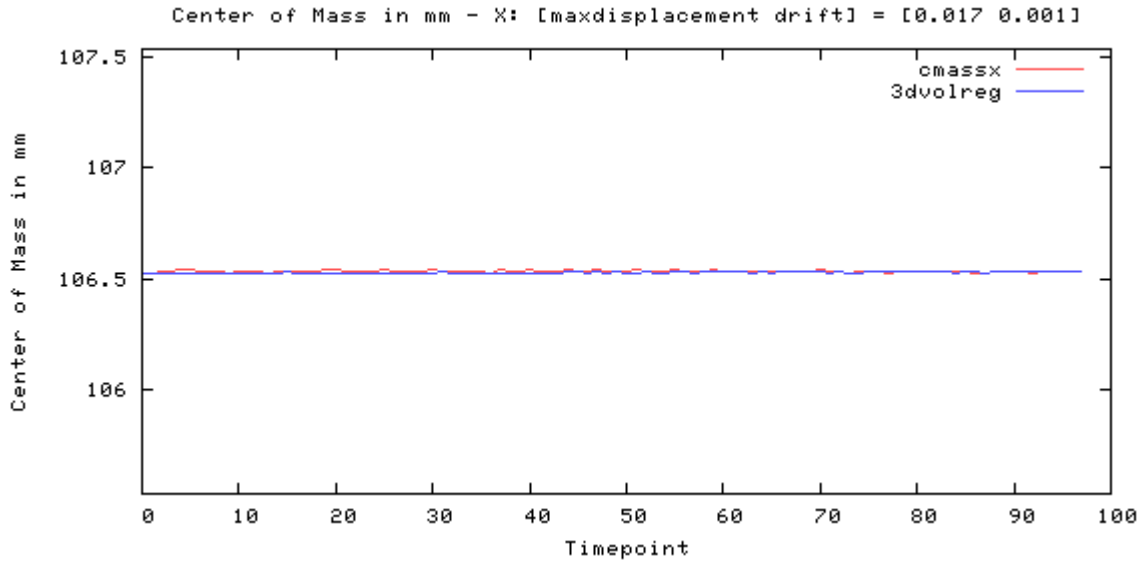
Center of Mass in mm - X: [maxdisplacement drift] = [0.017 0.001]
cmassx
3dvolreg
Center of Mass in mm
Timepoint

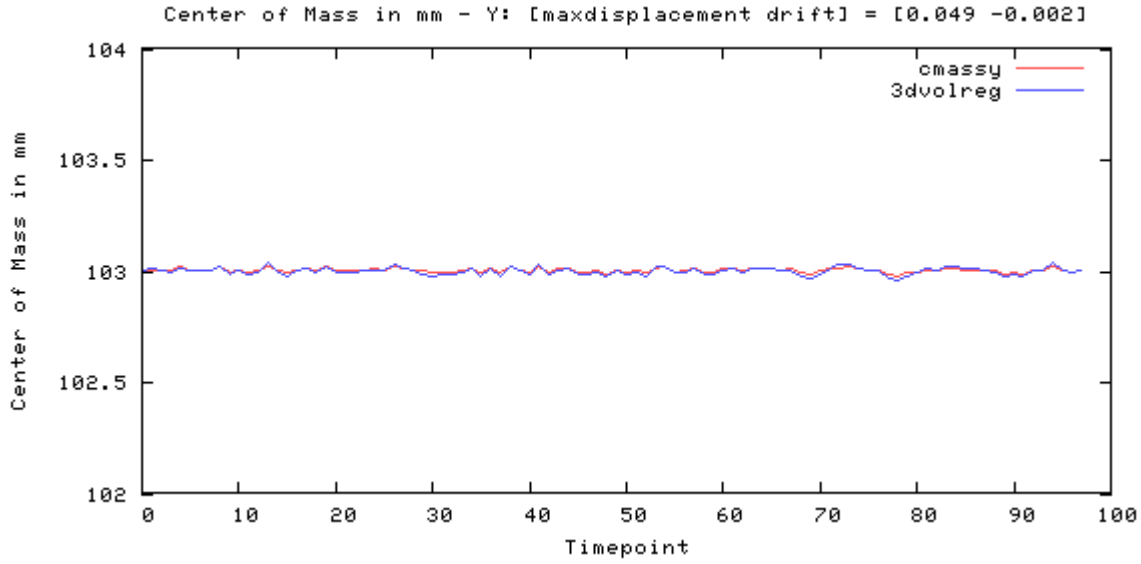
Center of Mass in mm - Y: [maxdisplacement drift] = [0.049 -0.002]
cmassy
3dvolreg
Center of Mass in mm
Timepoint

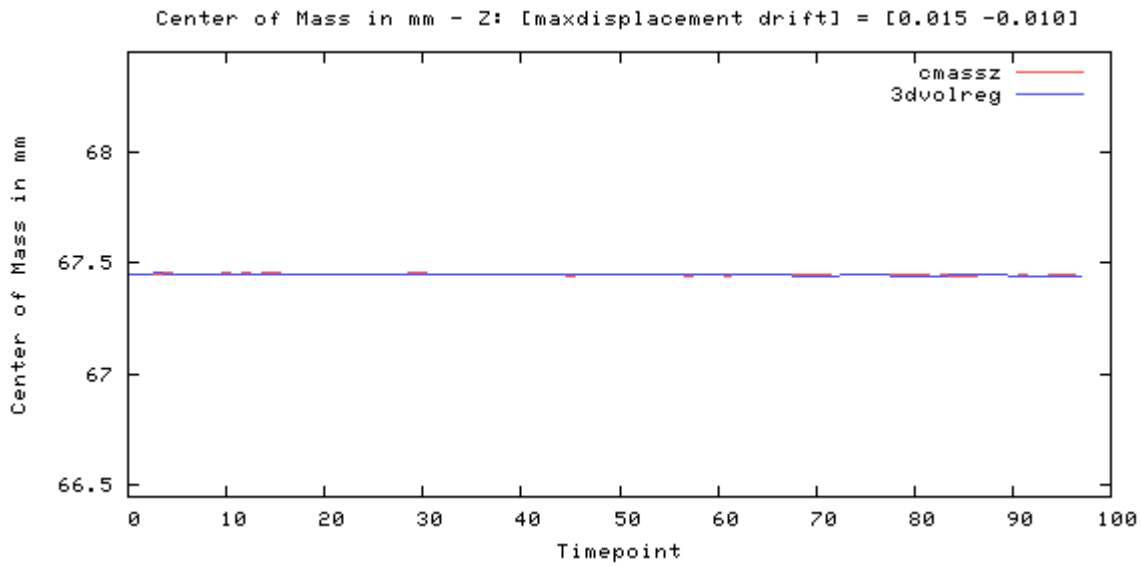


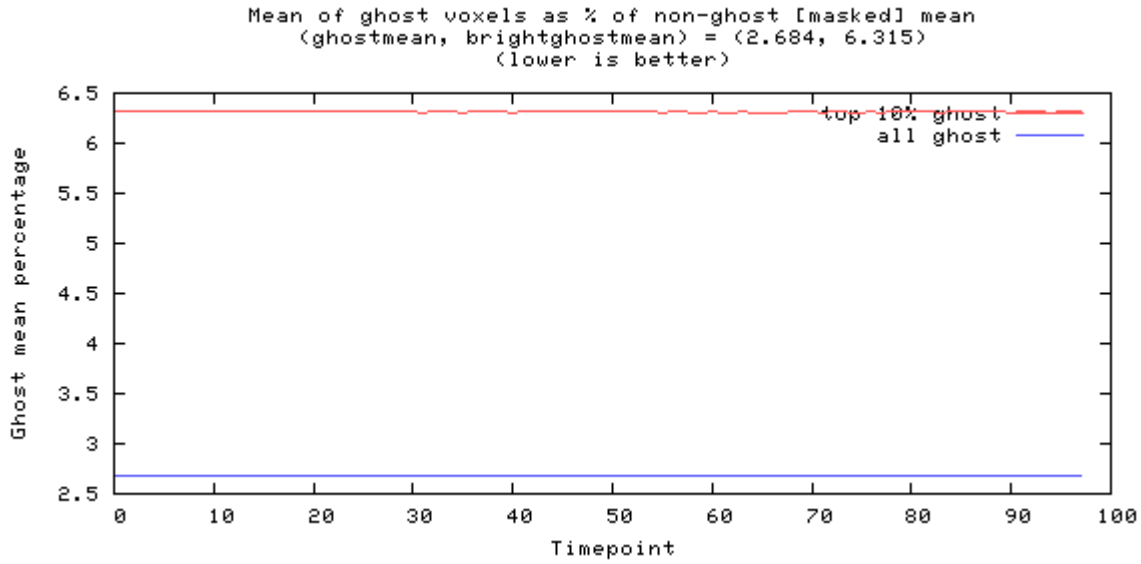

Odd-even difference image




image min: -7954, image max: 12074

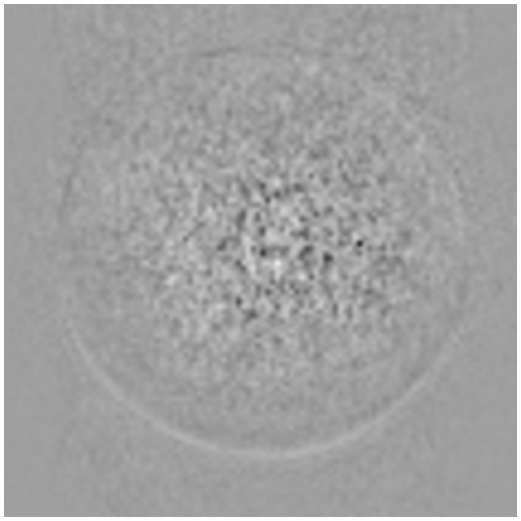

Mean image

0 44594.1


image min: 0, image max: 44966.5

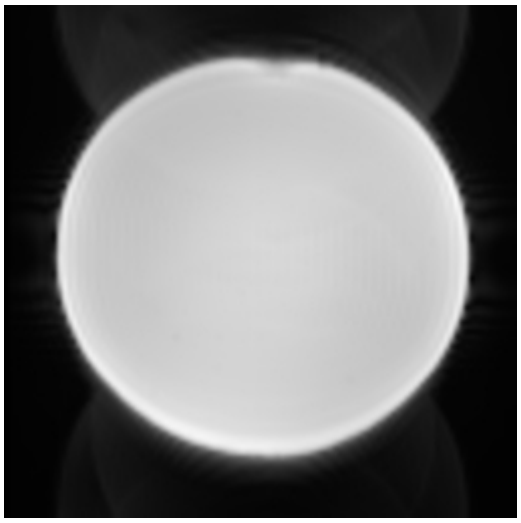

Standard Deviation image

0 338.337


image min: 0, image max: 339.697

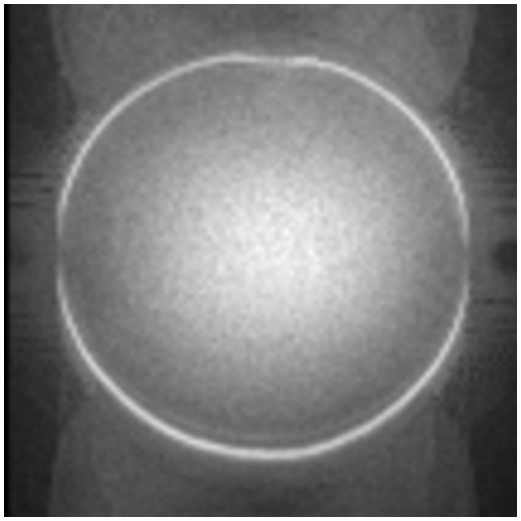

SFNR image

0 679.232

image min: 0, image max: 729.943

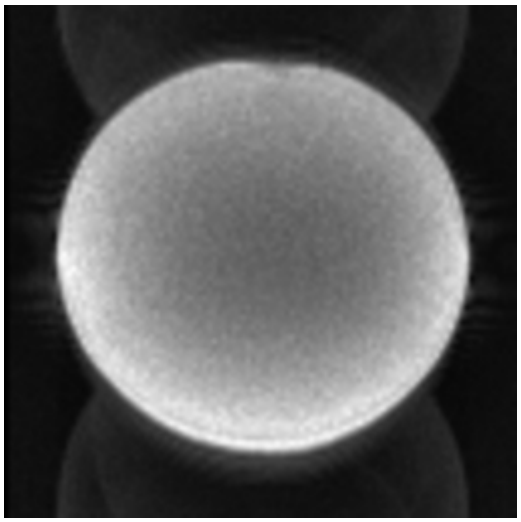

Acquisition parameters

dimensions	106x106x69x100
spacing	2mmx2mmx2mmx2000ms
gap	0mmx0mmx0mmx0ms
scanner	AWP213018
psdname	
examnumber	a0f8a673-da21-44
studyid	Stability_20261019
seriesnumber	10
runnumber	1
magneticfield	3

description	ses-64ch_func-bold_acq-cmrrstd_task-tsnrxacpc
scandate	2026-10-19
scantime	11:53:04
tr	2000
te	30
operator	
flipangle	79
prescribedslicespacing	2
frequencydirection	1
receivecoilname	HeadNeck_64_CS
transmitcoilname	Body
institution	THE UNIVERSITY OF PENNSYLVANIA
examdescription	ACTIVE KIRWAN
scanner	AWP213018
scannermanufacturer	Siemens Healthineers
scannermodelname	MAGNETOM Cima.X
protocolname	ses-64ch_func-bold_acq-cmrrstd_task-tsnrxacpc
institutionaddress	Grays Ferry Ave. BLDG 250 STE 140 3401,Philadelphia,69 - KEYSTONE,US,19146
institutionaldepartmentname	MindCORE Neuroimaging Suite 140
acquisitiondatetime	20261019115302.575000
frametype	ORIGINAL
pixelpresentation	MONOCHROME
volumetricproperties	DISTORTED
volumebasedcalculationtechnique	NONE
complexitimagecomponent	MAGNITUDE
acquisitioncontrast	UNKNOWN
mracquisitiontype	2D
numaverages	1
spacingbetweenslices	2
echotrainlength	80
percentsampling	100
percentphasefieldofview	100
scannerserialnumber	213018
softwareversions	syngo MR XA61
inplanephaseencodingdirection	COLUMN
variableflipangleflag	N
contentqualification	RESEARCH
acquisitionduration	217.89500000000001

resonantnucleus	1H
applicablesafetystandardagency	IEC
acquisitionnumber	1
instancenumber	1
numtemporalpositions	100
imagecomments	Not for diagnostic use, Unaliased MB3/ PE3/LB
samplesperpixel	1
photometricinterpretation	MONOCHROME2
numberofframes	69
rows	106
columns	106
bitsallocated	16
bitsstored	16
highbit	15
lossyimagecompression	00